

LOW DROPOUT VOLTAGE REGULATOR

■ GENERAL DESCRIPTION

The NJM2867/68 is a 100mA output low dropout voltage regulator with ON/OFF control.

Advanced Bipolar technology achieves low noise, high ripple rejection and low quiescent current.

Small packaging, 0.1 μ F small decoupling capacitor, built-in noise bypass capacitor make the NJM2867/68 suitable for space conscious applications.

■ PACKAGE OUTLINE



NJM2867F3




NJM2867F/NJM2868F

■ FEATURES


- High Ripple Rejection 75dB typ. (f=1kHz Vo=3V Version)
- Output Noise Voltage Vno=40 μ Vrms typ.
- Output capacitor with 0.1 μ F ceramic capacitor (Vo $\geq$ 2.8V)
- Output Current Io(max.)=100mA
- High Precision Output Vo $\pm$ 1.0%
- Low Dropout Voltage 0.10V typ. (Io=60mA)
- ON/OFF Control (Active High)
- Internal Short Circuit Current Limit
- Internal Thermal Overload Protection
- Bipolar Technology
- Package Outline SC88A (NJM2867F3), SOT-23-5 (NJM2867F/NJM2868F)

■ PIN CONFIGURATION



NJM2867F/NJM2867F3


- PIN FUNCTION**
- 1.CONTROL
 - 2.GND
 - 3.NC
 - 4.V_{OUT}
 - 5.V_{IN}



NJM2868F

- PIN FUNCTION**
1. V_{IN}
 - 2.GND
 - 3.CONTROL
 - 4.NC
 - 5.V_{OUT}

■ EQUIVALENT CIRCUIT

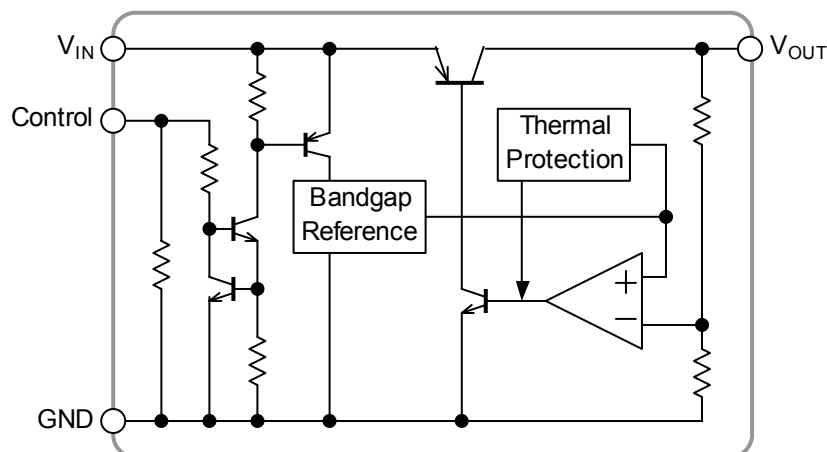

NJM2867/68

■ OUTPUT VOLTAGE RANK LIST

●NJM2867

Device Name	V _{OUT}	Device Name	V _{OUT}	Device Name	V _{OUT}
NJM2867F3-/F21	2.1V	NJM2867F3-/F29	2.9V	NJM2867F3-/F38	3.8V
NJM2867F3-/F24	2.4V	NJM2867F3-/F03	3.0V	NJM2867F3-/F04	4.0V
NJM2867F3-/F25	2.5V	NJM2867F3-/F31	3.1V	NJM2867F3-/F445	4.45V
NJM2867F3-/F26	2.6V	NJM2867F3-/F32	3.2V	NJM2867F3-/F05	5.0V
NJM2867F3-/F27	2.7V	NJM2867F3-/F33	3.3V		
NJM2867F3-/F28	2.8V	NJM2867F3-/F34	3.4V		

●NJM2868

Device Name	V _{OUT}	Device Name	V _{OUT}	Device Name	V _{OUT}
NJM2868F21	2.1V	NJM2868F29	2.9V	NJM2868F38	3.8V
NJM2868F24	2.4V	NJM2868F03	3.0V	NJM2868F04	4.0V
NJM2868F25	2.5V	NJM2868F31	3.1V	NJM2868F445	4.45V
NJM2868F26	2.6V	NJM2868F32	3.2V	NJM2868F05	5.0V
NJM2868F27	2.7V	NJM2868F33	3.3V		
NJM2868F28	2.8V	NJM2868F34	3.4V		

■ ABSOLUTE MAXIMUM RATINGS

(Ta=25°C)

PARAMETER	SYMBOL	RATINGS		UNIT
Input Voltage	V _{IN}	+14		V
Control Voltage	V _{CONT}	+14(*1)		V
Power Dissipation	P _D	SC88A	250(*2)	mW
		SOT-23-5	200(*3)	
			350(*2)	
Operating Temperature	Topr	-40~+85		°C
Storage Temperature	Tstg	-40~+125		°C

(*1): When input voltage is less than +14V, the absolute maximum control voltage is equal to the input voltage.

(*2): Mounted on glass epoxy board based on EIA/JEDEC. (114.3x76.2x1.6mm: 2Layers)

(*3): Device itself.

■ ELECTRICAL CHARACTERISTICS


($V_{IN}=V_O+1V$, $C_{IN}=0.1\mu F$, $C_O=0.1\mu F$ ($2.3V<V_O\leq 2.8V$: $C_O=0.22\mu F$, $V_O\leq 2.3V$: $C_O=0.47\mu F$), $T_a=25^\circ C$)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Output Voltage	V_O	$I_O=30mA$	-1.0%	—	+1.0%	V
Quiescent Current	I_Q	$I_O=0mA$, expect I_{CONT}	—	120	180	μA
Quiescent Current at Control OFF	$I_{Q(OFF)}$	$V_{CONT}=0V$	—	—	100	nA
Output Current	I_O	$V_O=0.3V$	100	130	—	mA
Line Regulation	$\Delta V_O/\Delta V_{IN}$	$V_{IN}=V_O+1V \sim V_O+6V$, $I_O=30mA$	—	—	0.10	%/V
Load Regulation	$\Delta V_O/\Delta I_O$	$I_O=0 \sim 60mA$	—	—	0.03	%/mA
Dropout Voltage	ΔV_{L-O}	$I_O=60mA$	—	0.10	0.18	V
Ripple Rejection	RR	$e_{in}=200mV_{rms}$, $f=1kHz$, $I_O=10mA$, $V_O=3V$ Version	—	75	—	dB
Average Temperature Coefficient of Output Voltage	$\Delta V_O/\Delta T_a$	$T_a=0 \sim 85^\circ C$, $I_O=10mA$	—	± 50	—	ppm/ $^\circ C$
Output Noise Voltage	V_{NO}	$f=10Hz \sim 80kHz$, $I_O=10mA$, $V_O=3V$ Version	—	40	—	μV_{rms}
Control Current	I_{CONT}	$V_{CONT}=1.6V$, $I_O=0mA$	—	—	12	μA
Control Voltage for ON-state	$V_{CONT(ON)}$		1.6	—	—	V
Control Voltage for OFF-state	$V_{CONT(OFF)}$		—	—	0.6	V

The above specification is a common specification for all output voltages.

Therefore, it may be different from the individual specification for a specific output voltage.

■ TEST CIRCUIT

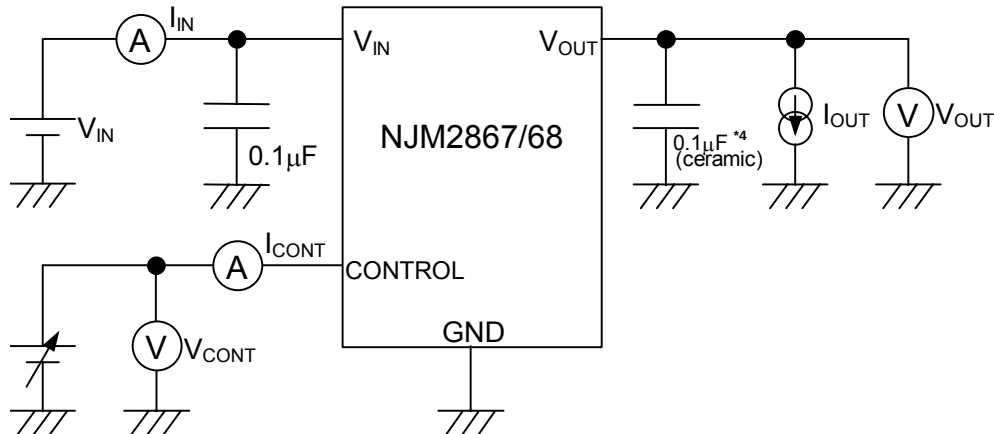


*4 2.3V< $V_O\leq 2.8V$ version: $C_O=0.22\mu F$ (ceramic)
 $V_O\leq 2.3V$ version: $0.47\mu F$ (ceramic)

NJM2867/68

■ TYPICAL APPLICATION


① In the case where ON/OFF Control is not required:

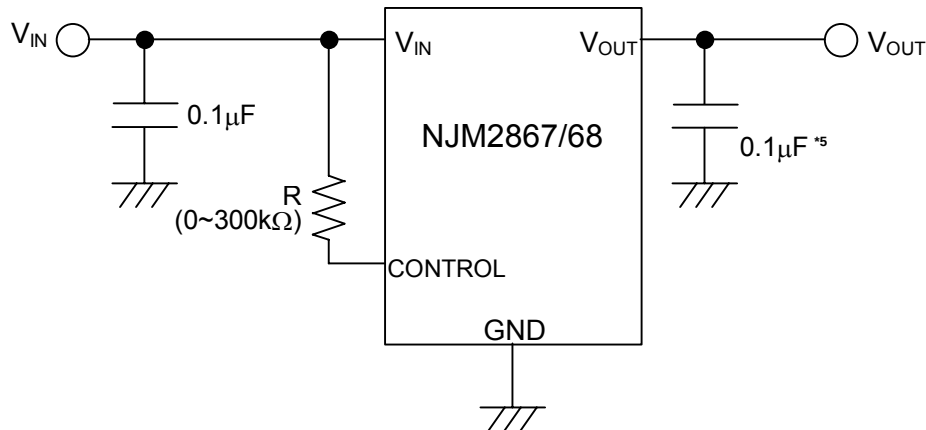

*5 2.3V<V_O≤2.8V version: C_O=0.22μF
V_O≤2.3V version: 0.47μF

Connect control terminal to V_{IN} terminal

② In use of ON/OFF CONTROL:

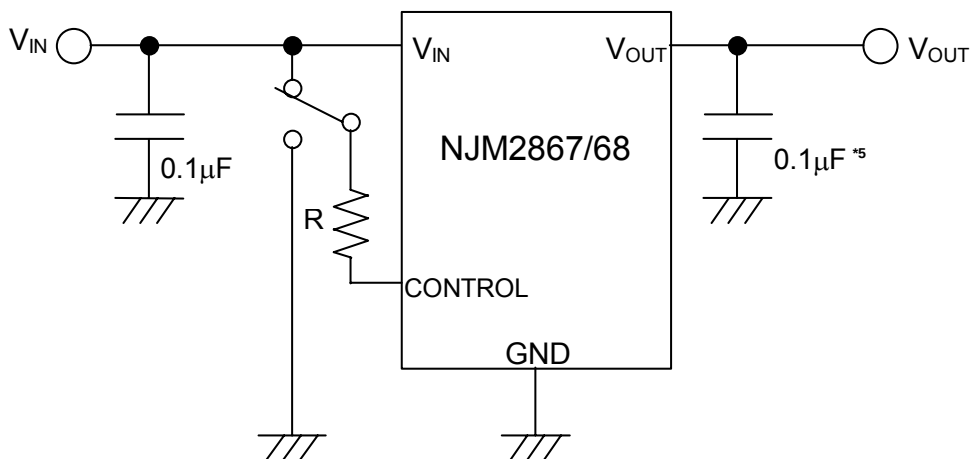

*5 2.3V<V_O≤2.8V version: C_O=0.22μF
V_O≤2.3V version: 0.47μF

State of control terminal:



- “H”→ output is enabled.
- “L” or “open” → output is disabled.

*In the case of using a resistance "R" between V_{IN} and control.







The current flow into the control terminal while the IC is ON state (I_{CONT}) can be reduced when a pull up resistance "R" is inserted between V_{IN} and the control terminal.

The minimum control voltage for ON state (V_{CONT(ON)}) is increased due to the voltage drop caused by I_{CONT} and the resistance "R". The I_{CONT} is temperature dependence as shown in the "Control Current vs. Temperature" characteristics. Therefore, the resistance "R" should be carefully selected to ensure the control voltage exceeds the V_{CONT(ON)} over the required temperature range.







POWER DISSIPATION vs. AMBIENT TEMPERATURE

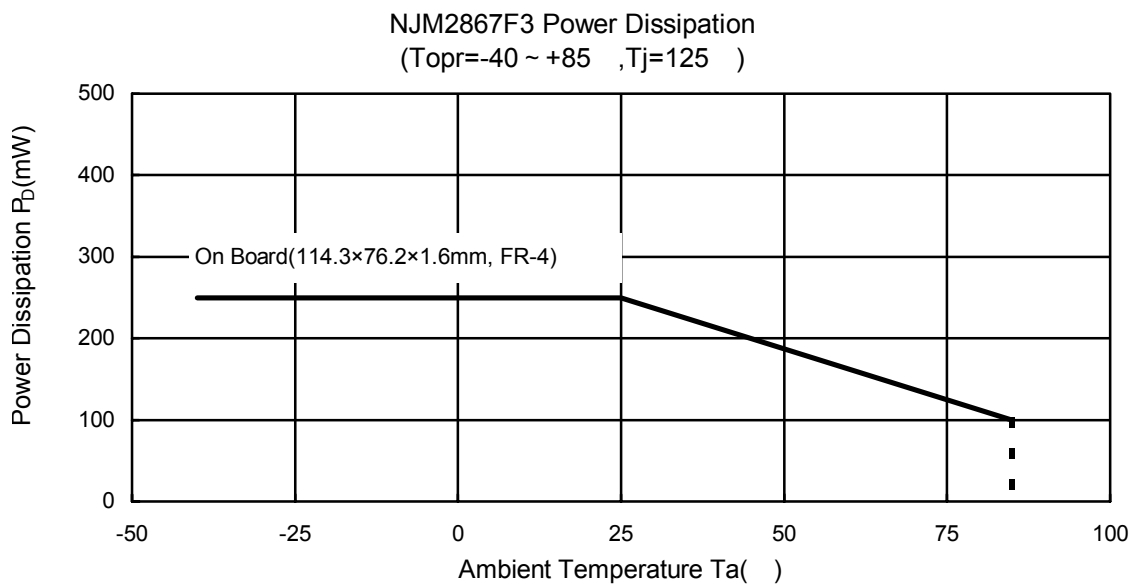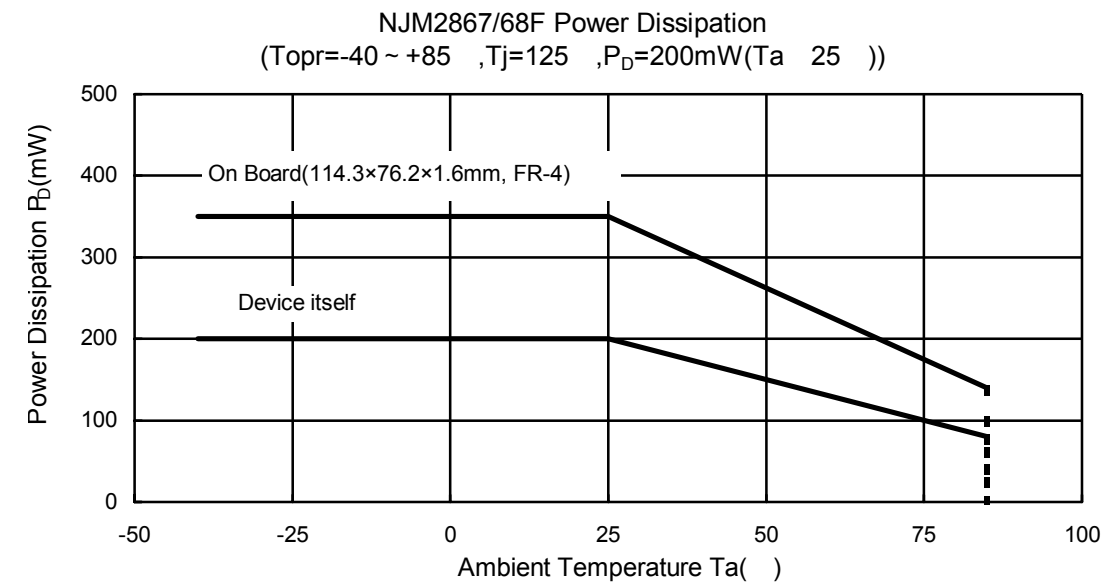






■ ELECTRICAL CHARACTERISTICS

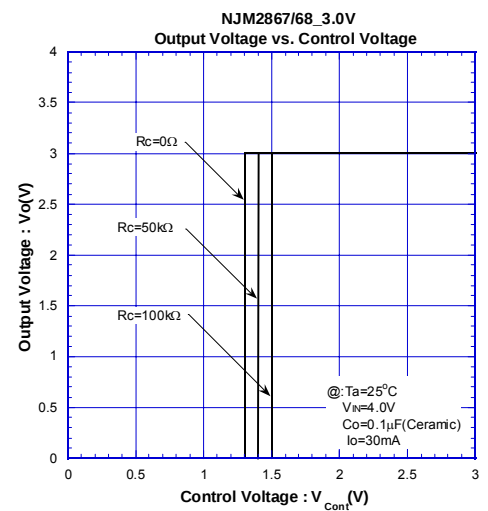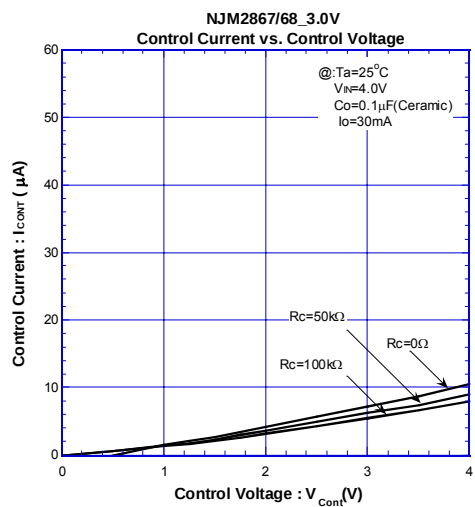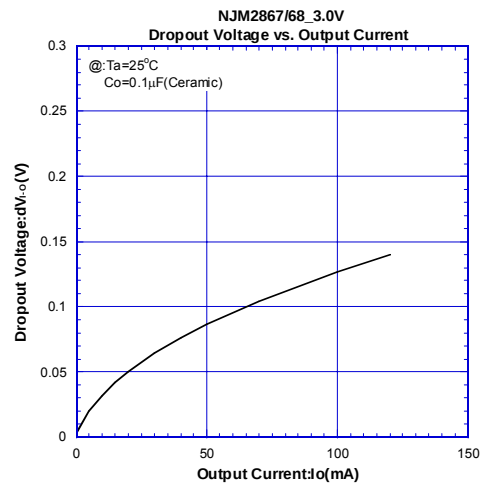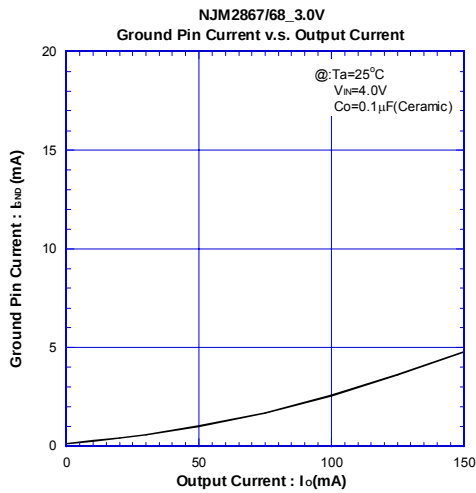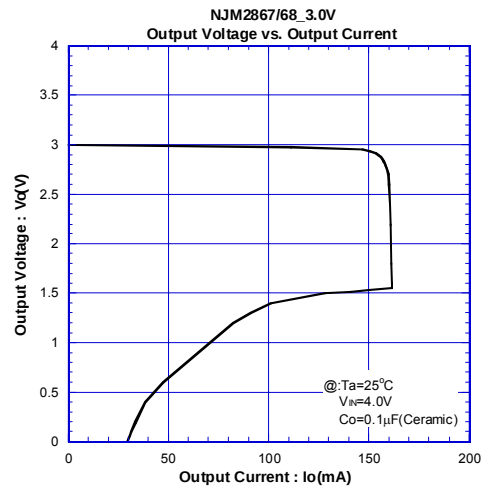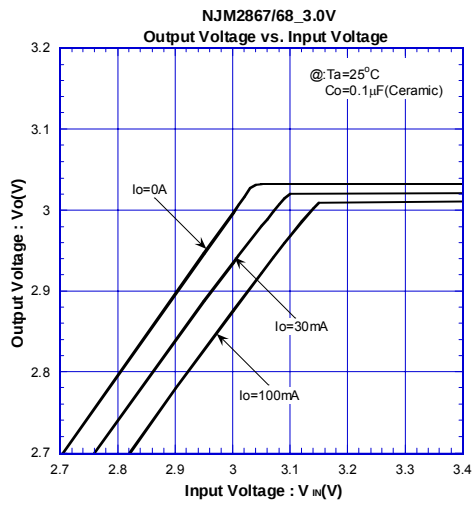






ELECTRICAL CHARACTERISTICS

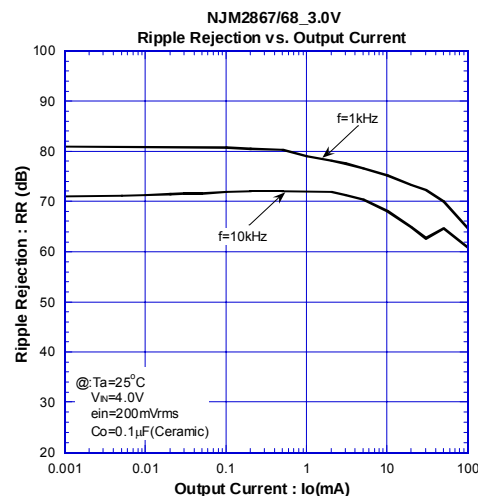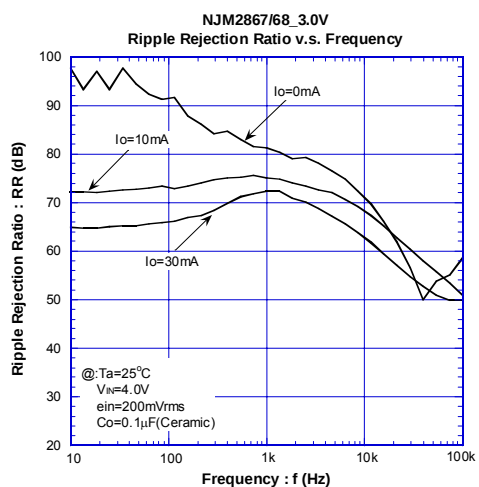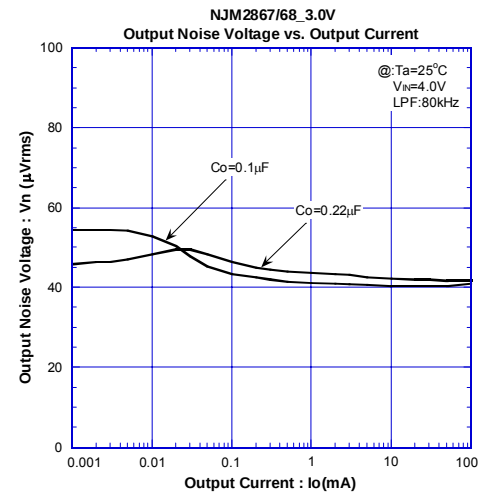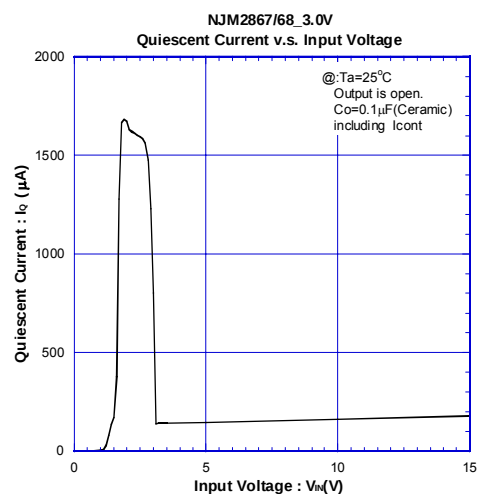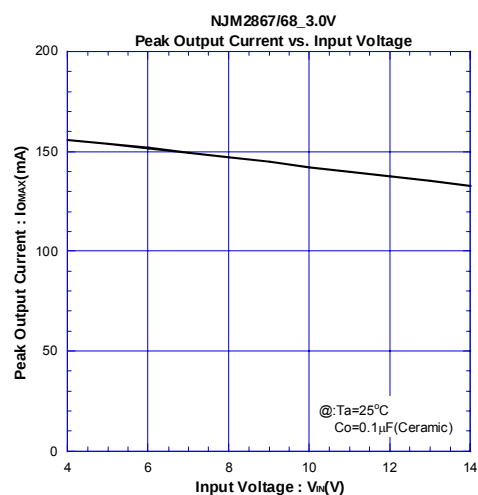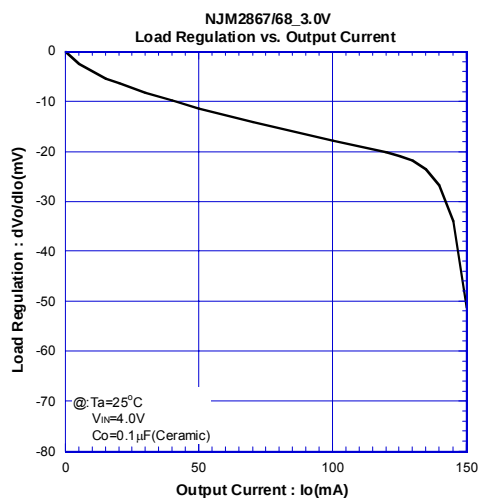

■ ELECTRICAL CHARACTERISTICS

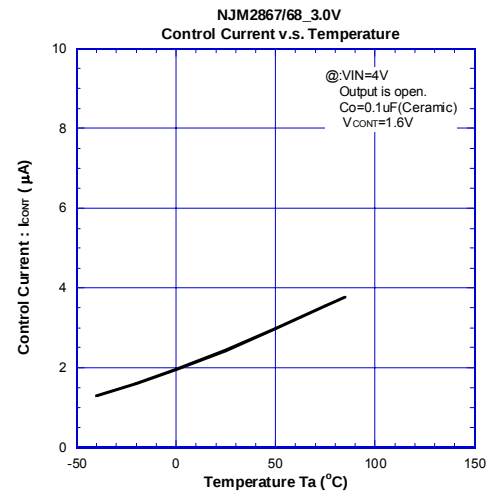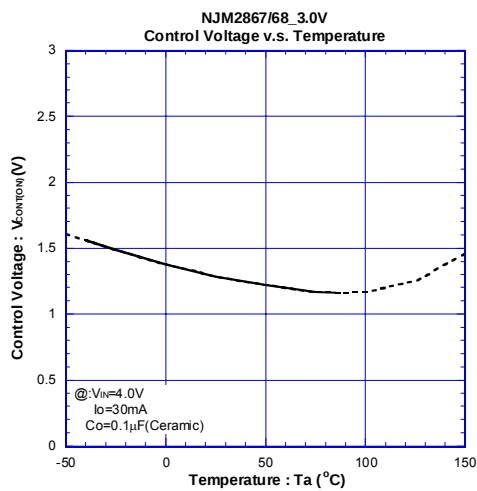
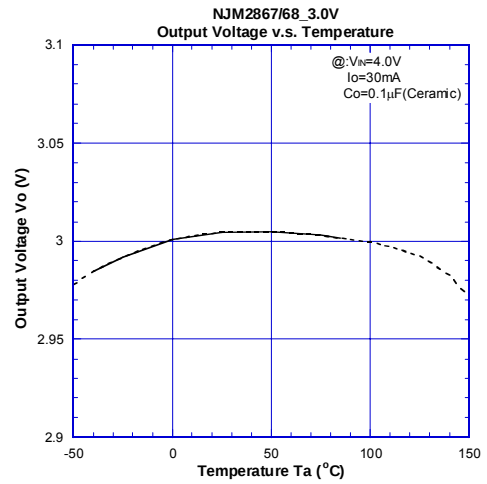
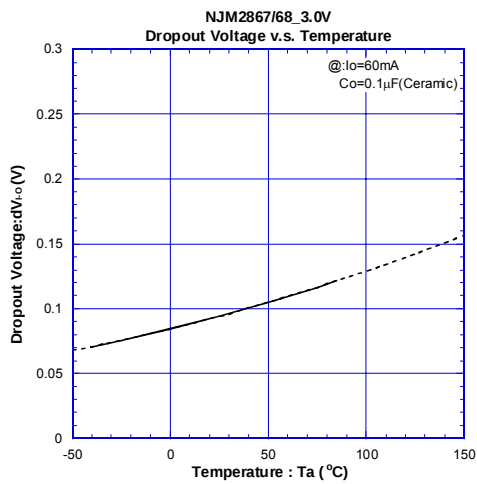
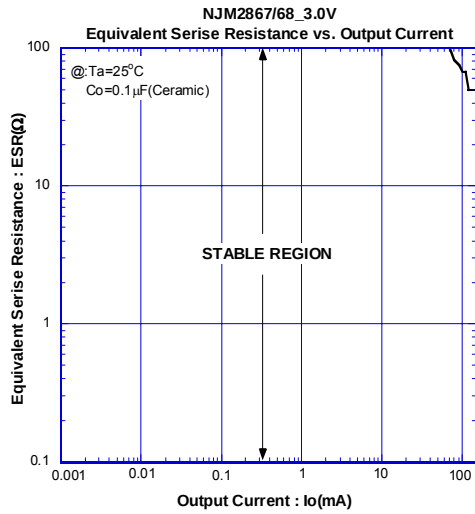


■ ELECTRICAL CHARACTERISTICS

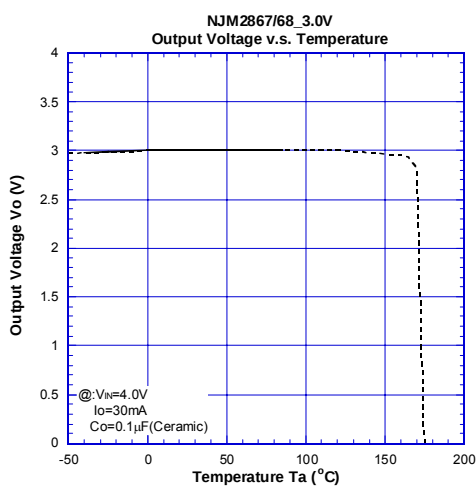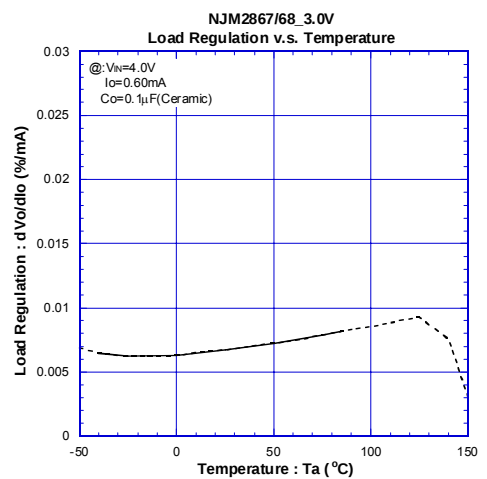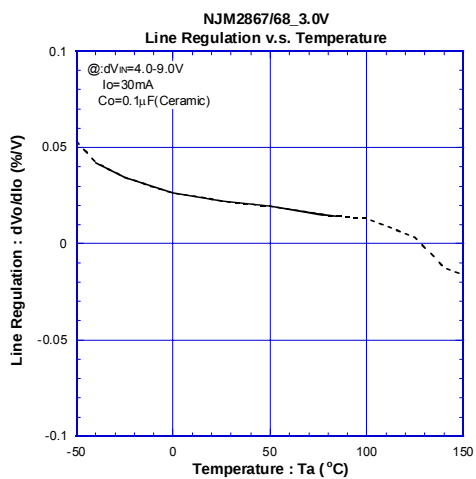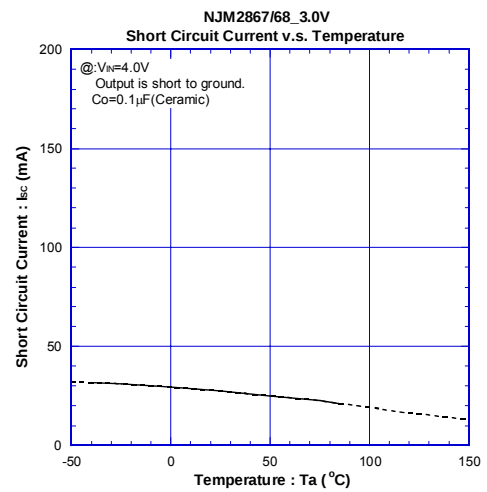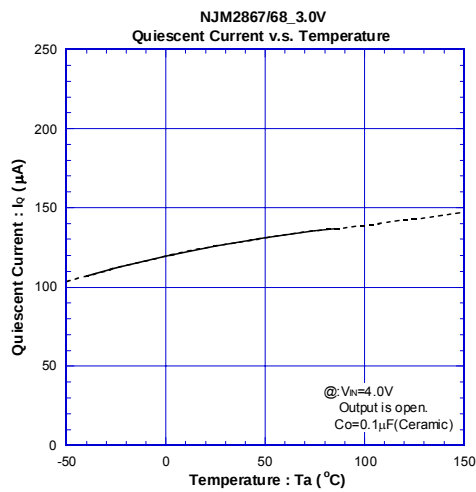

NJM2867/68

ELECTRICAL CHARACTERISTICS

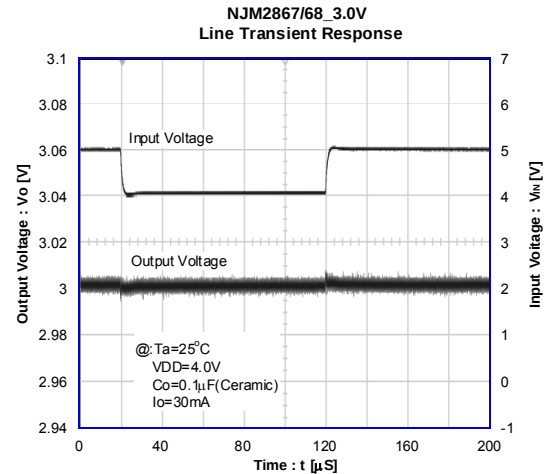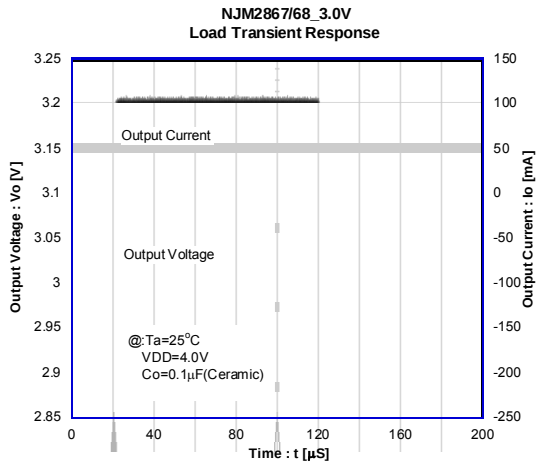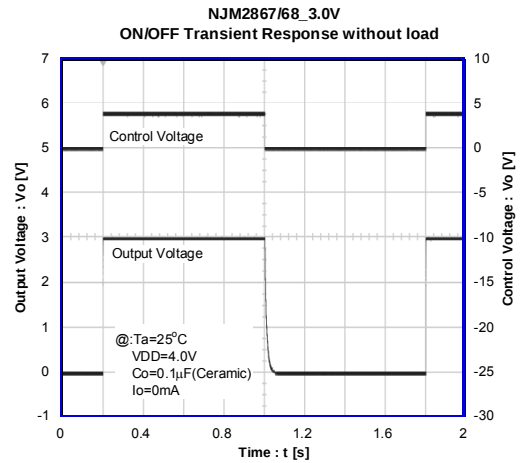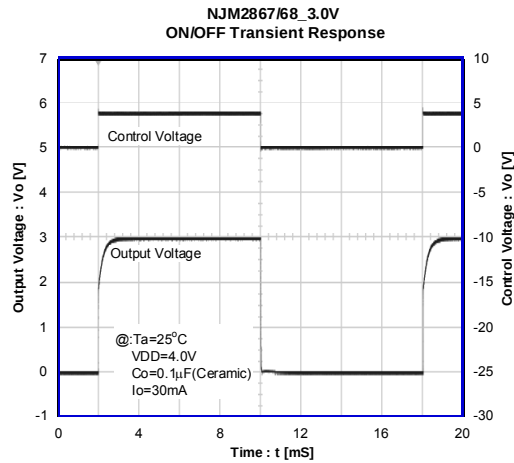

[CAUTION]

The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[NJR:](#)

[NJM2867F26-TE2](#) [NJM2867F3-29-TE2](#) [NJM2868F28-TE1](#) [NJM2867F3-25-TE1](#) [NJM2867F29-TE2](#) [NJM2867F25-TE2](#) [NJM2867F3-05-TE1](#) [NJM2867F3-34-TE2](#) [NJM2867F3-38-TE2](#) [NJM2868F21-TE1](#) [NJM2868F32-TE1](#) [NJM2868F33-TE1](#) [NJM2867F38-TE2](#) [NJM2868F34-TE1](#) [NJM2868F05-TE1](#) [NJM2867F3-32-TE2](#) [NJM2867F33-TE1](#) [NJM2867F33-TE2](#) [NJM2867F3-26-TE1](#) [NJM2867F34-TE2](#) [NJM2867F3-03-TE1](#) [NJM2867F24-TE1](#) [NJM2867F3-27-TE1](#) [NJM2868F03-TE1](#) [NJM2867F32-TE2](#) [NJM2867F3-33-TE1](#) [NJM2867F05-TE2](#) [NJM2867F21-TE2](#) [NJM2868F05-TE2](#) [NJM2867F3-21-TE2](#) [NJM2868F26-TE1](#) [NJM2867F31-TE2](#) [NJM2867F3-28-TE1](#) [NJM2868F31-TE1](#) [NJM2867F28-TE2](#) [NJM2867F3-24-TE2](#) [NJM2867F03-TE1](#) [NJM2868F25-TE1](#) [NJM2868F24-TE1](#) [NJM2868F38-TE1](#) [NJM2868F29-TE1](#) [NJM2867F3-31-TE2](#) [NJM2867F05-TE1](#)



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.