


### Product Overview


The Qorvo TGF2942 is a 2 W ( $P_{3dB}$ ) discrete GaN on SiC HEMT which operates from DC to 25 GHz and 28 V supply. The device is constructed with Qorvo’s proven QGaN15 process. The device can support pulsed, CW, and linear operations.

Lead-free and ROHS compliant

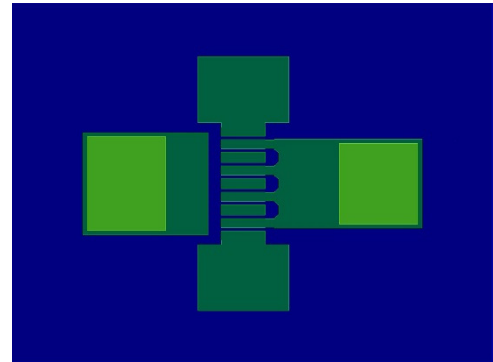

0.411 x 0.551 x 0.100 mm

### Functional Block Diagram

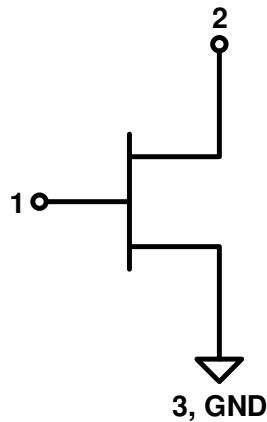

### Key Features

- Frequency: DC to 25 GHz
  - Output Power ( $P_{3dB}$ )<sup>1</sup>: 2.4 W
  - Linear Gain<sup>1</sup>: 18 dB
  - Typical PAE<sub>3dB</sub><sup>1</sup>: 59%
  - Typical Noise Figure<sup>1</sup>: 1.2 dB
  - Operating Voltage: 28 V
  - CW and Pulse capable
  - Non-linear & Noise Models available
- Note 1: @ 10 GHz

### Applications

- Defense and Aerospace
- Broadband wireless
- Low noise amplifier

### Ordering info

Part No.	ECCN	Description
TGF2942	EAR99	DC–25GHz, 28 V, 2 W GaN RF Transistor

### Absolute Maximum Ratings<sup>1</sup>

Parameter	Rating	Units
Breakdown Voltage, $BV_{DG}$	+60	V
Gate Voltage Range, $V_G$	-7 to +1.5	V
Drain Current, $I_{D_{MAX}}$	500	mA
Gate Current Range, $I_G$	See page 20.	mA
Power Dissipation, CW, $P_{DISS}$	3.2	W
RF Input Power, CW, 10 GHz, $T = 25\text{ }^\circ\text{C}$	+23	dBm
Channel Temperature, $T_{CH}$	275	$^\circ\text{C}$
Mounting Temperature (30 Seconds)	320	$^\circ\text{C}$
Storage Temperature	-65 to +150	$^\circ\text{C}$

Notes:

1. Operation of this device outside the parameter ranges given above may cause permanent damage.

### Recommended Operating Conditions<sup>1</sup>

Parameter	Min	Typ	Max	Units
Operating Temp. Range	-40	+25	+85	$^\circ\text{C}$
Drain Voltage Range, $V_D$	+12	+20	+29.5	V
Drain Bias Current, $I_{DQ}$	10	20	40	mA
Drain Current, $I_D$	-	170	-	mA
Gate Voltage, $V_G^3$	-	-2.8	-	V
Channel Temperature ( $T_{CH}$ )	-	-	250	$^\circ\text{C}$
Power Dissipation, CW ( $P_D$ ) <sup>2</sup>	-	-	2.9	W

Notes:

1. Electrical performance is measured under conditions noted in the electrical specifications table. Specifications are not guaranteed over all recommended operating conditions.
2. Package base at 85  $^\circ\text{C}$
3. To be adjusted to desired  $I_{DQ}$

### Model Load Pull Performance – Power Tuned<sup>1</sup>

Parameter	Typical Values								Units
	3		6		10		18		
Frequency, F									GHz
Drain Voltage, $V_D$	20	28	20	28	20	28	20	28	V
Drain Bias Current, $I_{DQ}$	20	20	20	20	20	20	20	20	mA
Output Power at 3dB compression, $P_{3dB}$	32.5	33.8	32.5	33.7	32.6	33.8	32.8	33.8	dBm
Power Added Efficiency at 3dB compression, $PAE_{3dB}$	58.7	61.3	60.5	58.6	57.2	56.6	54.3	54.2	%
Gain at 3dB compression, $G_{3dB}$	20.5	22.5	17.3	19.5	12.8	13.6	8.9	9.8	dB
Load Reflection Coefficient <sup>(2)</sup> , $\Gamma_L$	0.32 $\angle$ 18°	0.54 $\angle$ 22°	0.42 $\angle$ 45°	0.57 $\angle$ 45°	0.45 $\angle$ 63°	0.58 $\angle$ 59°	0.61 $\angle$ 99°	0.70 $\angle$ 90°	--

Notes:

1. CW, bondwires not included
2. Characteristic Impedance,  $Z_0 = 50 \Omega$ .

### Model Load Pull Performance – Efficiency Tuned<sup>1</sup>

Parameter	Typical Values								Units
	3		6		10		18		
Frequency, F									GHz
Drain Voltage, $V_D$	20	28	20	28	20	28	20	28	V
Drain Bias Current, $I_{DQ}$	20	20	20	20	20	20	20	20	mA
Output Power at 3dB compression, $P_{3dB}$	32.1	33.8	31.5	33.7	31.7	33.4	32.1	33.8	dBm
Power Added Efficiency at 3dB compression, $PAE_{3dB}$	62.8	61.3	61.5	58.6	60.3	59.2	56.3	54.2	%
Gain at 3dB compression, $G_{3dB}$	22.6	22.5	17.9	19.5	14.9	15.3	9.4	9.8	dB
Load Reflection Coefficient <sup>(2)</sup> , $\Gamma_L$	0.45 $\angle$ 27°	0.54 $\angle$ 22°	0.57 $\angle$ 45°	0.57 $\angle$ 45°	0.63 $\angle$ 72°	0.67 $\angle$ 63°	0.71 $\angle$ 98°	0.70 $\angle$ 90°	--

Notes:


1. CW, bondwires not included
2. Characteristic Impedance,  $Z_0 = 50 \Omega$ .

### Model S-parameters<sup>1</sup>


Notes:

- Bondwires are not included. T = 25 °C.


S11 from 0.01 GHz to 40 GHz

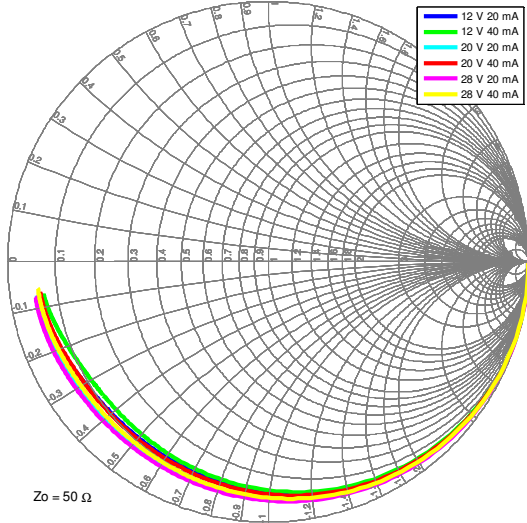


S21

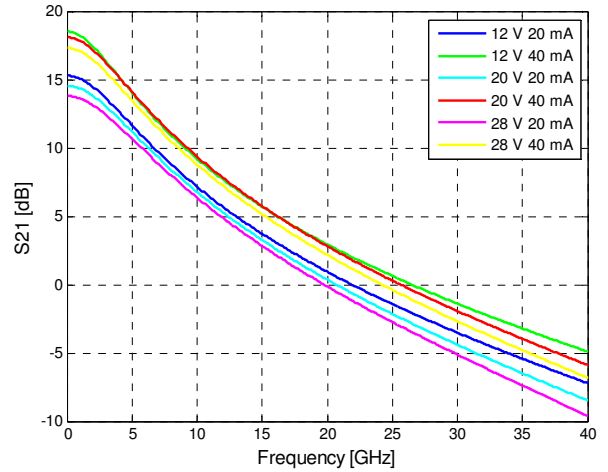

S12

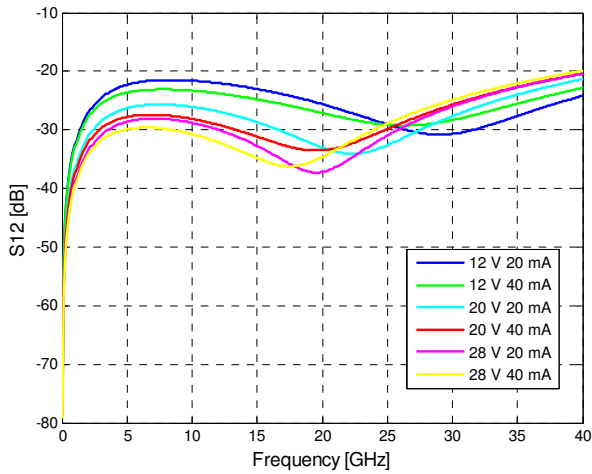


S22 from 0.01 GHz to 40 GHz

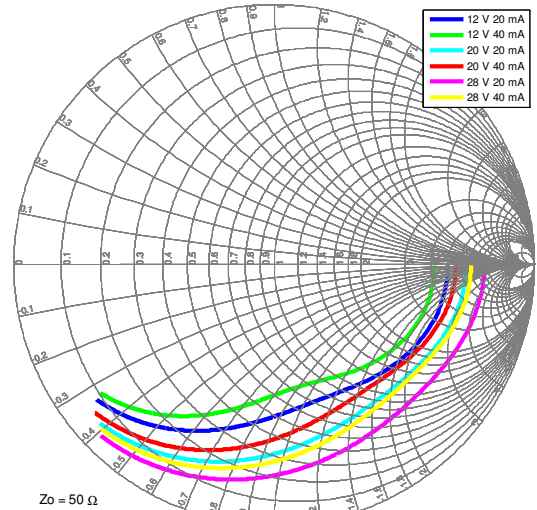

Model Maximum Available Gain<sup>1</sup>

Notes:




1. Bondwires are not included. T = 25 °C.

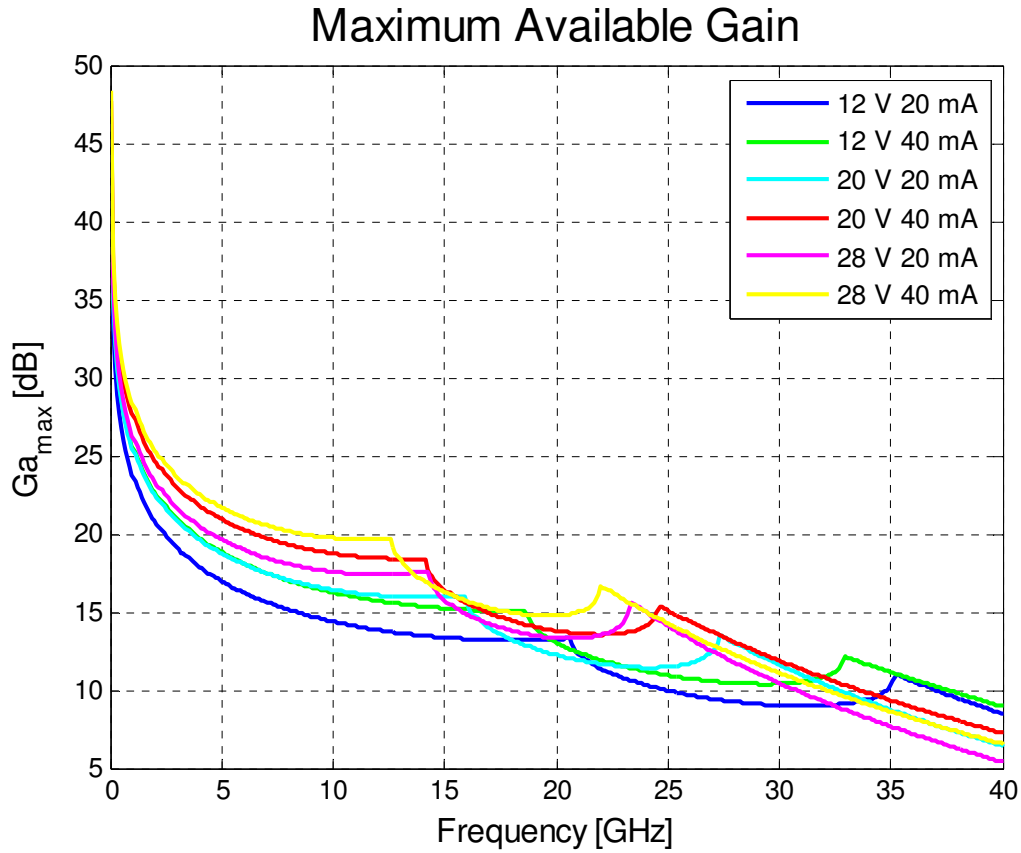

Model Noise<sup>1</sup>

Notes:

- 1. Bondwires are not included. T = 25 °C.

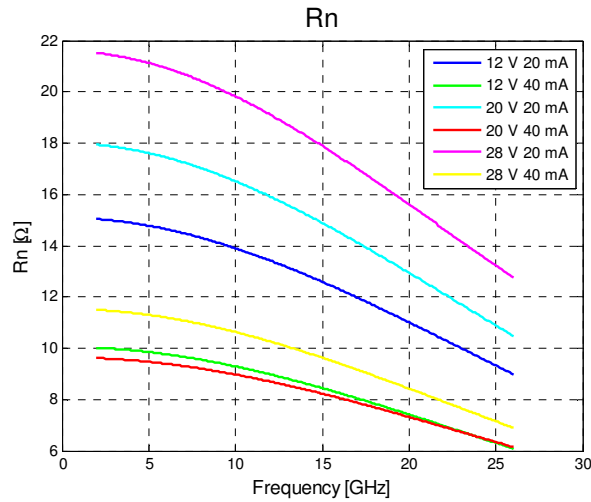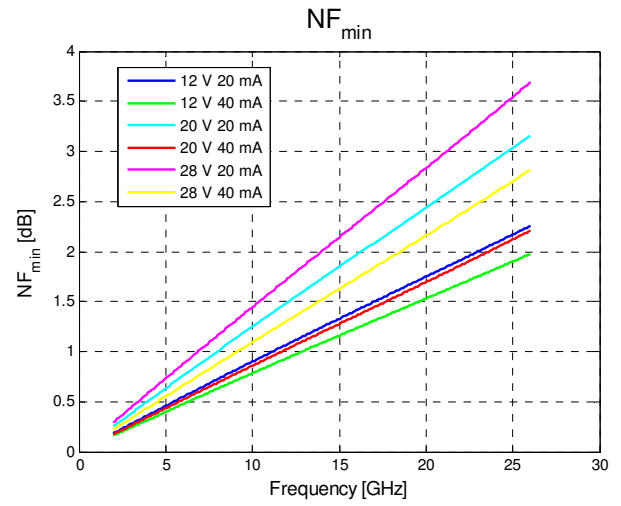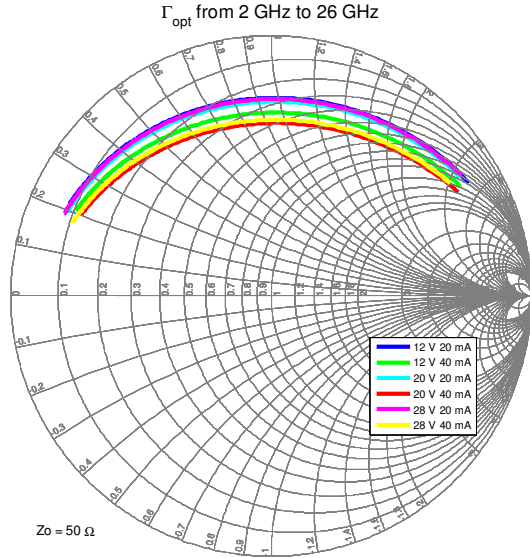


Load-Pull Smith Charts<sup>1, 2</sup>

Notes:

1. Test Conditions:  $V_D = 20\text{ V}$ ,  $I_{DQ} = 20\text{ mA}$ , CW, Bondwires not included
2. See page 22 for load pull reference planes where the performance was simulated.

3GHz, Load-pull

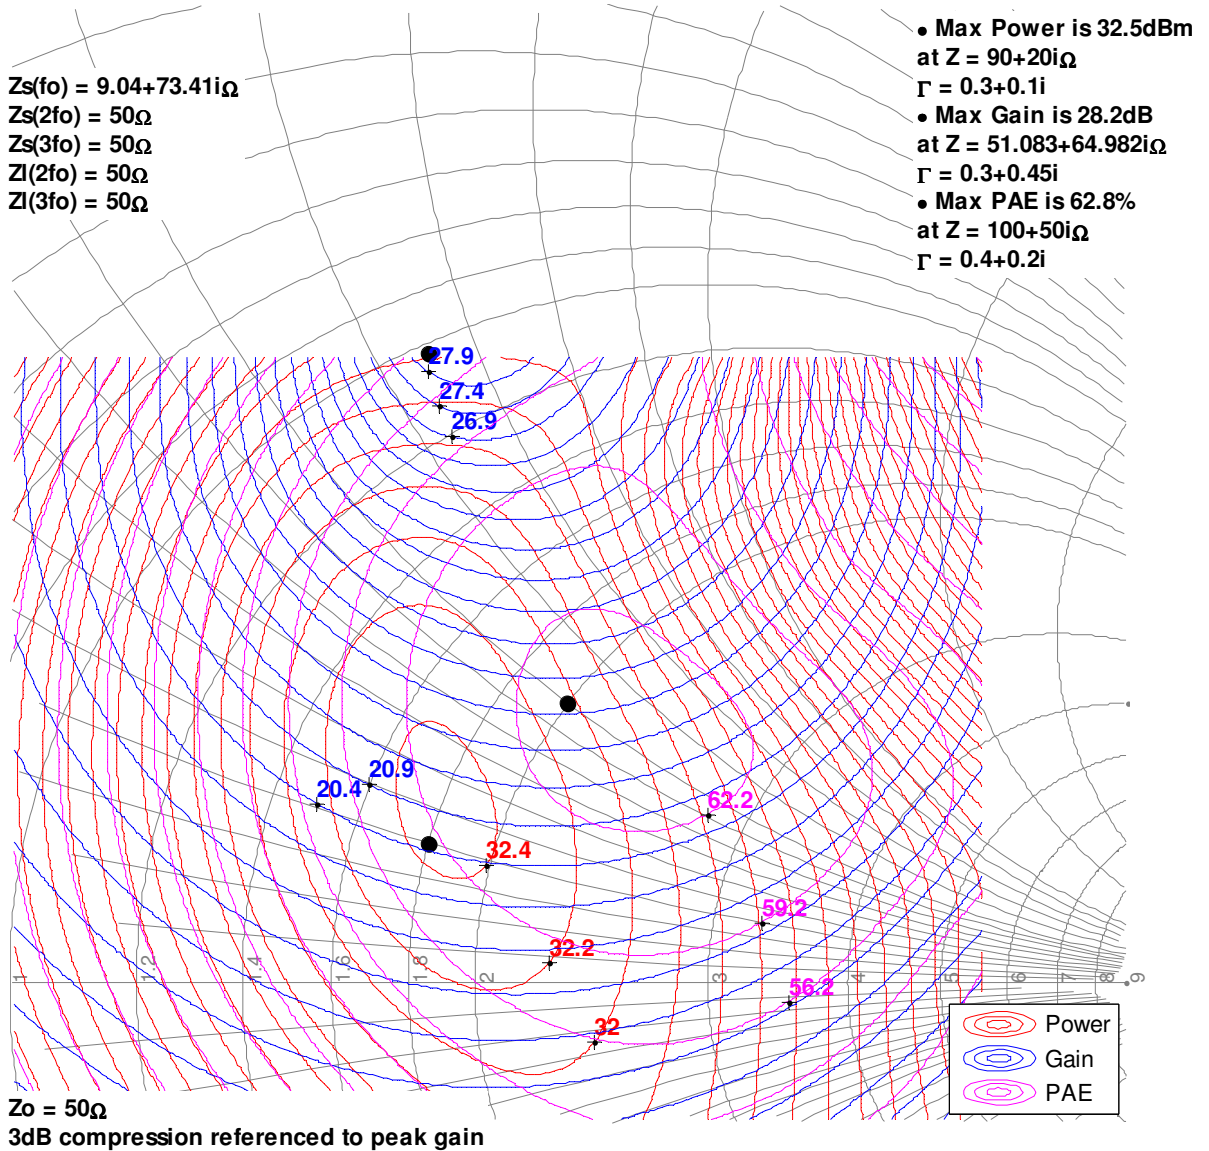


Load-Pull Smith Charts<sup>1, 2</sup>

Notes:

1. Test Conditions:  $V_D = 20\text{ V}$ ,  $I_{DQ} = 20\text{ mA}$ , CW, Bondwires not included
2. See page 22 for load pull reference planes where the performance was simulated.

6GHz, Load-pull

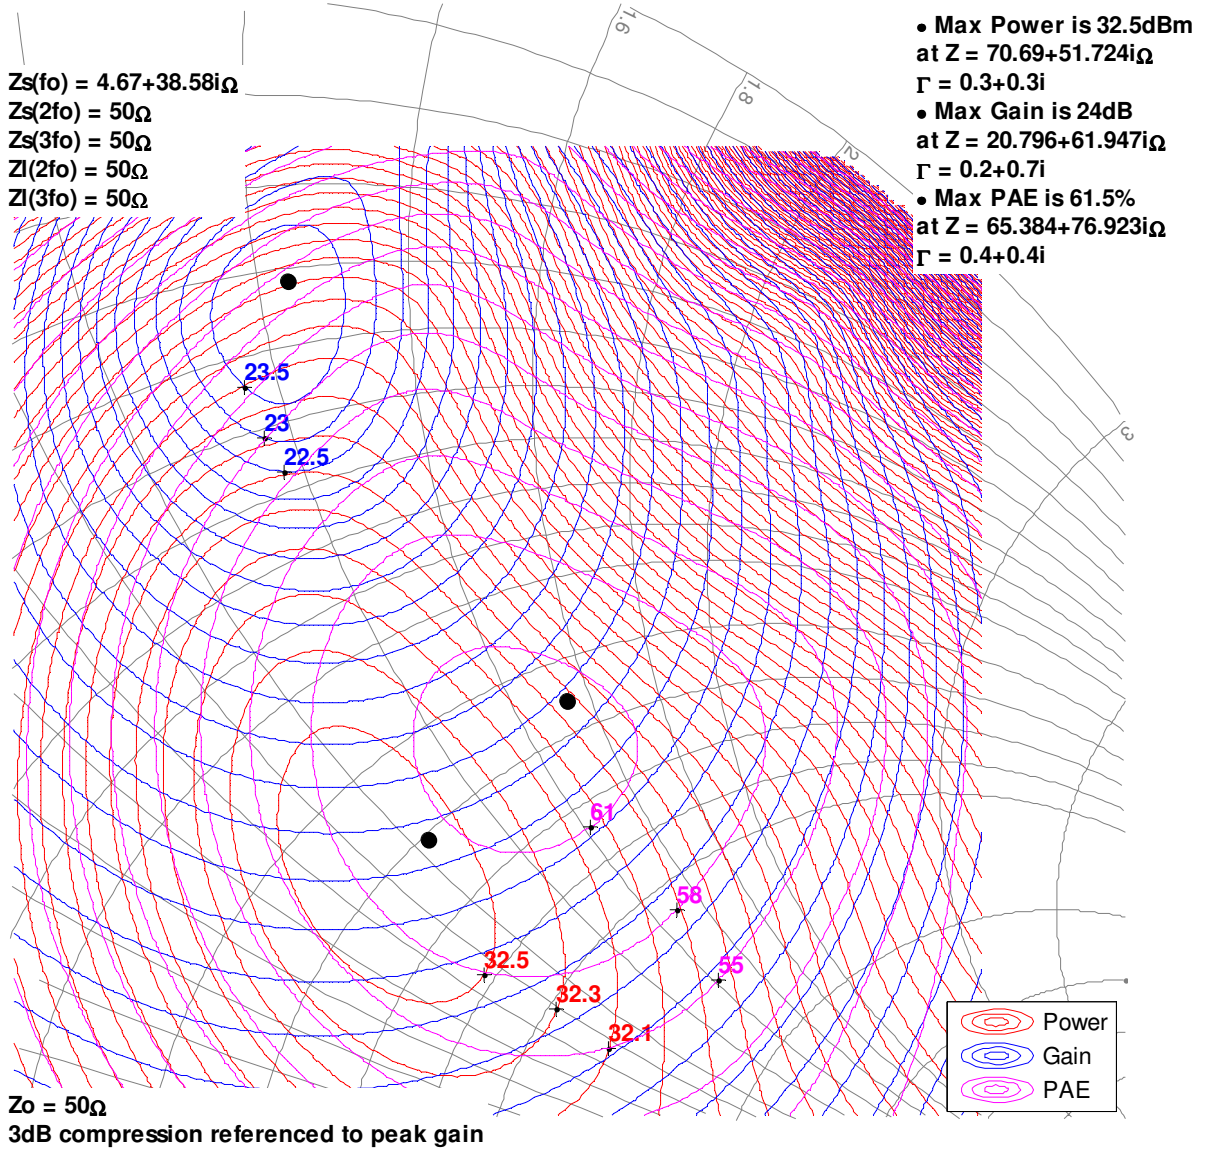




Load-Pull Smith Charts<sup>1, 2</sup>

Notes:

1. Test Conditions:  $V_D = 20\text{ V}$ ,  $I_{DQ} = 20\text{ mA}$ , CW, Bondwires not included
2. See page 22 for load pull reference planes where the performance was simulated.

10GHz, Load-pull

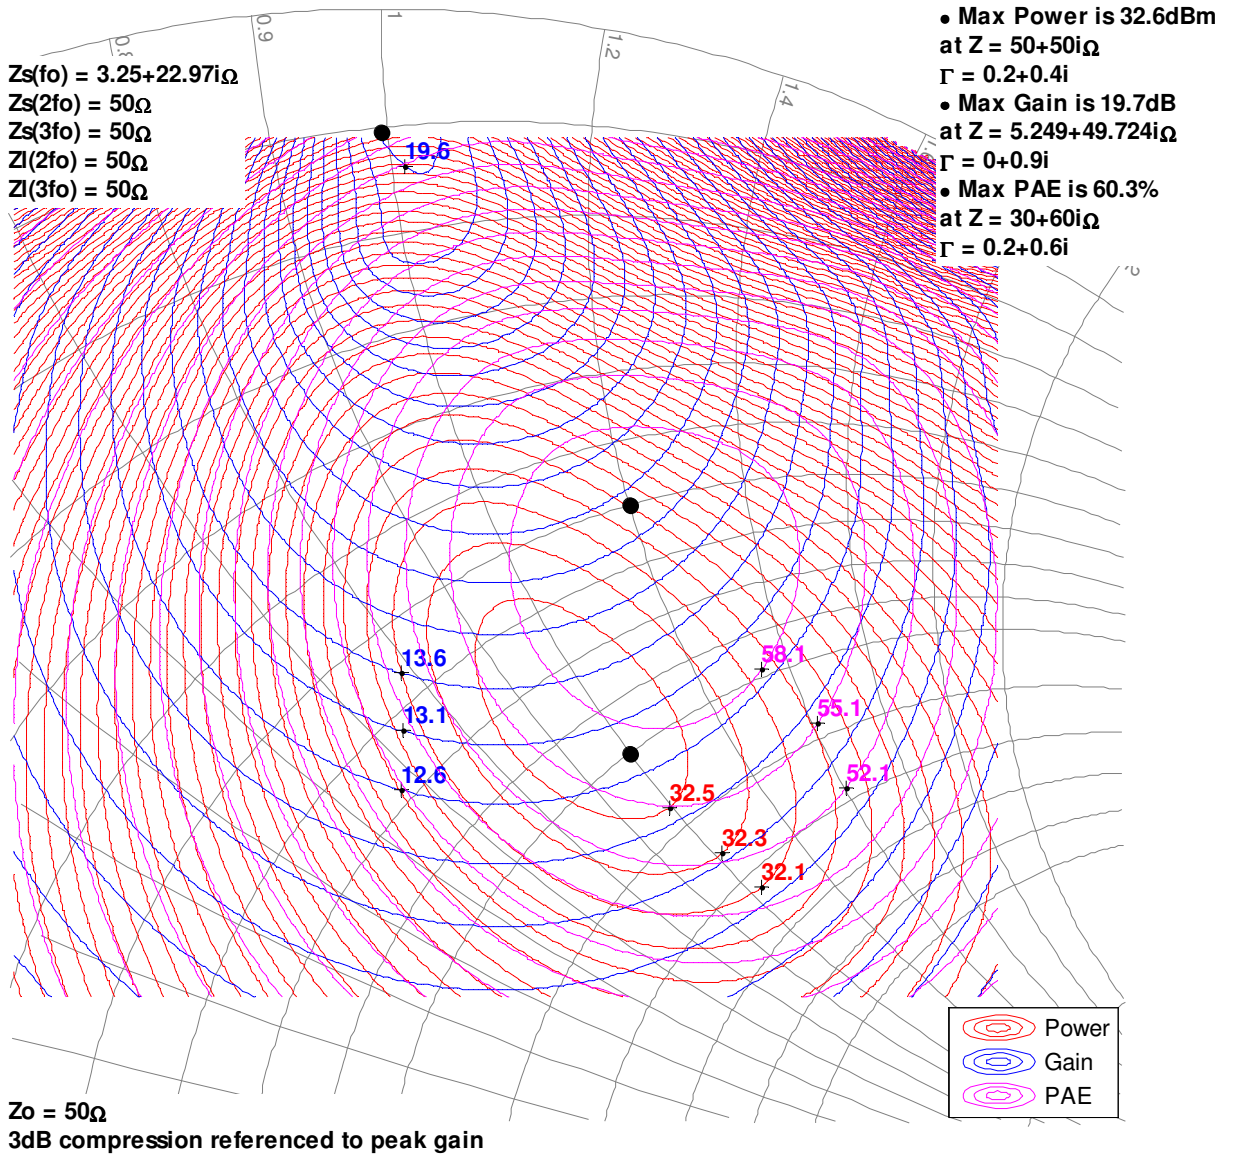


Load-Pull Smith Charts<sup>1, 2</sup>

Notes:

1. Test Conditions:  $V_D = 20\text{ V}$ ,  $I_{DQ} = 20\text{ mA}$ , CW, Bondwires not included
2. See page 22 for load pull reference planes where the performance was simulated.

18GHz, Load-pull

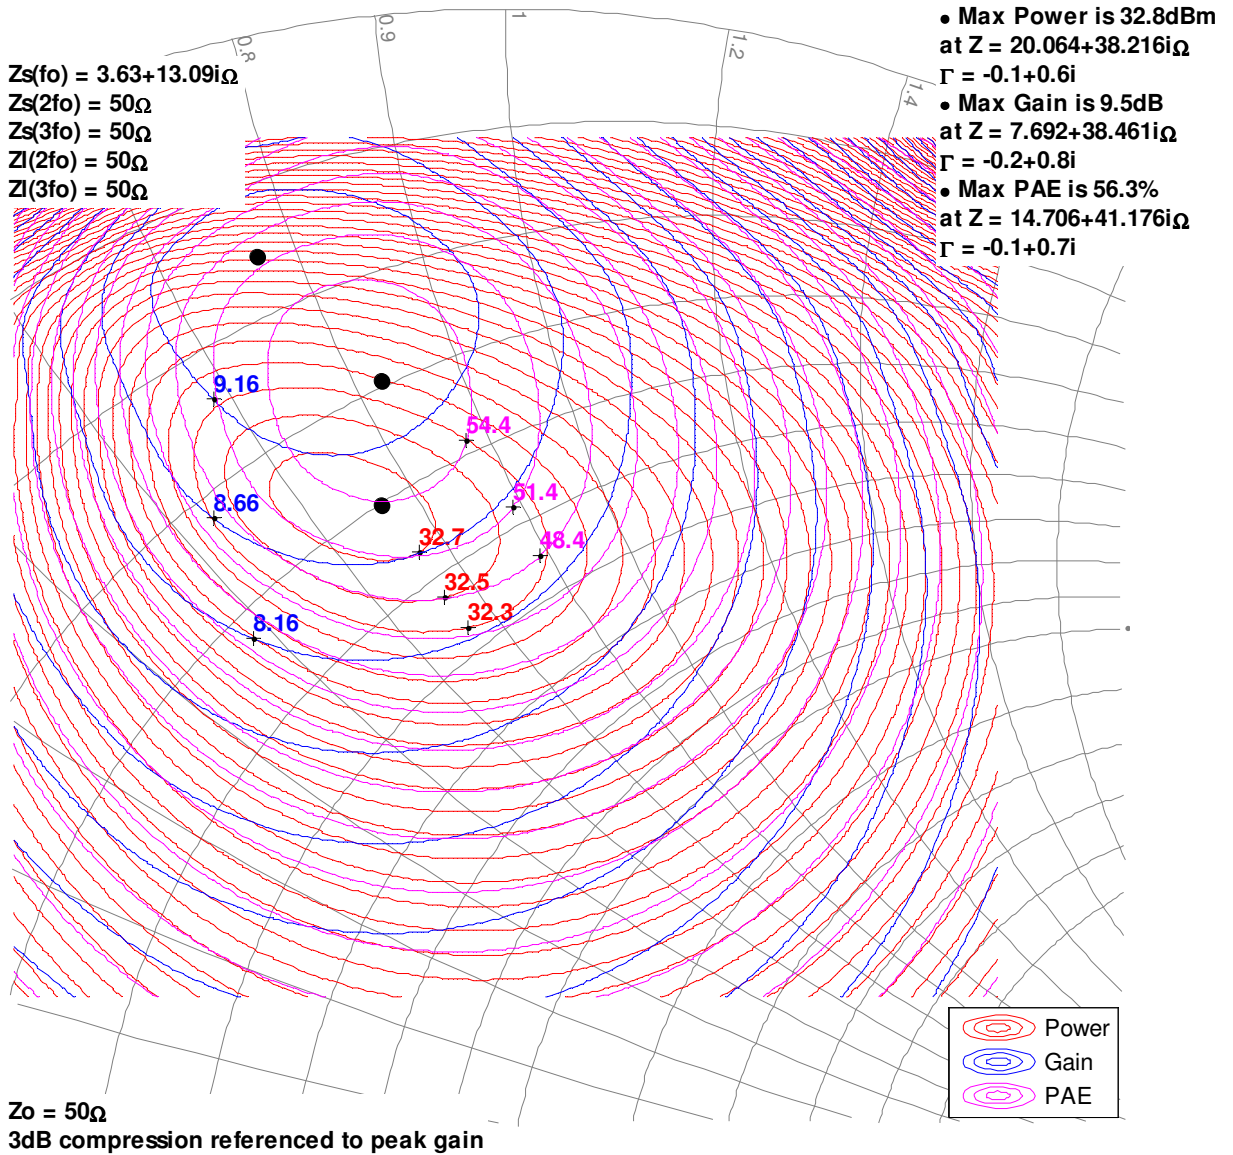


Load-Pull Smith Charts<sup>1, 2</sup>

Notes:

1. Test Conditions:  $V_D = 28\text{ V}$ ,  $I_{DQ} = 40\text{ mA}$ , CW, Bondwires not included
2. See page 22 for load pull reference planes where the performance was simulated.

3GHz, Load-pull

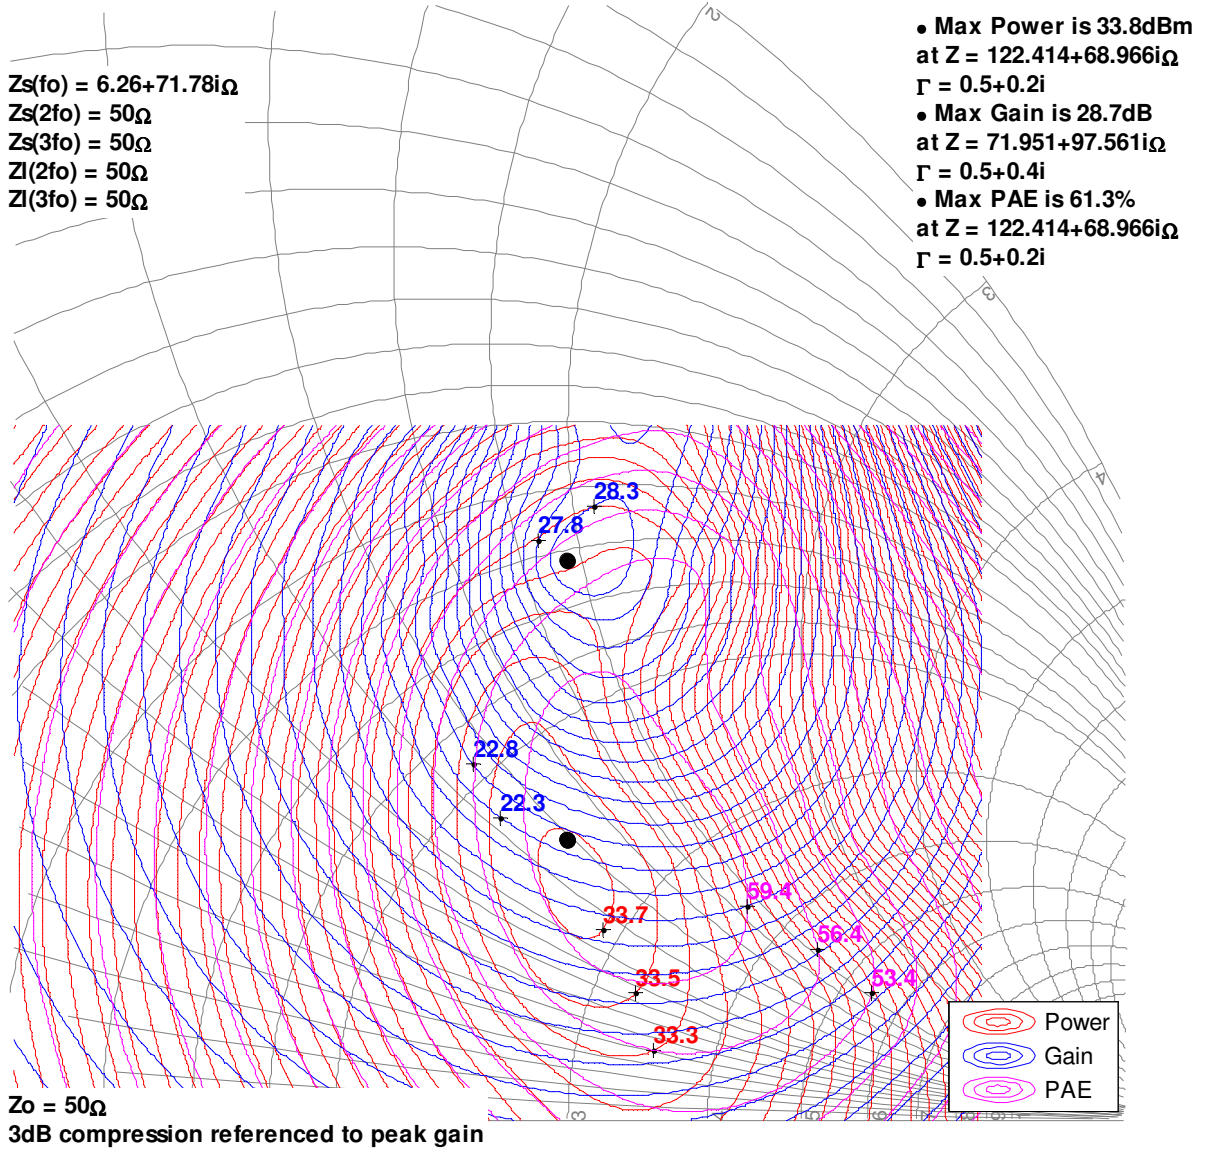


Load-Pull Smith Charts<sup>1, 2</sup>

Notes:

1. Test Conditions:  $V_D = 28\text{ V}$ ,  $I_{DQ} = 20\text{ mA}$ , CW, Bondwires not included
2. See page 22 for load pull reference planes where the performance was simulated.

6GHz, Load-pull

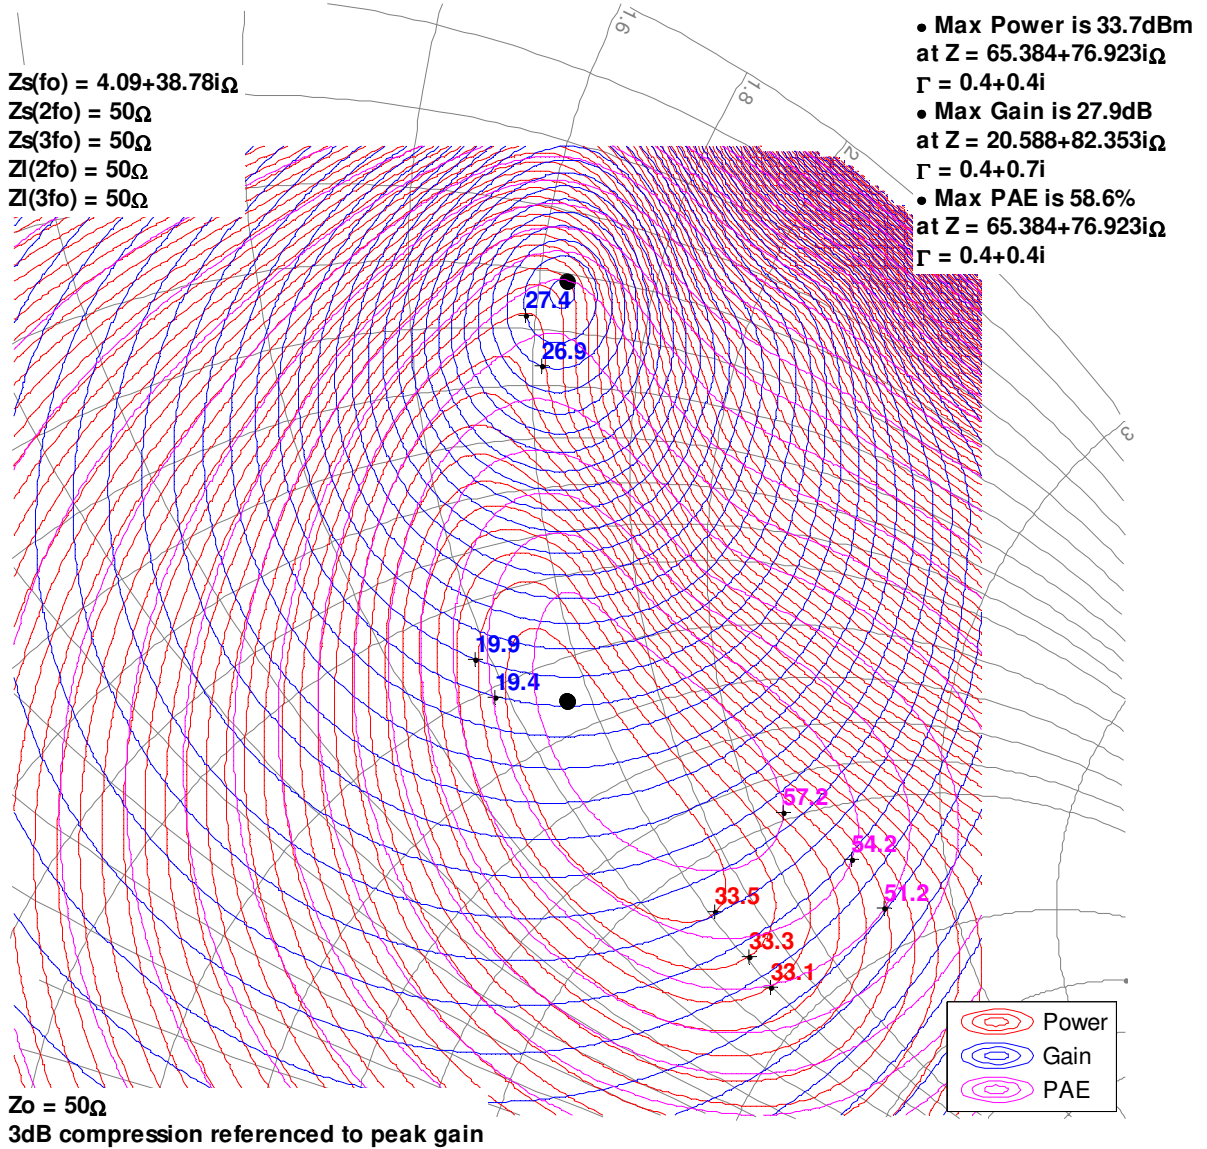


Load-Pull Smith Charts<sup>1, 2</sup>

Notes:

1. Test Conditions:  $V_D = 28\text{ V}$ ,  $I_{DQ} = 20\text{ mA}$ , CW, Bondwires not included
2. See page 22 for load pull reference planes where the performance was simulated.

10GHz, Load-pull

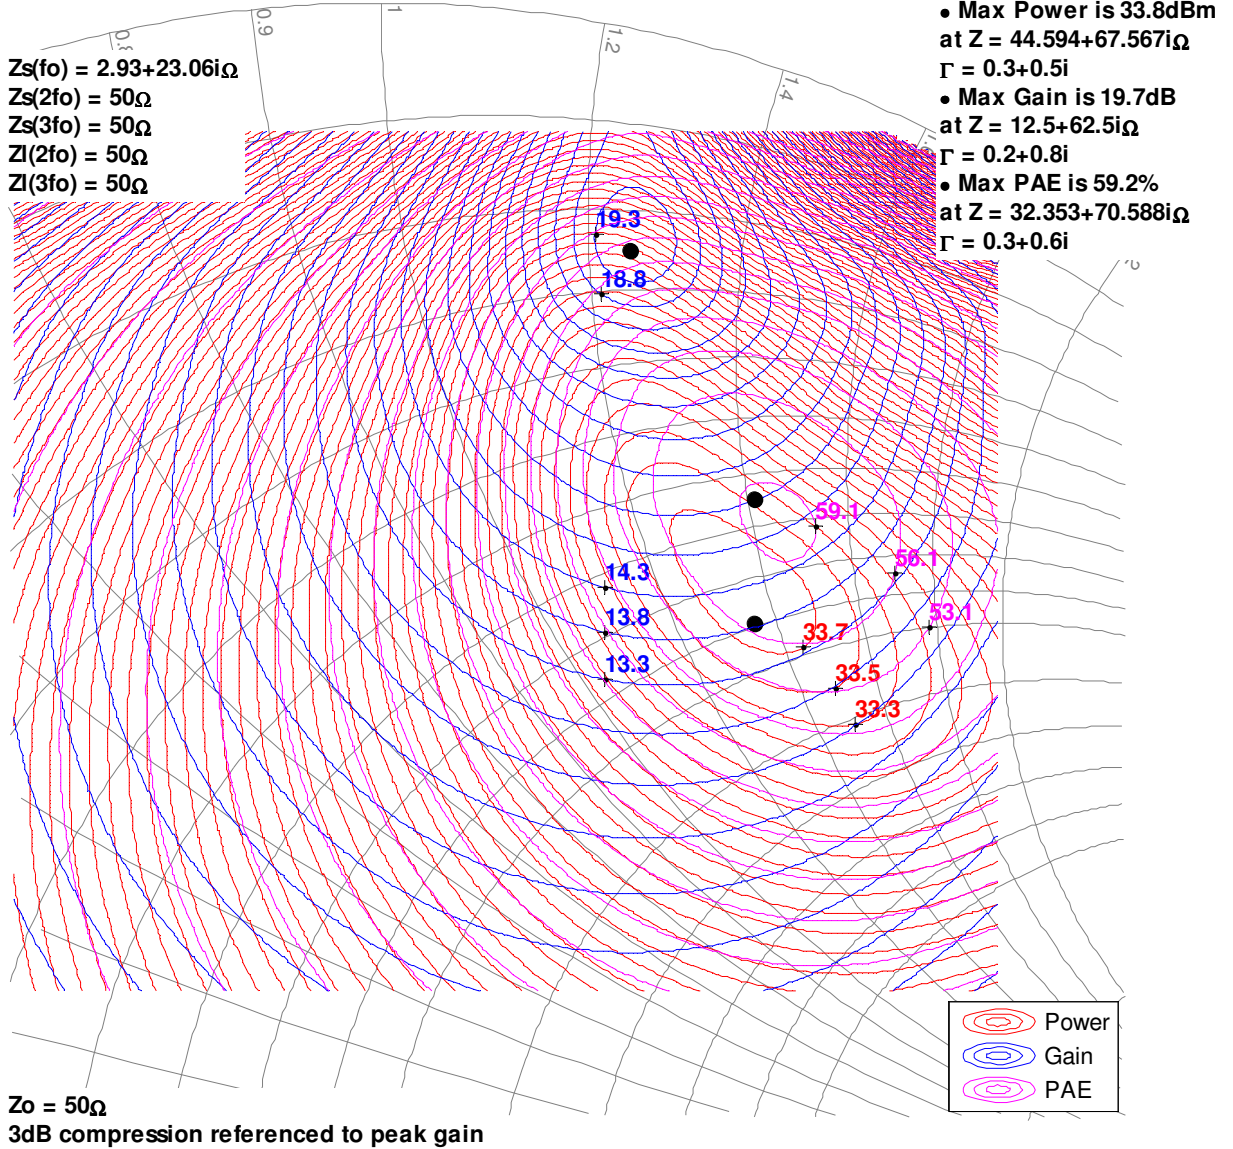


Load-Pull Smith Charts<sup>1, 2</sup>

Notes:

1. Test Conditions:  $V_D = 28\text{ V}$ ,  $I_{DQ} = 20\text{ mA}$ , CW, Bondwires not included
2. See page 22 for load pull reference planes where the performance was simulated.





18GHz, Load-pull

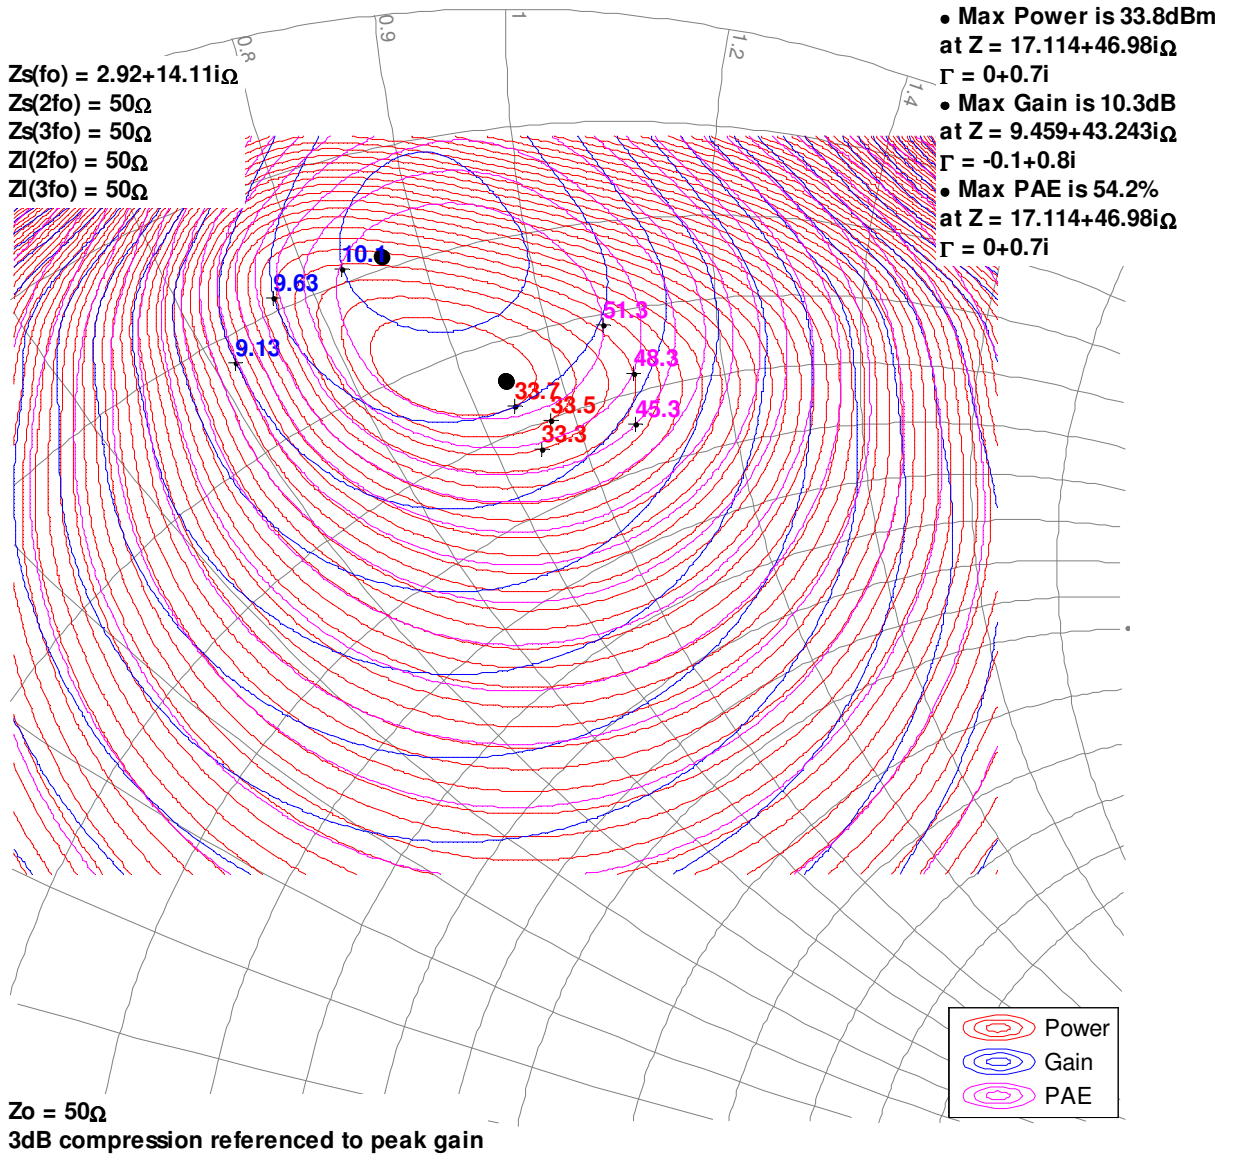

### Typical Model Performance – Load-Pull Drive-up<sup>1,2</sup>

Notes:





1. CW, Bondwires not included
2. See page 22 for load-pull and source-pull reference planes where the performance was measured.

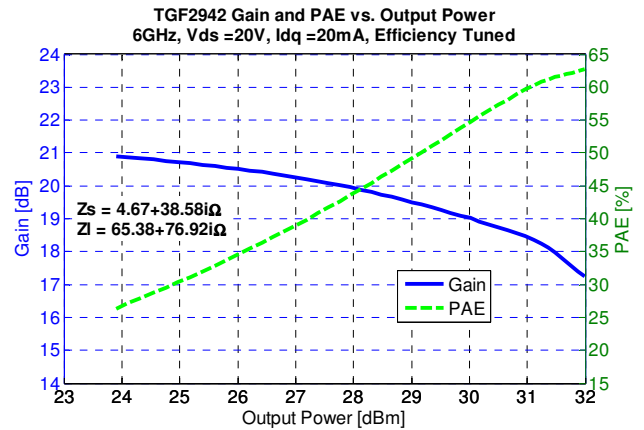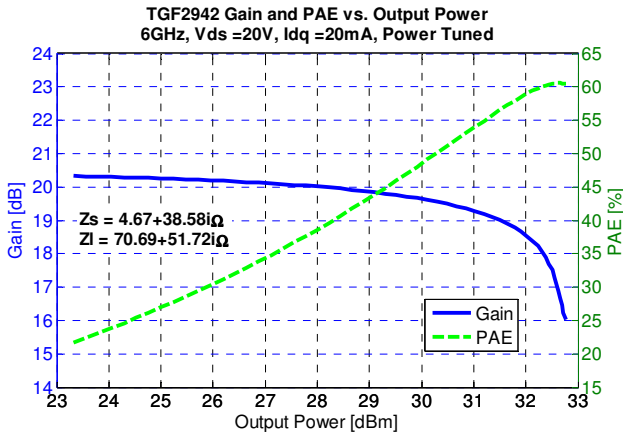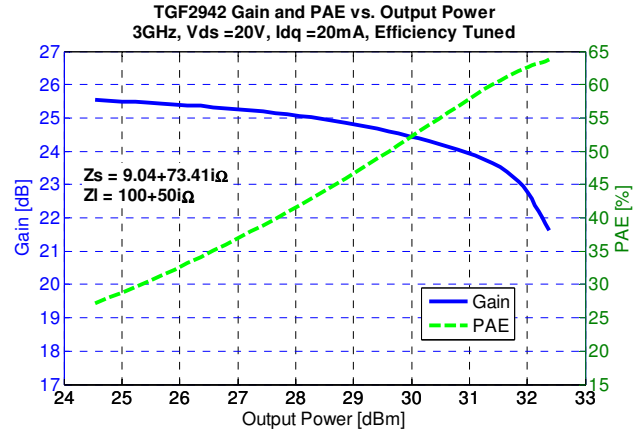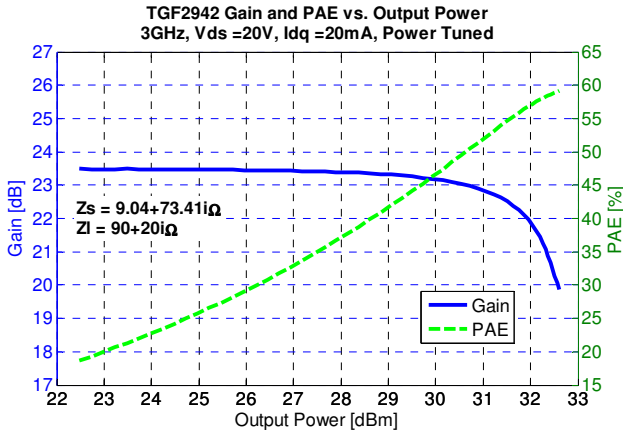

### Typical Model Performance – Load-Pull Drive-up<sup>1,2</sup>

Notes:

1. CW, Bondwires not included
2. See page 22 for load-pull and source-pull reference planes where the performance was measured.

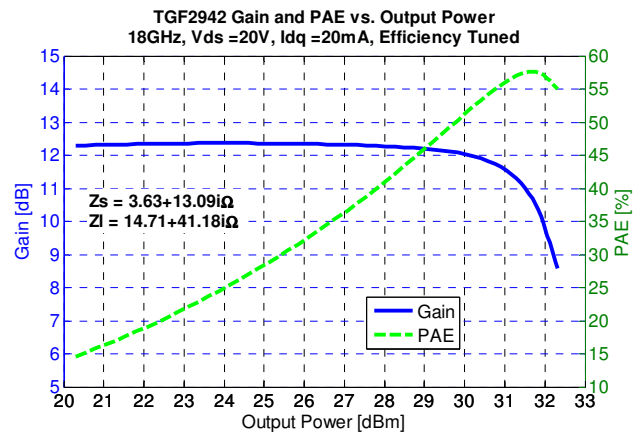
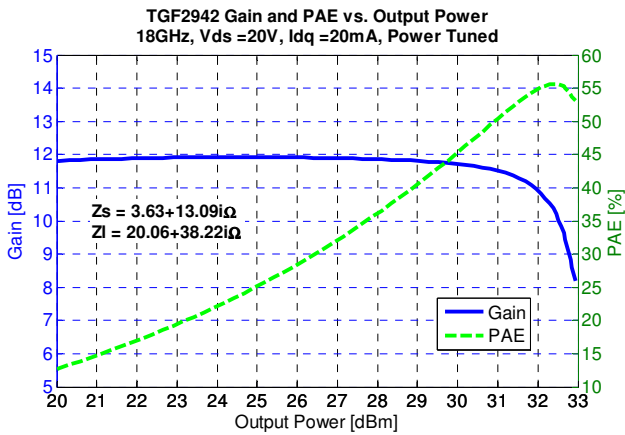
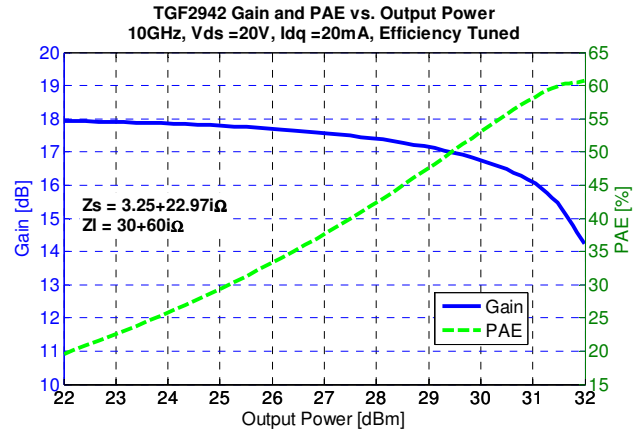
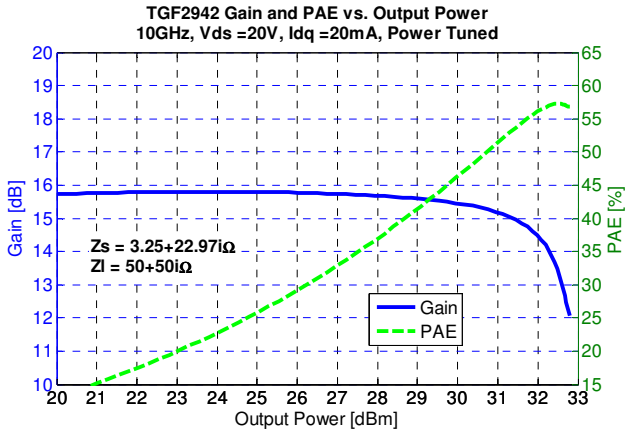




### Typical Model Performance – Load-Pull Drive-up<sup>1, 2</sup>

Notes:





1. CW, Bondwires not included
2. See page 22 for load-pull and source-pull reference planes where the performance was measured.

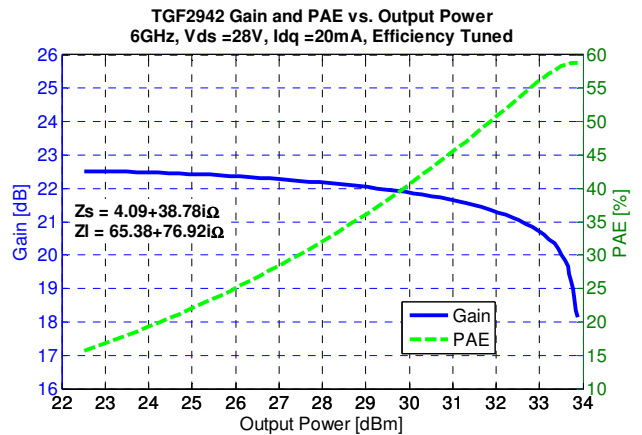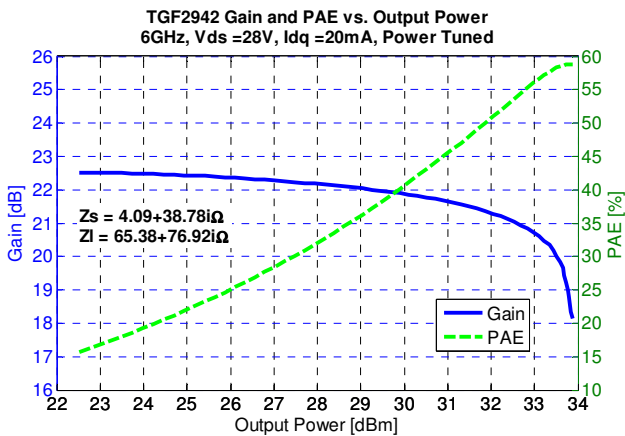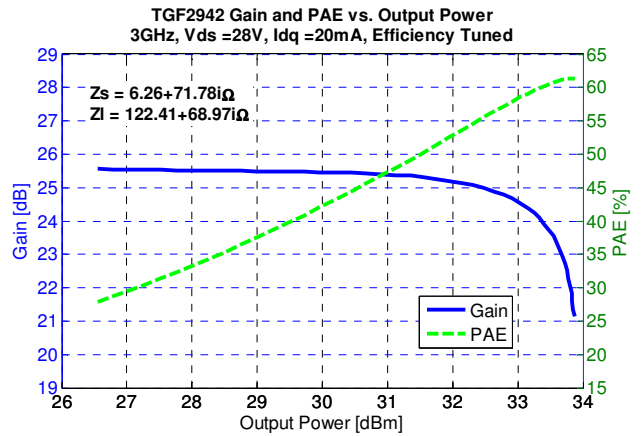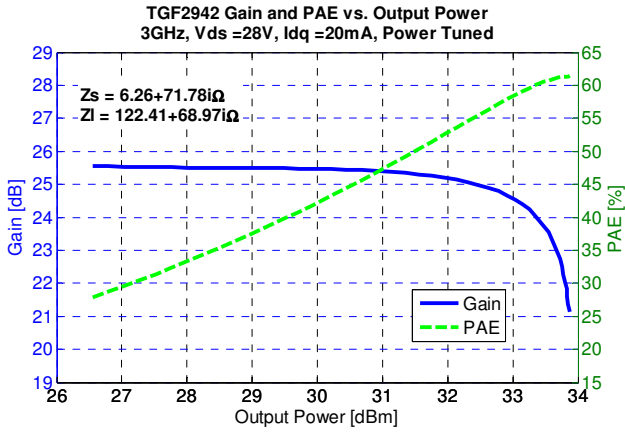


### Typical Model Performance – Load-Pull Drive-up<sup>1,2</sup>

Notes:

1. CW, Bondwires not included
2. See page 22 for load-pull and source-pull reference planes where the performance was measured.

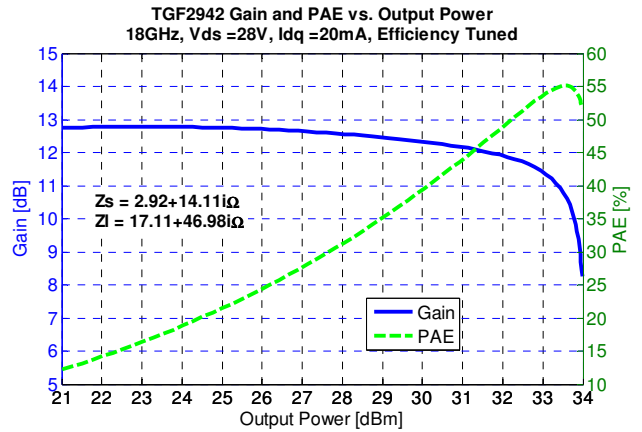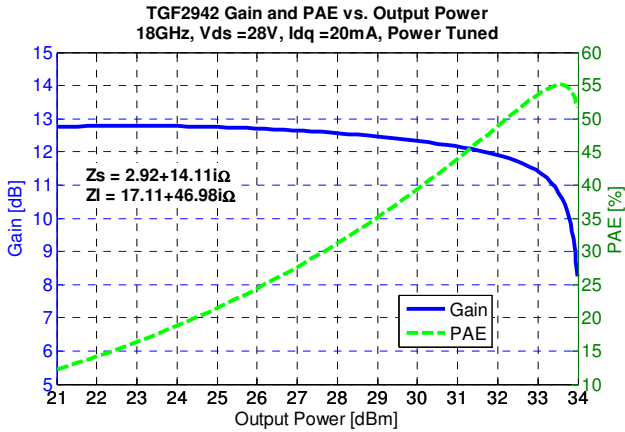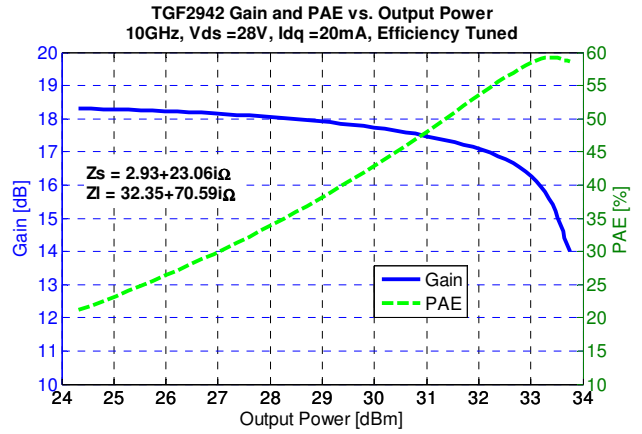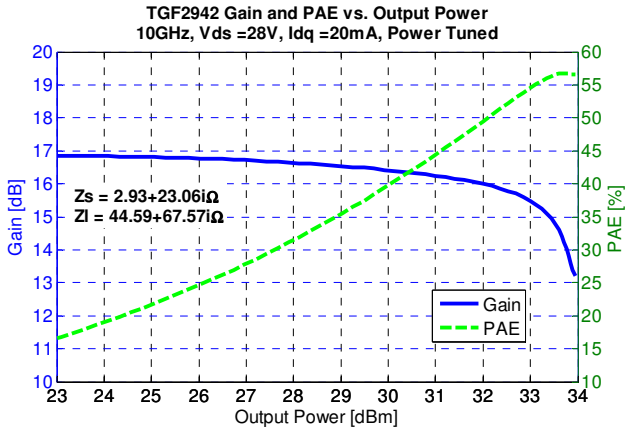


Median Lifetime<sup>1</sup>

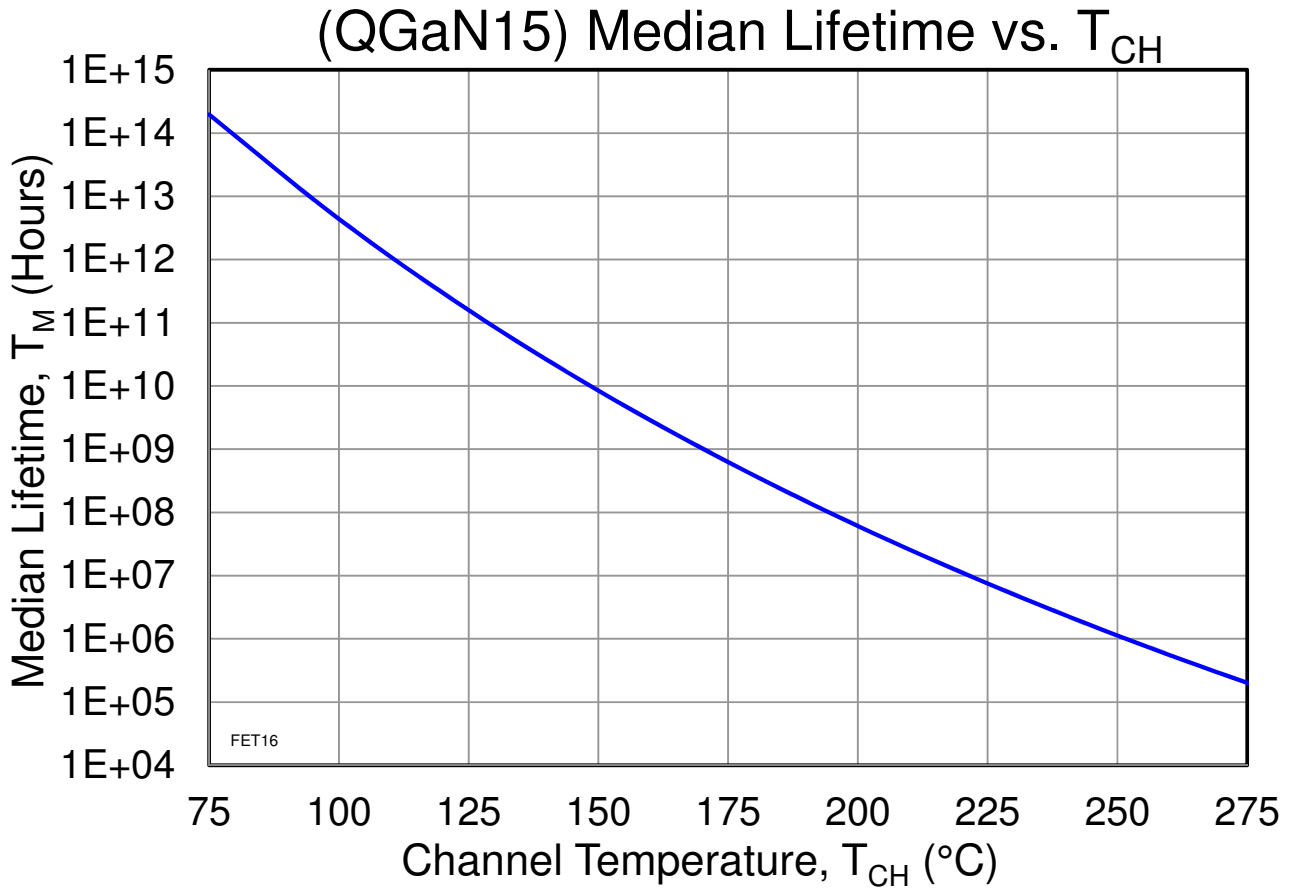

Notes:

1. Test Conditions:  $V_D = +28\text{ V}$ ; Failure Criteria = 10% reduction in  $I_{D\_MAX}$  during DC Life Testing

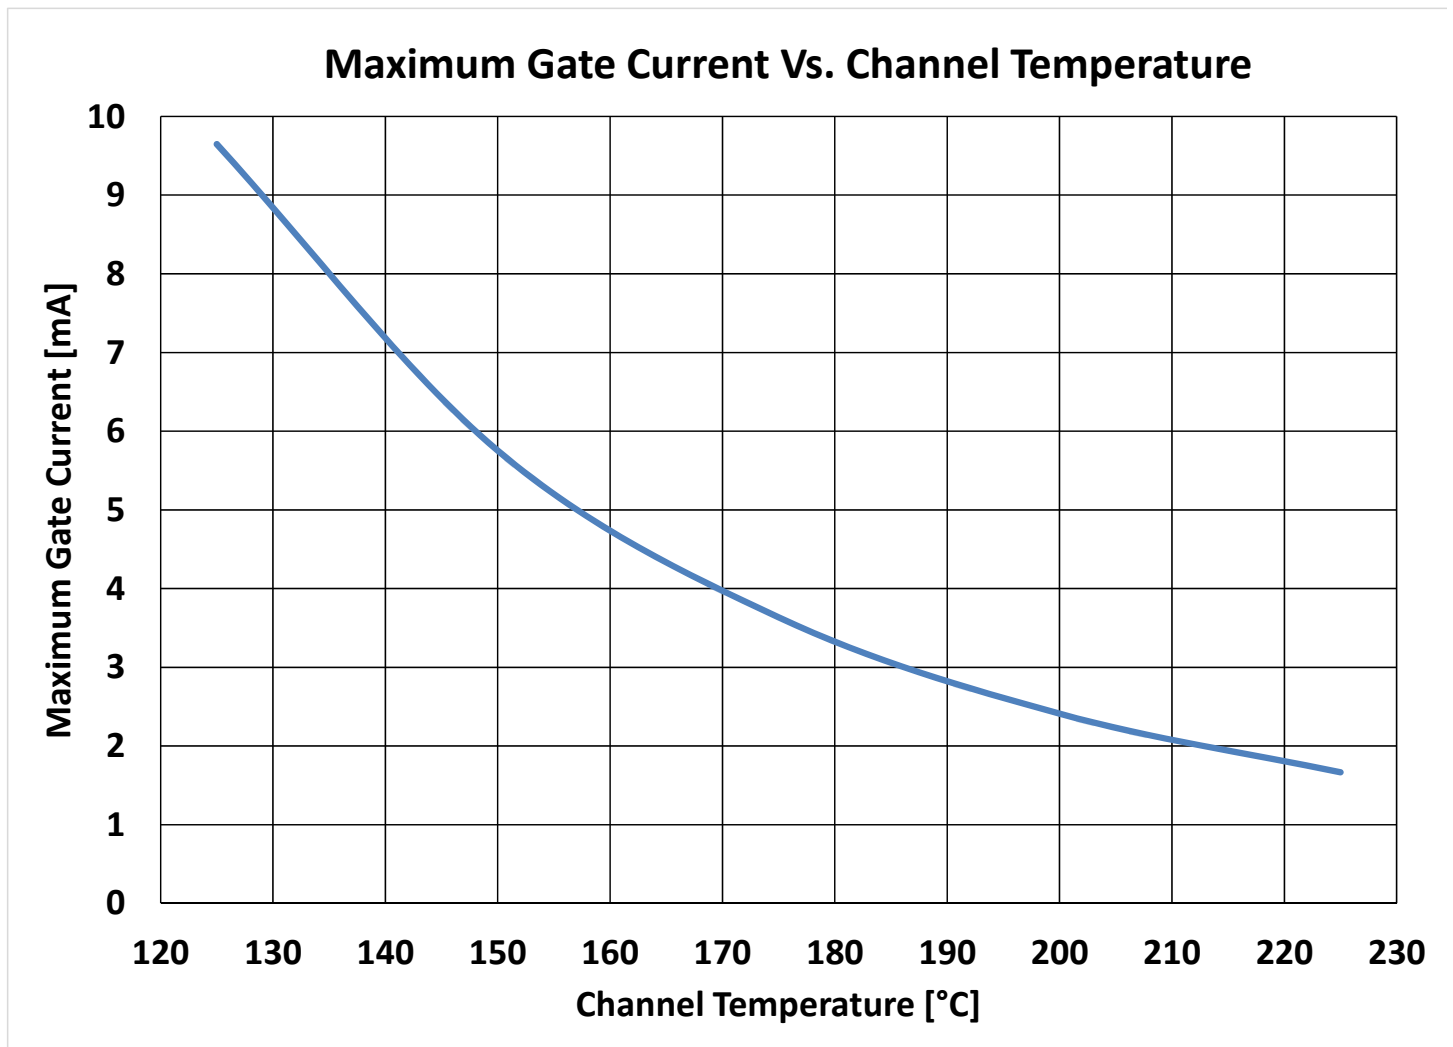
**Maximum Gate Current**

### Thermal and Reliability Information

Parameter	Test Conditions	Value	Units
Thermal Resistance, $\theta_{JC}$ <sup>(1)</sup>	CW	45.0	°C/W
Channel Temperature, $T_{CH}$	$T_{baseplate} = +85\text{ °C}$	103	°C
Median Lifetime, $T_M$	$P_{DISS} = 0.4\text{ W}$	2.9E12	Hrs
Thermal Resistance, $\theta_{JC}$ <sup>(1)</sup>	CW	47.5	°C/W
Channel Temperature, $T_{CH}$	$T_{baseplate} = +85\text{ °C}$	123	°C
Median Lifetime, $T_M$	$P_{DISS} = 0.8\text{ W}$	2.0E11	Hrs
Thermal Resistance, $\theta_{JC}$ <sup>(1)</sup>	CW	49.2	°C/W
Channel Temperature, $T_{CH}$	$T_{baseplate} = +85\text{ °C}$	144	°C
Median Lifetime, $T_M$	$P_{DISS} = 1.2\text{ W}$	1.7E10	Hrs
Thermal Resistance, $\theta_{JC}$ <sup>(1)</sup>	CW	51.3	°C/W
Channel Temperature, $T_{CH}$	$T_{baseplate} = +85\text{ °C}$	167	°C
Median Lifetime, $T_M$	$P_{DISS} = 1.6\text{ W}$	1.4E9	Hrs
Thermal Resistance, $\theta_{JC}$ <sup>(1)</sup>	CW	53.5	°C/W
Channel Temperature, $T_{CH}$	$T_{baseplate} = +85\text{ °C}$	192	°C
Median Lifetime, $T_M$	$P_{DISS} = 2.0\text{ W}$	1.2E8	Hrs
Thermal Resistance, $\theta_{JC}$ <sup>(1)</sup>	CW	55.4	°C/W
Channel Temperature, $T_{CH}$	$T_{baseplate} = +85\text{ °C}$	218	°C
Median Lifetime, $T_M$	$P_{DISS} = 2.4\text{ W}$	1.3E7	Hrs


Notes:

1. Thermal resistance measured at back of package.

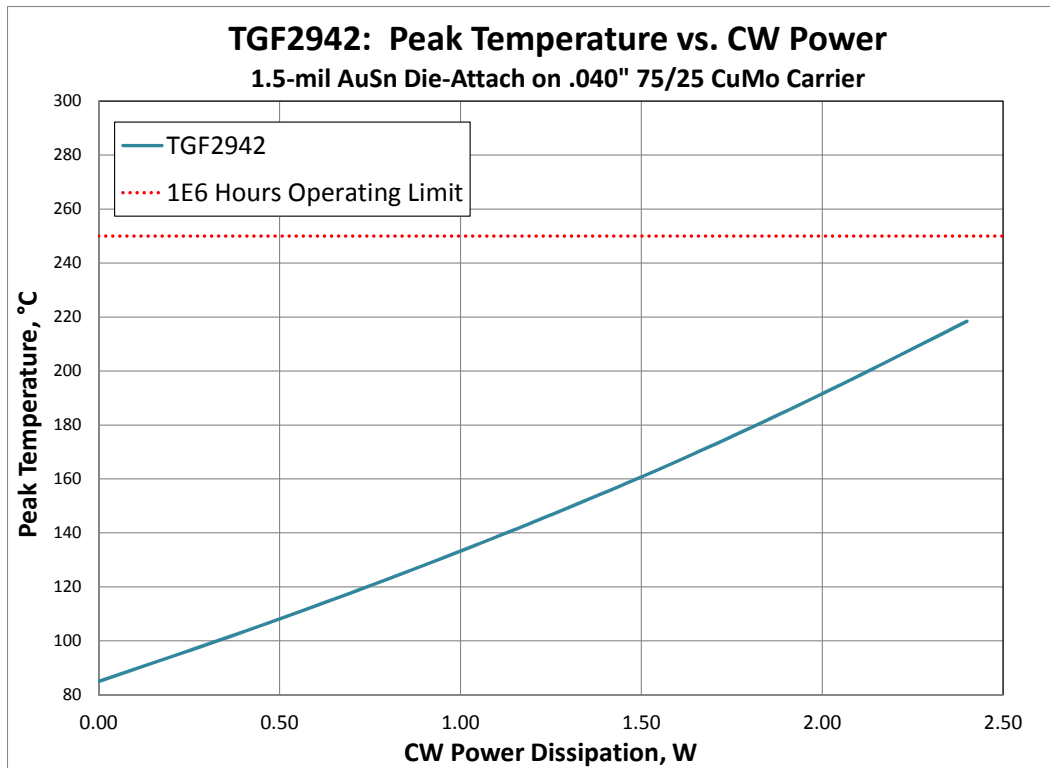

### Pin Configuration and Description<sup>1</sup>

Notes: 1. Die size tolerance is  $\pm 0.015$  mm.

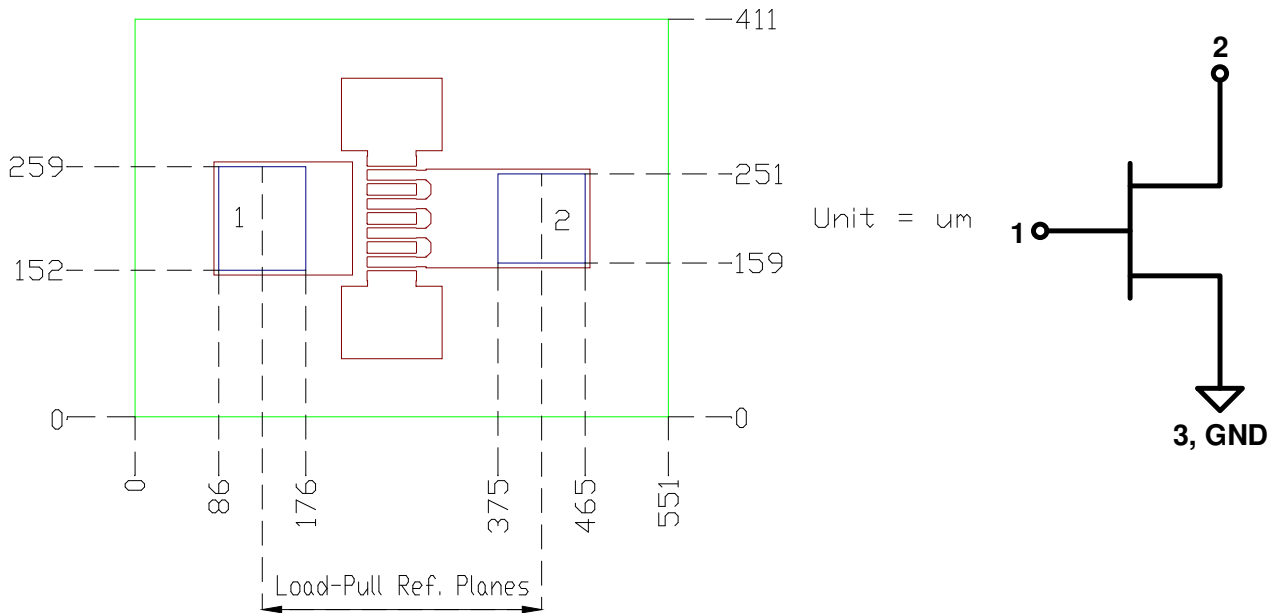

### Pin Description

Pin	Symbol	Description	Dimension
1	RF IN / $V_G$	Gate	0.107 x 0.090 mm
2	RF OUT / $V_D$	Drain	0.092 x 0.090 mm
3	Source	Source / Ground	0.411 x 0.551 mm

## Assembly Notes

Component placement and adhesive attachment assembly notes:

- Vacuum pencils and/or vacuum collets are the preferred method of pick up.
- Air bridges must be avoided during placement.
- The force impact is critical during auto placement.
- Organic attachment (i.e. epoxy) not recommended.

Reflow process assembly notes:

- Use AuSn (80/20) solder and limit exposure to temperatures above 300°C to 3-4 minutes, maximum.
- An alloy station or conveyor furnace with reducing atmosphere should be used.
- Do not use any kind of flux.
- Coefficient of thermal expansion matching is critical for long-term reliability.
- Devices must be stored in a dry nitrogen atmosphere.

Interconnect process assembly notes:

- Ball bonding is the preferred interconnect technique, except where noted on the assembly diagram.
- Force, time, and ultrasonics are critical bonding parameters.
- Aluminum wire should not be used.
- Devices with small pad sizes should be bonded with 0.0007-inch wire.

## Disclaimer

GaN/SiC devices are susceptible to damage from Electrostatic Discharge. Proper precautions should be observed during handling, assembly and test.

### Bias-up Procedure

1. Set  $V_G$  to -4 V.
2. Set  $I_D$  limit to 25 mA.
3. Slowly adjust  $V_G$  until  $I_D$  reaches 20 mA.
4. Set  $I_D$  limit to 180 mA.
5. Apply RF signal.

### Bias-down Procedure

1. Turn off RF signal.
2. Turn off  $V_D$  and wait 1 second to allow drain capacitor discharge.
3. Turn off  $V_G$ .

### Handling Precautions

Parameter	Rating	Standard
ESD – Human Body Model (HBM)	N/A	ESDA / JEDEC JS-001-2012
ESD – Charged Device Model (CDM)	N/A	JEDEC JESD22-C101F
MSL – Moisture Sensitivity Level	N/A	IPC/JEDEC J-STD-020



Caution!  
ESD-Sensitive Device

### Solderability

Compatible with both lead-free (260°C max. reflow temp.) and tin/lead (245°C max. reflow temp.) soldering processes.

Solder profiles available upon request.

Contact plating: NiPdAu

### RoHS Compliance

This part is compliant with 2011/65/EU RoHS directive (Restrictions on the Use of Certain Hazardous Substances in Electrical and Electronic Equipment) as amended by Directive 2015/863/EU.

This product also has the following attributes:

- Lead Free
- Halogen Free (Chlorine, Bromine)
- Antimony Free
- TBBP-A (C<sub>15</sub>H<sub>12</sub>Br<sub>4</sub>O<sub>2</sub>) Free
- PFOS Free
- SVHC Free



### Contact Information

For the latest specifications, additional product information, worldwide sales and distribution locations, and information about Qorvo:

**Web:** [www.Qorvo.com](http://www.Qorvo.com)  
**Email:** [info-sales@qorvo.com](mailto:info-sales@qorvo.com)

**Tel:** +1.972.994.8465  
**Fax:** +1.972.994.8504

For technical questions and application information: **Email:** [info-products@qorvo.com](mailto:info-products@qorvo.com)

### Important Notice

The information contained herein is believed to be reliable; however, Qorvo makes no warranties regarding the information contained herein and assumes no responsibility or liability whatsoever for the use of the information contained herein. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for Qorvo products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information. **THIS INFORMATION DOES NOT CONSTITUTE A WARRANTY WITH RESPECT TO THE PRODUCTS DESCRIBED HEREIN, AND QORVO HEREBY DISCLAIMS ANY AND ALL WARRANTIES WITH RESPECT TO SUCH PRODUCTS WHETHER EXPRESS OR IMPLIED BY LAW, COURSE OF DEALING, COURSE OF PERFORMANCE, USAGE OF TRADE OR OTHERWISE, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.**

Without limiting the generality of the foregoing, Qorvo products are not warranted or authorized for use as critical components in medical, life-saving, or life-sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.

Copyright 2016 © Qorvo, Inc. | Qorvo is a registered trademark of Qorvo, Inc.





Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.