



STM8-SK/RAIS STM8-D/RAIS ST7-SK/RAIS ST7-D/RAIS

Raisonance's complete, low-cost starter kits for STM8 and ST7

Data brief

Features

Embedded RLink

- USB interface to host PC
- In-circuit debugging and programming
- Application board connection via ST SWIM, ICC or JTAG

REva motherboard


- 1 standard SO-DIMM connector to plug in daughterboards
- Digital and analog I/O evaluation features, including on-board LEDs, buttons, switches, external analog connector, temperature sensor and potentiometer
- I²C EEPROM and bus
- RS-232 driver and 2 DB9 connectors
- Prototype area
- VDD settings for 1.8 V, 3.3 V and 5 V microcontrollers
- USB powered, no external power required

Interchangeable REva daughterboard

- Features different STM8 and ST7 MCUs to permit application development for a wide range of devices and may include additional device specific features

Raisonance software

- Ride7: Editor, SIMICE simulator, Rbuilder, C compiler, debugger, Project manager, and CodeCompressor
- RFlasher7 device programming interface

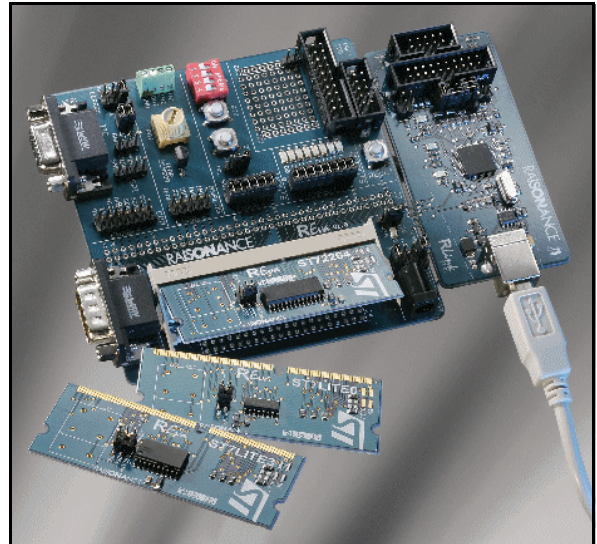

Description

The REva starter kits are Raisonance's complete, cost-effective solutions for starting application development and evaluating STM8x, ST7LITEx, ST7Fox, ST7232x, ST7234x, ST7236x and ST7263B microcontrollers.

Kits contain all the hardware and software required to develop applications for microcontrollers, including the REva evaluation board, target STM8 and ST7 microcontrollers, embedded RLink for in-circuit debugging and in-circuit programming and the raisonance integrated development environment (Ride7) with application builder.

Architecture

Embedded RLink: In-circuit debugging and programming tool that uses SWIM for the STM8, in-circuit communication (ICC) for the ST7 and supports the JTAG protocol. It interfaces with the host PC via a USB connection.

REva mother board: Universal evaluation board designed for quick and easy evaluation of a complete range of features (I/Os, ADC, SPI, CAN, I2C...) for a variety of STM8 and ST7s. It is powered from the RLink's USB connection to the host PC.

REva daughterboards: Interchangeable boards featuring different STM8 and ST7 microcontrollers, make it easy to evaluate and develop applications for a complete range of MCUs from a single evaluation platform. All boards have a clock source selection jumper, and an oscillator footprint. See [Table 1](#) and [Table 2](#) for details.

Raisonance's software: RLink can be driven by Raisonance's Ride7 or RFlasher7.

- **Ride7:** Drives the RLink and offers seamless control of software development tools (project manager, editor, compiler, assembler, linker, debugger, etc.) from an intuitive graphical interface. It offers full integration of the relevant C/C++ toolsets, project management, code editor and SIMICE instruction set simulator. Ride7 includes:
 - **RBUILDER** allows users to rapidly configure device peripherals in a GUI and generate the C source code for peripherals at the click of a button without writing a single line of code
 - **SIMICE** simulator
 - Raisonance STM8 and ST7 C compiler
 - High-level language debugging
 - Project manager
 - Color syntax highlighting editor
 - Free downloads of evaluation versions with unlimited debugging from www.raisonance.com
 - The optional **CodeCompressor** allows post-link optimization of the entire applications code using optimizations like in-lining, factorizing and peepholing, which can reduce application code by 5 to 15%.
- **RFlasher7:** Raisonance's easy-to-use device programming interface drives RLink and allows users to erase, program, view and verify microcontroller memory. RFlasher7 also includes automated mode for automatic execution of programming sequences for mass programming and project mode that allows users to save their programming configurations. In this operating mode, tasks become intuitive and can be achieved with only a few clicks such as:
 - Flash memory erasing and programming,
 - Flash or RAM memory dumping,
 - blank check, programming verifications,
 - mass programming process.

REva starter kits

REva boards can be purchased in the starter kit format, as shown in [Table 1](#).

REva standalone daughterboards are also available independently from STMicroelectronics, as shown in [Table 2](#).

Table 1. Raisonance starter kits for the STM8 and ST7

Starter kit (order code)	Daughterboard ID marking	Additional features ⁽¹⁾	MCU family supported	MCU device	MCU package
STM8/128-SK/RAIS	STM8S105		STM8S103/5	STM8S105C6	LQFP48
	STM8S208RB		STM8S207/8	STM8S208RB	LQFP64
	STM8S903		STM8S903	STM8S903K3	LQFP32
ST7FLITE-SK/RAIS	ST7LITEU0		ST7Ultralite0	ST7FLITEU0	DIP16
	ST7LITE0		ST7FLITE0	ST7FLITE09Y0	SO16
	ST7LITE1B		ST7FLIT1xB	ST7FLIT19BF1	SO20
	ST7LITE3		ST7FLITE3	ST7FLITE39F2	SO20
ST7232X-SK/RAIS	ST72321B		ST72321	ST72F321BAR9	LQFP64
	ST72325		ST72324/5	ST72F325AR9	LQFP64
ST72F34X-SK/RAIS	ST72345		ST7234x	ST72F345C4	LQFP48
	ST72264		ST7226x	ST72F264G2	S028
ST2F36X-SK/RAIS	ST72361		ST72361 ST7256X	ST72F361AR9	LQFP64
ST2F63B-SK/RAIS	ST7263B	Clock source selection jumper USB mini-B connector 24 MHz oscillator	ST7260 ST7263B	ST72F63BH6	LQFP48

1. All kits have a clock source selection jumper, and an oscillator footprint unless stated otherwise.

Table 2. Raisonance standalone daughterboards for the STM8 and ST7

Standalone daughterboard (order code)	Daughterboard ID marking	Additional features ⁽¹⁾	MCU family supported	MCU device	MCU package
STM8S/32-D/RAIS	STM8S105		STM8S103/5	STM8S105C6	LQFP48
STM8/128-D/RAIS	STM8S208RB		STM8S207/8	STM8S208RB	LQFP64
STM8S/8-D/RAIS	STM8S903		STM8S903	STM8S903K3	LQFP32
ST7FLIT1B-D/RAIS	ST7LITE1B		ST7FLIT1xB	ST7FLIT19BF1	SO20
ST7FLITU0-D/RAIS	ST7LITEU0		ST7Ultralite0	ST7FLITEU0	DIP16
ST7FLITUS-D/RAIS	ST7LITEUS5		ST7UltraliteS	ST7FLITEUS	DIP16
ST7FLI49-D/RAIS	ST7FLI49		ST7FLITE4	ST7FLITE49K2	LQFP32
ST7FLI49M-D/RAIS	ST7LITE4M		ST7FLITE4M	ST7FLI49MK1	LQFP32
ST72321B-D/RAIS	ST72321B		ST72321	ST72F321BAR9	LQFP64
ST72325-D/RAIS	ST72325		ST72324/25	ST72F325AR9	LQFP64
ST72345-D/RAIS	ST72345		ST7234x	ST72F345C4	LQFP48
ST7FOXA0-D/RAIS	ST7FOXA0		ST7FOXA0	ST7FOXA0	DIP16
ST7FOXK2-D/RAIS	ST7FOXK2		ST7FOXK2	ST7FOXK2	LQFP32

1. All kits have a clock source selection jumper, and an oscillator footprint unless stated otherwise.

Ordering information

REva starter kits and Raisonance development tools can be ordered from Raisonance or from your nearest ST Distributor or sales office.

REva starter kits based on the same mother/daughterboard design, with embedded RLink, driven by Ride software are also available for the STM32, STR7 and STR9 ARM® core-based microcontrollers and for the µPSD microcontrollers. For more information refer to www.st.com/mcu.

For more information, documentation and downloads, please refer to www.raisonance.com. For more information about which microcontrollers are supported, refer to www.raisonance.com or the STMicroelectronics microcontroller support site, www.st.com.

Revision history

Table 3. Document revision history

Date	Revision	Changes
01-Mar-2005	1	Initial release.
24-Aug-2005	2	Added part number ST7232x-SK/RAIS and ST7LITE1B daughterboard.
21-June-2006	3	Added part number ST72F34X-SK/RAIS, ST72F36X-SK/RAIS and ST72F63B-SK/RAIS. Added daughterboard features to Table 1.
21-Jul-2008	4	Added STM8 microcontroller family to supported devices. Updated the Raisonance's software paragraph, replaced Table 1 with Tables 1 and 2, and reformatted the document.
09-Apr-2010	5	Added STM8S105 and STM8S903 daughterboards to Table 1 and Table 2 .

Please Read Carefully:

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.

UNLESS EXPRESSLY APPROVED IN WRITING BY AN AUTHORIZED ST REPRESENTATIVE, ST PRODUCTS ARE NOT RECOMMENDED, AUTHORIZED OR WARRANTED FOR USE IN MILITARY, AIR CRAFT, SPACE, LIFE SAVING, OR LIFE SUSTAINING APPLICATIONS, NOR IN PRODUCTS OR SYSTEMS WHERE FAILURE OR MALFUNCTION MAY RESULT IN PERSONAL INJURY, DEATH, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE. ST PRODUCTS WHICH ARE NOT SPECIFIED AS "AUTOMOTIVE GRADE" MAY ONLY BE USED IN AUTOMOTIVE APPLICATIONS AT USER'S OWN RISK.

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2010 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Philippines - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

www.st.com



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.