

### FEATURES

**Frequency range:** 17.7 GHz to 19.7 GHz

**Typical gain of** >25.1 dB

**Low noise input**

**Noise figure:** 2.4 dB typical

**High linearity input**

**>−1.5 dBm typical input third-order intercept (IIP3)**

**−11.5 dBm input 1 dB compression point (P1dB) at 19.7 GHz**

**Matched 50  $\Omega$  single-ended input**

**Matched 100  $\Omega$  differential outputs**

**8-lead, 2.00 mm  $\times$  2.00 mm LFCSP microwave packaging**

### APPLICATIONS

**Point to point microwave radios**

**Instrumentation**

**Satellite communications (SATCOM)**

**Phased arrays**

### GENERAL DESCRIPTION

The [ADL5725](#) is a narrow-band, high performance, low noise amplifier (LNA) targeting microwave radio link receiver designs. The monolithic silicon germanium (SiGe) design is optimized for microwave radio link bands ranging from 17.7 GHz to 19.7 GHz. The unique design offers a single-ended 50  $\Omega$  input impedance and provides a 100  $\Omega$  balanced differential output that is ideal for driving Analog Devices, Inc., differential downconverters and radio frequency (RF) sampling analog-to-digital converters (ADCs).

### FUNCTIONAL BLOCK DIAGRAM

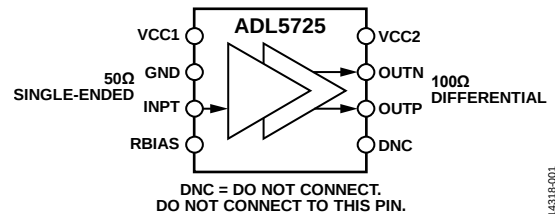


Figure 1.

1431P-001

This low noise amplifier provides noise figure performance that, in the past, required more expensive three-five (III-V) compounds process technology to achieve.

The [ADL5721](#) and [ADL5723](#) to [ADL5726](#) family of narrow-band LNAs are each packaged in a tiny, thermally enhanced, 2.00 mm  $\times$  2 mm LFCSP package. The [ADL5721](#) and [ADL5723](#) to [ADL5726](#) family operates over the temperature range of  $-40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$ .

TABLE OF CONTENTS

|                                                  |   |                                            |    |
|--------------------------------------------------|---|--------------------------------------------|----|
| Features .....                                   | 1 | Typical Performance Characteristics .....  | 6  |
| Applications .....                               | 1 | Theory of Operation .....                  | 8  |
| Functional Block Diagram .....                   | 1 | Applications Information .....             | 9  |
| General Description .....                        | 1 | Layout .....                               | 9  |
| Revision History .....                           | 2 | Differential vs. Single-Ended Output ..... | 9  |
| Specifications.....                              | 3 | Evaluation Board .....                     | 10 |
| AC Specifications.....                           | 3 | Initial Setup .....                        | 10 |
| DC Specifications .....                          | 3 | Results.....                               | 10 |
| Absolute Maximum Ratings.....                    | 4 | Basic Connections for Operation.....       | 11 |
| Thermal Resistance .....                         | 4 | Outline Dimensions .....                   | 12 |
| ESD Caution.....                                 | 4 | Ordering Guide .....                       | 12 |
| Pin Configuration and Function Descriptions..... | 5 |                                            |    |

REVISION HISTORY

4/16—Revision 0: Initial Version

## SPECIFICATIONS

### AC SPECIFICATIONS

VCC1 = 1.8 V, VCC2 = 3.3 V, RBIAS = 357  $\Omega$ , T = 25°C, Z<sub>SOURCE</sub> = 50  $\Omega$ , Z<sub>LOAD</sub> = 100  $\Omega$  differential, unless otherwise noted.

Table 1.

| Parameter                           | Test Conditions/Comments                                              | Min  | Typ   | Max  | Unit |
|-------------------------------------|-----------------------------------------------------------------------|------|-------|------|------|
| FREQUENCY RANGE                     |                                                                       | 17.7 |       | 19.7 | GHz  |
| FREQUENCY = 17.7 GHz                |                                                                       |      |       |      |      |
| Gain (S21)                          | $\Delta f = 1$ MHz, input power (P <sub>IN</sub> ) = –30 dBm per tone |      | 27.8  |      | dB   |
| Noise Figure                        |                                                                       |      | 2.4   |      | dB   |
| Input Third-Order Intercept (IIP3)  |                                                                       |      | –1.5  |      | dBm  |
| Input 1 dB Compression Point (P1dB) |                                                                       |      | –14   |      | dBm  |
| Input Return Loss (S11)             |                                                                       |      | 7     |      | dB   |
| Output Return Loss (S22)            |                                                                       |      | 8     |      | dB   |
| FREQUENCY = 19.7 GHz                |                                                                       |      |       |      |      |
| Gain (S21)                          | $\Delta f = 1$ MHz, P <sub>IN</sub> = –30 dBm per tone                |      | 25.1  |      | dB   |
| Noise Figure                        |                                                                       |      | 2.4   |      | dB   |
| Input Third-Order Intercept (IIP3)  |                                                                       |      | 2.0   |      | dBm  |
| Input 1 dB Compression Point (P1dB) |                                                                       |      | –11.5 |      | dBm  |
| Input Return Loss (S11)             |                                                                       |      | 10    |      | dB   |
| Output Return Loss (S22)            |                                                                       |      | 10    |      | dB   |

### DC SPECIFICATIONS

Table 2.

| Parameter                         | Test Conditions/Comments       | Min  | Typ | Max  | Unit |
|-----------------------------------|--------------------------------|------|-----|------|------|
| POWER INTERFACE                   |                                |      |     |      |      |
| Voltage                           |                                |      |     |      |      |
| VCC1                              |                                | 1.65 | 1.8 | 1.95 | V    |
| VCC2                              |                                | 3.1  | 3.3 | 3.5  | V    |
| Quiescent Current vs. Temperature |                                |      |     |      |      |
| VCC1                              | T <sub>A</sub> = 25°C          |      | 18  |      | mA   |
|                                   | –40°C ≤ T <sub>A</sub> ≤ +85°C |      | 19  |      | mA   |
| VCC2                              | T <sub>A</sub> = 25°C          |      | 88  |      | mA   |
|                                   | –40°C ≤ T <sub>A</sub> ≤ +85°C |      | 89  |      | mA   |

## ABSOLUTE MAXIMUM RATINGS

Table 3.

| Parameter                                  | Rating          |
|--------------------------------------------|-----------------|
| Supply Voltages                            |                 |
| VCC1                                       | 2.25 V          |
| VCC2                                       | 4.1 V           |
| Maximum Junction Temperature               | 150°C           |
| Operating Temperature Range                | –40°C to +85°C  |
| Storage Temperature Range                  | –55°C to +125°C |
| Lead Temperature Range (Soldering, 60 sec) | –65°C to +150°C |

Stresses at or above those listed under Absolute Maximum Ratings may cause permanent damage to the product. This is a stress rating only; functional operation of the product at these or any other conditions above those indicated in the operational section of this specification is not implied. Operation beyond the maximum operating conditions for extended periods may affect product reliability.

## THERMAL RESISTANCE

$\theta_{JA}$  is thermal resistance, junction to ambient (°C/W),  $\theta_{JB}$  is thermal resistance, junction to board (°C/W), and  $\theta_{JC}$  is thermal resistance, junction to case (°C/W).

Table 4. Thermal Resistance

| Package Type | $\theta_{JA}^1$ | $\theta_{JB}^1$ | $\theta_{JC}^1$ | Unit |
|--------------|-----------------|-----------------|-----------------|------|
| 8-Lead LFCSP | 39.90           | 23.88           | 3.71            | °C/W |

<sup>1</sup> See JEDEC standard JESD51-2 for additional information on optimizing the thermal impedance for a printed circuit board (PCB) with 3 × 4 vias.

## ESD CAUTION



### ESD (electrostatic discharge) sensitive device.

Charged devices and circuit boards can discharge without detection. Although this product features patented or proprietary protection circuitry, damage may occur on devices subjected to high energy ESD. Therefore, proper ESD precautions should be taken to avoid performance degradation or loss of functionality.

## PIN CONFIGURATION AND FUNCTION DESCRIPTIONS

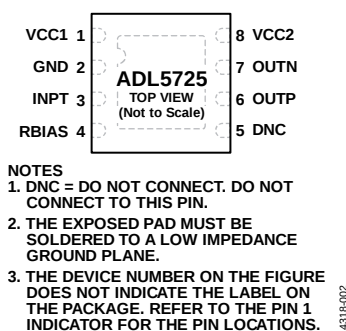


Figure 2. Pin Configuration

Table 5. Pin Function Descriptions

| Pin No. | Mnemonic   | Description                                                                                                                                                             |
|---------|------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1       | VCC1       | 1.8 V Power Supply. It is recommended to place the decoupling capacitors as close to this pin as possible.                                                              |
| 2       | GND        | Ground.                                                                                                                                                                 |
| 3       | INPT       | RF Input. This is a 50 $\Omega$ single-ended input.                                                                                                                     |
| 4       | RBIAS      | Resistor Bias. For typical operation, connect a 357 $\Omega$ resistor from RBIAS to GND. It is recommended to place the RBIAS resistor as close to the pin as possible. |
| 5       | DNC        | Do Not Connect. Do not connect to this pin.                                                                                                                             |
| 6, 7    | OUTP, OUTN | RF Outputs. These pins are 100 $\Omega$ differential outputs.                                                                                                           |
| 8       | VCC2       | 3.3 V Power Supply. It is recommended to place the decoupling capacitors as close to this pin as possible.                                                              |
|         | EPAD (EP)  | Exposed Pad. The exposed pad must be soldered to a low impedance ground plane.                                                                                          |

## TYPICAL PERFORMANCE CHARACTERISTICS

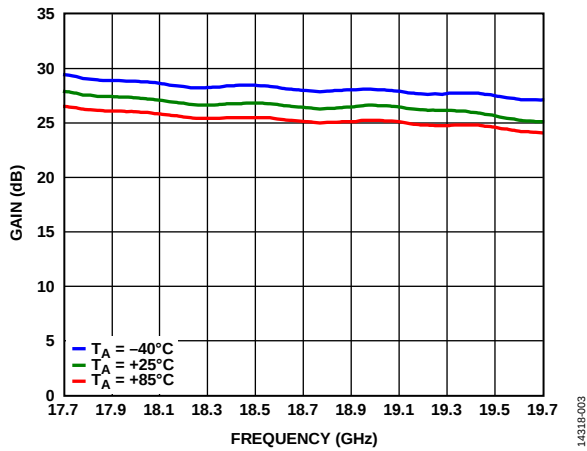


Figure 3. Gain vs. Frequency for Various Temperatures

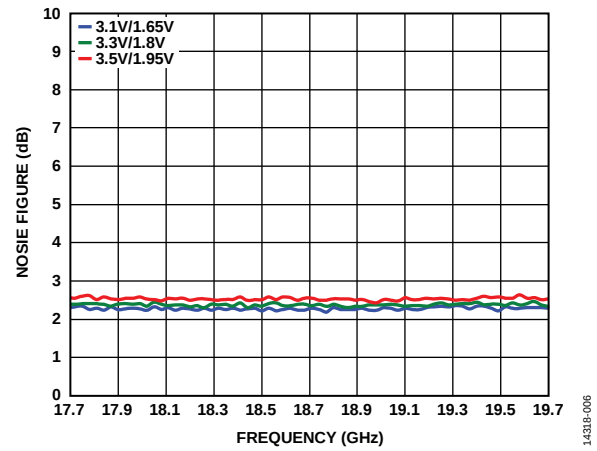


Figure 6. Noise Figure vs. Frequency for Various Supply Voltages

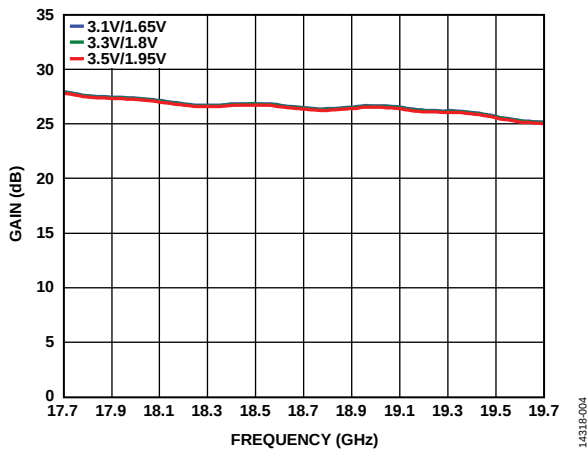


Figure 4. Gain vs. Frequency for Various Supply Voltages

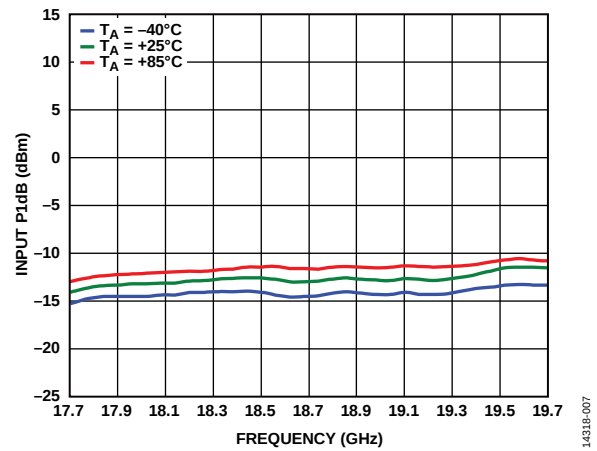


Figure 7. Input P1dB vs. Frequency for Various Temperatures

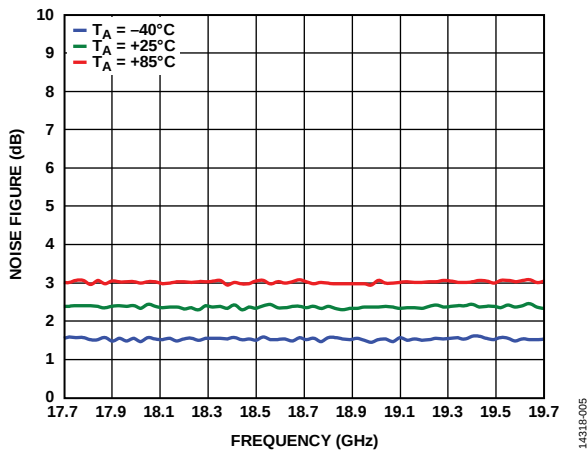


Figure 5. Noise Figure vs. Frequency for Various Temperatures

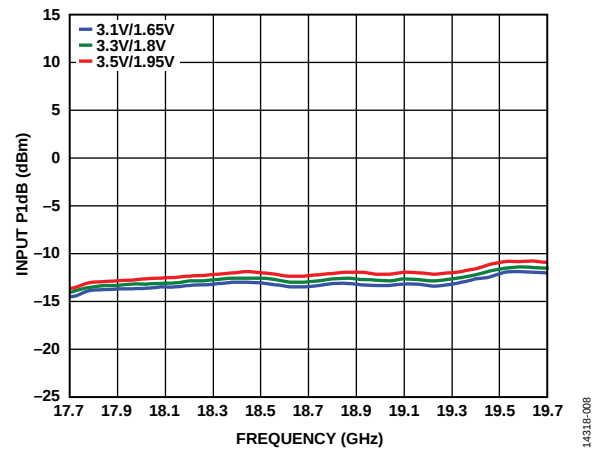


Figure 8. Input P1dB vs. Frequency for Various Supply Voltages

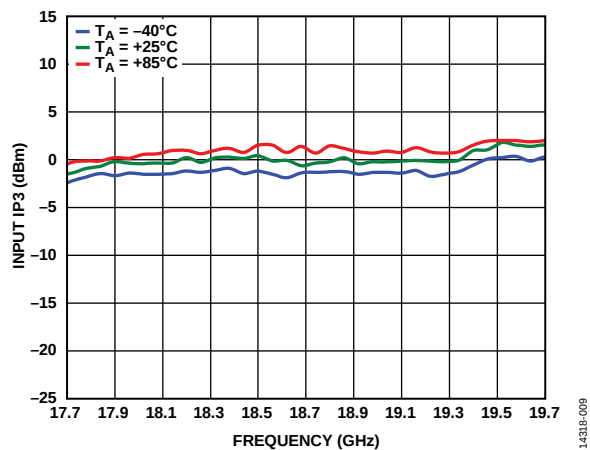


Figure 9. Input IP3 vs. Frequency for Various Temperatures

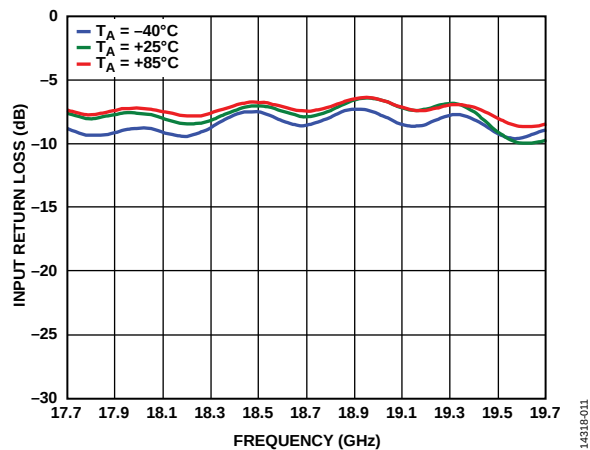


Figure 11. Input Return Loss vs. Frequency for Various Temperatures

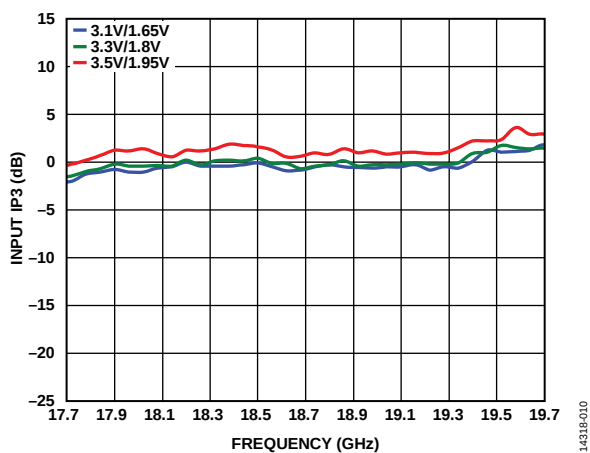


Figure 10. Input IP3 vs. Frequency for Various Supply Voltages

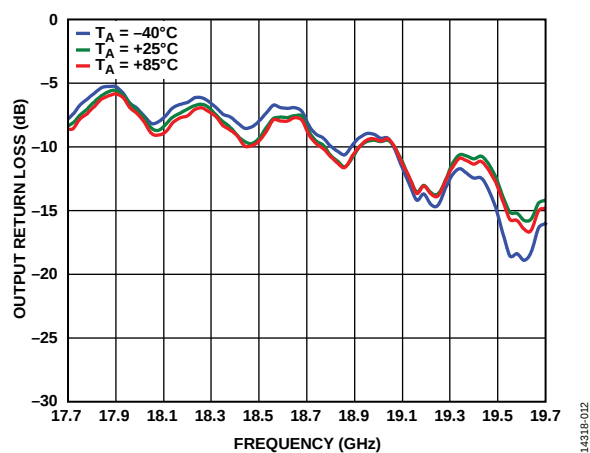


Figure 12. Output Return Loss vs. Frequency for Various Temperatures

## THEORY OF OPERATION

The [ADL5725](#) is a narrow-band, high performance, low noise amplifier targeting microwave radio link receiver designs. The monolithic SiGe design is optimized for microwave radio link bands ranging from 17.7 GHz to 19.7 GHz.

The unique design of the [ADL5725](#) offers a single-ended 50  $\Omega$  input impedance via the INPT pin, and provides a 100  $\Omega$  balanced differential output via the OUTP and OUTN pins.

This LNA is ideal for driving Analog Devices differential downconverters and RF sampling ADCs.

The [ADL5725](#) provides cost-effective noise figure performance without requiring more expensive III-V compounds process technology.

The [ADL5725](#) is available in a 2.00 mm  $\times$  2.00 mm LFCSP package, and operates over the temperature range of  $-40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$ .

## APPLICATIONS INFORMATION

### LAYOUT

Solder the exposed pad on the underside of the ADL5725 to a low thermal and electrical impedance ground plane. This pad is typically soldered to an exposed opening in the solder mask on the evaluation board. Connect the ground vias to all other ground layers on the evaluation board to maximize heat dissipation from the device package.

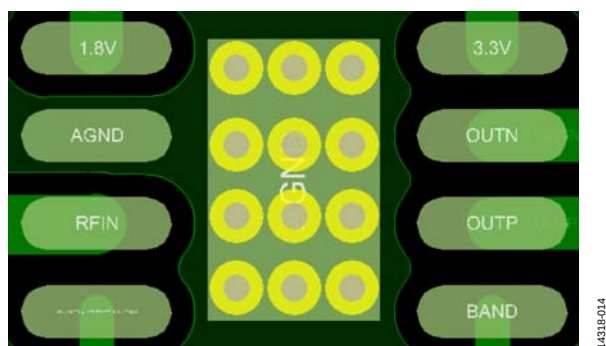


Figure 13. Evaluation Board Layout for the ADL5725 Package

### DIFFERENTIAL vs. SINGLE-ENDED OUTPUT

This section provides the test results that compare the ADL5725 using a differential vs. single-ended output. When using the device as a single-ended output, use the RFOP output of the evaluation board and terminate RFON to 50  $\Omega$ . Note that the converse can be done as well; however, doing so produces slightly different results from the plots shown in this section because there is some amplitude imbalance between the two differential ports, RFOP and RFON. The output trace and connector loss were not deembedded for these measurements.

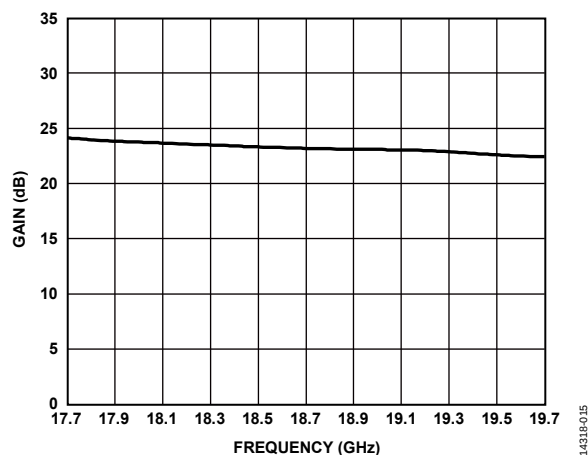


Figure 14. Gain vs. Frequency

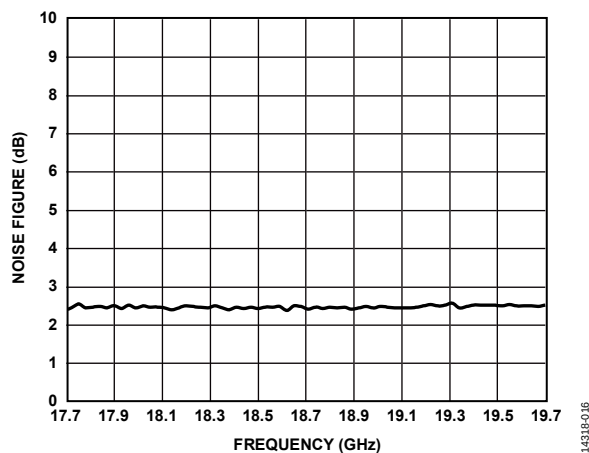


Figure 15. Noise Figure vs. Frequency

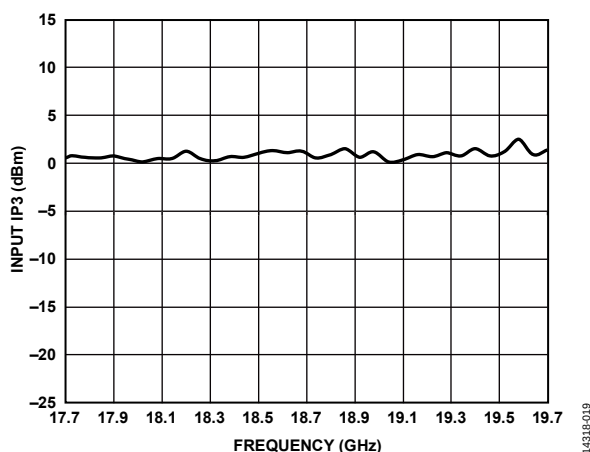


Figure 16. Input IP3 vs. Frequency

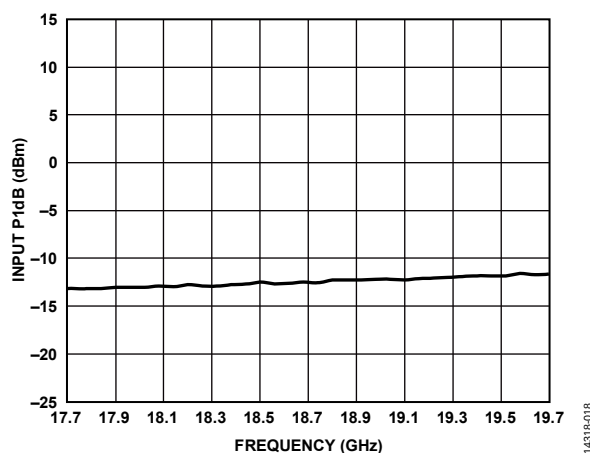


Figure 17. Input P1dB vs. Frequency

## EVALUATION BOARD

The [ADL5725-EVALZ](#) comes with an [ADL5725](#) chip. It supports a single 5 V supply for ease of use. For 5 V operation, use the 3.3 V and 1.8 V test loops for evaluation purposes only. When using a 3.3 V or 1.8 V supply, remove the R1 and R2 resistors from the evaluation board. Figure 19 shows the [ADL5725-EVALZ](#) evaluation board lab bench setup.

### INITIAL SETUP

To set up the [ADL5725-EVALZ](#), take the following steps:

1. Power up the [ADL5725-EVALZ](#) with a 5 V dc supply. The supply current of the evaluation board is approximately 111 mA, which is a combination of the VCC1 (1.8 V) and the VCC2 (3.3 V) currents.
2. Connect the signal generator to the input of the [ADL5725-EVALZ](#).
3. Connect RFOP and RFON to a 180° hybrid that works within the 17.7 GHz to 19.7 GHz frequency range.
4. Connect the difference output of the hybrid to the spectrum analyzer. The sum port of hybrid must be terminated to 50  $\Omega$ .

See Figure 19 for the [ADL5725-EVALZ](#) lab bench setup.

### RESULTS

Figure 18 shows the expected results when testing the [ADL5725-EVALZ](#) using the Rev. A version of the evaluation board and its software. Note that future iterations of the software may produce different results. See the [ADL5725](#) product page for the most recent software version.

Figure 18 shows the results of the differential output for an input of 17.7 GHz at -15 dBm. The hybrid and board loss were not deembedded.

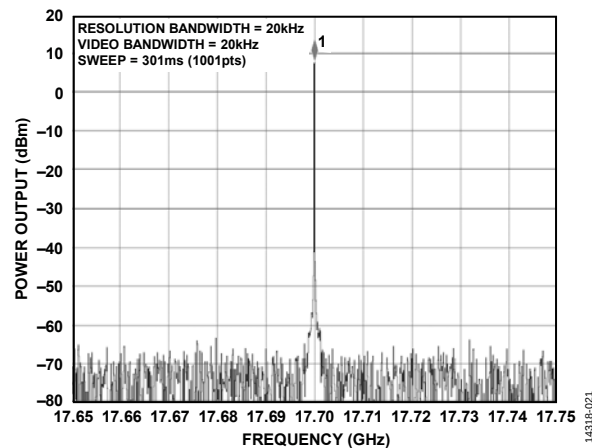


Figure 18. Test Results at 17.7 GHz

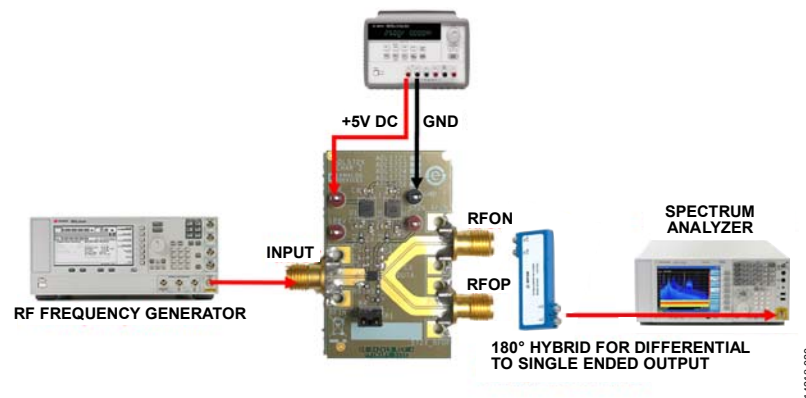


Figure 19. [ADL5725-EVALZ](#) Lab Bench Setup

## BASIC CONNECTIONS FOR OPERATION

Figure 20 shows the basic connections for operating the [ADL5725](#) as it is implemented on the evaluation board of the device.

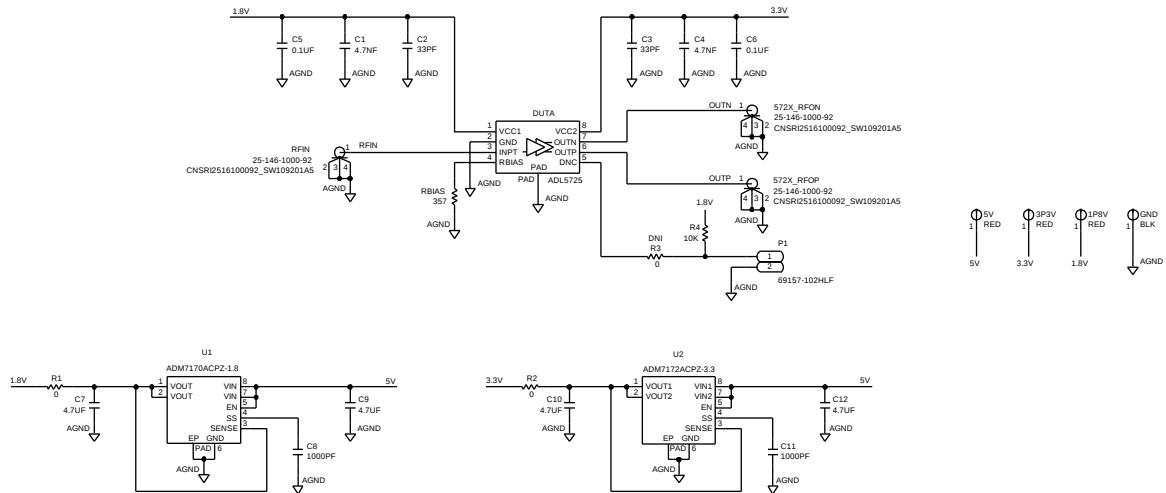


Figure 20. Evaluation Board Schematic

14318-013

Table 6. Evaluation Board Configuration Options

| Component                  | Function                                                                    | Default Condition                                                                                                                                       |
|----------------------------|-----------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|
| 3P3V, 1P8V, GND, 5V        | Power supplies and ground.                                                  | Not applicable                                                                                                                                          |
| RFIN, 572X_RFOP, 572x_RFON | Input, output, and data.                                                    | Not applicable                                                                                                                                          |
| RBIAS                      | 357 $\Omega$ for RBIAS.                                                     | RBIAS = 357 $\Omega$ (0402)                                                                                                                             |
| R1, R2                     | 1.8 V and 3.3 V regulator connections.                                      | R1, R2 = 0 $\Omega$ (0402)                                                                                                                              |
| R3                         | Do not install (DNI).                                                       | R3 = DNI (0402)                                                                                                                                         |
| R4                         | Pull-up or pull-down resistor.                                              | R4 = 10 k $\Omega$ (0402)                                                                                                                               |
| C1 to C12                  | The capacitors provide the required decoupling for the supply related pins. | C1, C4 = 4.7 nF (0402),<br>C2, C3 = 33 pF (0402),<br>C5, C6 = 0.1 $\mu$ F (0402),<br>C7, C9, C10, C12 = 4.7 $\mu$ F (0603),<br>C8, C11 = 1000 pF (0603) |
| P1                         | Jumper to change bands, 2-pin jumper.                                       | Not applicable                                                                                                                                          |
| U1                         | <a href="#">ADM7170ACPZ-1.8</a> 1.8 V regulator.                            | Not applicable                                                                                                                                          |
| U2                         | <a href="#">ADM7172ACPZ-3.3</a> 3.3 V regulator.                            | Not applicable                                                                                                                                          |
| DUTA                       | <a href="#">ADL5725</a> device under test (DUT).                            | Not applicable                                                                                                                                          |

## OUTLINE DIMENSIONS

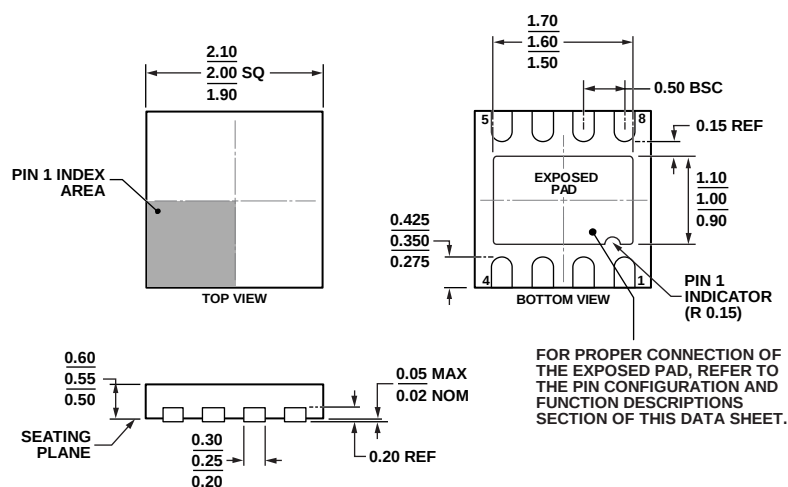


Figure 21. 8-Lead Lead Frame Chip Scale Package [LFCSP]  
2.00 mm × 2.00 mm Body, and 0.55 mm Package Height  
(CP-8-10)

Dimensions shown in millimeters

## ORDERING GUIDE

| Model <sup>1</sup> | Temperature Range | Package Description                          | Package Option |
|--------------------|-------------------|----------------------------------------------|----------------|
| ADL5725ACPZN-R7    | −40°C to +85°C    | 8-Lead Lead Frame Chip Scale Package [LFCSP] | CP-8-10        |
| ADL5725-EVALZ      |                   | Evaluation Board                             |                |

<sup>1</sup> Z = RoHS-Compliant Part.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.