

## LOW DROPOUT VOLTAGE REGULATOR WITH ON/OFF CONTROL


### ■ GENERAL DESCRIPTION

The NJM2386/88 is a general purpose low dropout voltage regulators with ON/OFF control.

The output current is up to 1.0A and dropout voltage is 0.2V typical at 500mA load.

It features high maximum input voltage of 35V for a wide application range including TV, home appliances and power modules.

### ■ PACKAGE OUTLINE




NJM2386DL3

NJM2388F

### ■ FEATURES

- High Maximum Input Voltage Up to 35V
- Low Dropout Voltage 0.2V typ. at  $I_o=0.5A$
- Output Current  $I_o(max.)=1.0A$
- ON/OFF Control (Active High)
- Internal Short Circuit Current Limit
- Internal Overvoltage Protection
- Internal Thermal Overload Protection
- Bipolar Technology
- Package Outline TO-252-5(NJM2386), TO-220F-4(NJM2388)


### ■ PIN CONFIGURATION



NJM2386DL3

#### PIN FUNCTION

1.  $V_{IN}$
2. ON/OFF CONTROL
3.  $V_{OUT}$
4. N.C.
5. GND




NJM2388F

#### PIN FUNCTION

1.  $V_{IN}$
2.  $V_{OUT}$
3. GND
4. ON/OFF CONTROL

### ■ EQUIVALENT CIRCUIT

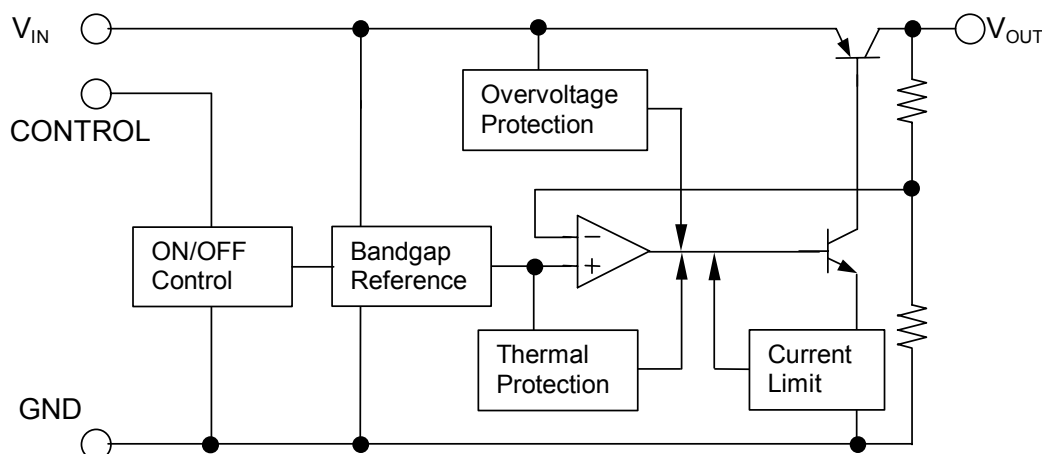

# NJM2386/88

## ■ OUTPUT VOLTAGE RANK LIST

| Device Name   | V <sub>OUT</sub> |
|---------------|------------------|
| NJM2386DL3-33 | 3.3V             |
| NJM2386DL3-05 | 5.0V             |
| NJM2386DL3-63 | 6.3V             |
| NJM2386DL3-08 | 8.0V             |
| NJM2386DL3-09 | 9.0V             |
| NJM2386DL3-12 | 12.0V            |

| Device Name | V <sub>OUT</sub> |
|-------------|------------------|
| NJM2388F33  | 3.3V             |
| NJM2388F05  | 5.0V             |
| NJM2388F63  | 6.3V             |
| NJM2388F08  | 8.0V             |
| NJM2388F84  | 8.4V             |
| NJM2388F09  | 9.0V             |
| NJM2388F10  | 10.0V            |
| NJM2388F12  | 12.0V            |

## ■ ABSOLUTE MAXIMUM RATINGS

(Ta=25°C)

| PARAMETER                            | SYMBOL            | RATINGS    |                          | UNIT |
|--------------------------------------|-------------------|------------|--------------------------|------|
| Input Voltage                        | V <sub>IN</sub>   | +35        |                          | V    |
| Control Voltage                      | V <sub>CONT</sub> | +35(*1)    |                          | V    |
| Output Current                       | I <sub>O</sub>    | 1.0        |                          | A    |
| Power Dissipation                    | P <sub>D</sub>    | NJM2386    | 10(Tc≤25°C) / 1(Ta≤25°C) | W    |
|                                      |                   | NJM2388    | 18(Tc<50°C)              |      |
| Operating Junction Temperature Range | T <sub>j</sub>    | -40 ~ +150 |                          | °C   |
| Operating Temperature Range          | T <sub>opr</sub>  | -40 ~ +85  |                          | °C   |
| Storage Temperature Range            | T <sub>stg</sub>  | -50 ~ +150 |                          | °C   |

(\*1): When input voltage is less than +35V, the absolute maximum control voltage is equal to the input voltage.

## ■ ELECTRICAL CHARACTERISTICS (V<sub>IN</sub>=V<sub>O</sub>+1V, I<sub>O</sub>=0.5A, C<sub>IN</sub>=0.33μF, C<sub>O</sub>=22μF, Ta=25°C)


Measurement is to be conducted in pulse testing.

| PARAMETER                                         |            | SYMBOL                            | CONDITIONS                                                                | MIN.    | TYP.  | MAX. | UNIT |
|---------------------------------------------------|------------|-----------------------------------|---------------------------------------------------------------------------|---------|-------|------|------|
| Output Voltage                                    |            | V <sub>O</sub>                    | V <sub>IN</sub> =V <sub>O</sub> +1V                                       | -2%     | -     | +2%  | V    |
| Line Regulation                                   |            | ΔV <sub>O</sub> /ΔV <sub>IN</sub> | V <sub>IN</sub> =V <sub>O</sub> +1V ~ V <sub>O</sub> +17V                 | -       | 0.04  | 0.16 | %/V  |
| Load Regulation                                   |            | ΔV <sub>O</sub> /ΔI <sub>O</sub>  | V <sub>IN</sub> =V <sub>O</sub> +2V, I <sub>O</sub> =0A ~ 1.0A            | -       | 0.2   | 1.4  | %/A  |
| Average Temperature Coefficient of Output Voltage |            | ΔV <sub>O</sub> /ΔT               | T <sub>j</sub> =0 ~ +125°C                                                | -       | ±0.02 | -    | %/°C |
| Quiescent Current                                 |            | I <sub>Q</sub>                    | I <sub>O</sub> =0A                                                        | -       | -     | 5    | mA   |
| Quiescent Current at Control OFF(*2)              |            | I <sub>Q(OFF)</sub>               | V <sub>CONT</sub> =0V                                                     | -       | -     | 500  | μA   |
| Dropout Voltage                                   |            | ΔV <sub>I-O</sub>                 | I <sub>O</sub> =0.5A                                                      | -       | 0.2   | 0.5  | V    |
| Ripple Rejection                                  | NJM238**33 | RR                                | V <sub>IN</sub> =V <sub>O</sub> +2V,<br>e <sub>in</sub> =0.5Vrms, f=120Hz | 54      | 67    | -    | dB   |
|                                                   | NJM238**05 |                                   |                                                                           | 54      | 67    | -    |      |
|                                                   | NJM238**63 |                                   |                                                                           | 54      | 67    | -    |      |
|                                                   | NJM238**08 |                                   |                                                                           | 52      | 65    | -    |      |
|                                                   | NJM238**84 |                                   |                                                                           | 52      | 65    | -    |      |
|                                                   | NJM238**09 |                                   |                                                                           | 52      | 65    | -    |      |
|                                                   | NJM238**10 |                                   |                                                                           | 50      | 63    | -    |      |
|                                                   | NJM238**12 |                                   |                                                                           | 50      | 63    | -    |      |
| ON Control Voltage                                |            | V <sub>CONT(ON)</sub>             |                                                                           | 2.0(*3) | -     | -    | V    |
| OFF Control Voltage                               |            | V <sub>CONT(OFF)</sub>            |                                                                           | -       | -     | 0.4  | V    |
| ON Control Current                                |            | I <sub>CONT(ON)</sub>             | V <sub>C</sub> =2.7V                                                      | -       | -     | 20   | μA   |
| OFF Control Current                               |            | I <sub>CONT(OFF)</sub>            | V <sub>C</sub> =0.4V                                                      | -       | -     | -20  | μA   |


(\*2) This electrical characteristics is applied to NJM2388.

(\*3): When ON/OFF CONTROL Terminal is open, Output Voltage is ON.

## POWER DISSIPATION vs. AMBIENT TEMPERATURE

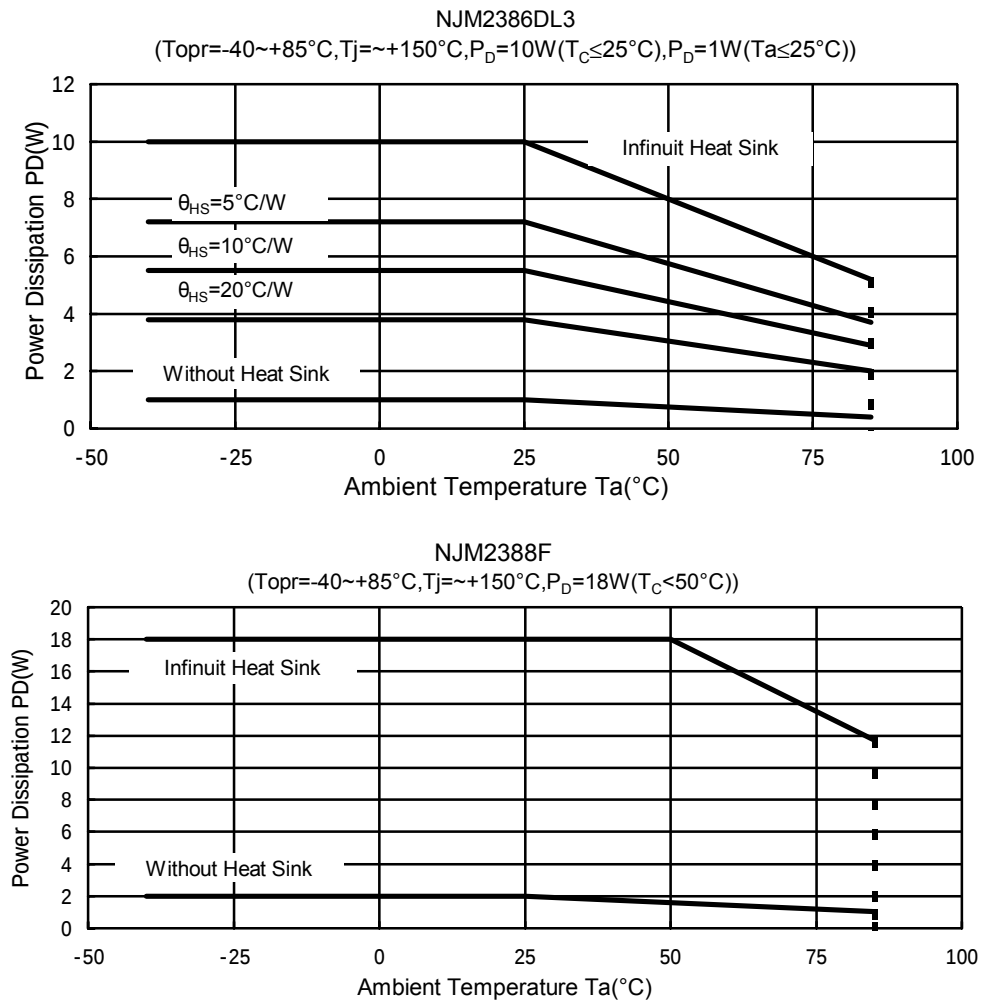


## TEST CIRCUIT

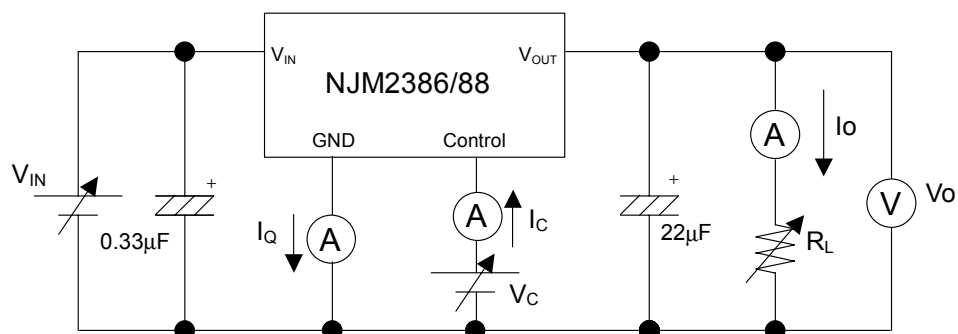

# NJM2386/88


## ■ TYPICAL APPLICATION

① In the case where ON/OFF Control is not required:

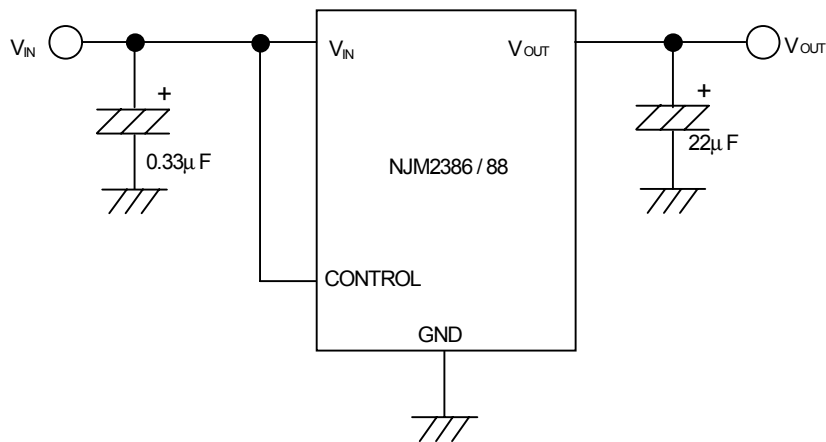

Connect control terminal to  $V_{IN}$  terminal or open.







② In use of ON/OFF CONTROL:

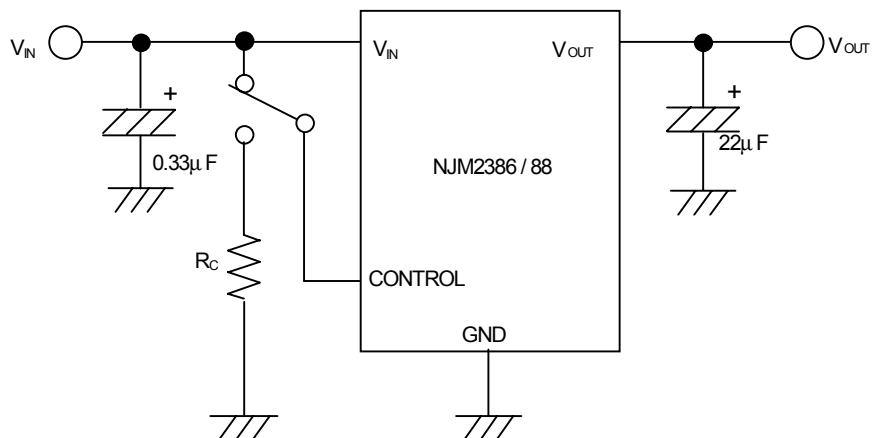







State of control terminal:

- "H" or "open" → output is enabled.
- "L" → output is disabled.







## TYPICAL CHARACTERISTICS

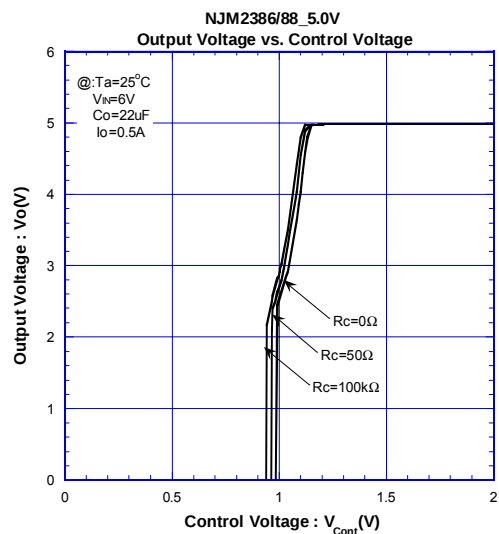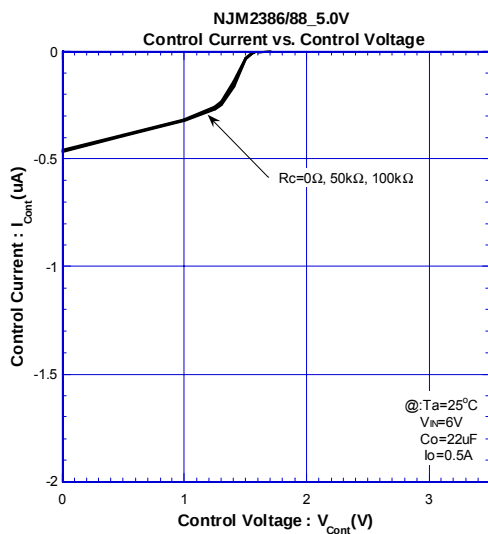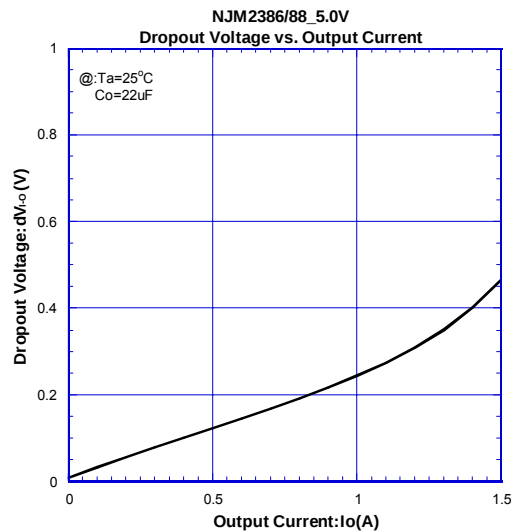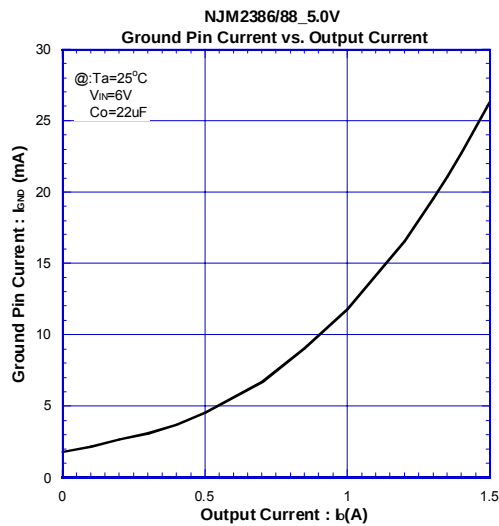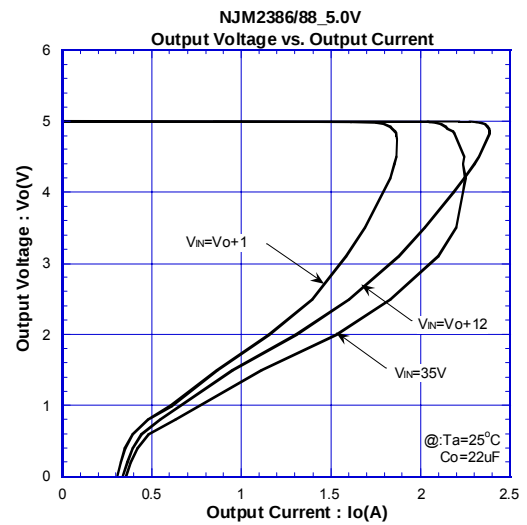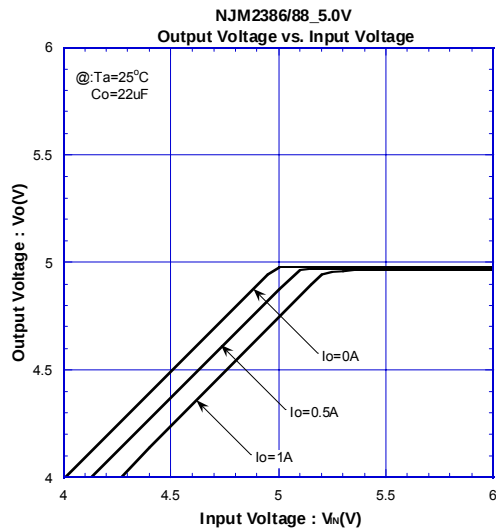






## TYPICAL CHARACTERISTICS

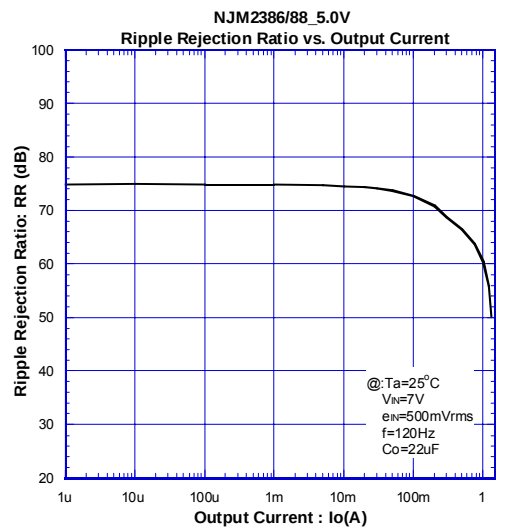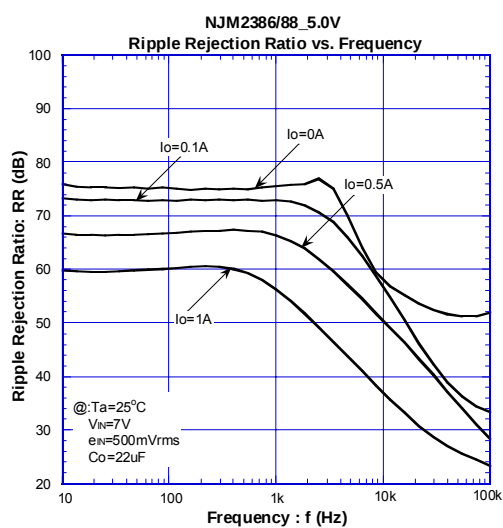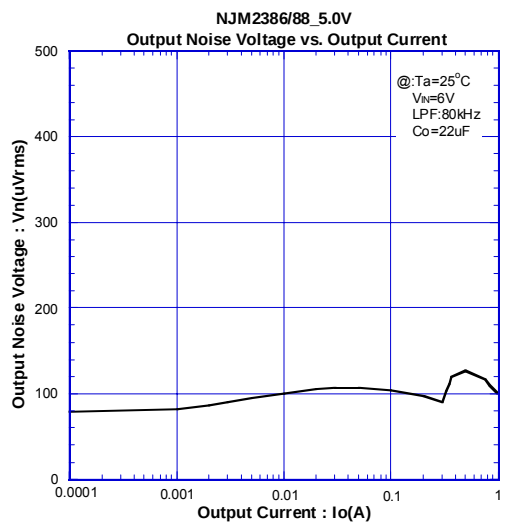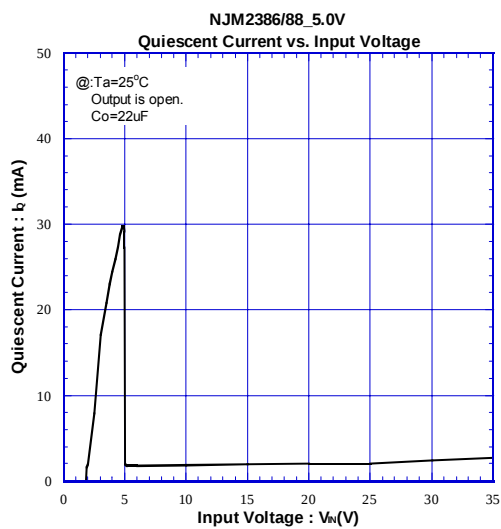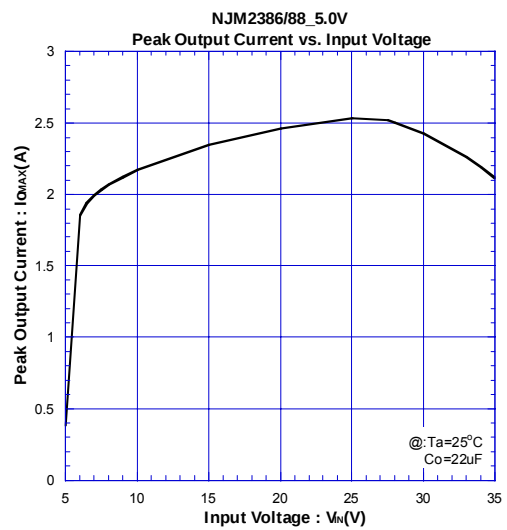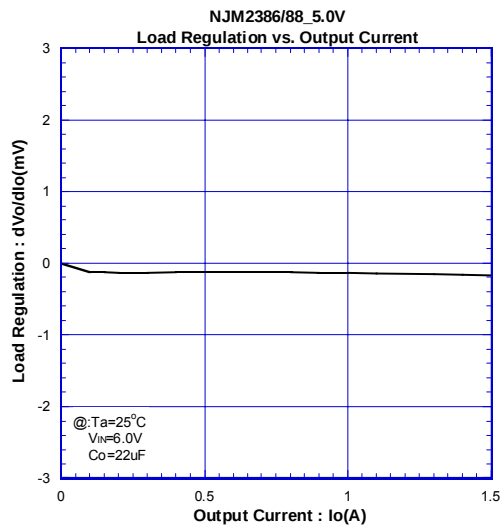



## TYPICAL CHARACTERISTICS

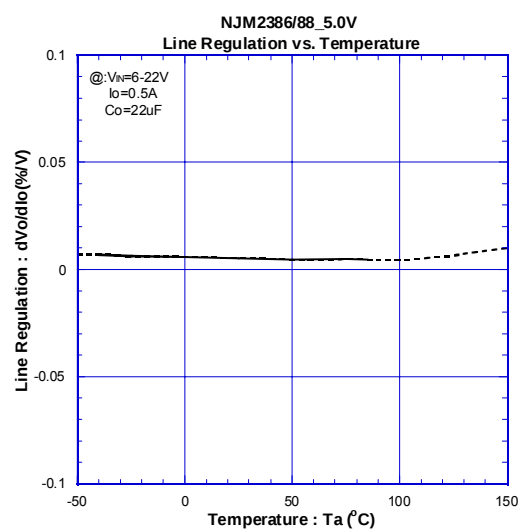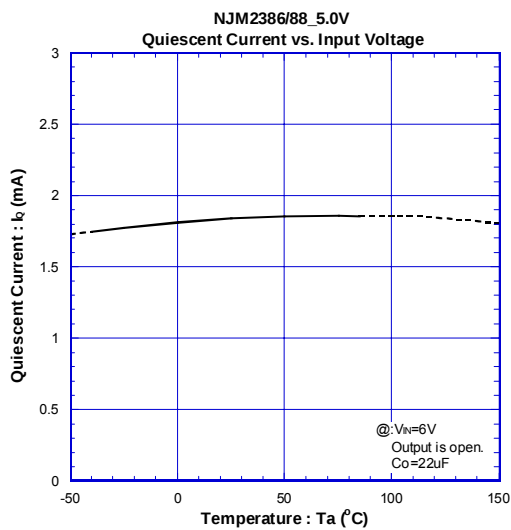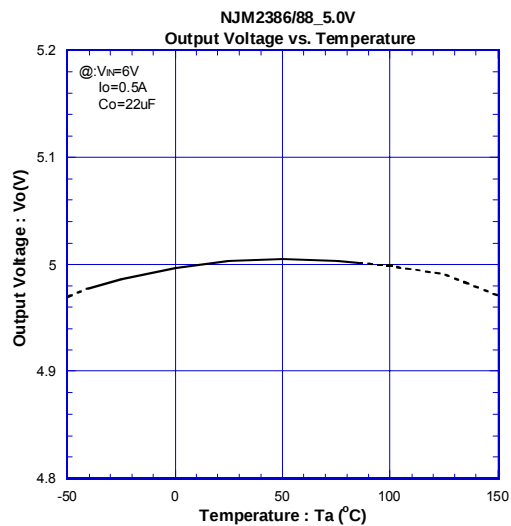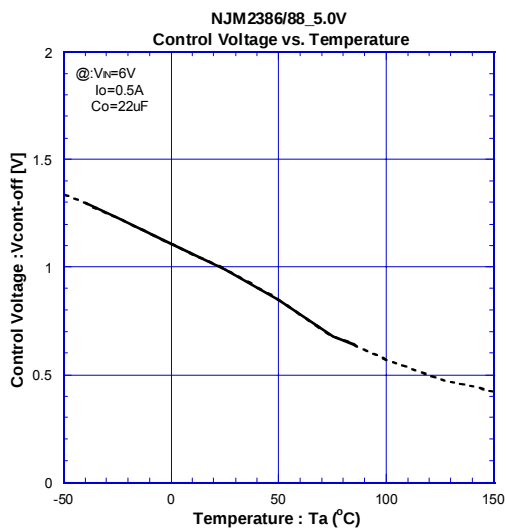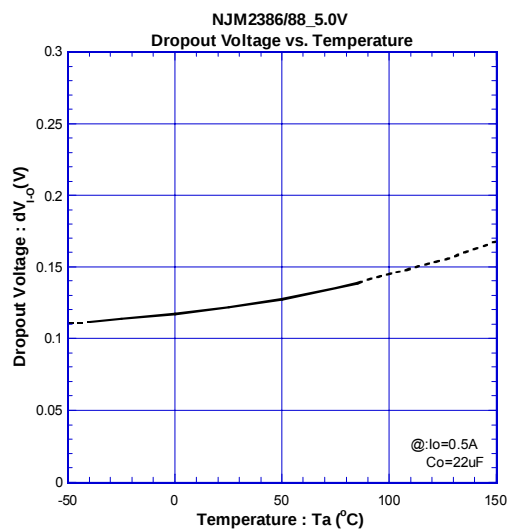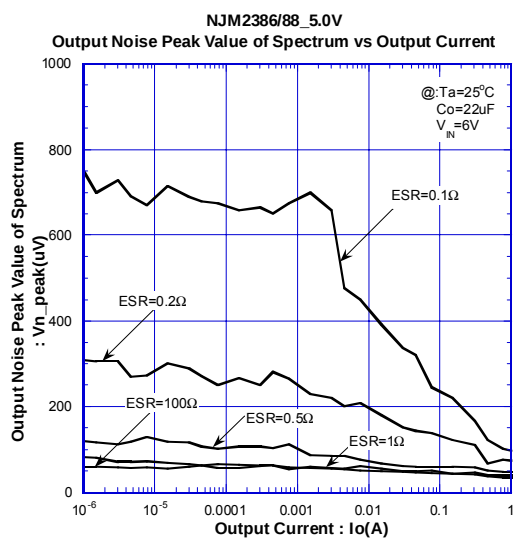

## ■ TYPICAL CHARACTERISTICS

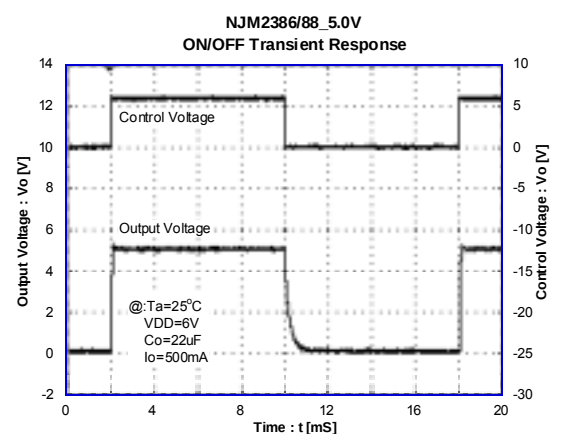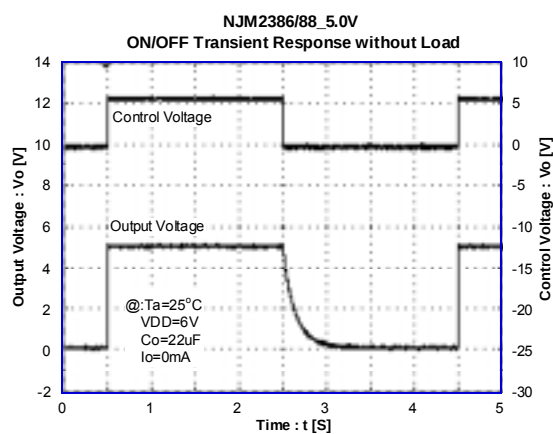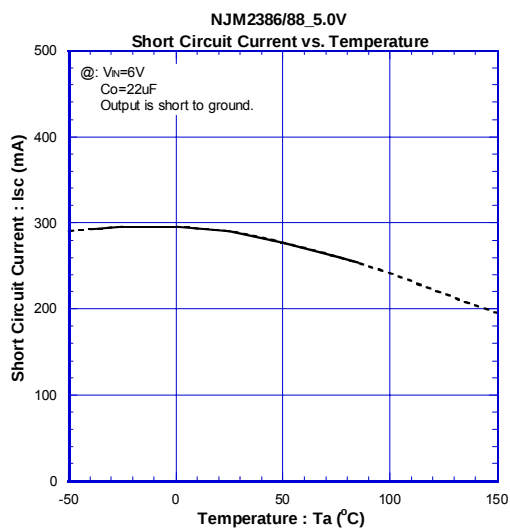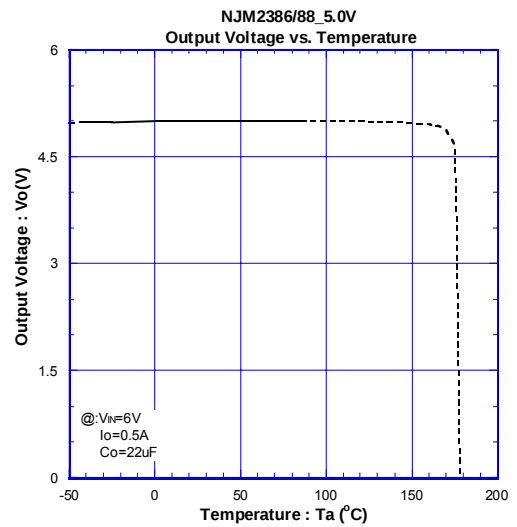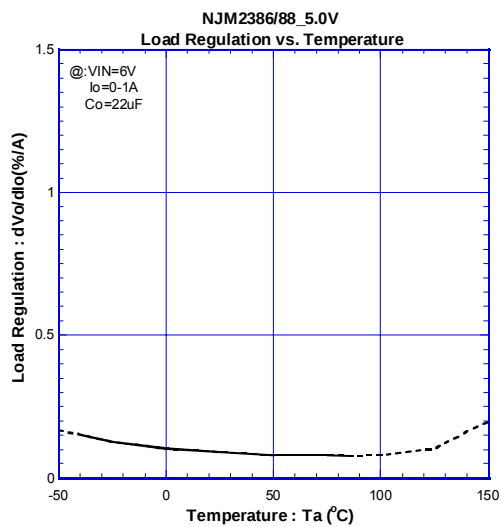

## TYPICAL CHARACTERISTICS

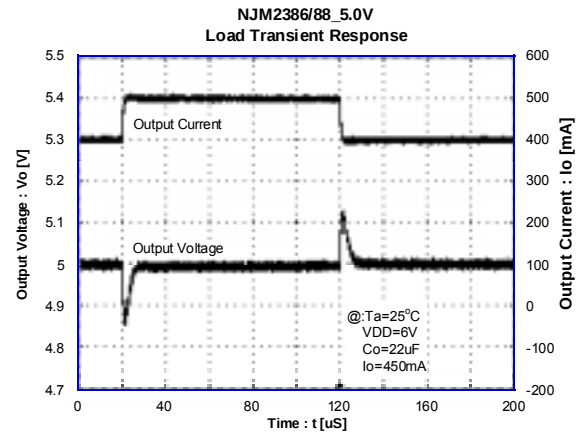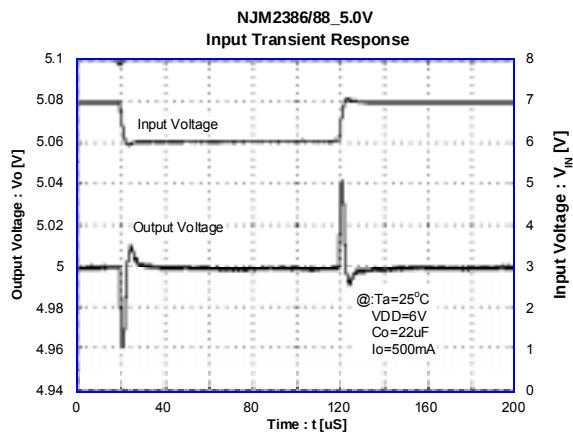

### [CAUTION]

The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[NJR:](#)

[NJM2388F05](#) [NJM2388F12](#) [NJM2388F10](#) [NJM2388F08](#) [NJM2388F09](#) [NJM2386DL3-12-TE1](#) [NJM2388F63](#)  
[NJM2386DL2-12-TE1](#) [NJM2386DL2-05-TE1](#) [NJM2386DL3-05-TE1](#) [NJM2386DL2-08-TE1](#) [NJM2386DL3-33-TE1](#)  
[NJM2386DL2-33-TE1](#) [NJM2388F33](#) [NJM2386DL3-08-TE1](#) [NJM2388F84](#) [NJM2386DL2-09-TE1](#) [NJM2386DL3-09-TE1](#)



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.