


## 200 mA low quiescent current and low noise LDO

Datasheet - production data

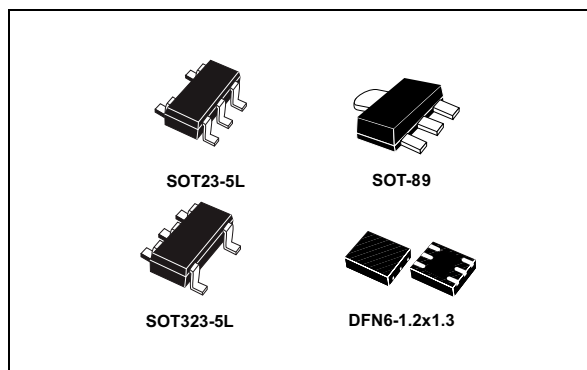

### Features

- Input voltage from 2.5 to 13.2 V
- Very low-dropout voltage (100 mV typ. @ 100 mA load)
- Low quiescent current (typ. 55  $\mu$ A, 1  $\mu$ A in off mode)
- Low noise
- Output voltage tolerance:  $\pm 2.0\%$  @ 25  $^{\circ}$ C
- 200 mA guaranteed output current
- Wide range of output voltages available on request: fixed from 1.2 V to 12 V with 100 mV step and adjustable
- Logic-controlled electronic shutdown
- Compatible with ceramic capacitor  $C_{OUT} = 1 \mu$ F
- Internal current and thermal limit
- Available in SOT23-5L, SOT323-5L, SOT-89 and DFN6-1.2x1.3 packages
- Temperature range: -40  $^{\circ}$ C to 125  $^{\circ}$ C

### Applications

- Battery-powered equipment
- TV
- Set-top box
- PC and laptop
- Industrial

### Description

The LDK220 is a low drop voltage regulator, which provides a maximum output current of 200 mA from an input voltage in the range of 2.5 V to 13.2 V, with a typical dropout voltage of 100 mV.

A ceramic capacitor stabilizes it on the output.

The very low drop voltage, low quiescent current and low noise make it suitable for battery-powered applications.

The enable logic control function puts the LDK220 in shutdown mode allowing a total current consumption lower than 1  $\mu$ A.


The device also includes a short-circuit constant current limiting and thermal protection.

## Contents


|          |                                         |           |
|----------|-----------------------------------------|-----------|
| <b>1</b> | <b>Diagram</b> .....                    | <b>3</b>  |
| <b>2</b> | <b>Pin configuration</b> .....          | <b>4</b>  |
| <b>3</b> | <b>Typical application</b> .....        | <b>5</b>  |
| <b>4</b> | <b>Maximum ratings</b> .....            | <b>6</b>  |
| <b>5</b> | <b>Electrical characteristics</b> ..... | <b>7</b>  |
| <b>6</b> | <b>Typical characteristics</b> .....    | <b>9</b>  |
| <b>7</b> | <b>Package information</b> .....        | <b>14</b> |
| 7.1      | SOT23-5L package information .....      | 14        |
| 7.2      | SOT323-5L package information .....     | 16        |
| 7.3      | DFN6-1.2x1.3 package information .....  | 18        |
| 7.4      | SOT-89 package information .....        | 21        |
| 7.5      | SOT-89 packing information .....        | 24        |
| <b>8</b> | <b>Ordering information</b> .....       | <b>25</b> |
| <b>9</b> | <b>Revision history</b> .....           | <b>26</b> |

1      **Diagram**

**Figure 1. Block diagram (fixed version)**

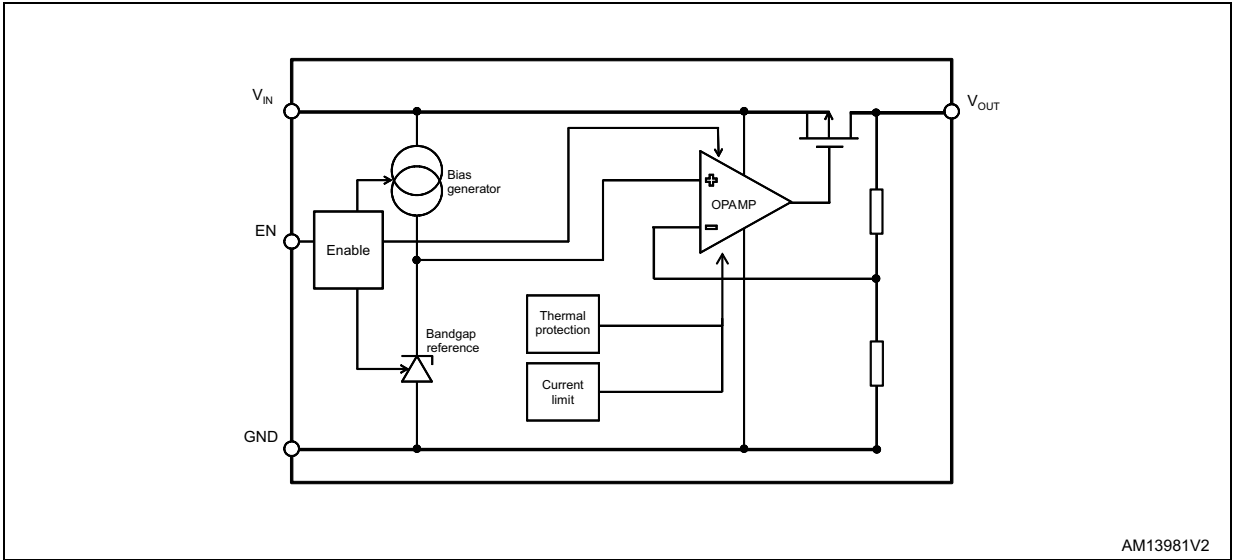

**Figure 2. Block diagram (adjustable version)**

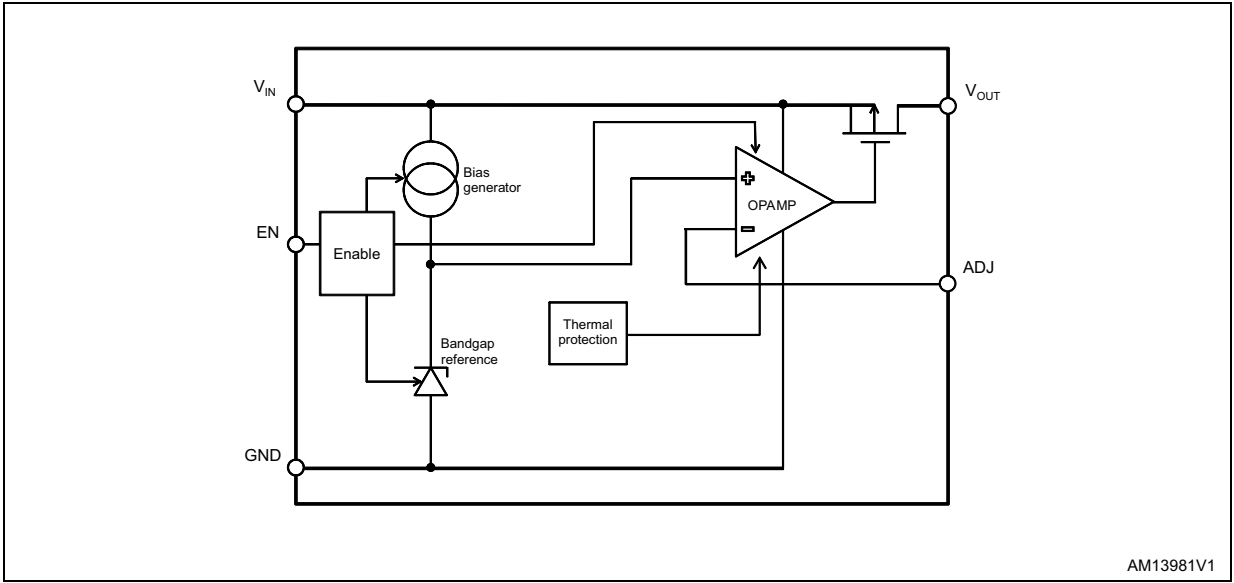

## 2 Pin configuration

Figure 3. Pin connection (top view)

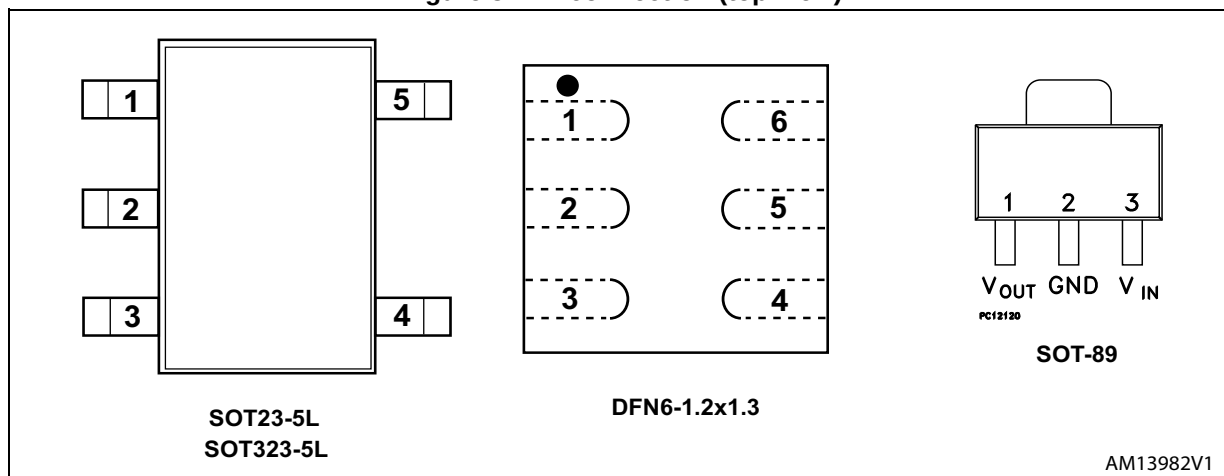


Table 1. Pin description (SOT23-5L, SOT323-5L)

| Pin n° | Symbol | Function                                                      |
|--------|--------|---------------------------------------------------------------|
| 1      | IN     | Input voltage of the LDO                                      |
| 2      | GND    | Common ground                                                 |
| 3      | EN     | Enable pin logic input: low = shutdown, high = active         |
| 4      | ADJ/NC | Adjustable pin on ADJ version, not connected on fixed version |
| 5      | OUT    | Output voltage of the LDO                                     |

Table 2. Pin description (DFN6)

| Pin n° | Symbol | Function                                                      |
|--------|--------|---------------------------------------------------------------|
| 1      | OUT    | Output voltage of the LDO                                     |
| 2      | N/C    | Not connected                                                 |
| 3      | ADJ/NC | Adjustable pin on ADJ version, not connected in fixed version |
| 4      | EN     | Enable pin logic input: low = shutdown, high = active         |
| 5      | GND    | Common ground                                                 |
| 6      | IN     | Input voltage of the LDO                                      |


Table 3. Pin description (SOT-89)

| Pin n° <sup>(1)</sup> | Symbol | Function                  |
|-----------------------|--------|---------------------------|
| 1                     | OUT    | Output voltage of the LDO |
| 2                     | GND    | Common ground             |
| 3                     | IN     | Input voltage of the LDO  |

1. Adjustable version and enable pin are not available on the SOT-89 package.

### 3 Typical application

Figure 4. Typical application circuits

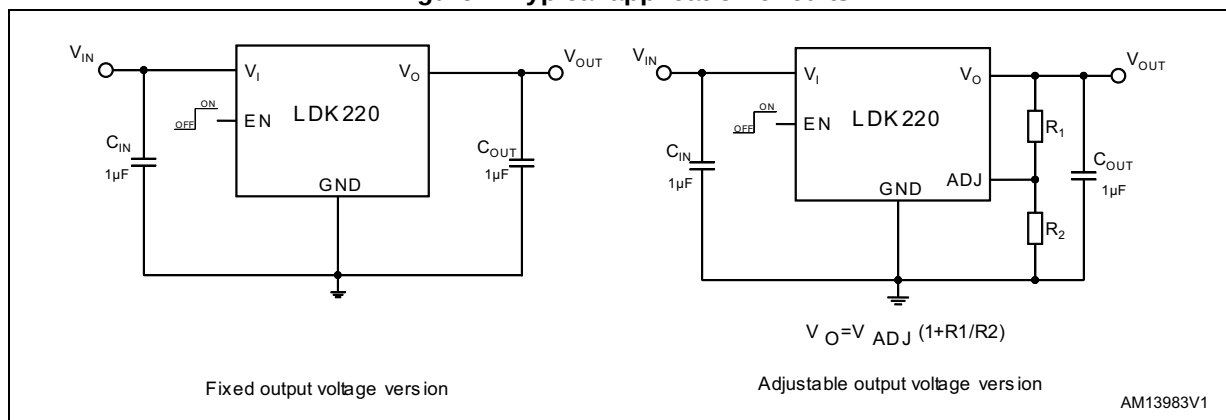

Note: Adjustable version and enable pin are not available on the SOT-89 package.

## 4 Maximum ratings

**Table 4. Absolute maximum ratings**

| Symbol      | Parameter                            | Value                | Unit |
|-------------|--------------------------------------|----------------------|------|
| $V_{IN}$    | DC input voltage                     | - 0.3 to 14          | V    |
| $V_{OUT}$   | DC output voltage                    | - 0.3 to $V_I + 0.3$ | V    |
| $V_{EN}$    | Enable input voltage                 | - 0.3 to $V_I + 0.3$ | V    |
| $V_{ADJ}$   | ADJ pin voltage                      | - 0.3 to 2           | V    |
| $I_{OUT}$   | Output current                       | Internally limited   | mA   |
| $P_D^{(1)}$ | Power dissipation                    | 500                  | mW   |
| $T_{STG}$   | Storage temperature range            | - 65 to 150          | °C   |
| $T_{OP}$    | Operating junction temperature range | - 40 to 125          | °C   |

1. Maximum power dissipation has to be calculated taking into account the package thermal performance.

**Note:** *Absolute maximum ratings are those values beyond which damage to the device may occur. Functional operation under these conditions is not implied. All values are referred to GND.*

**Table 5. Thermal data**

| Symbol     | Parameter                           | SOT23-5L | SOT323-5L | SOT-89 | DFN-6 | Unit |
|------------|-------------------------------------|----------|-----------|--------|-------|------|
| $R_{thJA}$ | Thermal resistance junction-ambient | 160      | 246       | 110    | 237   | °C/W |
| $R_{thJC}$ | Thermal resistance junction-case    | 68       | 134       | 15     | 104   | °C/W |

## 5 Electrical characteristics

$T_J = 25\text{ }^{\circ}\text{C}$ ,  $V_{IN} = V_{OUT(NOM)} + 1\text{ V}$ ,  $C_{IN} = C_{OUT} = 1\text{ }\mu\text{F}$ ,  $I_{OUT} = 1\text{ mA}$ ,  $V_{EN} = V_{IN}$ , unless otherwise specified.

**Table 6. LDK220 electrical characteristics for fixed output version**

| Symbol           | Parameter                            | Test conditions                                                                                                                                                       | Min. | Typ.  | Max.  | Unit                         |
|------------------|--------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|-------|-------|------------------------------|
| $V_{IN}$         | Operating input voltage              |                                                                                                                                                                       | 2.5  |       | 13.2  | V                            |
| $V_{OUT}$        | $V_{OUT}$ accuracy                   | $I_{OUT} = 1\text{ mA}$ , $T_J = 25\text{ }^{\circ}\text{C}$                                                                                                          | -2.0 |       | 2.0   | %                            |
|                  |                                      | $I_{OUT} = 1\text{ mA}$ , $-40\text{ }^{\circ}\text{C} < T_J < 125\text{ }^{\circ}\text{C}$                                                                           | -3.0 |       | 3.0   | %                            |
| $\Delta V_{OUT}$ | Static line regulation               | $V_{OUT} + 1\text{ V} \leq V_{IN} \leq 13.2\text{ V}$ , $I_{OUT} = 1\text{ mA}$                                                                                       |      | 0.001 | 0.05  | %/V                          |
| $\Delta V_{OUT}$ | Static load regulation               | $I_{OUT} = 1\text{ mA}$ to 200 mA                                                                                                                                     |      | 0.001 | 0.003 | %/mA                         |
| $V_{DROP}$       | Dropout voltage <sup>(1)</sup>       | $I_{OUT} = 100\text{ mA}$ , $V_{OUT} = 3.3\text{ V}$                                                                                                                  |      | 100   |       | mV                           |
|                  |                                      | $I_{OUT} = 200\text{ mA}$ , $V_{OUT} = 3.3\text{ V}$<br>$40\text{ }^{\circ}\text{C} < T_J < 125\text{ }^{\circ}\text{C}$                                              |      | 200   | 350   |                              |
| $e_N$            | Output noise voltage                 | 10 Hz to 100 kHz, $I_{OUT} = 10\text{ mA}$                                                                                                                            |      | 20    |       | $\mu\text{V}_{RMS}/\text{V}$ |
| SVR              | Supply voltage rejection             | $V_{IN} = V_{OUT(NOM)} + 0.5\text{ V} \pm V_{RIPPLE}$<br>$V_{RIPPLE} = 0.1\text{ V}$<br>frequency = 120 Hz to 1 kHz<br>$I_{OUT} = 10\text{ mA}$                       |      | 55    |       | dB                           |
|                  |                                      | $V_{IN} = V_{OUT(NOM)} + 0.5\text{ V} \pm V_{RIPPLE}$<br>$V_{RIPPLE} = 0.1\text{ V}$ frequency = 10 kHz<br>$I_{OUT} = 10\text{ mA}$                                   |      | 50    |       |                              |
| $I_Q$            | Quiescent current                    | $V_{IN} = V_{OUT} + 1\text{ V}$<br>$I_{OUT} = 0\text{ mA}$ , $-40\text{ }^{\circ}\text{C} < T_J < 125\text{ }^{\circ}\text{C}$                                        |      | 55    | 90    | $\mu\text{A}$                |
|                  |                                      | $V_{OUT} + 1\text{ V} \leq V_{IN} \leq 13.2\text{ V}$ <sup>(2)</sup><br>$I_{OUT} = 200\text{ mA}$ , $-40\text{ }^{\circ}\text{C} < T_J < 125\text{ }^{\circ}\text{C}$ |      | 60    | 100   |                              |
|                  |                                      | $V_{IN}$ input current in off mode:<br>$V_{EN} = \text{GND}$ , $T_J = 25\text{ }^{\circ}\text{C}$                                                                     |      | 0.1   | 1     |                              |
| $I_{SC}$         | Short-circuit current <sup>(2)</sup> | $R_L = 0$                                                                                                                                                             |      | 400   |       | mA                           |
| $V_{EN}$         | Enable input logic low               | $V_{IN} = 2.5\text{ V}$ to $13.2\text{ V}$ , $-40\text{ }^{\circ}\text{C} < T_J < 125\text{ }^{\circ}\text{C}$                                                        |      |       | 0.4   | V                            |
|                  | Enable input logic high              | $V_{IN} = 2.5\text{ V}$ to $13.2\text{ V}$ , $-40\text{ }^{\circ}\text{C} < T_J < 125\text{ }^{\circ}\text{C}$                                                        | 1.2  |       |       |                              |
| $I_{EN}$         | Enable pin input current             | $V_{EN} = V_{IN}$                                                                                                                                                     |      | 0.1   | 100   | nA                           |
| $T_{SHDN}$       | Thermal shutdown                     |                                                                                                                                                                       |      | 160   |       | $^{\circ}\text{C}$           |
|                  | Hysteresis                           |                                                                                                                                                                       |      | 20    |       |                              |
| $C_{OUT}$        | Output capacitor                     | Capacitance<br>(see <a href="#">Section 6: Typical characteristics</a> )                                                                                              | 1    |       | 22    | $\mu\text{F}$                |

1. Dropout voltage is the input-to-output voltage difference at which the output voltage is 100 mV below its nominal value.
2. The maximum current has to be limited according to the maximum power dissipation.

$T_J = 25\text{ }^{\circ}\text{C}$ ,  $V_{IN} = V_{OUT(NOM)} + 1\text{ V}$ ,  $C_{IN} = C_{OUT} = 1\text{ }\mu\text{F}$ ,  $I_{OUT} = 1\text{ mA}$ ,  $V_{EN} = V_{IN}$ , unless otherwise specified.

Table 7. LDK220 electrical characteristics for adjustable version

| Symbol           | Parameter                            | Test conditions                                                                                                                                              | Min. | Typ.       | Max.  | Unit                         |
|------------------|--------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|------|------------|-------|------------------------------|
| $V_{IN}$         | Operating input voltage              |                                                                                                                                                              | 2.5  |            | 13.2  | V                            |
| $V_{ADJ}$        | $V_{ADJ}$ accuracy                   | $I_{OUT} = 1\text{ mA}$ , $T_J = 25\text{ }^{\circ}\text{C}$                                                                                                 | -2%  | 1.19       | +2%   | mV                           |
|                  |                                      | $I_{OUT} = 1\text{ mA}$ , $-40\text{ }^{\circ}\text{C} < T_J < 125\text{ }^{\circ}\text{C}$                                                                  | -3.0 | 1.185      | 3.0   | %                            |
| $\Delta V_{OUT}$ | Static line regulation               | $V_{OUT} + 1\text{ V} \leq V_{IN} \leq 13.2\text{ V}$<br>$I_{OUT} = 1\text{ mA}$                                                                             |      | 0.001      | 0.05  | %/V                          |
| $\Delta V_{OUT}$ | Static load regulation               | $I_{OUT} = 1\text{ mA}$ to 200 mA                                                                                                                            |      | 0.000<br>2 | 0.003 | %/mA                         |
| $V_{DROP}$       | Dropout voltage <sup>(1)</sup>       | $I_{OUT} = 100\text{ mA}$ , $V_{OUT} = 3.3\text{ V}$                                                                                                         |      | 100        |       | mV                           |
|                  |                                      | $I_{OUT} = 200\text{ mA}$ , $V_{OUT} = 3.3\text{ V}$<br>$40\text{ }^{\circ}\text{C} < T_J < 125\text{ }^{\circ}\text{C}$ ,                                   |      | 200        | 350   |                              |
| $e_N$            | Output noise voltage                 | 10 Hz to 100 kHz, $I_{OUT} = 10\text{ mA}$                                                                                                                   |      | 100        |       | $\mu\text{V}_{RMS}/\text{V}$ |
| $I_{ADJ}$        | Adjust pin current                   |                                                                                                                                                              |      |            | 1     | $\mu\text{A}$                |
| SVR              | Supply voltage rejection             | $V_{IN} = V_{OUTNOM} + 0.5\text{ V} \pm V_{RIPPLE}$<br>$V_{RIPPLE} = 0.1\text{ V}$<br>frequency=120 Hz to 1 kHz<br>$I_{OUT} = 10\text{ mA}$                  |      | 60         |       | dB                           |
|                  |                                      | $V_{IN} = V_{OUTNOM} + 0.5\text{ V} \pm V_{RIPPLE}$<br>$V_{RIPPLE} = 0.1\text{ V}$<br>frequency=10 kHz, $I_{OUT} = 10\text{ mA}$                             |      | 45         |       |                              |
| $I_Q$            | Quiescent current                    | $V_{OUT} + 1\text{ V} \leq V_{IN} \leq 13.2\text{ V}$<br>$I_{OUT} = 0\text{ mA}$ , $-40\text{ }^{\circ}\text{C} < T_J < 125\text{ }^{\circ}\text{C}$         |      | 55         | 90    | $\mu\text{A}$                |
|                  |                                      | $V_{OUT} + 1\text{ V} \leq V_{IN} \leq 13.2\text{ V}^{(2)}$<br>$I_{OUT} = 200\text{ mA}$ , $-40\text{ }^{\circ}\text{C} < T_J < 125\text{ }^{\circ}\text{C}$ |      | 60         | 100   |                              |
|                  |                                      | $V_{IN}$ input current in off mode:<br>$V_{EN} = \text{GND}$ , $T_J = 25\text{ }^{\circ}\text{C}$                                                            |      | 0.1        | 1     |                              |
| $I_{SC}$         | Short-circuit current <sup>(2)</sup> | $R_L = 0$                                                                                                                                                    |      | 400        |       | mA                           |
| $V_{EN}$         | Enable input logic low               | $V_{IN} = 2.5\text{ V}$ to $13.2\text{ V}$<br>$-40\text{ }^{\circ}\text{C} < T_J < 125\text{ }^{\circ}\text{C}$                                              |      |            | 0.4   | V                            |
|                  | Enable input logic high              | $V_{IN} = 2.5\text{ V}$ to $13.2\text{ V}$<br>$-40\text{ }^{\circ}\text{C} < T_J < 125\text{ }^{\circ}\text{C}$                                              | 1.2  |            |       |                              |
| $I_{EN}$         | Enable pin input current             | $V_{EN} = V_{IN}$                                                                                                                                            |      | 0.1        | 100   | nA                           |
| $T_{SHDN}$       | Thermal shutdown                     |                                                                                                                                                              |      | 160        |       | $^{\circ}\text{C}$           |
|                  | Hysteresis                           |                                                                                                                                                              |      | 20         |       |                              |
| $C_{OUT}$        | Output capacitor                     | Capacitance<br>(see <a href="#">Section 6: Typical characteristics</a> )                                                                                     | 1    |            | 22    | $\mu\text{F}$                |

1. Dropout voltage is the input-to-output voltage difference at which the output voltage is 100 mV below its nominal value.


2. The maximum current has to be limited according to the maximum power dissipation.




## 6 Typical characteristics

( $C_{IN} = C_{OUT} = 1\ \mu\text{F}$ ,  $V_{EN}$  to  $V_{IN}$ )


**Figure 5. Output voltage vs. temperature**  
( $V_{OUT} = V_{ADJ}$ ,  $I_{OUT} = 1\ \text{mA}$ )

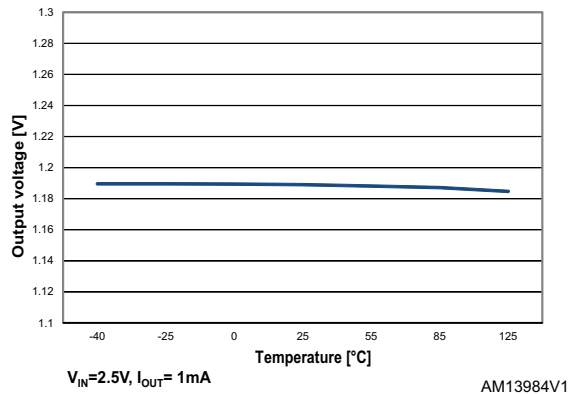


**Figure 6. Output voltage vs. temperature**  
( $V_{OUT} = V_{ADJ}$ ,  $I_{OUT} = 200\ \text{mA}$ )

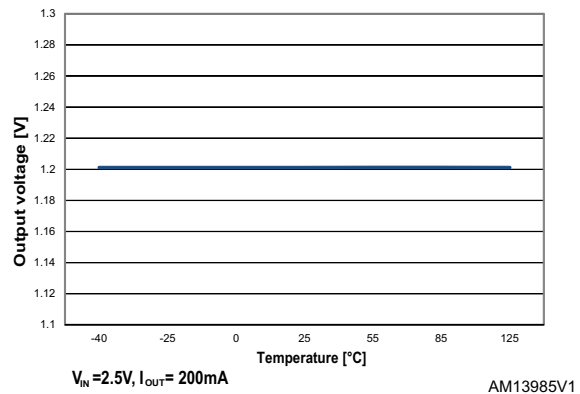


**Figure 7. Output voltage vs. temperature**  
( $V_{OUT} = 3.3\ \text{V}$ ,  $I_{OUT} = 1\ \text{mA}$ )

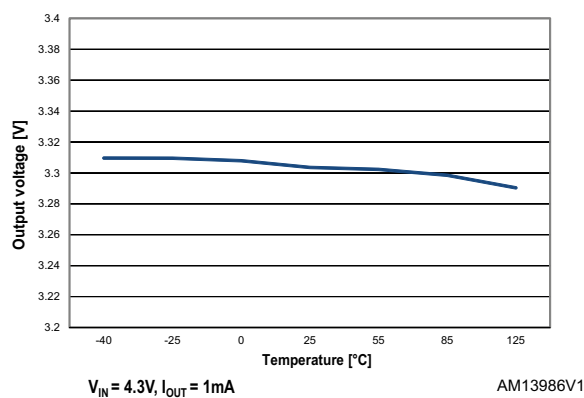

**Figure 8. Output voltage vs. temperature**  
( $V_{OUT} = 3.3\ \text{V}$ ,  $I_{OUT} = 200\ \text{mA}$ )

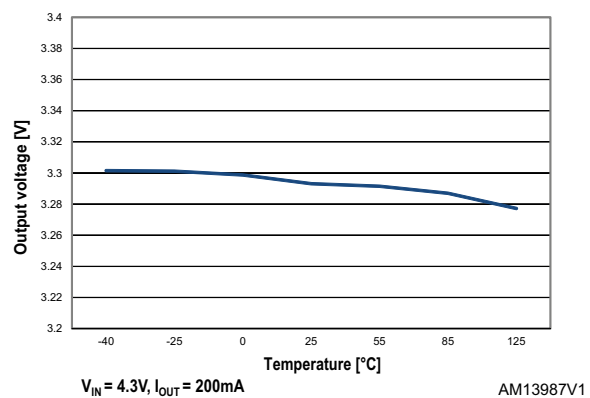

**Figure 9. Short-circuit current vs. temperature**

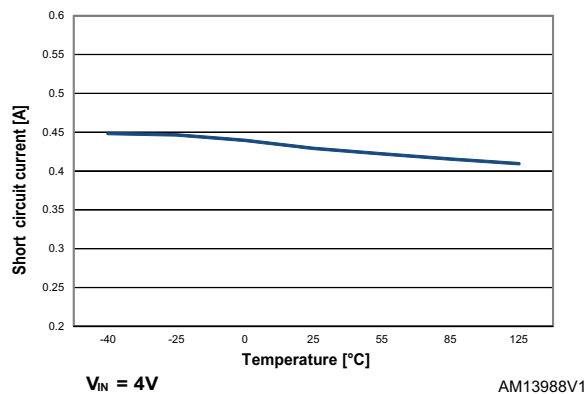

**Figure 10. Line regulation vs. temperature**  
( $V_{OUT} = 3.3\ \text{V}$ )

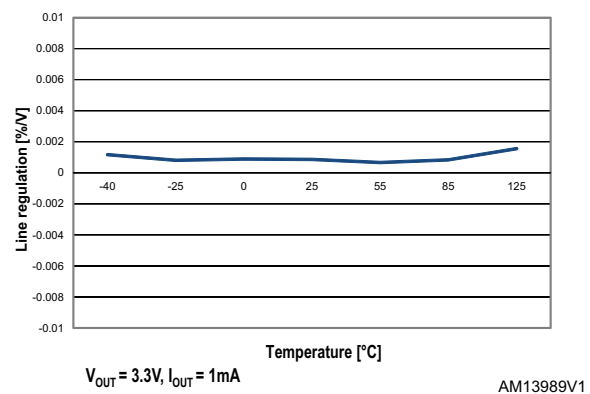


Figure 11. Line regulation vs. temperature  
( $V_{OUT} = V_{ADJ}$ )

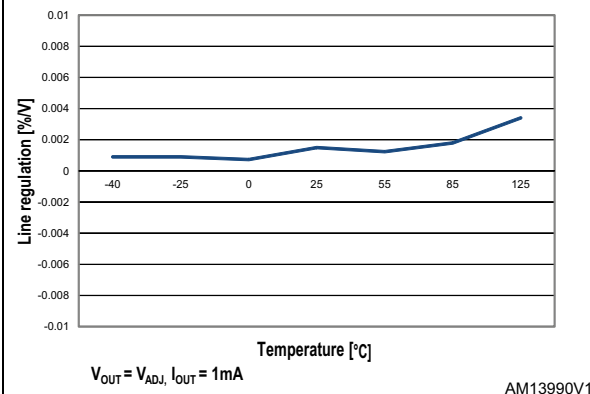


Figure 12. Load regulation vs. temperature  
( $V_{OUT} = 3.3\text{ V}$ )

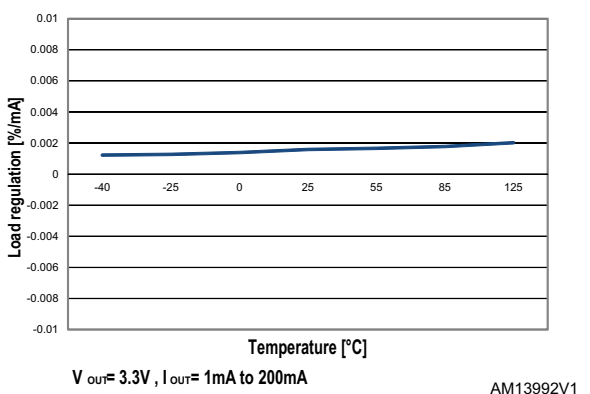


Figure 13. Load regulation vs. temperature  
( $V_{OUT} = V_{ADJ}$ )

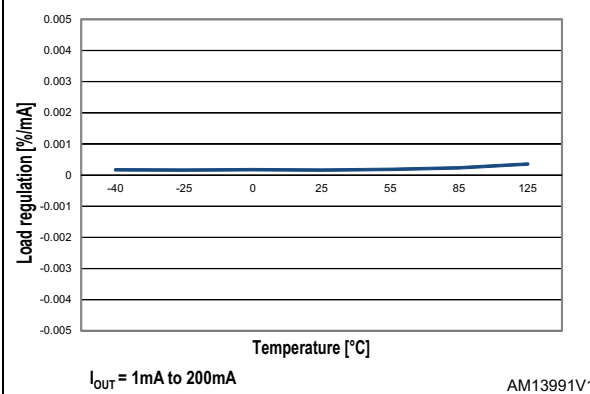


Figure 14. Enable thresholds vs. temperature

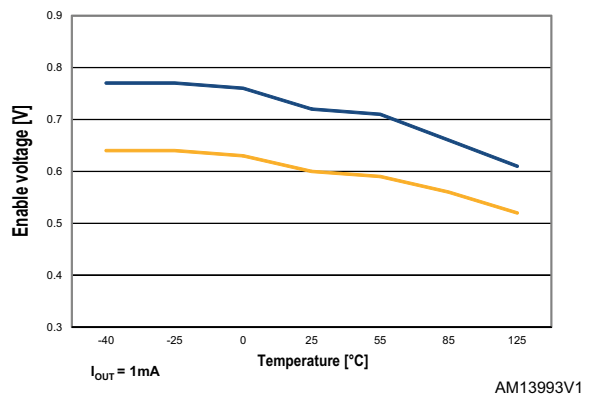


Figure 15. Dropout voltage vs. temperature

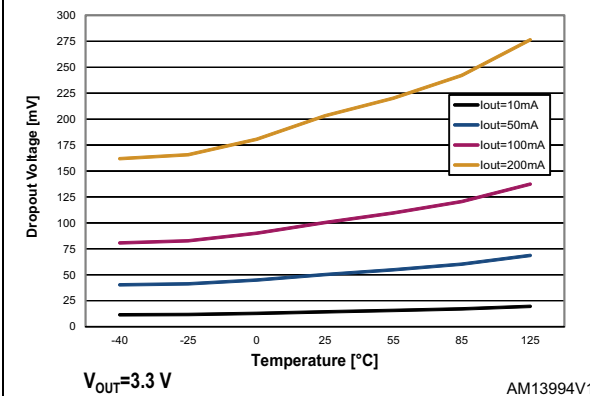


Figure 16. Quiescent current vs. temperature  
( $I_{OUT} = 0\text{ mA}$ )



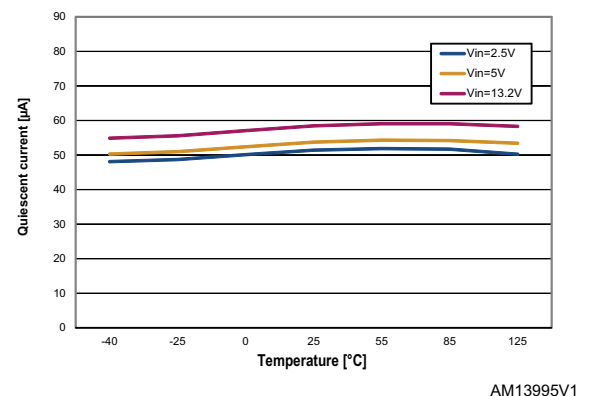


Figure 17. Quiescent current vs. temperature ( $I_{OUT} = 200\text{ mA}$ )

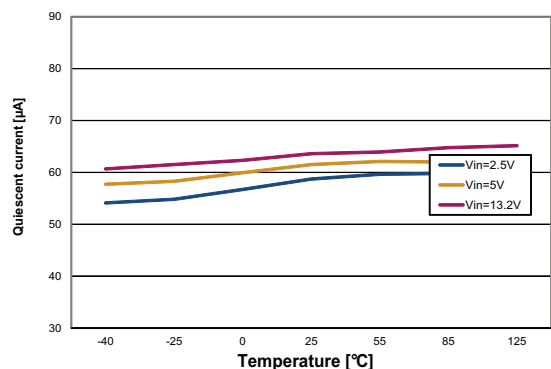


AM13996V1

Figure 18. Off-state current vs. temperature

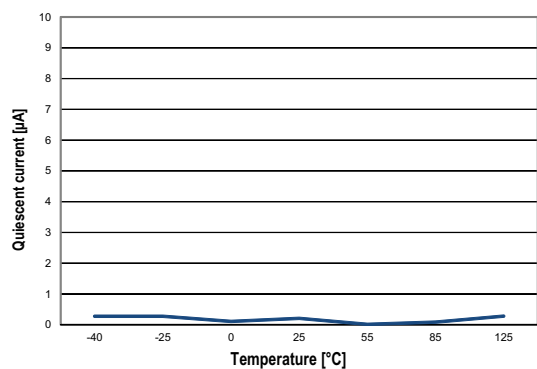

AM13997V1


Figure 19. SVR vs. frequency ( $V_{OUT} = 3.3\text{ V}$ )

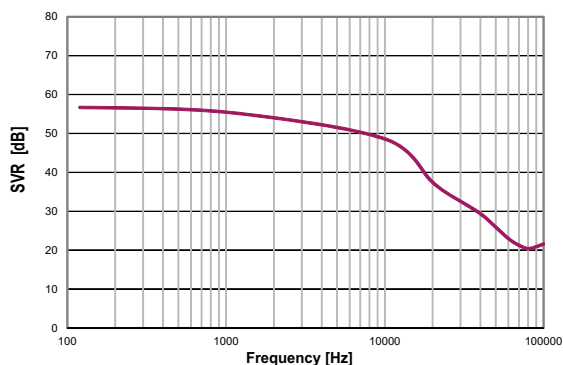

$V_{IN} = 3.7\text{ V} \pm 100\text{ mV}$ ,  $V_{OUT} = 3.3\text{ V}$ ,  $C_{OUT} = 1\mu\text{F}$

AM13998V1


Figure 20. SVR vs. frequency ( $V_{OUT} = V_{ADJ}$ )

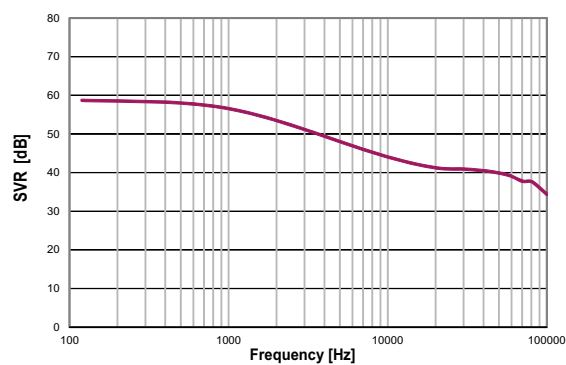

$V_{IN} = 2.5\text{ V} \pm 100\text{ mV}$ ,  $V_{OUT} = V_{ADJ}$ ,  $C_{OUT} = 1\mu\text{F}$

AM13999V1


Figure 21. Output noise spectral density

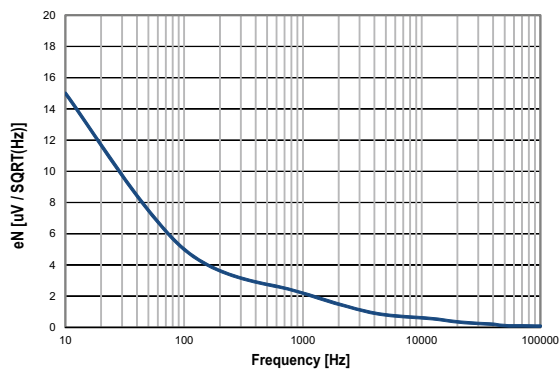

$V_{OUT} = 3.3\text{ V}$ ,  $C_{IN} = C_{OUT} = 1\mu\text{F}$


AM14000V1

Figure 22. Stability vs. ( $C_{OUT}$ , ESR)

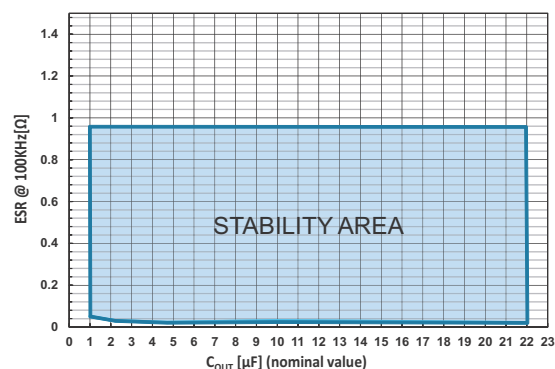

$V_{IN}$  from 2.5 to 13.2V,  $I_{OUT}$  from 0 to 200mA,  $C_{IN} = 1\mu\text{F}$  AM14001V1


Figure 23. Startup with enable ( $V_{OUT} = 3.3\text{ V}$ )

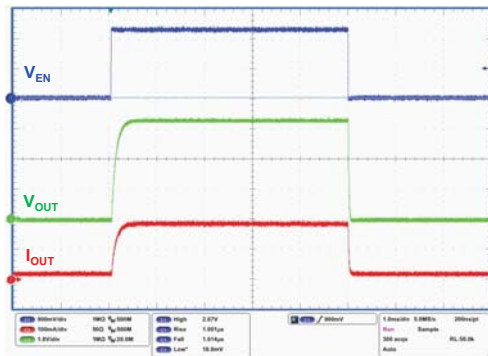

$V_{IN}=4.3\text{V}$ ,  $V_{EN}=0\text{V}$  to  $2\text{V}$ ,  $I_{OUT}=0.2\text{A}$ ,  $V_{OUT}=3.3\text{V}$ ,  $T_r=T_f=1\mu\text{s}$

AM14002V1


Figure 24. Startup with enable ( $V_{OUT} = V_{ADJ}$ )

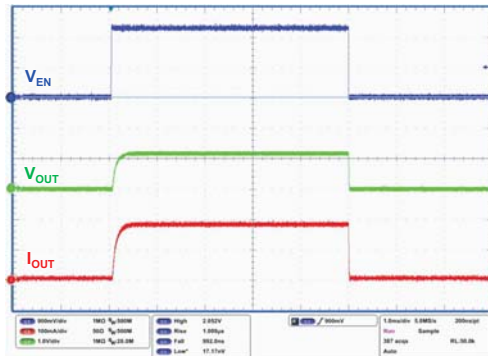

$V_{IN}=2.5\text{V}$ ,  $V_{EN}=0\text{V}$  to  $V_{IN}$ ,  $I_{OUT}=0.2\text{A}$ ,  $V_{OUT}=V_{ADJ}$ ,  $T_r=T_f=1\mu\text{s}$

AM14003V1


Figure 25. Turn-on time ( $V_{OUT} = 3.3\text{ V}$ )

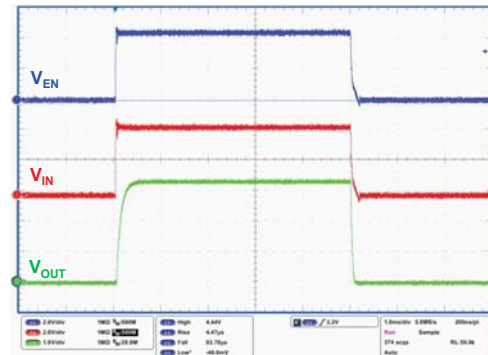

$V_{IN}=V_{EN}=0\text{V}$  to  $4.3\text{V}$ ,  $I_{OUT}=0.2\text{A}$ ,  $V_{OUT}=3.3\text{V}$ ,  $T_r=5\mu\text{s}$

AM14004V1


Figure 26. Turn-on time ( $V_{OUT} = V_{ADJ}$ )

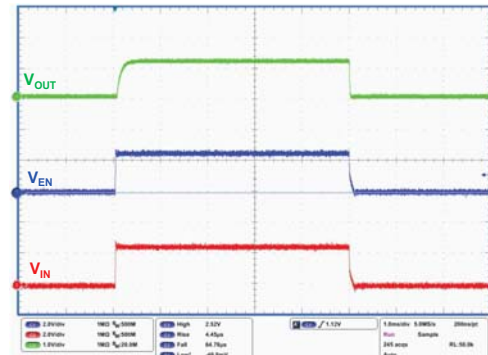

$V_{IN}=V_{EN}=0\text{V}$  to  $2.5\text{V}$ ,  $I_{OUT}=0.2\text{A}$ ,  $V_{OUT}=V_{ADJ}$ ,  $T_r=5\mu\text{s}$

AM14005V1


Figure 27. Line transient ( $V_{OUT} = 3.3\text{ V}$ )

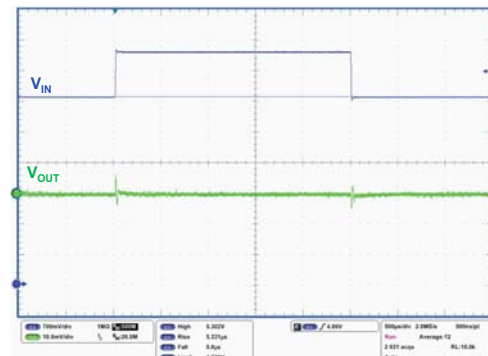

$V_{IN}=V_{EN}=4.3\text{V}$  to  $5.3\text{V}$ ,  $I_{OUT}=1\text{mA}$ ,  $V_{OUT}=3.3\text{V}$ ,  $T_r=T_f=5\mu\text{s}$

AM14006V1


Figure 28. Line transient ( $V_{OUT} = V_{ADJ}$ )

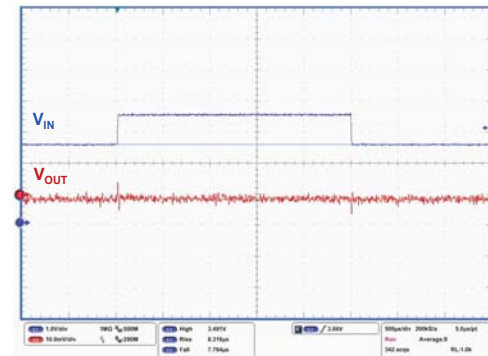

$V_{IN}=V_{EN}=2.5\text{V}$  to  $3.5\text{V}$ ,  $I_{OUT}=1\text{mA}$ ,  $V_{OUT}=V_{ADJ}$ ,  $T_r=T_f=5\mu\text{s}$

AM14007V1


Figure 29. Load transient ( $V_{OUT} = 3.3\text{ V}$ )

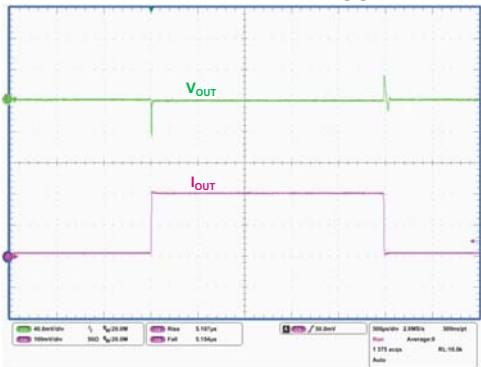

$V_{IN} = V_{EN} = 4.3\text{ V}$ ,  $I_{OUT} = 1\text{ mA to } 0.2\text{ A}$ ,  $V_{OUT} = 3.3\text{ V}$ ,  $T_r = T_f = 5\mu\text{s}$

AM14008V1

Figure 30. Load transient ( $V_{OUT} = V_{ADJ}$ )

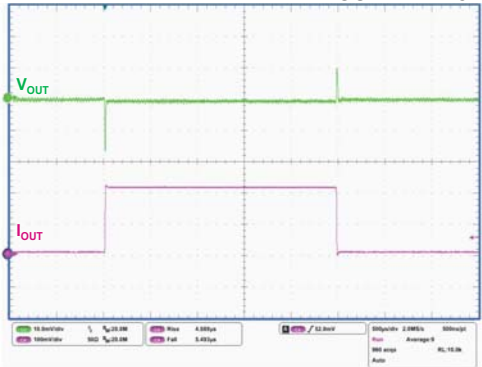

$V_{IN} = V_{EN} = 2.5\text{ V}$ ,  $I_{OUT} = 1\text{ mA to } 0.2\text{ A}$ ,  $V_{OUT} = V_{ADJ}$ ,  $T_r = T_f = 5\mu\text{s}$

AM14009V1

## 7 Package information

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK® packages, depending on their level of environmental compliance. ECOPACK® specifications, grade definitions and product status are available at: [www.st.com](http://www.st.com). ECOPACK® is an ST trademark.

### 7.1 SOT23-5L package information

Figure 31. SOT23-5L package outline


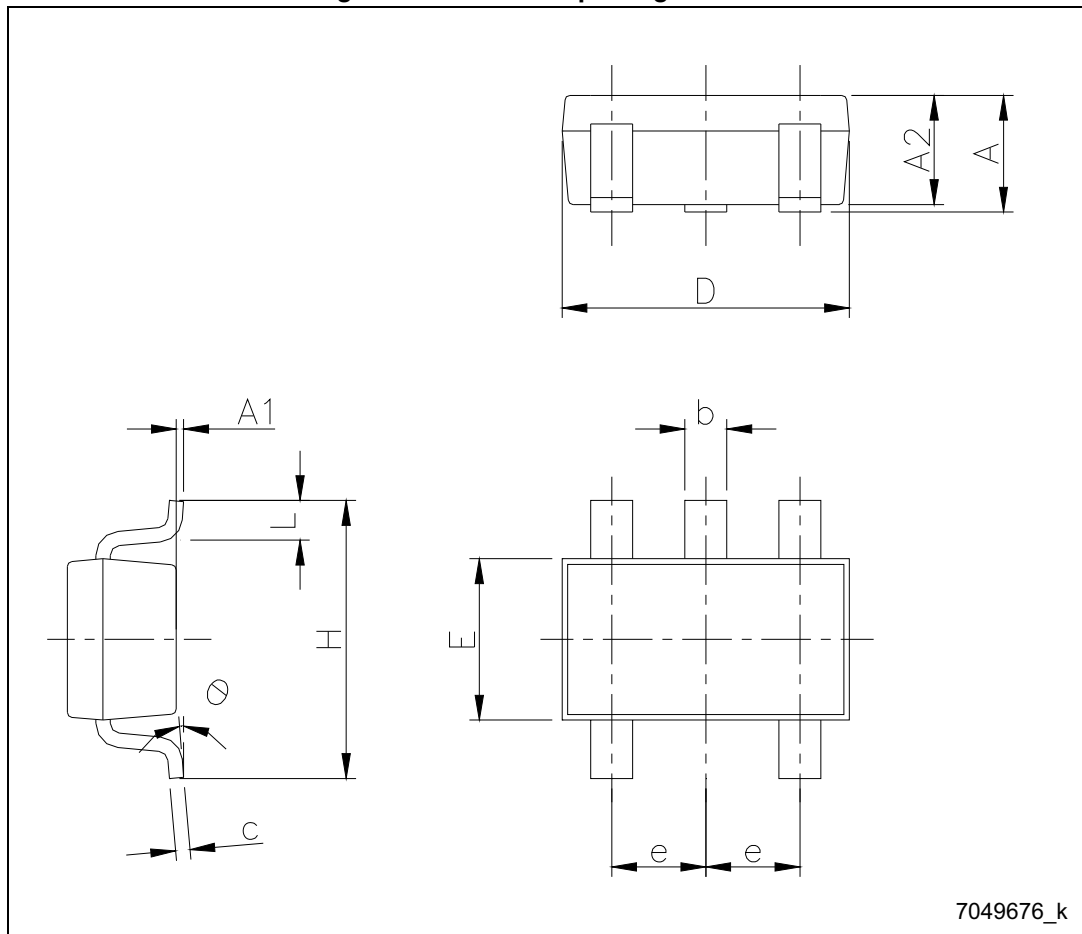


Table 8. SOT23-5L mechanical data

| Dim. | mm   |      |      |
|------|------|------|------|
|      | Min. | Typ. | Max. |
| A    | 0.90 |      | 1.45 |
| A1   | 0    |      | 0.15 |
| A2   | 0.90 |      | 1.30 |
| b    | 0.30 |      | 0.50 |
| c    | 0.09 |      | 0.20 |
| D    |      | 2.95 |      |
| E    |      | 1.60 |      |
| e    |      | 0.95 |      |
| H    |      | 2.80 |      |
| L    | 0.30 |      | 0.60 |
| θ    | 0    |      | 8    |

Figure 32. SOT23-5L recommended footprint (dimensions in mm)

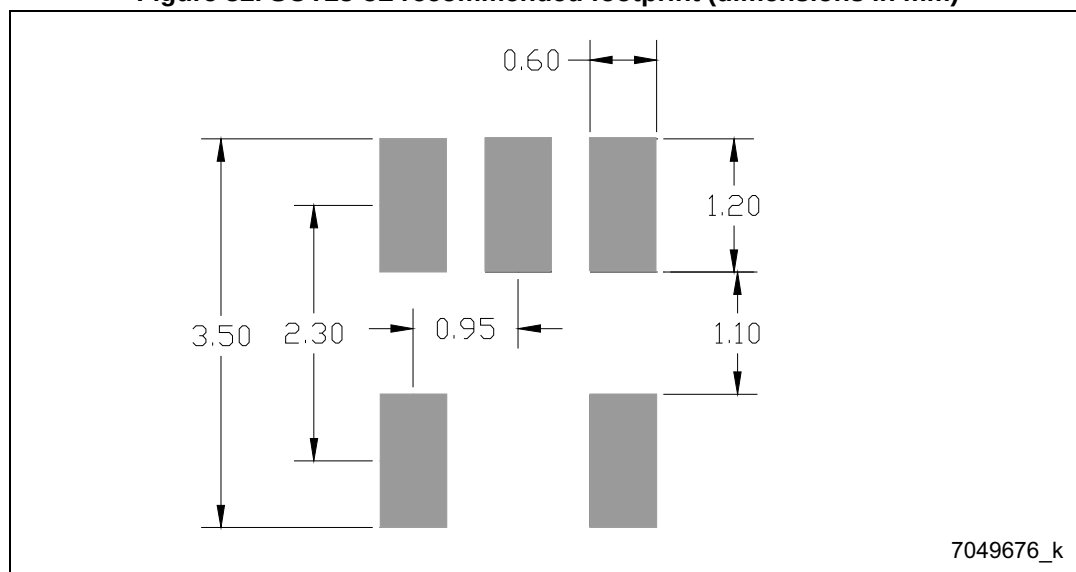

## 7.2 SOT323-5L package information

Figure 33. SOT323-5L package outline

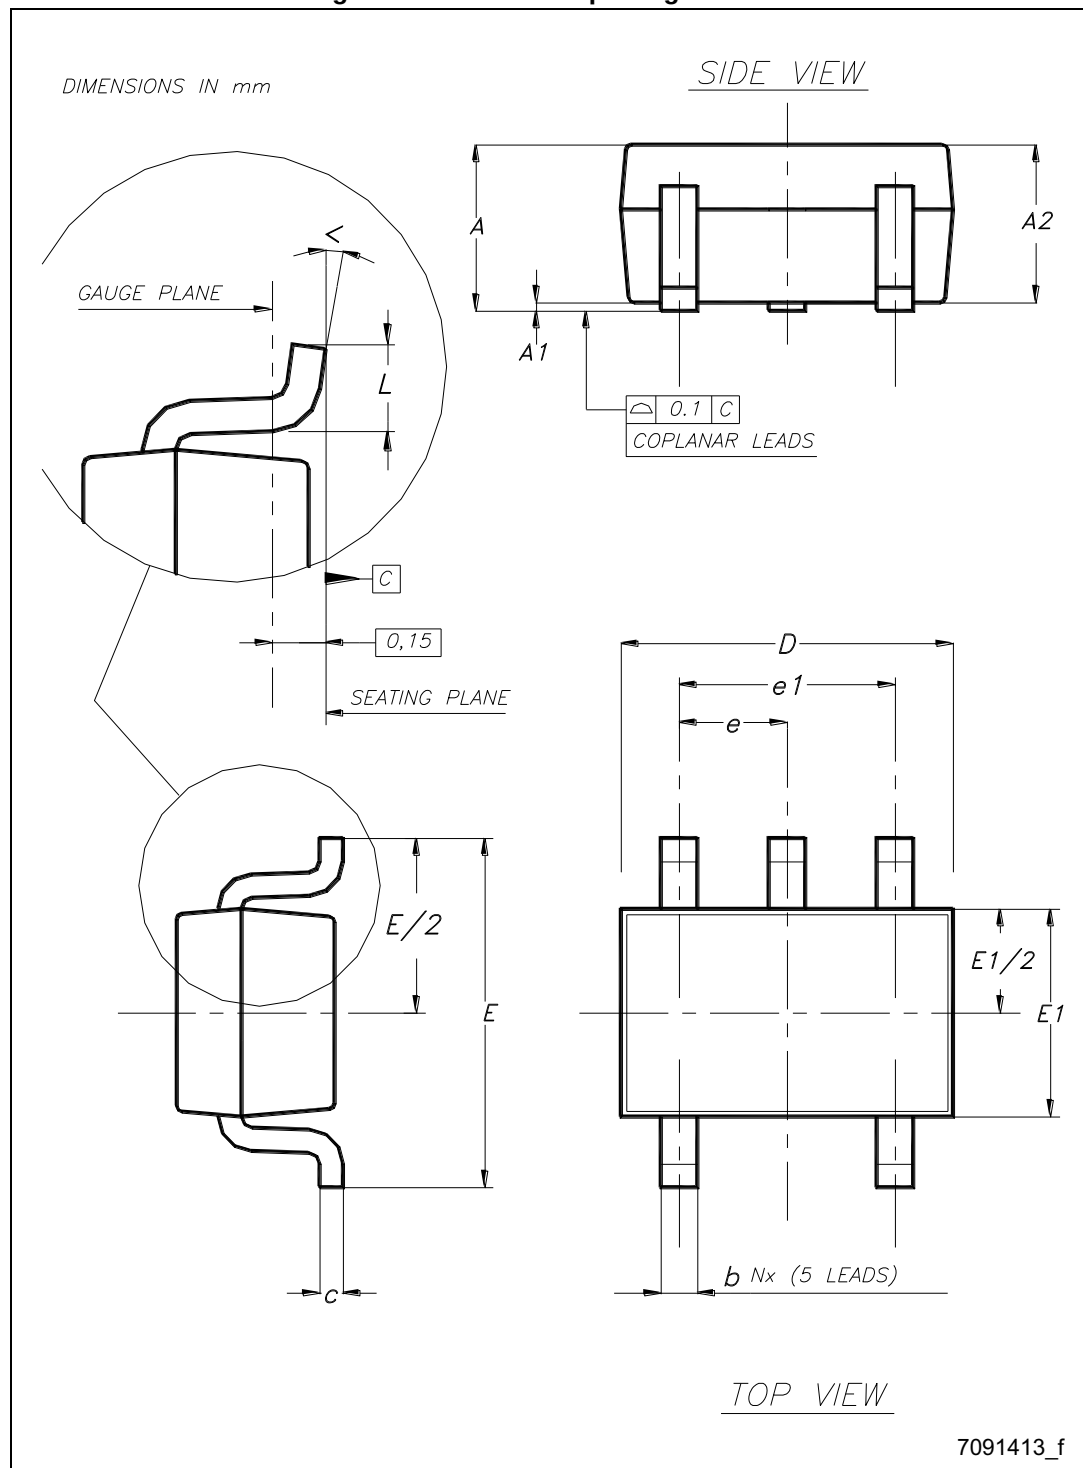




Table 9. SOT323-5L mechanical data

| Dim. | mm   |      |      |
|------|------|------|------|
|      | Min. | Typ. | Max. |
| A    | 0.80 |      | 1.10 |
| A1   | 0    |      | 0.10 |
| A2   | 0.80 | 0.90 | 1    |
| b    | 0.15 |      | 0.30 |
| c    | 0.10 |      | 0.22 |
| D    | 1.80 | 2    | 2.20 |
| E    | 1.80 | 2.10 | 2.40 |
| E1   | 1.15 | 1.25 | 1.35 |
| e    |      | 0.65 |      |
| e1   |      | 1.30 |      |
| L    | 0.26 | 0.36 | 0.46 |
| <    | 0°   |      | 8°   |

7.3 DFN6-1.2x1.3 package information

Figure 34. DFN6-1.2x1.3 package outline

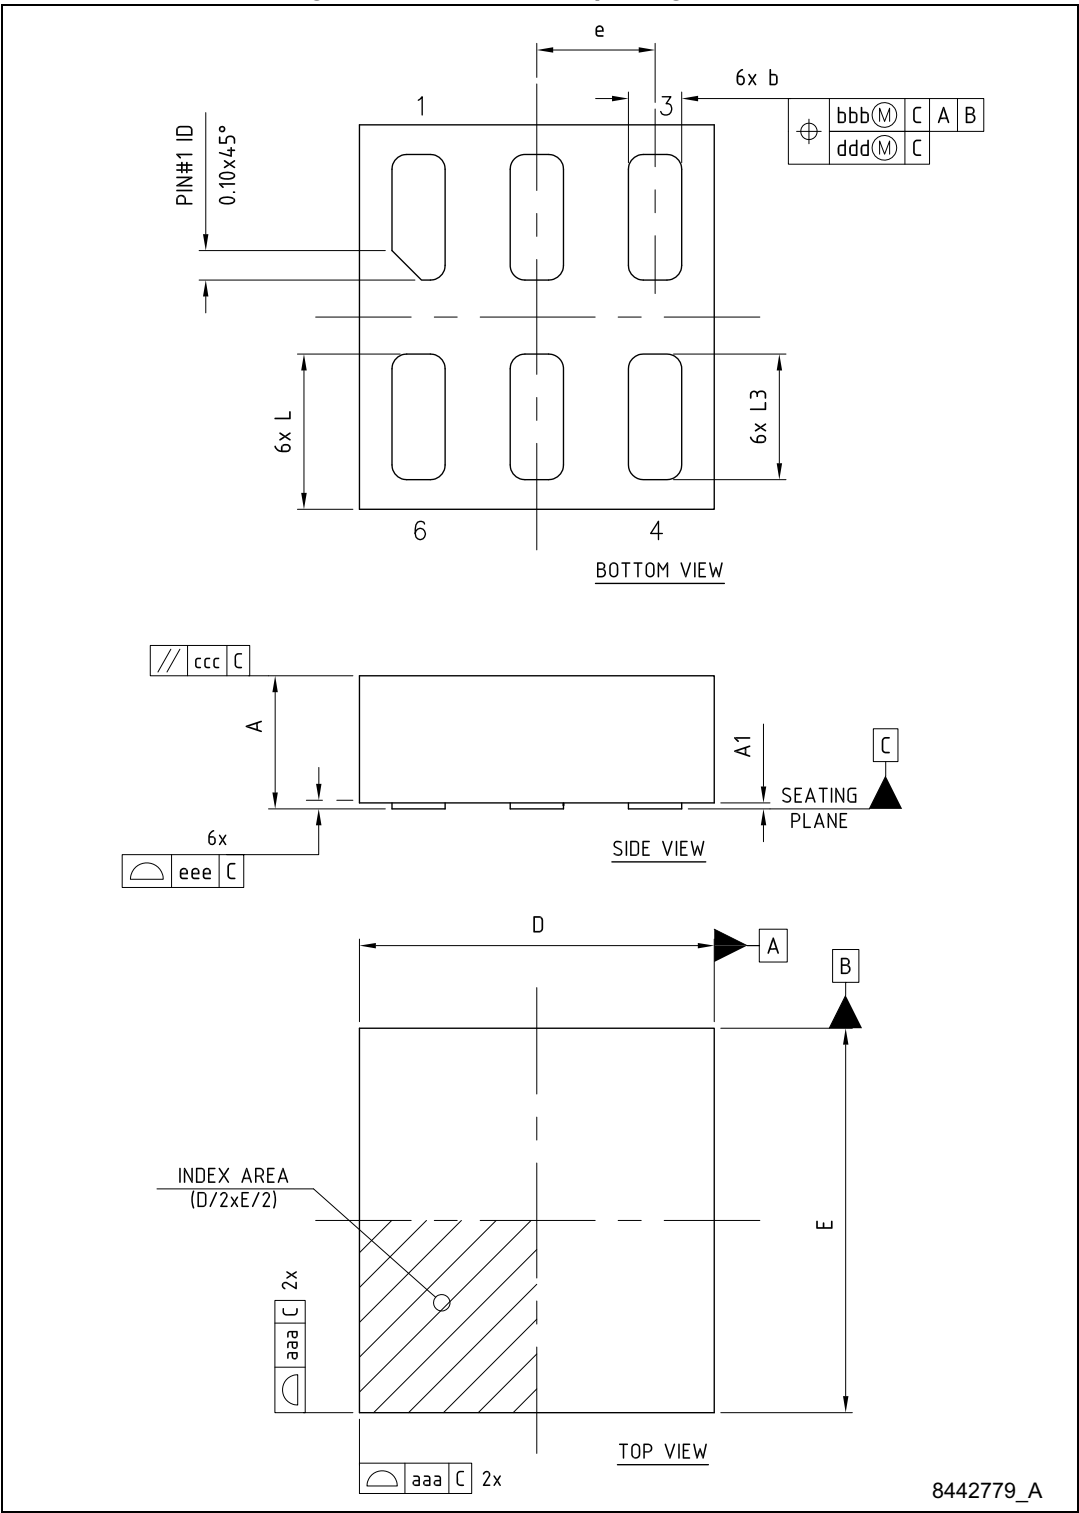


Table 10. DFN6-1.2x1.3 mechanical data

| Dim. | mm    |       |       |
|------|-------|-------|-------|
|      | Min.  | Typ.  | Max.  |
| A    | 0.41  | 0.45  | 0.50  |
| A1   | 0.00  | 0.02  | 0.05  |
| D    | -     | 1.20  | -     |
| E    | -     | 1.30  | -     |
| e    | -     | 0.40  | -     |
| b    | 0.15  | 0.18  | 0.25  |
| L    | 0.475 | 0.525 | 0.575 |
| L3   | 0.375 | 0.425 | 0.475 |
| aaa  | -     | 0.05  | -     |
| bbb  | -     | 0.10  | -     |
| ccc  | -     | 0.05  | -     |
| ddd  | -     | 0.05  | -     |
| eee  | -     | 0.05  | -     |

Figure 6: Recommended footprint dimensions in mm.

The diagram illustrates the recommended footprint dimensions for a component. The overall width is 1.08 mm and the overall height is 1.2 mm. The central component is 0.15 mm wide and 0.53 mm high. The other components are 0.28 mm wide and 0.4 mm high. The components are arranged in a 3x3 grid with a central component. The components are labeled A and B. A is the central component and B is the component to the right of the center. The components are shaded with diagonal lines.

## 7.4 SOT-89 package information

Figure 36. SOT-89 package outline


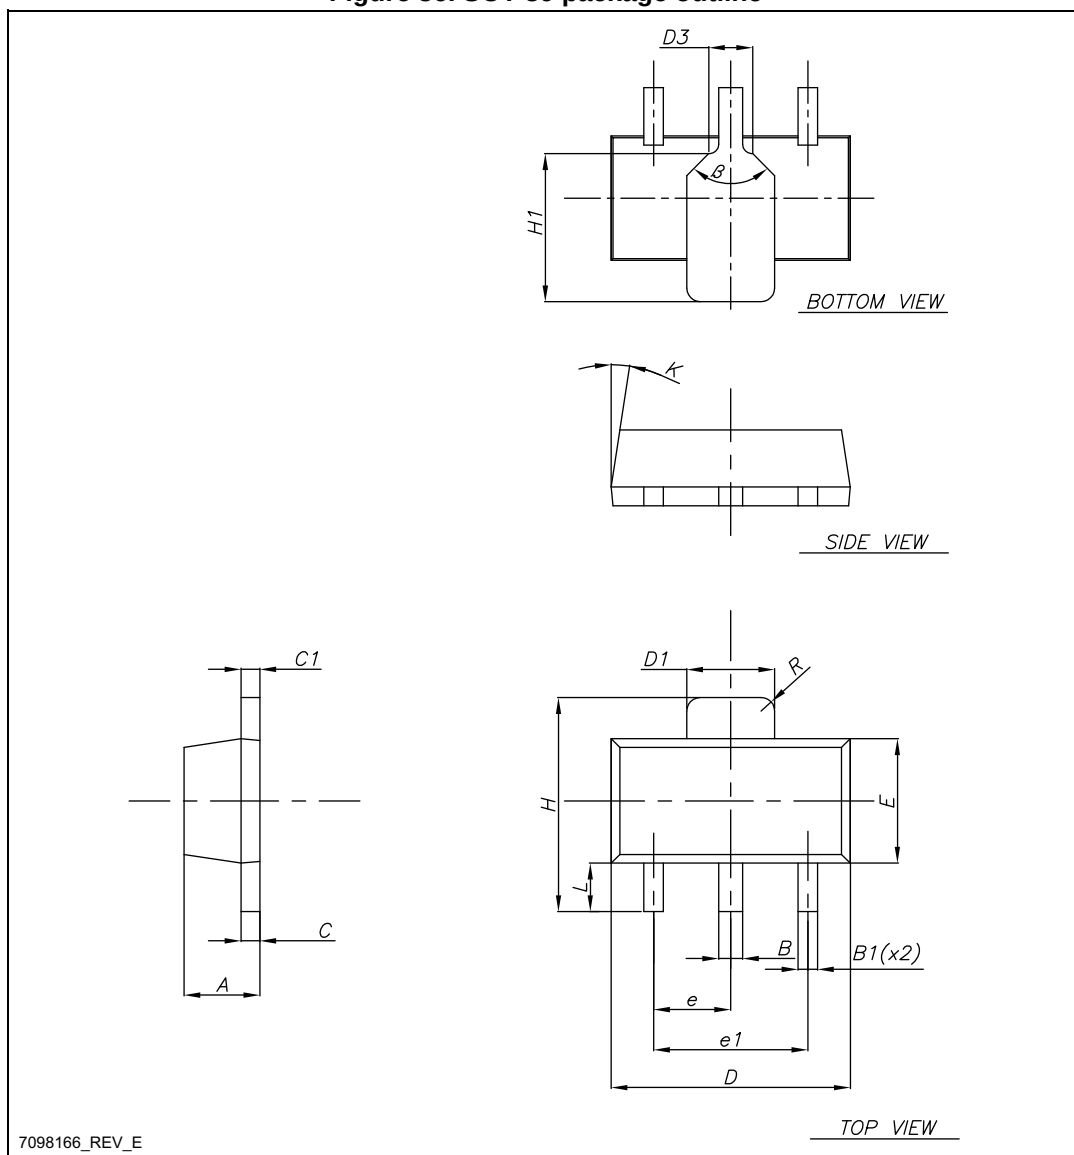


Table 11. SOT-89 mechanical data

| Dim. | mm   |      |      |
|------|------|------|------|
|      | Min. | Typ. | Max. |
| A    | 1.40 |      | 1.60 |
| B    | 0.44 |      | 0.56 |
| B1   | 0.36 |      | 0.48 |
| C    | 0.35 |      | 0.44 |
| C1   | 0.35 |      | 0.44 |
| D    | 4.40 |      | 4.60 |
| D1   | 1.62 |      | 1.83 |
| D3   |      | 0.90 |      |
| E    | 2.29 |      | 2.60 |
| e    | 1.42 |      | 1.57 |
| e1   | 2.92 |      | 3.07 |
| H    | 3.94 |      | 4.25 |
| H1   | 2.70 |      | 3.10 |
| K    | 1°   |      | 8°   |
| L    | 0.89 |      | 1.20 |
| R    |      | 0.25 |      |
| β    |      | 90°  |      |

Figure 37. SOT-89 recommended footprint

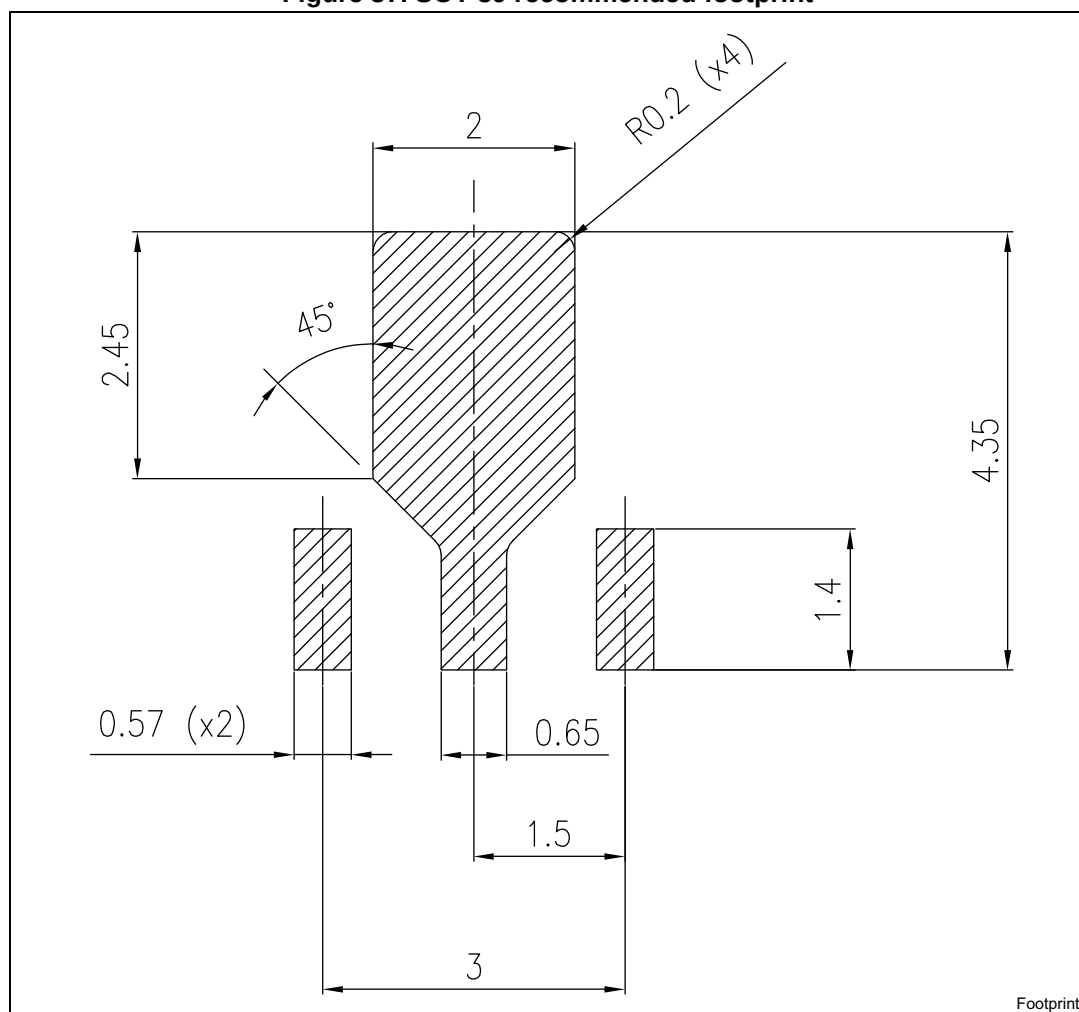

## 7.5 SOT-89 packing information

Figure 38. SOT-89 carrier tape outline

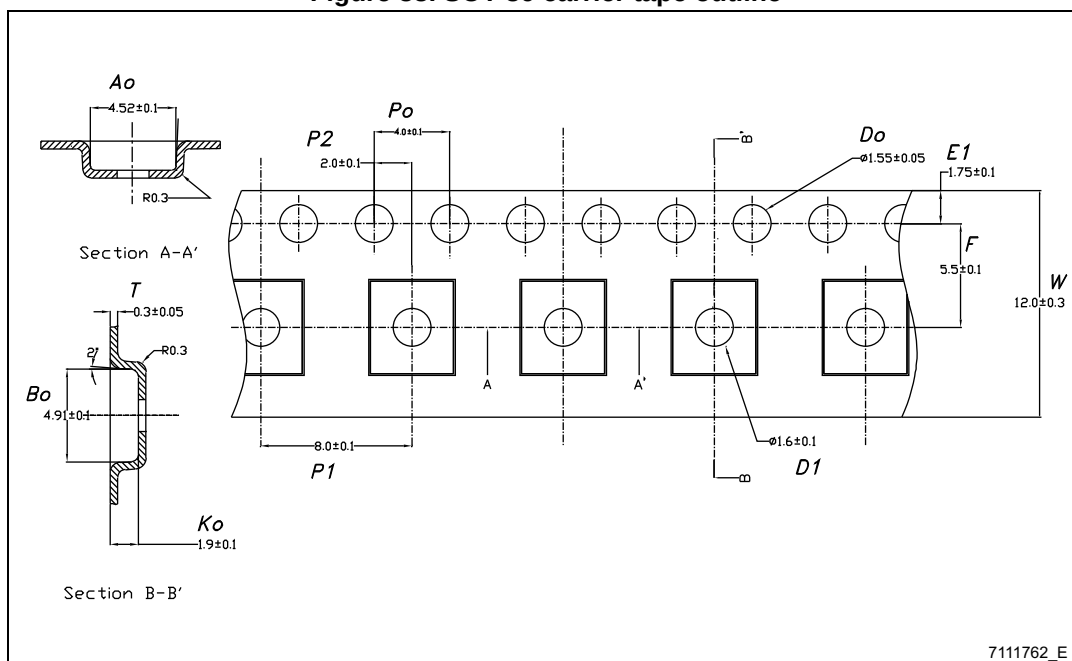


Table 12. SOT-89 carrier tape mechanical data

| Dim. | mm.    |           |
|------|--------|-----------|
|      | Values | Tolerance |
| Ao   | 4.52   | ± 0.10    |
| Bo   | 4.91   | ± 0.10    |
| Ko   | 1.90   | ± 0.10    |
| F    | 5.50   | ± 0.10    |
| E    | 1.75   | ± 0.10    |
| W    | 12     | ± 0.30    |
| P2   | 2      | ± 0.10    |
| Po   | 4      | ± 0.10    |
| P1   | 8      | ± 0.10    |
| T    | 0.30   | ± 0.10    |
| D    | Ø 1.55 | ± 0.05    |
| D1   | Ø 1.60 | ± 0.10    |



## 8 Ordering information

Table 13. Order codes

| SOT323-5L  | SOT23-5L   | SOT-89     | DFN6        | Output voltage (V) |
|------------|------------|------------|-------------|--------------------|
| LDK220C12R | LDK220M12R |            | LDK220PU12R | 1.2                |
| LDK220C13R | LDK220M13R |            | LDK220PU13R | 1.3                |
| LDK220C15R | LDK220M15R |            | LDK220PU15R | 1.5                |
| LDK220C18R | LDK220M18R |            | LDK220PU18R | 1.8                |
| LDK220C25R | LDK220M25R |            | LDK220PU25R | 2.5                |
| LDK220C27R | LDK220M27R |            | LDK220PU27R | 2.7                |
| LDK220C28R | LDK220M28R |            | LDK220PU28R | 2.8                |
| LDK220C30R | LDK220M30R | LDK220U30R | LDK220PU30R | 3                  |
| LDK220C31R | LDK220M31R |            | LDK220PU31R | 3.1                |
| LDK220C32R | LDK220M32R |            | LDK220PU32R | 3.2                |
| LDK220C33R | LDK220M33R | LDK220U33R | LDK220PU33R | 3.3                |
| LDK220C36R | LDK220M36R | LDK220U36R | LDK220PU36R | 3.6                |
| LDK220C40R | LDK220M40R |            | LDK220PU40R | 4                  |
| LDK220C42R | LDK220M42R |            | LDK220PU42R | 4.2                |
| LDK220C50R | LDK220M50R | LDK220U50R | LDK220PU50R | 5                  |
| LDK220C60R | LDK220M60R |            | LDK220PU60R | 6                  |
| LDK220C85R | LDK220M85R |            | LDK220PU85R | 8.5                |
| LDK220C90R | LDK220M90R |            | LDK220PU90R | 9                  |
| LDK220C-R  | LDK220M-R  |            | LDK220PU-R  | adj                |

## 9 Revision history

**Table 14. Document revision history**

| Date        | Revision | Changes                                                                                                                                                                                                                                                                                                                                           |
|-------------|----------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 19-Mar-2014 | 1        | Initial release.                                                                                                                                                                                                                                                                                                                                  |
| 24-Nov-2014 | 2        | Updated the features in cover page, <a href="#">Table 6: LDK220 electrical characteristics for fixed output version</a> , <a href="#">Table 7: LDK220 electrical characteristics for adjustable version</a> , <a href="#">Table 8: SOT23-5L mechanical data</a> , and <a href="#">Section 6: Typical characteristics</a> .<br>Minor text changes. |
| 19-May-2015 | 3        | Added SOT-89 package.<br>Updated features in cover page.<br>Updated <a href="#">Section 2: Pin configuration</a> , <a href="#">Section 3: Typical application</a> , <a href="#">Table 5: Thermal data</a> , <a href="#">Section 7: Package information</a> and <a href="#">Section 8: Ordering information</a> .<br>Minor text changes.           |

**IMPORTANT NOTICE – PLEASE READ CAREFULLY**

STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST's terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers' products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2015 STMicroelectronics – All rights reserved





Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.