

Series 2200

Single-Channel Programmable DC Power Supplies



- **Five models ranging in power from 86W to 150W with voltage outputs from 20V to 72V address a wide range of power requirements**
- **0.03% basic voltage output accuracy and 0.05% basic current accuracy provide quality test data**
- **High output and measurement resolution, 1mV and 0.1mA, for testing low power circuits and devices**
- **Remote sensing to ensure the programmed voltage is applied to the load**
- **Dual-line display shows both the programmed values and actual outputs for a continuous indication of the status of the power delivered to the load**
- **Repeatable test sequences of up to 80 output steps are easy to create with the built-in List mode**
- **GPIB and USB interfaces are standard for convenient automated control**

The Series 2200 Single-Channel Programmable DC Power Supplies provide a wide range of voltage outputs to address the testing and characterization of components, circuits, modules, and complete devices, whether you are in a research laboratory, in design and development, or in production test. The Series 2200 consists of five models with output voltages from 20V to 72V that can deliver 86W, 96W, 100W, and 150W of power. In addition, these power supplies can act as constant current sources as well as constant voltage sources. The Series 2200 power supplies offer an excellent combination of performance, versatility, and ease of use that allow you to obtain quality test data as quickly as possible. They perform as effectively in automated test systems as they do in manual instrument configurations.

Outstanding Accuracy Delivered to the Load

With basic voltage setting accuracy of 0.03% and basic voltage readback accuracy of 0.02%, you can be sure that the voltage you program for the load is applied at the output terminals. What's more, the rear panel connections include remote sense terminals that compensate for voltage drops in the power supply leads. This helps to ensure that the correct voltage is delivered to the load terminals of the device-under-test (DUT). Great accuracy is not limited to voltage—the basic current setting and readback accuracy is 0.05%, providing you with high quality load current measurements. Also, with less than 5mVp-p noise, you can be confident that the power applied to the DUT's load terminals is both accurate and of high quality.

Superior resolution is also provided by Keithley's Series 2200 single-channel power supplies. With 1mV and 0.1mA resolution, the effects of very small changes in voltage and current can be detected and studied. For portable devices in which minimum power consumption is critical, the 0.1mA current resolution allows you to measure the idle and sleep mode currents so you can verify that your products meet aggressive low power consumption goals.

Get Test Results Quickly

Keithley's Series 2200 single-channel power supplies have a number of features that enable you to obtain the results you need quickly and easily, including tools to help you create sophisticated tests for a wide range of requirements.

The dual-line display shows both the programmed settings and the actual voltage and current outputs, allowing you to immediately see, understand, and address any differences between the expected and actual output values. Multiple methods can be used to adjust the voltage and current settings. You can use the direct-entry numeric keypad to set precise voltage and current values. There is also a rotary knob with adjustable step size that lets you easily study the response of your DUT to small or large changes in voltage or current.

Need to repeat a set of tests often? Instead of programming a number of parameters for each test every time you run the test, just use a few keystrokes to save a test setup once and then recall it whenever you need it. Take advantage of 40 memory locations to save up to 40 set ups or use the Series 2200 List mode to define custom test sequences of up to 80 steps. This makes it easy to perform tests such as analyzing how your circuit- or device-under-test performs at each voltage level within a range of voltages. A saved test can be run manually using front panel key strokes, automatically using external trigger signals, or remotely using programmable interface commands. Up to seven 80-step lists can be stored in a Series 2200 single-channel power supply. Each step can have a programmable duration.

Protects Your DUT at All Times

A number of features are built into the Series 2200 power supplies to ensure that your DUT is protected from damage. A maximum voltage can be set so that regardless of the voltage value requested, the output will not exceed the programmed limit value. For further voltage magnitude protection, an Over Voltage protection level can be programmed that will cause the output to drop below 1V if the Over Voltage limit is reached. These protections are in addition to the Current Limit setting, which restricts the amount of current that can flow into the DUT. If the Current Limit is reached, the Series

1.888.KEITHLEY (U.S. only)

www.keithley.com

KEITHLEY

A Greater Measure of Confidence

A Tektronix Company

Series 2200

3-Year
Warranty

Single-Channel Programmable DC Power Supplies

Ordering Information

2200-20-5 Programmable DC Power Supply, 20V, 5A

2200-30-5 Programmable DC Power Supply, 30V, 5A

2200-32-3 Programmable DC Power Supply, 32V, 3A

2200-60-2 Programmable DC Power Supply, 60V, 2.5A

2200-72-1 Programmable DC Power Supply, 72V, 1.2A

Accessories Supplied

213-CON Rear Panel Mating Connector with Handle

CS-1638-12 Rear Panel Mating Connector

Documentation and Driver CD

ACCESSORIES AVAILABLE

| | |
|-------------|--|
| CS-1638-12 | Rear Panel Mating Connector |
| KPCI-488LPA | IEEE-488.2 Interface Board for the PCI Bus |
| USB-B-1 | USB Cable |
| 4299-7 | Fixed Rack Mount Kit |
| 7007-05 | Double Shielded Premium IEEE-488 Interface Cables, 0.5m (1.6 ft) |
| 7007-1 | Double Shielded Premium IEEE-488 Interface Cables, 1m (3.2 ft) |
| 7007-2 | Double Shielded Premium IEEE-488 Interface Cables, 2m (6.5 ft) |
| 7007-3 | Double Shielded Premium IEEE-488 Interface Cables, 3m (10 ft) |
| 7007-4 | Double Shielded Premium IEEE-488 Interface Cables, 4m (13 ft) |

SERVICES AVAILABLE

| | |
|---|---|
| Model Number-EW (Example: 2200-20-5-EW) | 1 additional year of factory warranty |
| C/Model Number-3Y-STD | 3 calibrations within 3 years of purchase |
| C/Model Number-3Y-DATA | 3 (ANSI-Z540-1 compliant) calibrations within 3 years of purchase |
| C/Model Number-5Y-STD | 5 calibrations within 5 years of purchase |
| C/Model Number-5Y-DATA | 5 (ANSI-Z540-1 compliant) calibrations within 5 years of purchase |

2200 power supplies convert from constant voltage to constant current operation in which the current is controlled at the Current Limit setting and the voltage varies based on the load resistance.


In addition to the limit settings, you can set a timer to turn off the output after a specified time interval, allowing you to setup a test on your bench and let it to run unattended knowing that power will automatically be removed from the DUT after the programmed time has elapsed.

Ensures that Test Parameters are Not Accidentally Changed

Prevent accidental changes to settings to avoid collecting incorrect test data and wasting time repeating tests by taking advantage of the Series 2200's front panel lock-out functions. You can disable the front panel knob or disable all the front panel data entry controls. When all the front panel data entry keys are disabled, the Series 2200 prompts for a password to re-activate the keys.

Select a Convenient Interface

The Series 2200 DC power supplies can be an integral part of your automated test system. You have the option to control each power supply over a GPIB interface or a USB interface. The USB interface is test and measurement class (TMC) compliant so you can use the standard SCPI command syntax. Standard drivers are included with the Series 2200 to simplify interfacing them into an automated test environment.

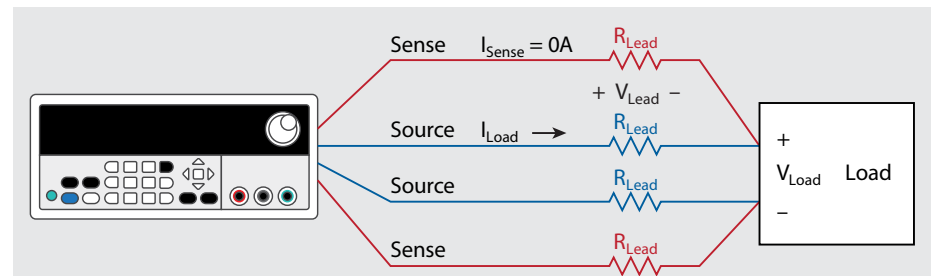

No matter how accurate your power supply output is, you cannot guarantee that the programmed output voltage is the same as the voltage at the DUT's load. This is because a power supply with two source output terminals regulates its output only at its output terminals. However, the voltage you want regulated is at the DUT's load, not at the power supply's output terminals. The power supply and the load are separated by lead wires that have a resistance, R_{Lead} , determined by the length of the lead, the conductivity of the conductor material, and the geometry of the conductor. The voltage at the load is: $V_{Load} = V_{Programmed} - 2 * V_{Lead} = V_{Programmed} - 2 * I_{Load} * R_{Lead}$. If the load requires high current, then I_{Load} is high and V_{Lead} can easily be a few tenths of a volt, especially if the power supply leads are long, as can be the case in an automated test rack. A voltage at the load could be 80mV to 160mV lower than the desired voltage (with 2A to 4A flowing through a 16-gauge wire).

The remote sensing technique solves the problem of voltage drop in the leads by extending the power supply feedback loop to the input of the load. Two sense lines from the power supply are connected to the power inputs. These sense leads are voltage measuring lines that connect to a high impedance voltage measuring circuit in the power supply. Since the voltage measuring circuit is a high input impedance circuit, the voltage drop in the sense leads is negligible. The sense lead voltage measurement circuit becomes the feedback control loop for the power supply. The voltage at the load is fed back to the power supply by the sense leads. The power supply raises its output to overcome the voltage drop in the source leads and $V_{Load} = V_{Programmed}$.

Thus, only with remote sensing can the accuracy of the power supply be applied to the load.

1.888.KEITHLEY (U.S. only)

www.keithley.com

A Greater Measure of Confidence

KEITHLEY

A Tektronix Company

Single-channel programmable DC power supplies


DC POWER SUPPLIES

Series 2200

Single-Channel Programmable DC Power Supplies

Series 2200 specifications

| | 2200-20-5 | 2200-30-5 | 2200-32-3 | 2200-60-2 | 2200-72-1 |
|--|---|--|--|--|--|
| DC OUTPUT RATING | | | | | |
| Voltage | 0 to 20 V | 0 to 30 V | 0 to 32 V | 0 to 60 V | 0 to 72 V |
| Current | 0 to 5 A | 0 to 5 A | 0 to 3 A | 0 to 2.5 A | 0 to 1.2 A |
| MAXIMUM POWER | 100 W | 150 W | 96 W | 150 W | 86 W |
| LOAD REGULATION | | | | | |
| Voltage | <0.01% + 2 mV | <0.01% + 2 mV | <0.01% + 2 mV | <0.01% + 2 mV | <0.01% + 2 mV |
| Current | <0.05% + 0.1 mA | <0.05% + 1.5 mA | <0.05% + 0.1 mA | <0.05% + 0.5 mA | <0.05% + 0.5 mA |
| LINE REGULATION | | | | | |
| Voltage | < 0.01% + 1 mV | <0.01% + 1 mV | <0.01% + 1 mV | <0.01% + 2 mV | <0.01% + 1 mV |
| Current | <0.05% + 0.1 mA | <0.05% + 0.1 mA | <0.05% + 0.1 mA | <0.05% + 0.05 mA | <0.05% + 0.1 mA |
| RIPPLE AND NOISE (20 Hz to 7 MHz) | | | | | |
| Voltage | <1 mV _{RMS} <3 mV _{P-P} | <1 mV _{RMS} <4 mV _{P-P} | <1 mV _{RMS} <4 mV _{P-P} | <1 mV _{RMS} <5 mV _{P-P} | <1 mV _{RMS} <3 mV _{P-P} |
| Current | <3 mA _{RMS} | <4 mA _{RMS} | <3 mA _{RMS} | <3 mA _{RMS} | <3 mA _{RMS} |
| SETTING RESOLUTION | | | | | |
| Voltage | 1 mV | 1 mV | 1 mV | 1 mV | 1 mV |
| Current | 0.1 mA | 0.1 mA | 0.1 mA | 0.1 mA | 0.1 mA |
| SETTING ACCURACY (using remote sense, 25°C ± 5°C) | | | | | |
| Voltage | ±0.03% + 3 mV | ±0.03% + 3 mV | ±0.03% + 3 mV | ±0.03% + 6 mV | ±0.03% + 6 mV |
| Current | ±0.05% + 2 mA | ±0.05% + 2.5 mA | ±0.05% + 2 mA | ±0.05% + 1.5 mA | ±0.05% + 1 mA |
| READBACK RESOLUTION | | | | | |
| Voltage | 1 mV | 1 mV | 1 mV | 1 mV | 1 mV |
| Current | 0.1 mA | 0.1 mA | 0.1 mA | 0.1 mA | 0.1 mA |
| READBACK ACCURACY (25°C ± 5°C) | | | | | |
| Voltage | 0.02% + 3 mV | ±0.02% + 2.5 mV | ±0.02% + 3 mV | ±0.02% + 6 mV | ±0.02% + 5 mV |
| Current | ±0.05% + 2 mA | ±0.05% + 2.5 mA | ±0.05% + 2 mA | ±0.05% + 1.5 mA | ±0.05% + 1 mA |
| VOLTAGE TRANSIENT RESPONSE – SETTLING TIME | | | | | |
| Load Change | <400 μs to within 75 mV following a change from 0.1 A to 1A | | | | |
| Setting Change | Rising | <35 ms from beginning of excursion to within 75 mV of terminal value following a change from 1 V to 11 V with a 1 A load (Note: Specification does not include command decode time) | | | |
| | Falling | <35 ms from beginning of excursion to within 75 mV of terminal value following a change from 11 V to 1 V with a 1 A load (Note: Specification does not include command decode time) | | | |
| OVERVOLTAGE PROTECTION | | | | | |
| Range (typical) | 1 V to 19 V | 1 V to 29 V | 1 V to 31 V | 1 V to 59 V | 1 V to 71 V |
| Accuracy | ±0.5% + 0.5 V | ±0.5% + 0.5 V | ±0.5% + 0.5 V | ±0.5% + 0.5 V | ±0.5% + 0.5 V |
| Response Time (typical) | <10 ms | <10 ms | <10 ms | <10 ms | <10 ms |

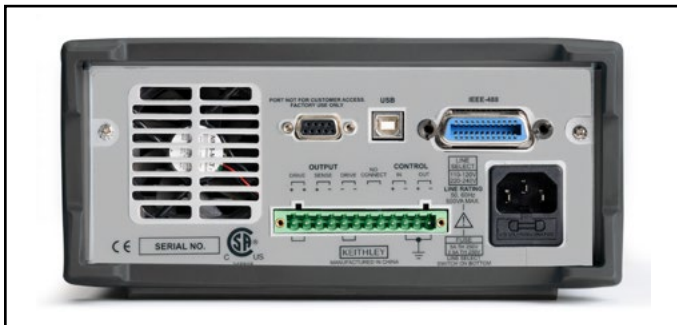

Series 2200 rear panel.

1.888.KEITHLEY (U.S. only)

www.keithley.com

A Greater Measure of Confidence

KEITHLEY
A Tektronix Company

DC POWER SUPPLIES

Series 2200

Single-Channel Programmable DC Power Supplies

GENERAL

COMMUNICATIONS: USB: Type B connector, USB-TMC compatible.

GPIO: IEEE-488.2 compliant.

DISPLAY: Vacuum fluorescent display.

MEMORY: 40 setup memories.

LIST MODE: Up to seven lists can be defined, each with up to 80 steps. Each step includes a voltage limit and a current limit. For continuous sequences each step also includes a duration.

OUTPUT, SENSE, STATUS, AND CONTROL: Removable screw terminal block carries the following signals:

Output Channel: Duplicates the front panel outputs.

Remote Sense Lines: Connection for remote sense.

Control Input: Multifunction TTL input which can function as a trigger input, output control line, or digital input.

Status Output: Multifunction TTL output which can function as a fault indication, or digital output.

FLOATING VOLTAGE RATING: Up to 100V (DC + peak AC) between earth ground and any output terminal.

POWER SOURCE:

110V AC Setting: 99V_{RMS} to 132V_{RMS}.

220V AC Setting: 198V_{RMS} to 264V_{RMS}.

Frequency: 50/60Hz.

Power Consumption: 2200-20-5, 2200-32-3, 2200-72-1: 250VA.

 2200-30-5, 2200-60-2: 350VA.

EMC:

European Union: EN 55011, Class A; IEC 61000-3-2; IEC 61000-3-3, IEC 61000-4-2, IEC 61000-4-3, IEC 61000-4-4, IEC 61000-4-5, IEC 61000-4-6, IEC 61000-4-8, IEC 61000-4-11.

USA: FCC, CFR Title 47, Part 15, Subpart B, Class A.

Australia: EMC Framework, demonstrated per Emission Standard AS/NZS 2064 (industrial, scientific, and medical equipment).

SAFETY:

European Union: Low voltage directive 2006/95/EC; EN61010-1 2001.

USA: Nationally recognized testing laboratory listing UL61010-1-2004.

Canada: CAN/CSA C22.2 No. 61010-1 2004.

DIMENSIONS:

With Boot: 106mm high × 242mm wide × 384mm deep (4.15 in × 9.52 in × 15.12 in).

Without Boot: 91mm high × 218mm wide × 362mm deep (3.57 in × 8.55 in × 14.24 in).

SHIPPING WEIGHT: 2200-20-5, 2200-32-3, 2200-72-1: 9.0kg.

 2200-30-5, 2200-60-2: 9.6kg.

NET WEIGHT: 2200-20-5, 2200-30-5, 2200-32-3, 2200-72-1: 7.3kg.

 2200-60-2: 7.0kg.

ENVIRONMENT:

Altitude: Operating: Up to 2,000m above sea level.

Storage: Up to 4,000m above sea level.

Operating: 0° to +40°C, 5% to 95% R.H. up to +40°C.

Storage: -20° to +70°C, 5% to 95% R.H. up to +40°C.

 -20° to +70°C, 5% to 60% R.H. above +40°C up to +70°C.

1.888.KEITHLEY (U.S. only)

www.keithley.com

A Greater Measure of Confidence

KEITHLEY

A Tektronix Company



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.