


# Surface Mount PTC

## 0ZCK Series

0805 Chip  
RoHS6 Compliant & Halogen-Free

## 0ZCK Series Fuse

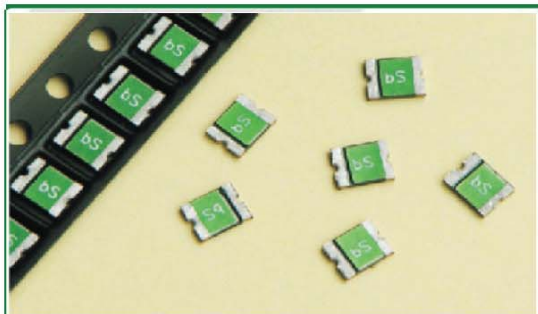

## Maximum Voltage

6- 15V (per table)

## Temperature Range

-40°C to 85°C

## Agency Approval

TUV (Std. EN60738-1-1 , Cert. R50102117)  
UL Component (Std. UL1434, File E305051)  
UL Conditions of Acceptability:

1. These devices have been investigated for use in safety circuits and are suitable as a limiting device.
2. These devices have been calibrated to limit the current to 8 amps within 5 seconds , per ANSI/NFPA 70, "National Electrical Code"

## Application



All high-density boards

## Product Features



0805 Chip Size , Fast Trip Time, Low DCR Resistance

## Operating (Hold Current) Range

100mA - 1A

HALOGEN FREE =   
LEAD FREE = 

## Electrical Characteristics (23°C)

|   | Part Number  | Hold Current       | Trip Current       | Max Time to Trip |      | Maximum Current      | Rated Voltage          | Typical Power      | Resistance Tolerance     |                           | Agency Approvals  |   |
|---|--------------|--------------------|--------------------|------------------|------|----------------------|------------------------|--------------------|--------------------------|---------------------------|---|---|
|   |              | I <sub>H</sub> , A | I <sub>T</sub> , A | Current          | Time | I <sub>max</sub> , A | V <sub>max</sub> , Vdc | P <sub>d</sub> , W | R <sub>min</sub><br>Ohms | R <sub>1max</sub><br>Ohms |  |  |
| A | 0ZCK0010FF2G | 0.10               | 0.30               | 0.50             | 1.50 | 100                  | 15                     | 0.50               | 0.700                    | 6.000                     | Y   | Y   |
| B | 0ZCK0020FF2G | 0.20               | 0.50               | 8.00             | 0.02 | 100                  | 9                      | 0.50               | 0.400                    | 3.500                     | Y   | Y   |
| C | 0ZCK0035FF2G | 0.35               | 0.75               | 8.00             | 0.10 | 100                  | 6                      | 0.50               | 0.250                    | 1.200                     | Y   | Y   |
| D | 0ZCK0050FF2E | 0.50               | 1.00               | 8.00             | 0.10 | 100                  | 6                      | 0.50               | 0.150                    | 0.850                     | Y   | Y   |
| E | 0ZCK0075FF2E | 0.75               | 1.50               | 8.00             | 0.20 | 40                   | 6                      | 0.60               | 0.090                    | 0.350                     | Y   | Y   |
| F | 0ZCK0100FF2E | 1.00               | 1.95               | 8.00             | 0.30 | 40                   | 6                      | 0.60               | 0.060                    | 0.210                     | Y   | Y   |

- I<sub>H</sub> Hold Current-maximum current at which the device will not trip in still air at 23°C.  
 I<sub>T</sub> Trip current-minimum current at which the device will always trip in still air at 23°C.  
 I<sub>max</sub> Maximum fault current device can withstand without damage at rated voltage (V<sub>max</sub>).  
 V<sub>max</sub> Maximum voltage device can withstand without damage at its rated current.  
 P<sub>d</sub> Typical power dissipated by device when in tripped state in 23°C still air environment.  
 R<sub>min</sub> Minimum device resistance at 23°C.  
 R<sub>1max</sub> Maximum device resistance at 23°C, 1 hour after initial device trip, or after being soldered to PCB in end application.

Specifications subject to change without notice

## Surface Mount PTC

### 0ZCK Series

0805 Chip  
RoHS6 Compliant & Halogen-Free



0ZCK Oct2013C

#### PTC's – Basic Theory of Operation / "Tripped" Resistance Explanation

Fundamentally, a Bel PTC consists of a block of polymeric material containing conductive filler and bonded between two conductive, planar terminations.

At currents below the device I<sub>HOLD</sub> rating, AND at temperatures below 100C, the PTC maintains a resistance value below its R<sub>1</sub> MAX rating.

As the device's temperature approaches 130C, either due to an increase in ambient temperature or a current exceeding its I<sub>TRIP</sub> rating, volumetric expansion of the filled polymer breaks apart the majority of conductive pathways across the terminals created by chain contact of adjacent filler particles and device resistance increases sharply by several orders of magnitude.

At the much higher "Tripped" resistance, there is just enough leakage current to allow internal heating to "hold" the device in its tripped state (around 125C) until power is interrupted. Once power is removed, the PTC's core cools and contracts allowing conductive chains to reform and return the device to its low resistance state.

The catalog data for each device specifies a "**Typical Power**" value. This is the power required to exactly match the heat lost by the tripped device to its ambient surroundings at 23C. By Ohm's Law, power can be stated as:  $W = E^2/R$ . Thus the approximate resistance of a "Tripped" PTC can be determined by:

$R = E^2/W$ , where "E" is the voltage appearing across the PTC (usually the supply's open circuit voltage), and "W" is the **Typical Power** value for the particular PTC.

Since the PPTC acts to maintain a constant internal temperature, its apparent resistance will change based upon applied voltage and, to a lesser degree, ambient conditions. Consider the following example....

A PTC with a **Typical Power** of 1 watt protecting a circuit using a 60V supply will demonstrate an apparent, tripped resistance "R" of:


$$R = 60^2/1 = 3,600 \text{ ohms}$$

This same tripped device when used to protect a 12V circuit would now present an apparent resistance of:


$$R = 12^2/1 = 144 \text{ ohms}$$

The value for Typical Power is "typical" because any physical factors that affect heat loss (such as ambient temperature or air convection) will somewhat alter the level of power that the PTC needs to maintain its internal temperature. In short, PTCs do not exhibit a constant, quantifiable tripped resistance value.

#### Typical Time - To - Trip at 23°C

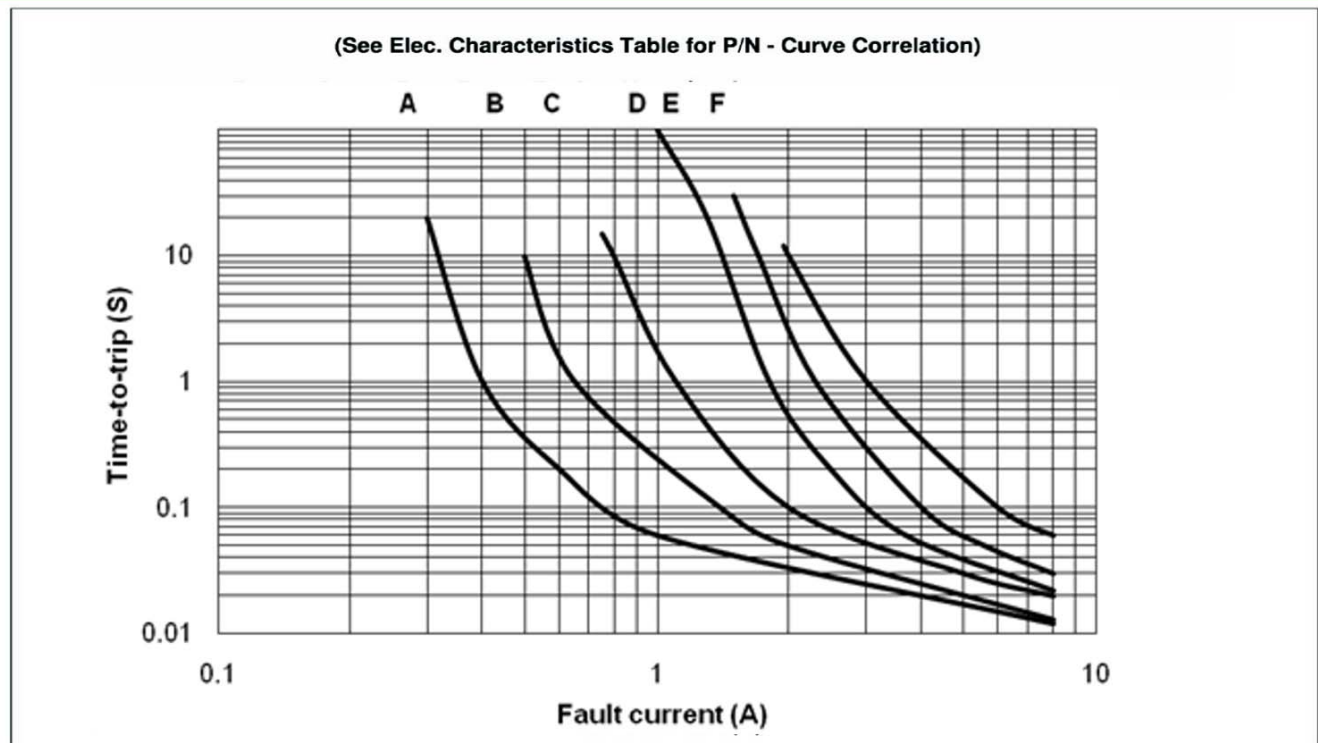


## Thermal Derating Curve

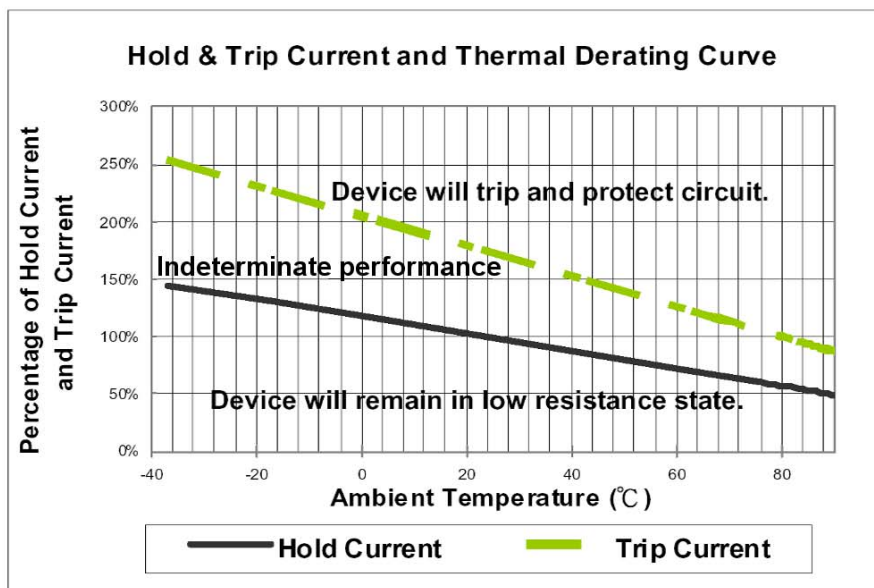

### Cautionary Notes

1. Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.
2. These Polymer PTC (PPTC) devices are intended for protection against occasional overcurrent/ overtemperature fault conditions and may not be suitable for use in applications where repeated and/or prolonged fault conditions are anticipated.
3. Avoid contact of PTC device with chemical solvent. Prolonged contact may adversely impact the PTC performance.
4. These PTC devices may not be suitable for use in circuits with a large inductance, as the PTC trip can generate circuit voltage spikes above the PTC rated voltage.
5. These devices are intended for use in DC voltage applications only. Use in AC voltage applications should be first discussed with Bel Fuse engineering.
6. Not recommended for use on potted or conformal coated PCB's. Restriction of free air flow could affect electrical performance and/or result in device failure. Consult Bel Fuse engineering.
7. In the "Indeterminate Performance / grey zone", tripping may occur but cannot be relied upon. For special circumstances considering use within this region, consult Bel Fuse Engineering.
8. MSL : 2a (According to IPC J-Std-020).

## Mechanical Dimensions

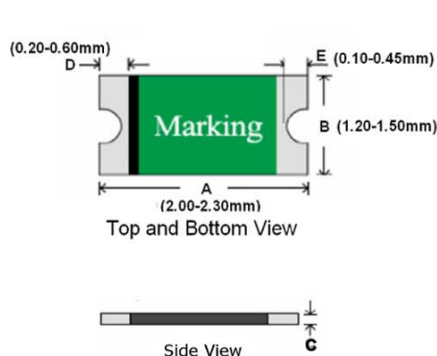

| Part Number  | C    |      |
|--------------|------|------|
|              | Min  | Max  |
| 0ZCK0010FF2G | 0.55 | 1.00 |
| 0ZCK0020FF2G | 0.55 | 1.00 |
| 0ZCK0035FF2G | 0.45 | 0.75 |
| 0ZCK0050FF2E | 0.55 | 1.25 |
| 0ZCK0075FF2E | 0.55 | 1.25 |
| 0ZCK0100FF2E | 0.75 | 1.80 |

## PTC Marking




"b" , LH code.

| Part Number  | LH Code |
|--------------|---------|
| 0ZCK0010FF2G | D       |
| 0ZCK0020FF2G | F       |
| 0ZCK0035FF2G | J       |
| 0ZCK0050FF2E | M       |
| 0ZCK0075FF2E | P       |
| 0ZCK0100FF2E | 1       |

## Pad Layout

The dimensions in the table below provide the recommended pad layout.



| P<br>Nominal |       | S<br>Nominal |       | W<br>Nominal |       |
|--------------|-------|--------------|-------|--------------|-------|
| mm           | Inch  | mm           | Inch  | mm           | Inch  |
| 1.20         | 0.047 | 1.00         | 0.039 | 1.50         | 0.059 |

**Matte Tin - Plated Copper**

Specifications subject to change without notice

# Surface Mount PTC

## 0ZCK Series

0805 Chip  
RoHS6 Compliant & Halogen-Free




# bel

0ZCK Oct2013D

### Solder Reflow and Rework Recommendations

| Profile Feature   | Pb-Free Assembly |
|---|------------------|
| Average Ramp-Up Rate (T <sub>smax</sub> to T <sub>p</sub> ) | 3 °C/second max. |
| Preheat :   |                  |
| Temperature Min (T <sub>smin</sub> )                        | 150 °C           |
| Temperature Max (T <sub>smax</sub> )                        | 200 °C           |
| Time (t <sub>smin</sub> to t <sub>smax</sub> )              | 60-180 seconds   |
| Time maintained above:                                      |                  |
| Temperature (T <sub>L</sub> )                               | 217 °C           |
| Time (t <sub>L</sub> )                                      | 60-150 seconds   |
| Peak/Classification Temperature (T <sub>p</sub> )           | 260 °C           |
| Time within 5°C of actual Peak :                            |                  |
| Temperature (t <sub>p</sub> )                               | 20-40 seconds    |
| Ramp-Down Rate :  | 6 °C/second max. |
| Time 25 °C to Peak Temperature :                            | 8 minutes max.   |

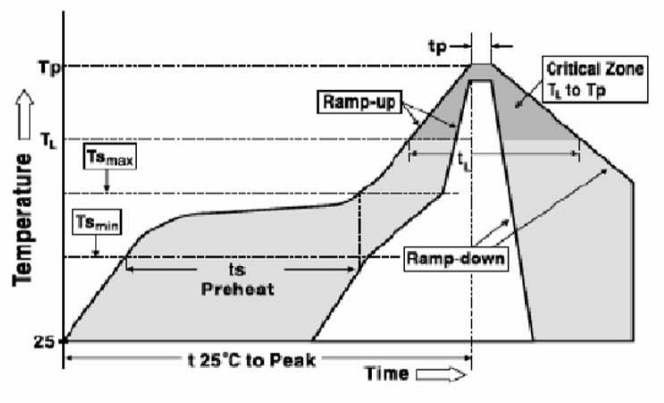

### Solder Reflow

Due to "lead free / RoHS6" construction of these PTC devices, the required Temperature and Dwell Time in the "Soldering" zone of the reflow profile are greater than those used for non-RoHS devices.

1. Recommended reflow methods ; IR , vapor phase oven , hot air oven.
2. Not Recommended For Wave Solder / Direct Immersion.
3. Recommended maximum ; paste thickness is 0.25mm.
4. Devices are compatible with standard industry cleaning solvents and methods.

### Caution

If reflow temperature / dwell times exceed the recommended profile, the electrical performance of the PTC may be affected.

Rework : MIL-STD-202G Method 210F. Test Condition A.

### Standard Packaging

| Part Number                          | Tape/Reel Qty |
|--------------------------------------|---------------|
| 0ZCK0010FF2G<br>Thru<br>0ZCK0035FF2G | 4,000         |
| 0ZCK0050FF2E<br>Thru<br>0ZCK0100FF2E | 3,000         |

4000 or 3000 fuses in 7 inches dia. Reel, 8mm wide tape, 4mm pitch, per EIA-481 (equivalent IEC-286 part 3).

### P/N Explanation and Ordering Information

|  | 0ZCK            | 0XXX | X | X | XX |
|--|-----------------|------|---|---|----|
| PTC series   | 0ZCK, 0805 Size |      |   |   |    |
| I HOLD Rating  |                 |      |   |   |    |
| Refer to Part Number and IH Rating in Electrical Characteristics Table on P.1. |                 |      |   |   |    |
| Electrical Characteristics   |                 |      |   |   |    |
| F = Standard Design  |                 |      |   |   |    |
| A to Z (except F) = Special, customer spec, DCR sort, etc.                     |                 |      |   |   |    |
| Mechanical Features  |                 |      |   |   |    |
| F = Standard Design  |                 |      |   |   |    |
| A to Z (except F) = Special, customer spec, lead forming, etc.                 |                 |      |   |   |    |
| Tape & Reel Qty  |                 |      |   |   |    |
| See standard packaging   |                 |      |   |   |    |

Specifications subject to change without notice

### CORPORATE OFFICE

Bel Fuse Inc.

206 Van Vorst Street  
Jersey City, NJ 07302  
Tel 201-432-0463  
Fax 201-432-9542  
E-Mail: belfuse@belf.com  
Website: www. belfuse.com

### FAR EAST OFFICE

Bel Fuse Ltd.

8/F Luk Hop Industrial Building  
8 Luk Hop Street  
San Po Kong  
Kowloon, Hong Kong  
Tel 852-2328-5515  
Fax 852-2352-3706

### EUROPE OFFICE

Bel Fuse Europe Ltd.

Preston Technology Management Centre  
Marsh Lane, Suite F15  
Preston, Lancashire, PR1 8UQ  
United Kingdom  
Tel 44-1772-556601  
Fax 44-1772-561008

### EUROPE

Bel Stewart GmbH

Industriestrasse 20  
61381 Friedrichsdorf  
Germany  
Tel 49-6172-9552-0  
Fax 49-6172-9552-40



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.