


# CGH40006P

## 6 W, RF Power GaN HEMT

Cree's CGH40006P is an unmatched, gallium nitride (GaN) high electron mobility transistor (HEMT). The CGH40006P, operating from a 28 volt rail, offers a general purpose, broadband solution to a variety of RF and microwave applications. GaN HEMTs offer high efficiency, high gain and wide bandwidth capabilities making the CGH40006P ideal for linear and compressed amplifier circuits. The transistor is available in a solder-down, pill package.

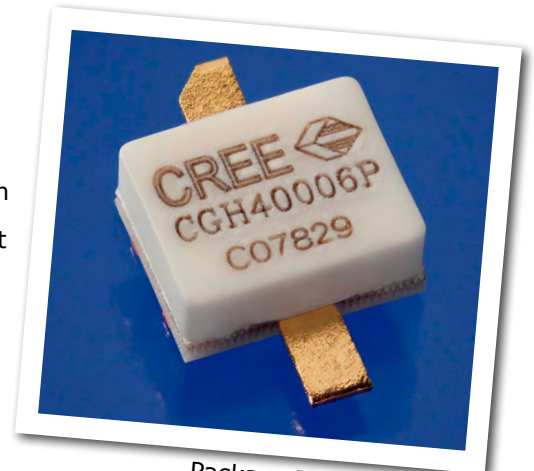

Package Types: 440109  
PN's: CGH40006P

### FEATURES

- Up to 6 GHz Operation
- 13 dB Small Signal Gain at 2.0 GHz
- 11 dB Small Signal Gain at 6.0 GHz
- 8 W typical at  $P_{IN} = 32$  dBm
- 65 % Efficiency at  $P_{IN} = 32$  dBm
- 28 V Operation

### APPLICATIONS

- 2-Way Private Radio
- Broadband Amplifiers
- Cellular Infrastructure
- Test Instrumentation
- Class A, AB, Linear amplifiers suitable for OFDM, W-CDMA, EDGE, CDMA waveforms



Large Signal Models Available for SiC & GaN



## Absolute Maximum Ratings (not simultaneous) at 25 °C Case Temperature

| Parameter   | Symbol          | Rating    | Units | Conditions |
|---|-----------------|-----------|-------|------------|
| Drain-Source Voltage                              | $V_{DS}$        | 84        | Volts | 25 °C      |
| Gate-to-Source Voltage                            | $V_{GS}$        | -10, +2   | Volts | 25 °C      |
| Storage Temperature                               | $T_{STG}$       | -65, +150 | °C    |            |
| Operating Junction Temperature                    | $T_J$           | 225       | °C    |            |
| Maximum Forward Gate Current                      | $I_{GMAX}$      | 2.1       | mA    | 25 °C      |
| Maximum Drain Current <sup>1</sup>                | $I_{DMAX}$      | 0.75      | A     | 25 °C      |
| Soldering Temperature <sup>2</sup>                | $T_S$           | 245       | °C    |            |
| Thermal Resistance, Junction to Case <sup>3</sup> | $R_{\theta JC}$ | 9.5       | °C/W  | 85 °C      |
| Case Operating Temperature <sup>3</sup>           | $T_C$           | -40, +150 | °C    | 30 seconds |

Note:

<sup>1</sup> Current limit for long term, reliable operation

<sup>2</sup> Refer to the Application Note on soldering at [www.cree.com/products/wireless\\_appnotes.asp](http://www.cree.com/products/wireless_appnotes.asp)

<sup>3</sup> Measured for the CGH40006P at  $P_{DISS} = 8$  W.

## Electrical Characteristics ( $T_C = 25$ °C)

| Characteristics   | Symbol       | Min. | Typ. | Max.   | Units    | Conditions   |
|---|--------------|------|------|--------|----------|--|
| <b>DC Characteristics<sup>1</sup></b>   |              |      |      |        |          |  |
| Gate Threshold Voltage  | $V_{GS(th)}$ | -3.8 | -3.0 | -2.3   | $V_{DC}$ | $V_{DS} = 10$ V, $I_D = 2.1$ mA  |
| Gate Quiescent Voltage  | $V_{GS(Q)}$  | -    | -2.7 | -      | $V_{DC}$ | $V_{DS} = 28$ V, $I_D = 100$ mA  |
| Saturated Drain Current   | $I_{DS}$     | 1.7  | 2.1  | -      | A        | $V_{DS} = 6.0$ V, $V_{GS} = 2.0$ V   |
| Drain-Source Breakdown Voltage  | $V_{BR}$     | 120  | -    | -      | $V_{DC}$ | $V_{GS} = -8$ V, $I_D = 2.1$ mA  |
| <b>RF Characteristics<sup>2</sup> (<math>T_C = 25</math> °C, <math>F_0 = 2.0</math> GHz unless otherwise noted)</b> |              |      |      |        |          |  |
| Small Signal Gain   | $G_{SS}$     | 11.5 | 13   | -      | dB       | $V_{DD} = 28$ V, $I_{DQ} = 100$ mA   |
| Power Output at $P_{IN} = 32$ dBm   | $P_{OUT}$    | 7.0  | 9    | -      | W        | $V_{DD} = 28$ V, $I_{DQ} = 100$ mA   |
| Drain Efficiency <sup>3</sup>   | $\eta$       | 53   | 65   | -      | %        | $V_{DD} = 28$ V, $I_{DQ} = 100$ mA, $P_{IN} = 32$ dBm                                      |
| Output Mismatch Stress  | VSWR         | -    | -    | 10 : 1 | $\Psi$   | No damage at all phase angles,<br>$V_{DD} = 28$ V, $I_{DQ} = 100$ mA,<br>$P_{IN} = 32$ dBm |
| <b>Dynamic Characteristics</b>  |              |      |      |        |          |  |
| Input Capacitance   | $C_{GS}$     | -    | 3.0  | -      | pF       | $V_{DS} = 28$ V, $V_{GS} = -8$ V, $f = 1$ MHz  |
| Output Capacitance  | $C_{DS}$     | -    | 1.1  | -      | pF       | $V_{DS} = 28$ V, $V_{GS} = -8$ V, $f = 1$ MHz  |
| Feedback Capacitance  | $C_{GD}$     | -    | 0.1  | -      | pF       | $V_{DS} = 28$ V, $V_{GS} = -8$ V, $f = 1$ MHz  |

Notes:

<sup>1</sup> Measured on wafer prior to packaging.


<sup>2</sup> Measured in CGH40006P-TB.

<sup>3</sup> Drain Efficiency =  $P_{OUT} / P_{DC}$




## Typical Performance


**Small Signal Gain vs Frequency at 28 V of the CGH40006P in the CGH40006P-TB**

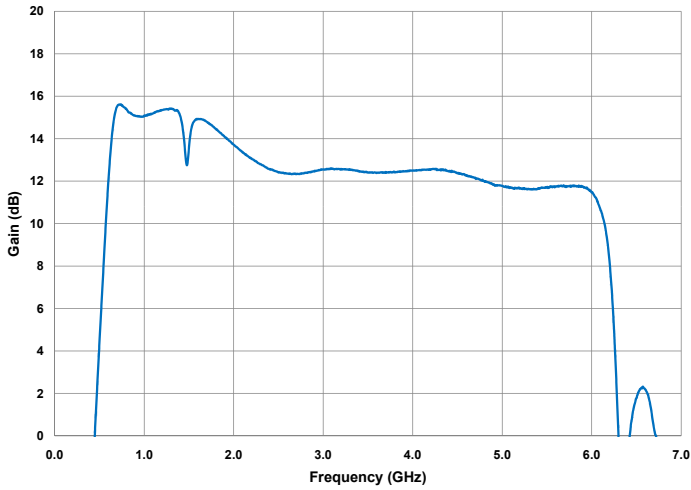


**Input & Output Return Losses vs Frequency at 28 V of the CGH40006P in the CGH40006P-TB**

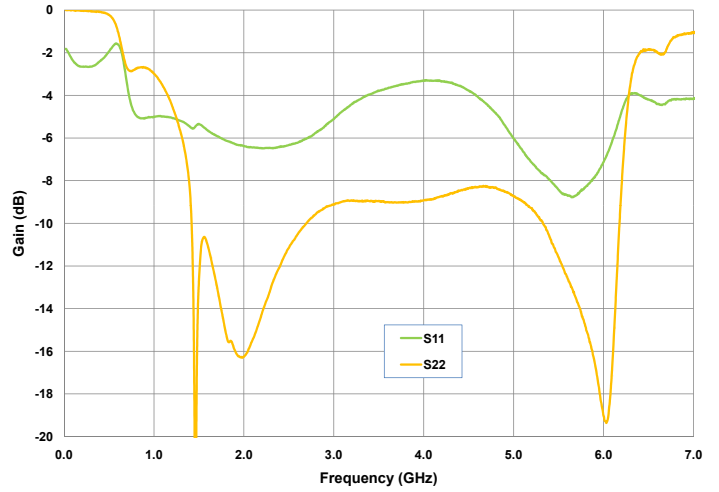

**Small Signal Gain vs Frequency at 20 V of the CGH40006P in the CGH40006P-TB**

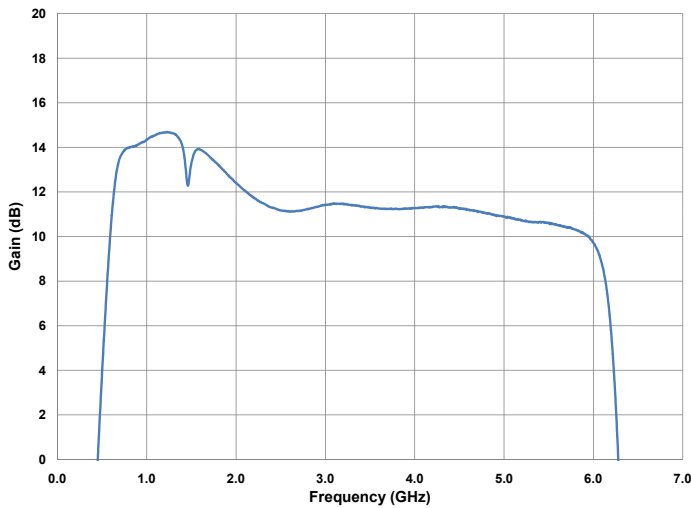


**Input & Output Return Losses vs Frequency at 20 V of the CGH40006P in the CGH40006P-TB**

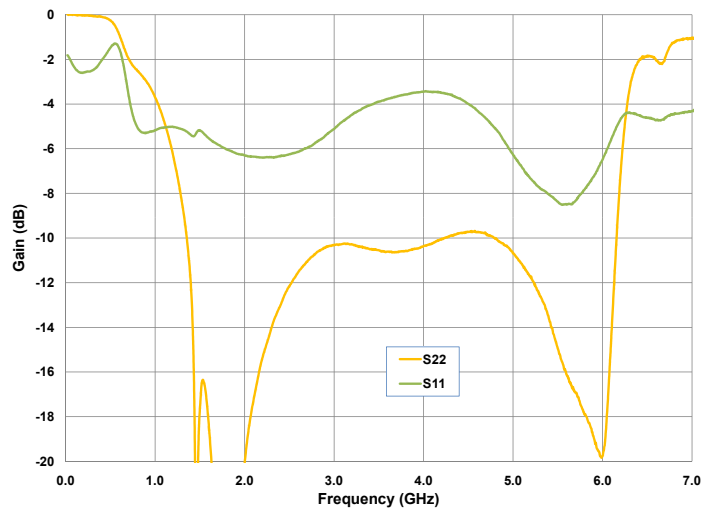


## Typical Performance

**Power Gain vs Output Power as a Function of Frequency  
of the CGH40006P in the CGH40006P-TB**  
 $V_{DD} = 28\text{ V}, I_{DQ} = 100\text{ mA}$

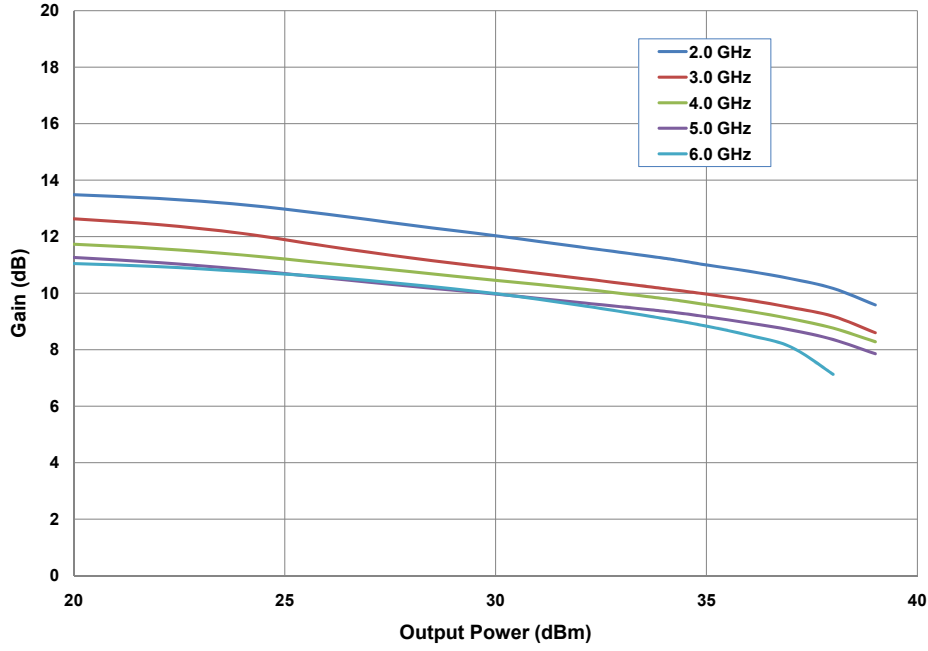


**Drain Efficiency vs Output Power as a Function of Frequency  
of the CGH40006P in the CGH40006P-TB**  
 $V_{DD} = 28\text{ V}, I_{DQ} = 100\text{ mA}$

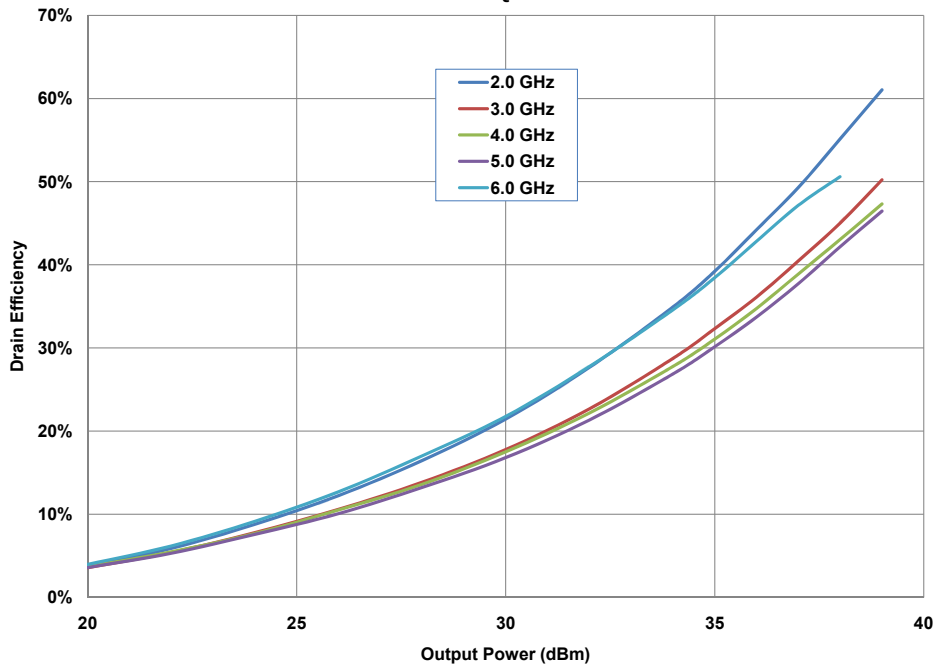




## Typical Performance


**Power Gain vs Frequency of the CGH40006P in the CGH40006P-TB at  $P_{IN} = 32$  dBm,  $V_{DD} = 28$  V**

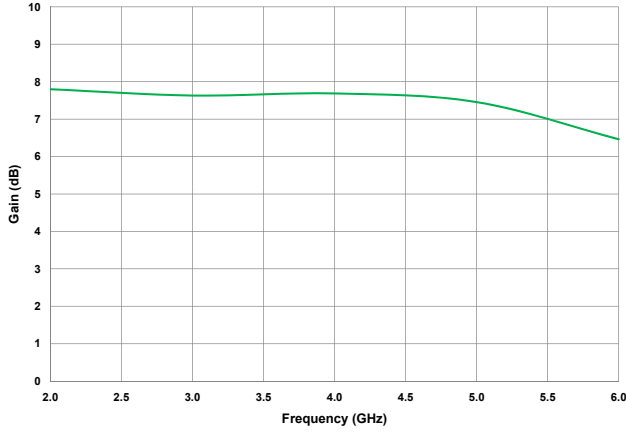


**Power Gain vs Frequency of the CGH40006P in the CGH40006P-TB at  $P_{IN} = 30$  dBm,  $V_{DD} = 20$  V**

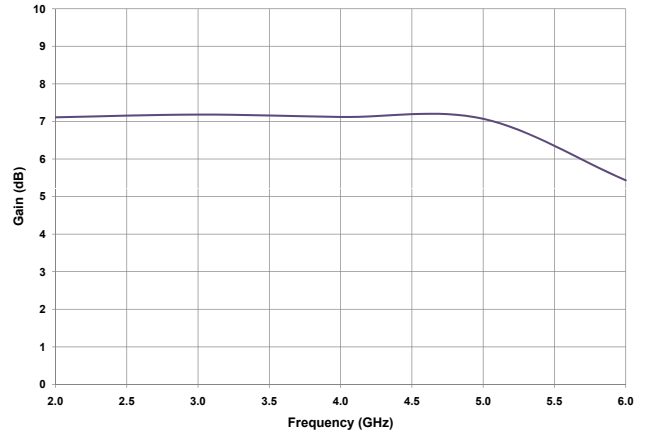


**Output Power vs Frequency of the CGH40006P in the CGH40006P-TB at  $P_{IN} = 32$  dBm,  $V_{DD} = 28$  V**

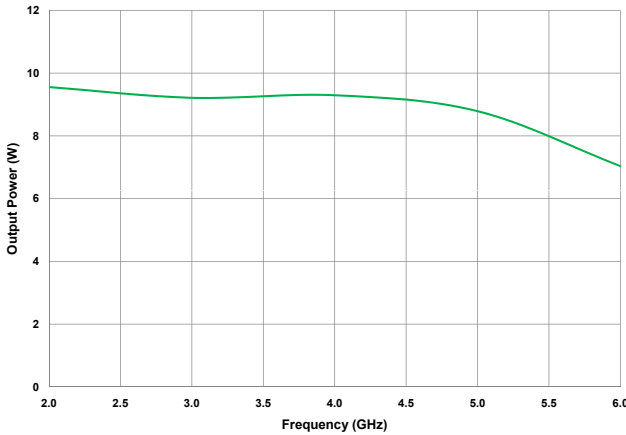


**Output Power vs Frequency of the CGH40006P in the CGH40006P-TB at  $P_{IN} = 30$  dBm,  $V_{DD} = 20$  V**

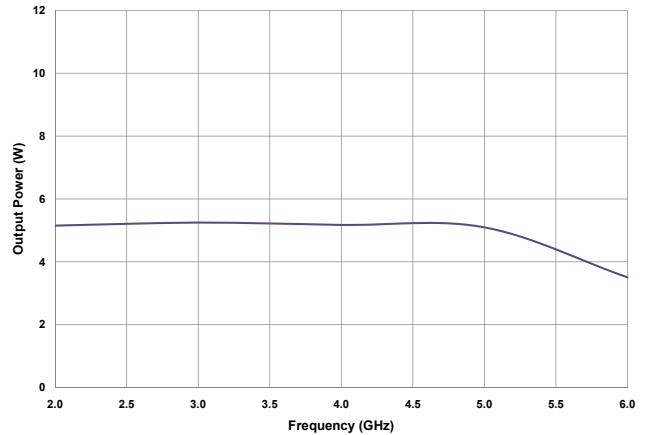

**Drain Efficiency vs Frequency of the CGH40006P in the CGH40006P-TB at  $P_{IN} = 32$  dBm,  $V_{DD} = 28$  V**

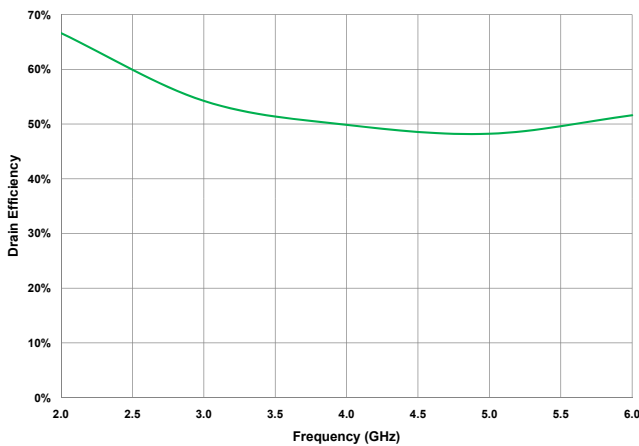


**Drain Efficiency vs Frequency of the CGH40006P in the CGH40006P-TB at  $P_{IN} = 30$  dBm,  $V_{DD} = 20$  V**

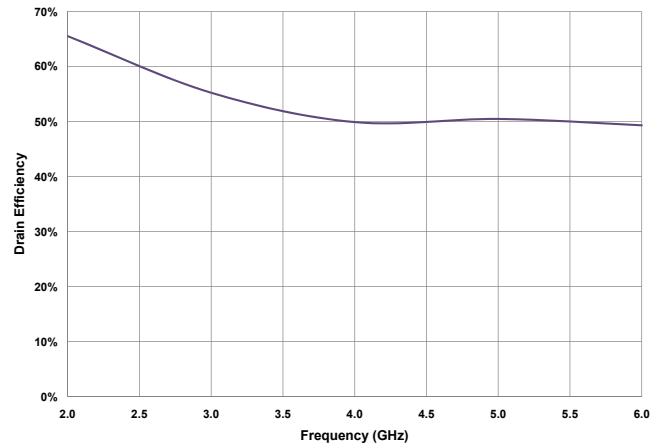


## Typical Performance

**Third Order Intermodulation Distortion vs Average Output Power as a Function of Frequency of the CGH40006P in the CGH40006P-TB**  
 $V_{DD} = 28\text{ V}$ ,  $I_{DQ} = 60\text{ mA}$

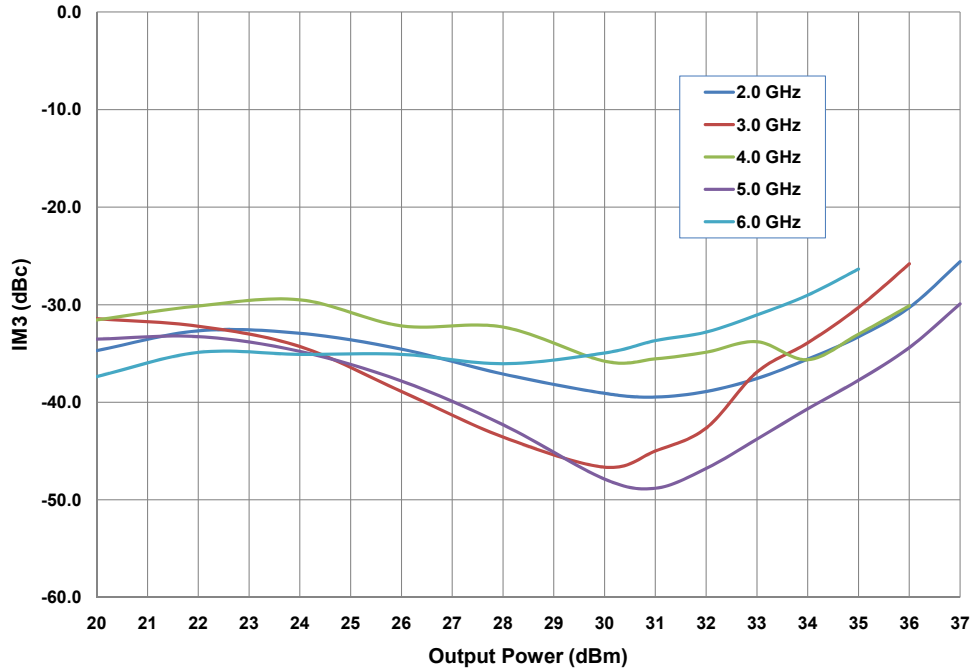


**Simulated Maximum Available Gain and K Factor of the CGH40006P**  
 $V_{DD} = 28\text{ V}$ ,  $I_{DQ} = 100\text{ mA}$

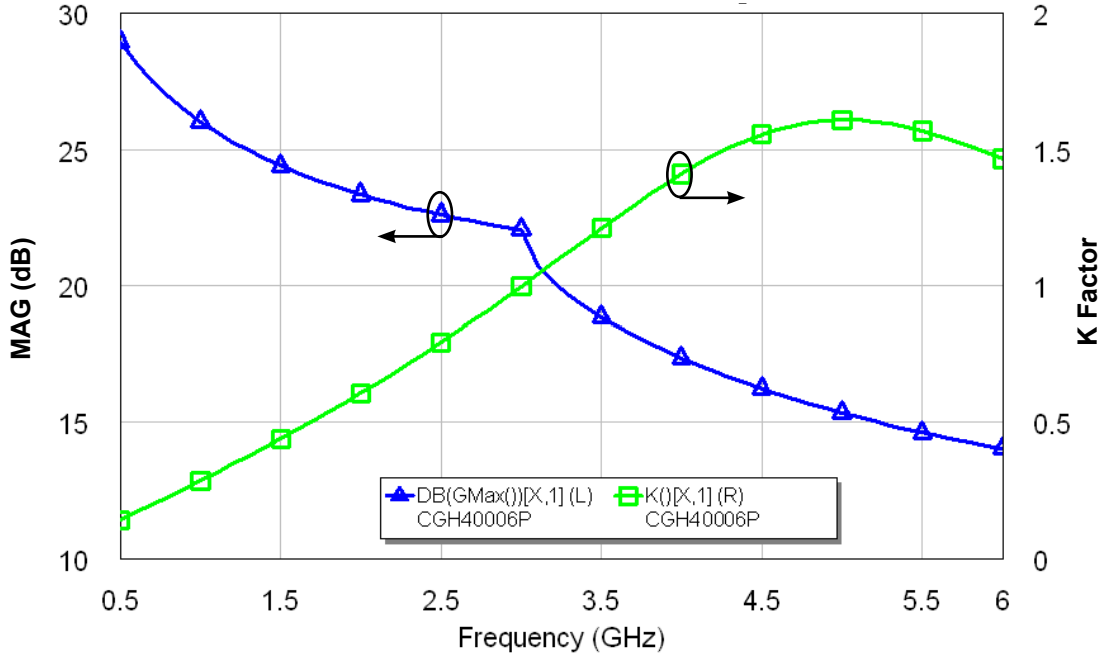

## Typical Noise Performance


**Simulated Minimum Noise Figure and Noise Resistance vs Frequency of the CGH40006P**  
 $V_{DD} = 28\text{ V}$ ,  $I_{DQ} = 100\text{ mA}$

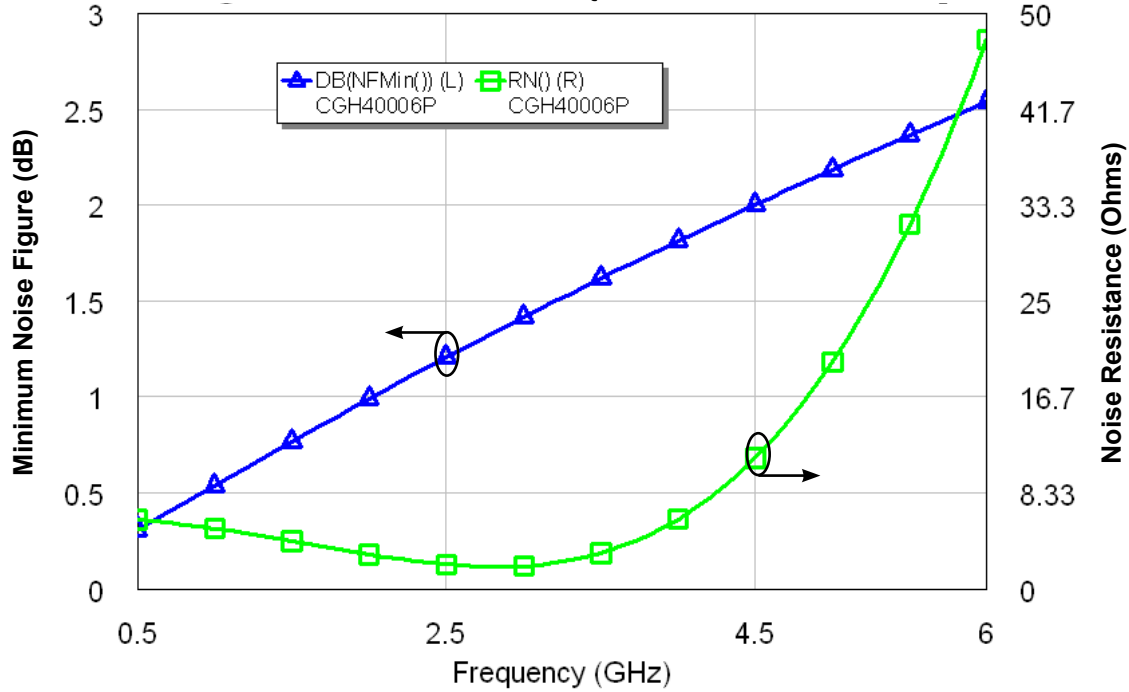

## Electrostatic Discharge (ESD) Classifications

| Parameter           | Symbol | Class      | Test Methodology    |
|---------------------|--------|------------|---------------------|
| Human Body Model    | HBM    | 1A > 250 V | JEDEC JESD22 A114-D |
| Charge Device Model | CDM    | 1 < 200 V  | JEDEC JESD22 C101-C |

## Source and Load Impedances

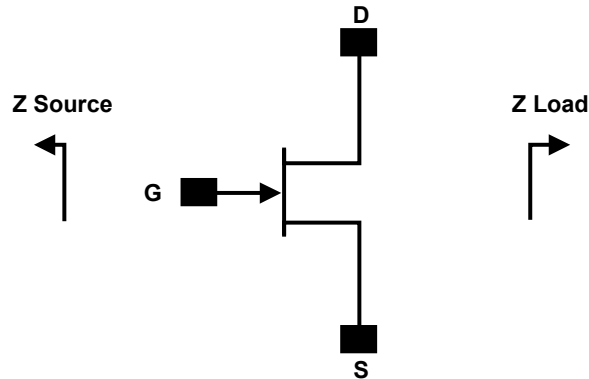


| Frequency (MHz) | Z Source      | Z Load        |
|-----------------|---------------|---------------|
| 1000            | 13.78 + j6.9  | 61.5 + j47.4  |
| 2000            | 4.78 + j1.78  | 19.4 + j39.9  |
| 3000            | 2.57 - j6.94  | 12.57 + j23.1 |
| 4000            | 3.54 - j14.86 | 9.44 + j11.68 |
| 5000            | 4.42 - j25.8  | 9.78 + j4.85  |
| 6000            | 7.1 - j42.7   | 9.96 - j4.38  |

Note 1.  $V_{DD} = 28V$ ,  $I_{DQ} = 100mA$  in the 440109 package.

Note 2. Optimized for power gain,  $P_{SAT}$  and PAE.

Note 3. When using this device at low frequency, series resistors should be used to maintain amplifier stability.

## CGH40006P Power Dissipation De-rating Curve

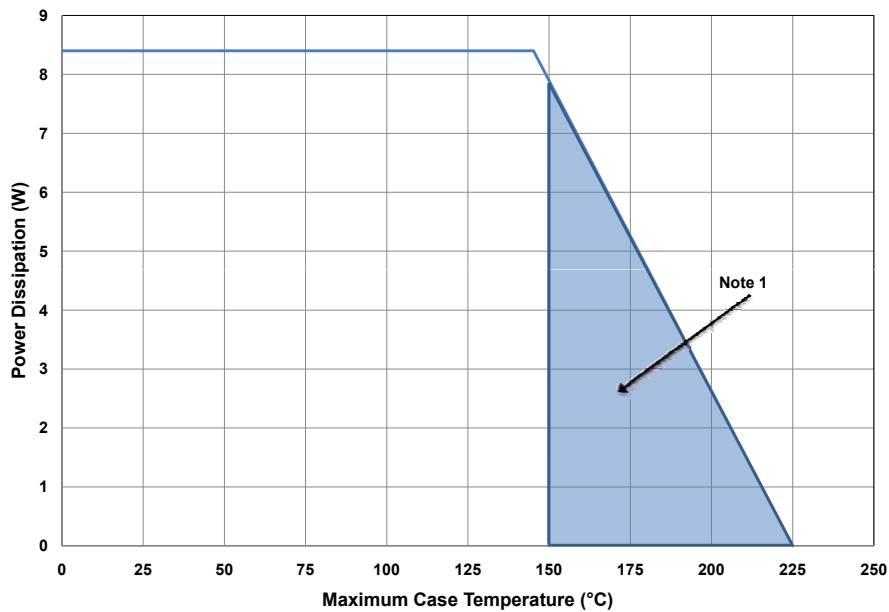


Note 1. Area exceeds Maximum Case Operating Temperature (See Page 2).




## CGH40006P-TB Demonstration Amplifier Circuit Bill of Materials

| Designator | Description                                      | Qty |
|------------|--|-----|
| R1         | RES, AIN, 0505, 470 Ohms ( $\leq 5\%$ tolerance) | 1   |
| R2         | RES, AIN, 0505, 10 Ohms ( $\leq 5\%$ tolerance)  | 1   |
| R3         | RES, AIN, 0505, 150 Ohms ( $\leq 5\%$ tolerance) | 1   |
| C1         | CAP, 2.0 pF +/-0.1 pF, 0603, ATC 600S            | 1   |
| C2         | CAP, 4.7 pF +/-0.1 pF, 0603, ATC 600S            | 1   |
| C10        | CAP, 3.6 pF +/-0.1 pF, 0603, ATC 600S            | 1   |
| C4,C11     | CAP, 8.2 pF +/-0.25, 0603, ATC 600S              | 2   |
| C6,C13     | CAP, 470 pF +/-5%, 0603, 100 V                   | 2   |
| C7,C14     | CAP, 33000 pF, CER, 100V, X7R, 0805              | 2   |
| C8         | CAP, 10 uf, 16V, SMT, TANTALUM                   | 1   |
| C15        | CAP, 1.0 uF +/-10%, CER, 100V, X7R, 1210         | 1   |
| C16        | CAP, 33 uF, 100V, ELECT, FK, SMD                 | 1   |
| J3,J4      | CONN, SMA, STR, PANEL, JACK, RECP                | 2   |
| J1         | HEADER RT>PLZ .1CEN LK 5POS                      | 1   |
| -          | PCB, RO5880, 20 MIL                              | 1   |
| Q1         | CGH40006P  | 1   |


## CGH40006P-TB Demonstration Amplifier Circuit

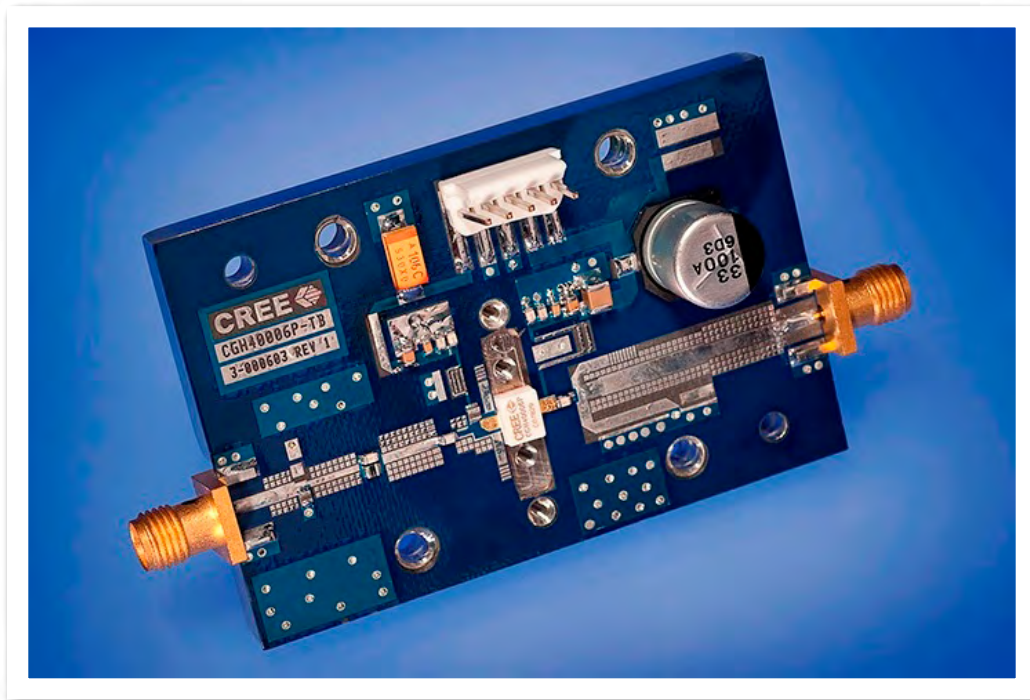

## CGH40006P-TB Demonstration Amplifier Circuit Schematic

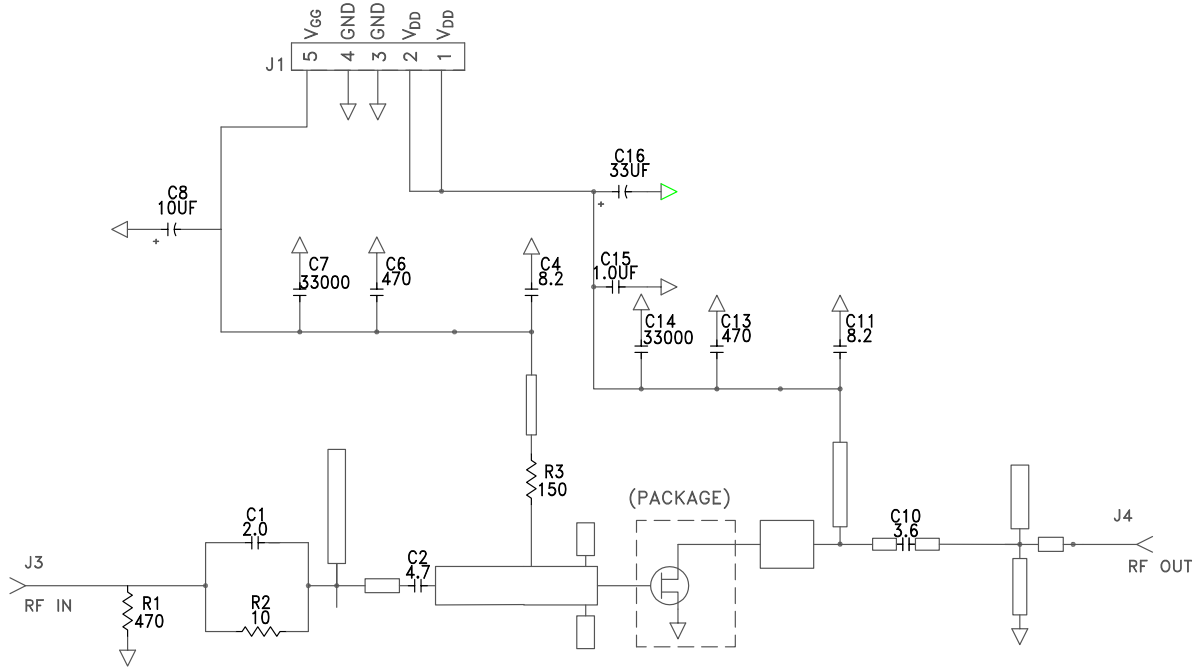

## CGH40006P-TB Demonstration Amplifier Circuit Outline

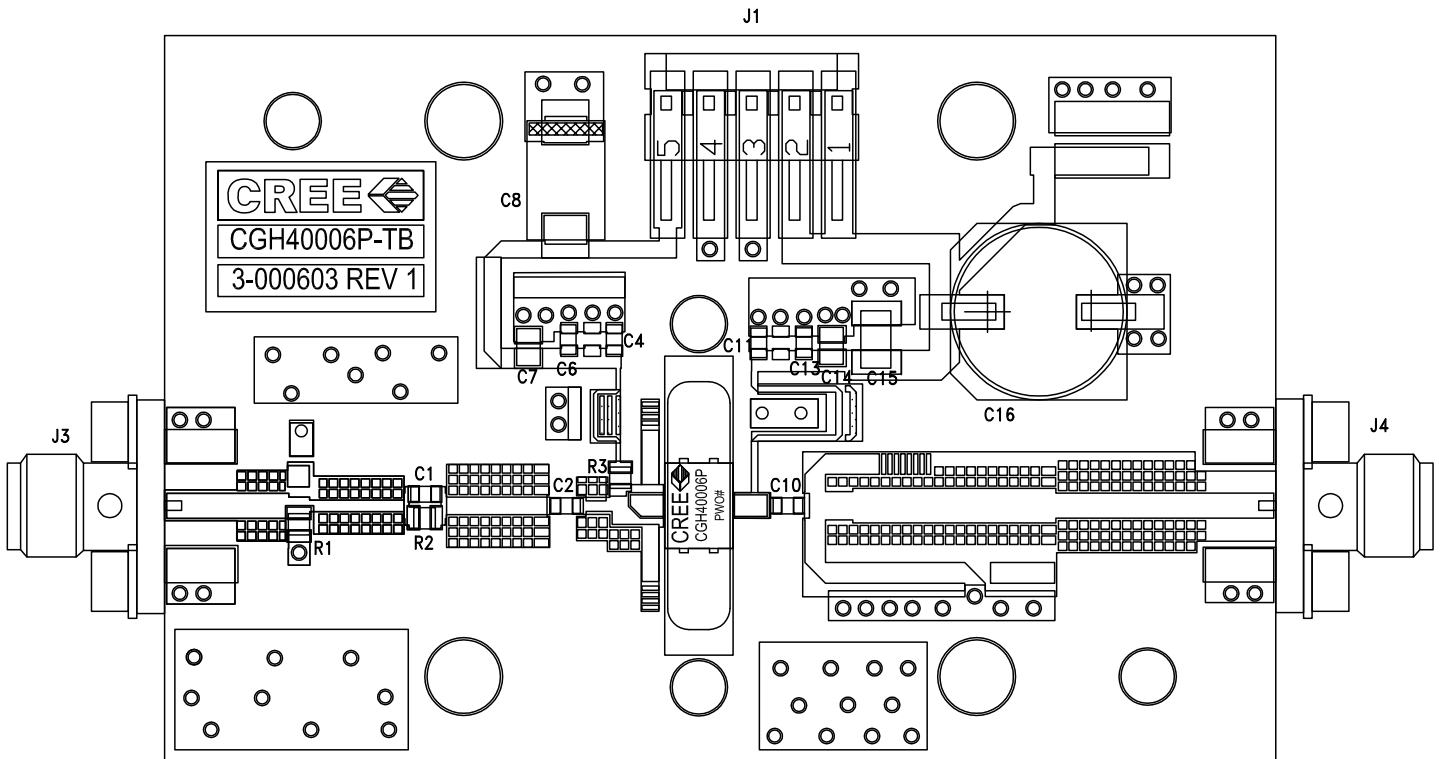




**Typical Package S-Parameters for CGH40006P**  
 (Small Signal,  $V_{DS} = 28\text{ V}$ ,  $I_{DQ} = 100\text{ mA}$ , angle in degrees)

| Frequency | Mag S11 | Ang S11 | Mag S21 | Ang S21 | Mag S12 | Ang S12 | Mag S22 | Ang S22 |
|-----------|---------|---------|---------|---------|---------|---------|---------|---------|
| 500 MHz   | 0.905   | -96.56  | 18.30   | 120.62  | 0.023   | 35.87   | 0.456   | -52.76  |
| 600 MHz   | 0.889   | -107.98 | 16.39   | 113.31  | 0.025   | 29.63   | 0.429   | -58.98  |
| 700 MHz   | 0.877   | -117.55 | 14.76   | 106.99  | 0.026   | 24.39   | 0.408   | -64.31  |
| 800 MHz   | 0.867   | -125.66 | 13.37   | 101.43  | 0.027   | 19.92   | 0.393   | -68.96  |
| 900 MHz   | 0.860   | -132.61 | 12.19   | 96.46   | 0.028   | 16.05   | 0.381   | -73.11  |
| 1.0 GHz   | 0.854   | -138.66 | 11.18   | 91.94   | 0.028   | 12.66   | 0.374   | -76.87  |
| 1.1 GHz   | 0.849   | -143.98 | 10.31   | 87.79   | 0.028   | 9.64    | 0.368   | -80.34  |
| 1.2 GHz   | 0.845   | -148.73 | 9.56    | 83.92   | 0.028   | 6.92    | 0.366   | -83.57  |
| 1.3 GHz   | 0.842   | -153.01 | 8.90    | 80.29   | 0.028   | 4.46    | 0.365   | -86.61  |
| 1.4 GHz   | 0.839   | -156.90 | 8.33    | 76.84   | 0.028   | 2.22    | 0.365   | -89.49  |
| 1.5 GHz   | 0.837   | -160.49 | 7.82    | 73.56   | 0.028   | 0.15    | 0.367   | -92.24  |
| 1.6 GHz   | 0.835   | -163.81 | 7.37    | 70.40   | 0.028   | -1.75   | 0.369   | -94.88  |
| 1.7 GHz   | 0.833   | -166.92 | 6.96    | 67.36   | 0.028   | -3.51   | 0.373   | -97.43  |
| 1.8 GHz   | 0.832   | -169.85 | 6.60    | 64.41   | 0.028   | -5.15   | 0.376   | -99.88  |
| 1.9 GHz   | 0.830   | -172.62 | 6.27    | 61.54   | 0.028   | -6.67   | 0.381   | -102.27 |
| 2.0 GHz   | 0.829   | -175.27 | 5.98    | 58.74   | 0.028   | -8.08   | 0.386   | -104.58 |
| 2.1 GHz   | 0.828   | -177.81 | 5.71    | 56.00   | 0.028   | -9.40   | 0.391   | -106.84 |
| 2.2 GHz   | 0.827   | 179.75  | 5.46    | 53.32   | 0.027   | -10.61  | 0.396   | -109.04 |
| 2.3 GHz   | 0.826   | 177.38  | 5.24    | 50.68   | 0.027   | -11.73  | 0.401   | -111.19 |
| 2.4 GHz   | 0.825   | 175.07  | 5.03    | 48.09   | 0.027   | -12.77  | 0.407   | -113.29 |
| 2.5 GHz   | 0.824   | 172.82  | 4.84    | 45.53   | 0.027   | -13.71  | 0.412   | -115.36 |
| 2.6 GHz   | 0.823   | 170.61  | 4.67    | 43.00   | 0.026   | -14.57  | 0.418   | -117.38 |
| 2.7 GHz   | 0.821   | 168.44  | 4.51    | 40.50   | 0.026   | -15.34  | 0.423   | -119.36 |
| 2.8 GHz   | 0.820   | 166.30  | 4.36    | 38.02   | 0.026   | -16.02  | 0.428   | -121.32 |
| 2.9 GHz   | 0.819   | 164.18  | 4.22    | 35.57   | 0.026   | -16.62  | 0.434   | -123.24 |
| 3.0 GHz   | 0.818   | 162.08  | 4.09    | 33.13   | 0.026   | -17.13  | 0.439   | -125.13 |
| 3.2 GHz   | 0.816   | 157.91  | 3.85    | 28.31   | 0.025   | -17.89  | 0.449   | -128.84 |
| 3.4 GHz   | 0.813   | 153.76  | 3.65    | 23.53   | 0.025   | -18.30  | 0.458   | -132.46 |
| 3.6 GHz   | 0.810   | 149.58  | 3.47    | 18.78   | 0.025   | -18.38  | 0.467   | -136.00 |
| 3.8 GHz   | 0.807   | 145.35  | 3.31    | 14.05   | 0.024   | -18.13  | 0.474   | -139.48 |
| 4.0 GHz   | 0.804   | 141.05  | 3.18    | 9.32    | 0.024   | -17.60  | 0.481   | -142.91 |
| 4.2 GHz   | 0.801   | 136.66  | 3.05    | 4.57    | 0.024   | -16.82  | 0.488   | -146.30 |
| 4.4 GHz   | 0.797   | 132.15  | 2.94    | -0.20   | 0.025   | -15.89  | 0.493   | -149.67 |
| 4.6 GHz   | 0.793   | 127.50  | 2.85    | -5.01   | 0.025   | -14.87  | 0.497   | -153.02 |
| 4.8 GHz   | 0.789   | 122.70  | 2.76    | -9.86   | 0.026   | -13.89  | 0.500   | -156.37 |
| 5.0 GHz   | 0.785   | 117.72  | 2.68    | -14.79  | 0.027   | -13.04  | 0.503   | -159.74 |
| 5.2 GHz   | 0.780   | 112.55  | 2.62    | -19.78  | 0.029   | -12.42  | 0.504   | -163.14 |
| 5.4 GHz   | 0.776   | 107.17  | 2.55    | -24.86  | 0.030   | -12.13  | 0.505   | -166.59 |
| 5.6 GHz   | 0.772   | 101.58  | 2.50    | -30.03  | 0.032   | -12.22  | 0.504   | -170.10 |
| 5.8 GHz   | 0.768   | 95.76   | 2.44    | -35.30  | 0.035   | -12.75  | 0.503   | -173.70 |
| 6.0 GHz   | 0.764   | 89.70   | 2.40    | -40.69  | 0.037   | -13.73  | 0.501   | -177.41 |

Download this s-parameter file in ".s2p" format at [http://www.cree.com/products/wireless\\_s-parameters.asp](http://www.cree.com/products/wireless_s-parameters.asp)

## Product Dimensions CGH40006P (Package Type — 440109)

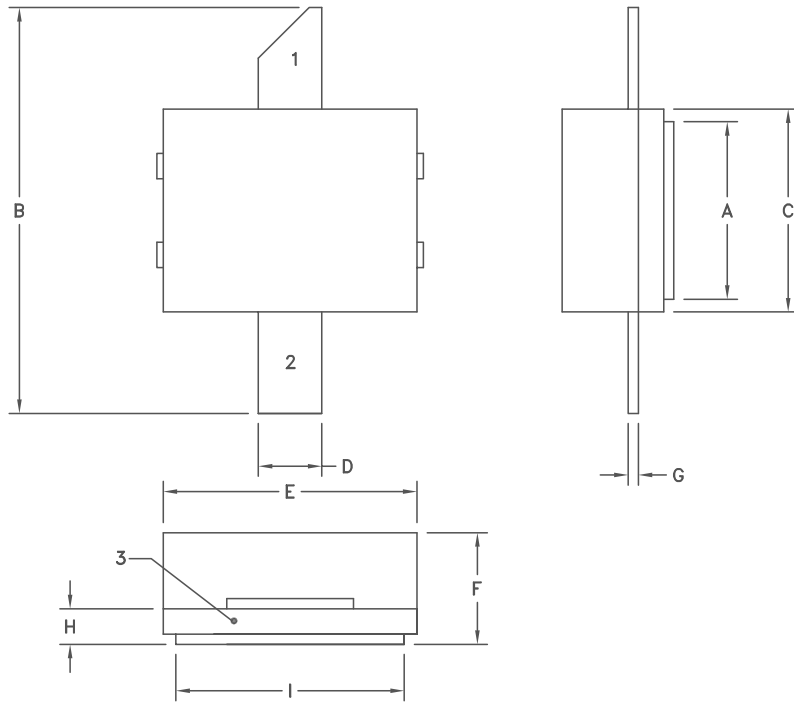

NOTES: (UNLESS OTHERWISE SPECIFIED)

1. INTERPRET DRAWING IN ACCORDANCE WITH ANSI Y14.5M-1982 DIMENSIONING AND TOLERANCING.
2. CONTROLLING DIMENSION: INCH.

| DIM | INCHES |      | MILLIMETERS |      |
|-----|--------|------|-------------|------|
|     | MIN    | MAX  | MIN         | MAX  |
| A   | .135   | .145 | 3.43        | 3.68 |
| B   | .315   | .325 | 8.00        | 8.26 |
| C   | .155   | .165 | 3.94        | 4.19 |
| D   | .045   | .055 | 1.14        | 1.40 |
| E   | .195   | .205 | 4.95        | 5.21 |
| F   | .090   | .110 | 2.29        | 2.79 |
| G   | .007   | .009 | .178        | 0.23 |
| H   | .026   | .030 | .660        | .762 |
| I   | .175   | .185 | 4.45        | 4.70 |

PIN 1. GATE  
 PIN 2. DRAIN  
 PIN 3. SOURCE



## Disclaimer

Specifications are subject to change without notice. Cree, Inc. believes the information contained within this data sheet to be accurate and reliable. However, no responsibility is assumed by Cree for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Cree. Cree makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose. "Typical" parameters are the average values expected by Cree in large quantities and are provided for information purposes only. These values can and do vary in different applications and actual performance can vary over time. All operating parameters should be validated by customer's technical experts for each application. Cree products are not designed, intended or authorized for use as components in applications intended for surgical implant into the body or to support or sustain life, in applications in which the failure of the Cree product could result in personal injury or death or in applications for planning, construction, maintenance or direct operation of a nuclear facility.

For more information, please contact:

Cree, Inc.  
4600 Silicon Drive  
Durham, North Carolina, USA 27703  
[www.cree.com/wireless](http://www.cree.com/wireless)

Sarah Miller  
Marketing & Export  
Cree, RF Components  
1.919.407.5302

Ryan Baker  
Marketing  
Cree, Wireless Devices  
1.919.287.7816

Tom Dekker  
Sales Director  
Cree, Wireless Devices  
1.919.313.5639



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.