

# MMBT4403WT1G

## Switching Transistor

### PNP Silicon

#### Features

- Moisture Sensitivity Level: 1
- ESD Rating: Human Body Model; 4 kV,  
Machine Model; 400 V
- These Devices are Pb-Free, Halogen Free/BFR Free and are RoHS Compliant

#### MAXIMUM RATINGS

| Rating                         | Symbol    | Value | Unit |
|--------------------------------|-----------|-------|------|
| Collector - Emitter Voltage    | $V_{CEO}$ | -40   | Vdc  |
| Collector - Base Voltage       | $V_{CBO}$ | -40   | Vdc  |
| Emitter - Base Voltage         | $V_{EBO}$ | -5.0  | Vdc  |
| Collector Current - Continuous | $I_C$     | -600  | mAdc |

#### THERMAL CHARACTERISTICS



| Characteristic                                                  | Symbol          | Max         | Unit               |
|-----------------------------------------------------------------|-----------------|-------------|--------------------|
| Total Device Dissipation FR-5 Board<br>$T_A = 25^\circ\text{C}$ | $P_D$           | 150         | mW                 |
| Thermal Resistance,<br>Junction-to-Ambient                      | $R_{\theta JA}$ | 833         | $^\circ\text{C/W}$ |
| Junction and Storage Temperature                                | $T_J, T_{stg}$  | -55 to +150 | $^\circ\text{C}$   |

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.




ON Semiconductor®

<http://onsemi.com>



SC-70  
CASE 419  
STYLE 3

#### MARKING DIAGRAM



2T = Specific Device Code  
M = Date Code  
▪ = Pb-Free Package

(Note: Microdot may be in either location)

\*Date Code orientation may vary depending upon manufacturing location.

#### ORDERING INFORMATION

| Device       | Package            | Shipping†             |
|--------------|--------------------|-----------------------|
| MMBT4403WT1G | SC-70<br>(Pb-Free) | 3000 /<br>Tape & Reel |

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

# MMBT4403WT1G

## ELECTRICAL CHARACTERISTICS (T<sub>A</sub> = 25°C unless otherwise noted)

| Characteristic                                                                                               | Symbol               | Min  | Max  | Unit             |
|--------------------------------------------------------------------------------------------------------------|----------------------|------|------|------------------|
| <b>OFF CHARACTERISTICS</b>                                                                                   |                      |      |      |                  |
| Collector - Emitter Breakdown Voltage (Note 1) (I <sub>C</sub> = -1.0 mA <sub>dc</sub> , I <sub>B</sub> = 0) | V <sub>(BR)CEO</sub> | -40  | -    | V <sub>dc</sub>  |
| Collector - Base Breakdown Voltage (I <sub>C</sub> = -0.1 mA <sub>dc</sub> , I <sub>E</sub> = 0)             | V <sub>(BR)CBO</sub> | -40  | -    | V <sub>dc</sub>  |
| Emitter - Base Breakdown Voltage (I <sub>E</sub> = -0.1 mA <sub>dc</sub> , I <sub>C</sub> = 0)               | V <sub>(BR)EBO</sub> | -5.0 | -    | V <sub>dc</sub>  |
| Base Cutoff Current (V <sub>CE</sub> = -35 V <sub>dc</sub> , V <sub>EB</sub> = -0.4 V <sub>dc</sub> )        | I <sub>BEV</sub>     | -    | -0.1 | μA <sub>dc</sub> |
| Collector Cutoff Current (V <sub>CE</sub> = -35 V <sub>dc</sub> , V <sub>EB</sub> = -0.4 V <sub>dc</sub> )   | I <sub>CEX</sub>     | -    | -0.1 | μA <sub>dc</sub> |

## ON CHARACTERISTICS

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                      |                              |                         |                 |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|------------------------------|-------------------------|-----------------|
| DC Current Gain<br>(I <sub>C</sub> = -0.1 mA <sub>dc</sub> , V <sub>CE</sub> = -1.0 V <sub>dc</sub> )<br>(I <sub>C</sub> = -1.0 mA <sub>dc</sub> , V <sub>CE</sub> = -1.0 V <sub>dc</sub> )<br>(I <sub>C</sub> = -10 mA <sub>dc</sub> , V <sub>CE</sub> = -1.0 V <sub>dc</sub> )<br>(I <sub>C</sub> = -150 mA <sub>dc</sub> , V <sub>CE</sub> = -2.0 V <sub>dc</sub> ) (Note 1)<br>(I <sub>C</sub> = -500 mA <sub>dc</sub> , V <sub>CE</sub> = -2.0 V <sub>dc</sub> ) (Note 1) | h <sub>FE</sub>      | 30<br>60<br>100<br>100<br>20 | -<br>-<br>-<br>300<br>- | -               |
| Collector - Emitter Saturation Voltage (Note 1)<br>(I <sub>C</sub> = -150 mA <sub>dc</sub> , I <sub>B</sub> = -15 mA <sub>dc</sub> )<br>(I <sub>C</sub> = -500 mA <sub>dc</sub> , I <sub>B</sub> = -50 mA <sub>dc</sub> )                                                                                                                                                                                                                                                      | V <sub>CE(sat)</sub> | -<br>-                       | -0.4<br>-0.75           | V <sub>dc</sub> |
| Base - Emitter Saturation Voltage (Note 1)<br>(I <sub>C</sub> = -150 mA <sub>dc</sub> , I <sub>B</sub> = -15 mA <sub>dc</sub> )<br>(I <sub>C</sub> = -500 mA <sub>dc</sub> , I <sub>B</sub> = -50 mA <sub>dc</sub> )                                                                                                                                                                                                                                                           | V <sub>BE(sat)</sub> | -0.75<br>-                   | -0.95<br>-1.3           | V <sub>dc</sub> |

## SMALL-SIGNAL CHARACTERISTICS

|                                                                                                                                  |                 |     |     |                    |
|----------------------------------------------------------------------------------------------------------------------------------|-----------------|-----|-----|--------------------|
| Current - Gain - Bandwidth Product (I <sub>C</sub> = -20 mA <sub>dc</sub> , V <sub>CE</sub> = -10 V <sub>dc</sub> , f = 100 MHz) | f <sub>T</sub>  | 200 | -   | MHz                |
| Collector-Base Capacitance (V <sub>CB</sub> = -10 V <sub>dc</sub> , I <sub>E</sub> = 0, f = 1.0 MHz)                             | C <sub>cb</sub> | -   | 8.5 | pF                 |
| Emitter-Base Capacitance (V <sub>BE</sub> = -0.5 V <sub>dc</sub> , I <sub>C</sub> = 0, f = 1.0 MHz)                              | C <sub>eb</sub> | -   | 30  | pF                 |
| Input Impedance (I <sub>C</sub> = -1.0 mA <sub>dc</sub> , V <sub>CE</sub> = -10 V <sub>dc</sub> , f = 1.0 kHz)                   | h <sub>ie</sub> | 1.5 | 15  | kΩ                 |
| Voltage Feedback Ratio (I <sub>C</sub> = -1.0 mA <sub>dc</sub> , V <sub>CE</sub> = -10 V <sub>dc</sub> , f = 1.0 kHz)            | h <sub>re</sub> | 0.1 | 8.0 | X 10 <sup>-4</sup> |
| Small - Signal Current Gain (I <sub>C</sub> = -1.0 mA <sub>dc</sub> , V <sub>CE</sub> = -10 V <sub>dc</sub> , f = 1.0 kHz)       | h <sub>fe</sub> | 60  | 500 | -                  |
| Output Admittance (I <sub>C</sub> = -1.0 mA <sub>dc</sub> , V <sub>CE</sub> = -10 V <sub>dc</sub> , f = 1.0 kHz)                 | h <sub>oe</sub> | 1.0 | 100 | μmhos              |

## SWITCHING CHARACTERISTICS

|              |                                                                                                                                                                        |                |   |     |    |
|--------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|---|-----|----|
| Delay Time   | (V <sub>CC</sub> = -30 V <sub>dc</sub> , V <sub>EB</sub> = -2.0 V <sub>dc</sub> ,<br>I <sub>C</sub> = -150 mA <sub>dc</sub> , I <sub>B1</sub> = -15 mA <sub>dc</sub> ) | t <sub>d</sub> | - | 15  | ns |
| Rise Time    |                                                                                                                                                                        | t <sub>r</sub> | - | 20  |    |
| Storage Time | (V <sub>CC</sub> = -30 V <sub>dc</sub> , I <sub>C</sub> = -150 mA <sub>dc</sub> ,<br>I <sub>B1</sub> = I <sub>B2</sub> = -15 mA <sub>dc</sub> )                        | t <sub>s</sub> | - | 225 | ns |
| Fall Time    |                                                                                                                                                                        | t <sub>f</sub> | - | 30  |    |

1. Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2.0%.

## SWITCHING TIME EQUIVALENT TEST CIRCUIT

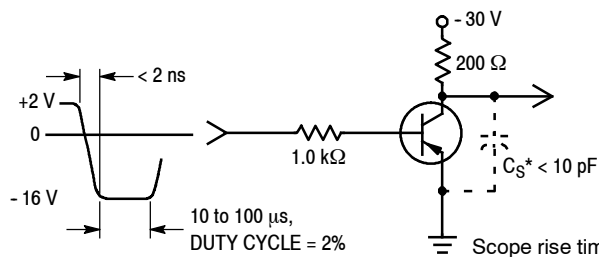


Figure 1. Turn-On Time

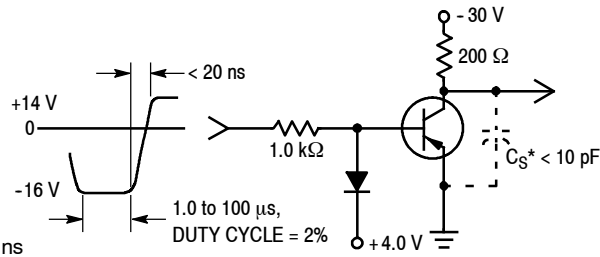


Figure 2. Turn-Off Time

# MMBT4403WT1G

## TRANSIENT CHARACTERISTICS

— 25°C    - - - 100°C

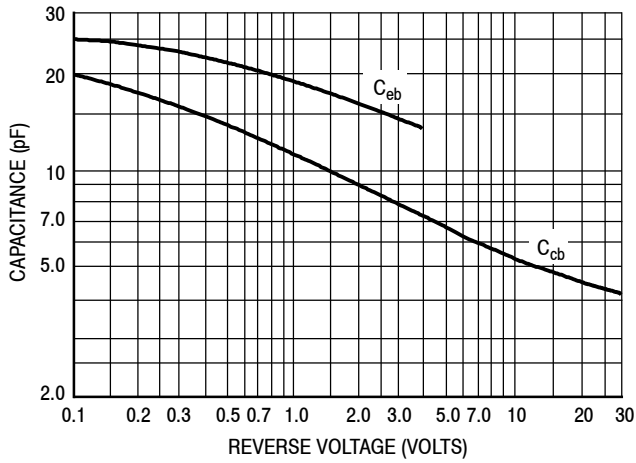


Figure 3. Capacitances

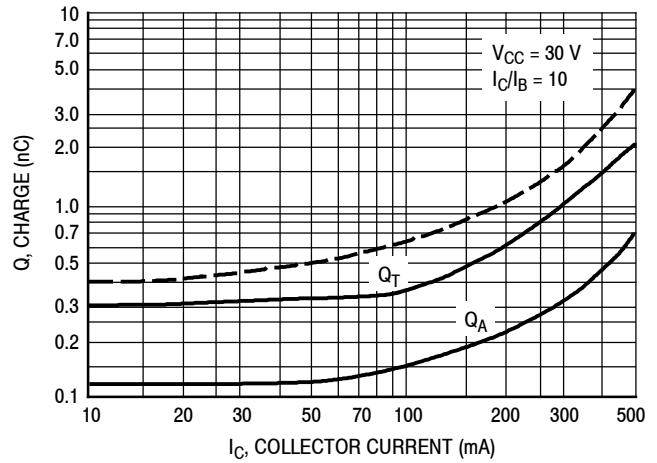


Figure 4. Charge Data

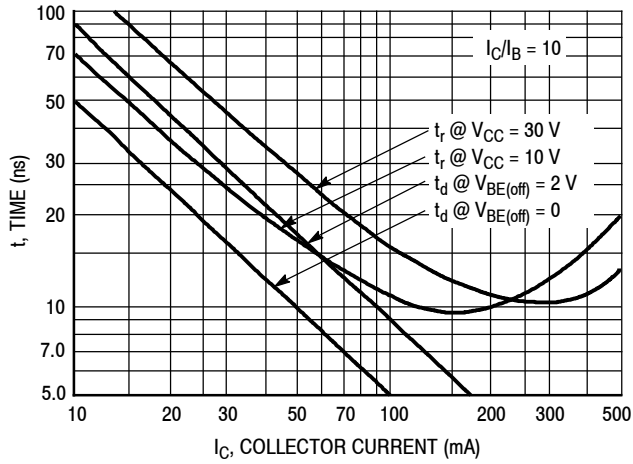


Figure 5. Turn-On Time

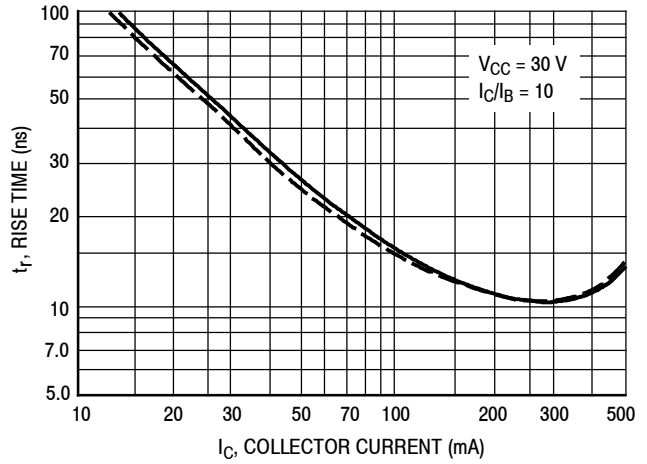


Figure 6. Rise Time

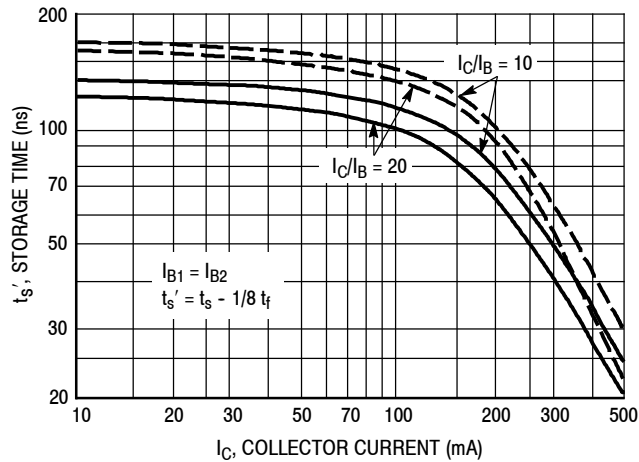


Figure 7. Storage Time

# MMBT4403WT1G

## SMALL-SIGNAL CHARACTERISTICS NOISE FIGURE

$V_{CE} = -10 \text{ Vdc}$ ,  $T_A = 25^\circ\text{C}$ ; Bandwidth = 1.0 Hz

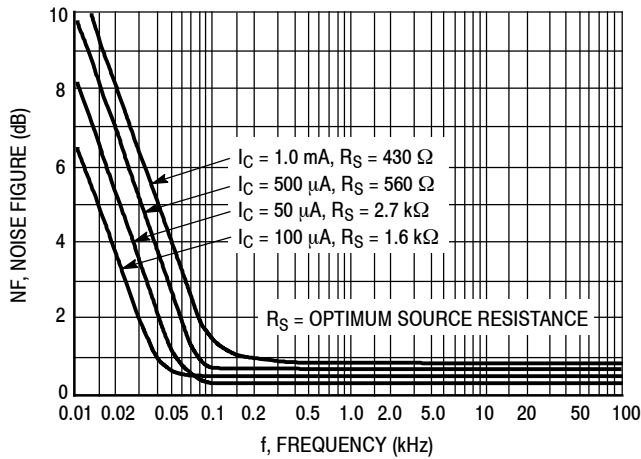


Figure 8. Frequency Effects

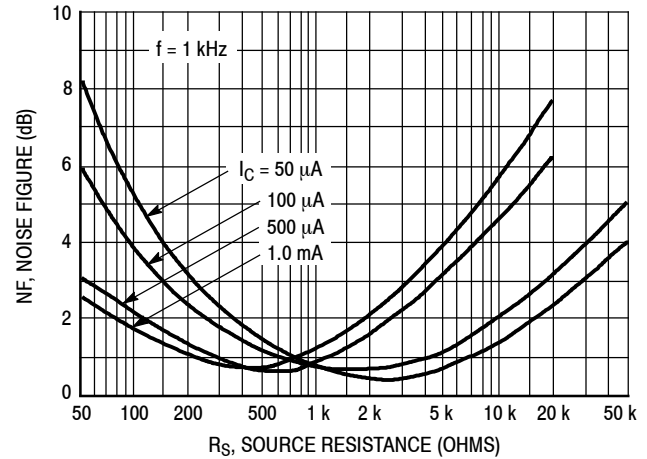


Figure 9. Source Resistance Effects

## h PARAMETERS

$V_{CE} = 10 \text{ Vdc}$ ,  $f = 1.0 \text{ kHz}$ ,  $T_A = 25^\circ\text{C}$

This group of graphs illustrates the relationship between  $h_{fe}$  and other "h" parameters for this series of transistors. To obtain these curves, a high-gain and a low-gain unit were selected from the MMBT4403LT1 lines, and the same units were used to develop the correspondingly numbered curves on each graph.

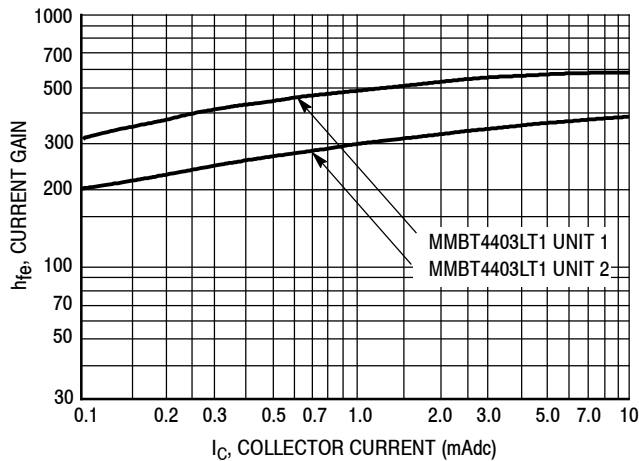


Figure 10. Current Gain

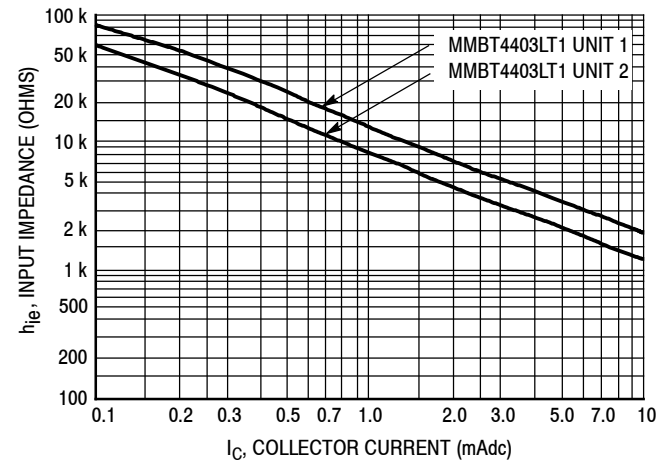


Figure 11. Input Impedance

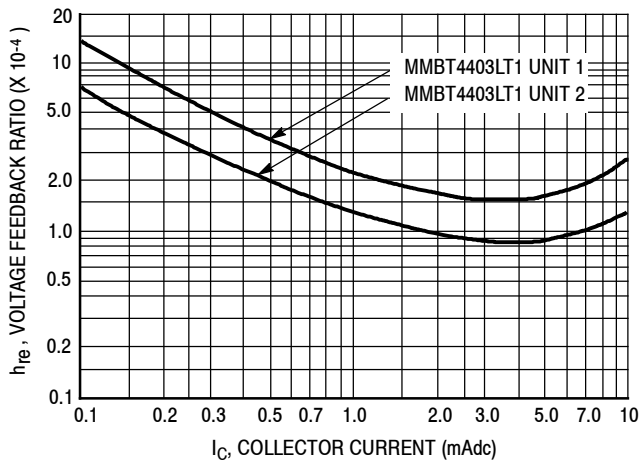


Figure 12. Voltage Feedback Ratio

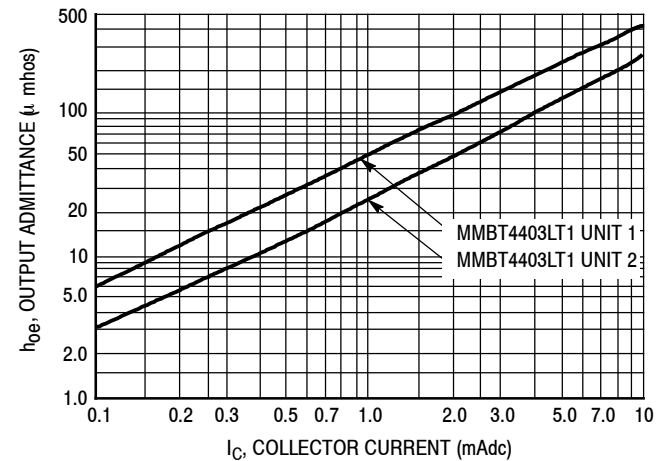


Figure 13. Output Admittance

# MMBT4403WT1G

## STATIC CHARACTERISTICS

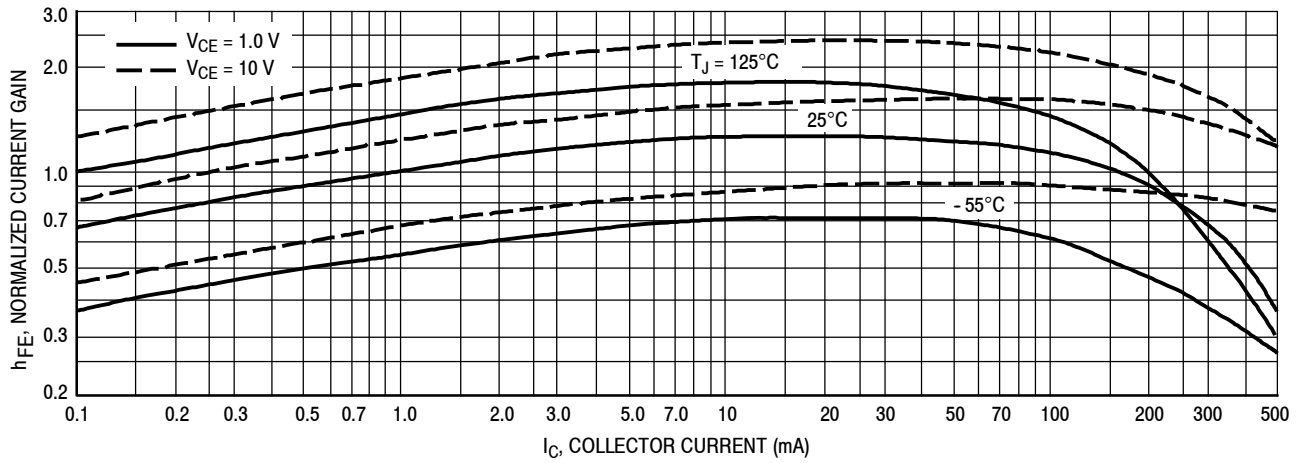


Figure 14. DC Current Gain

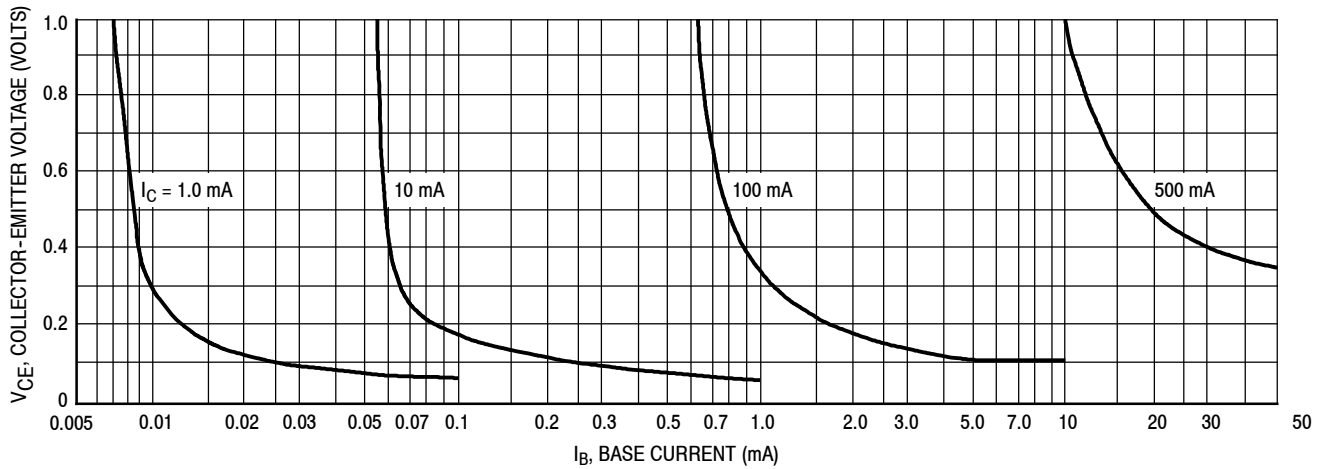


Figure 15. Collector Saturation Region

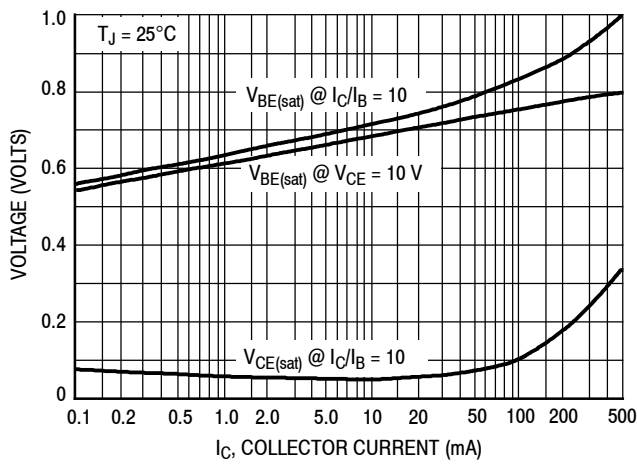


Figure 16. "On" Voltages



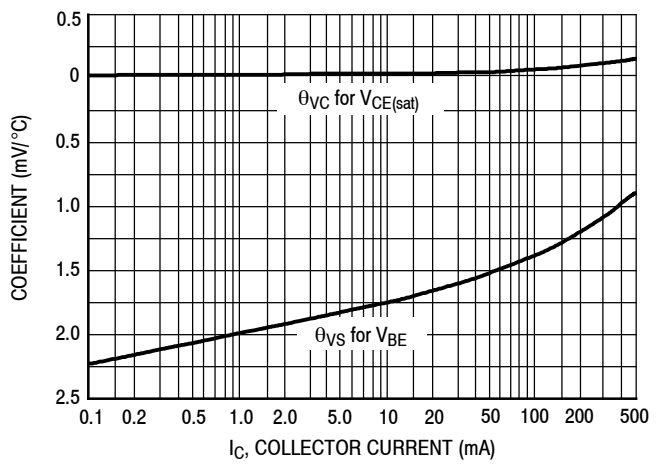


Figure 17. Temperature Coefficients

# MMBT4403WT1G

## PACKAGE DIMENSIONS

### SC-70 (SOT-323) CASE 419-04 ISSUE N

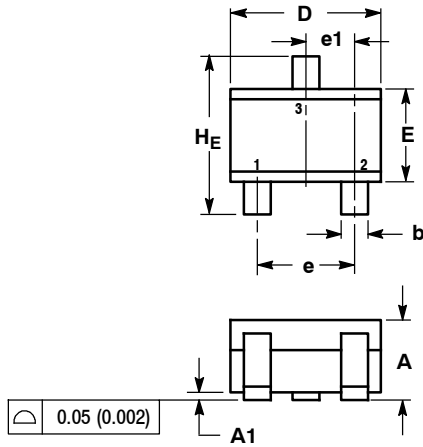


#### NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.

| DIM | MILLIMETERS |      |      | INCHES    |       |       |
|-----|-------------|------|------|-----------|-------|-------|
|     | MIN         | NOM  | MAX  | MIN       | NOM   | MAX   |
| A   | 0.80        | 0.90 | 1.00 | 0.032     | 0.035 | 0.040 |
| A1  | 0.00        | 0.05 | 0.10 | 0.000     | 0.002 | 0.004 |
| A2  | 0.70 REF    |      |      | 0.028 REF |       |       |
| b   | 0.30        | 0.35 | 0.40 | 0.012     | 0.014 | 0.016 |
| c   | 0.10        | 0.18 | 0.25 | 0.004     | 0.007 | 0.010 |
| D   | 1.80        | 2.10 | 2.20 | 0.071     | 0.083 | 0.087 |
| E   | 1.15        | 1.24 | 1.35 | 0.045     | 0.049 | 0.053 |
| e   | 1.20        | 1.30 | 1.40 | 0.047     | 0.051 | 0.055 |
| e1  | 0.65 BSC    |      |      | 0.026 BSC |       |       |
| L   | 0.20        | 0.38 | 0.56 | 0.008     | 0.015 | 0.022 |
| HE  | 2.00        | 2.10 | 2.40 | 0.079     | 0.083 | 0.095 |

STYLE 3:  
PIN 1. BASE  
2. EMITTER  
3. COLLECTOR

### SOLDERING FOOTPRINT\*

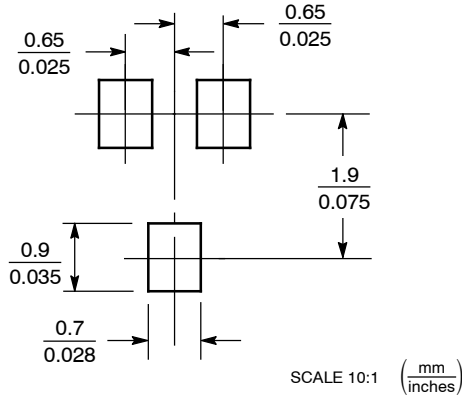

\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

ON Semiconductor and  are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

## PUBLICATION ORDERING INFORMATION

**LITERATURE FULFILLMENT:**  
Literature Distribution Center for ON Semiconductor  
P.O. Box 5163, Denver, Colorado 80217 USA  
**Phone:** 303-675-2175 or 800-344-3860 Toll Free USA/Canada  
**Fax:** 303-675-2176 or 800-344-3867 Toll Free USA/Canada  
**Email:** [orderlit@onsemi.com](mailto:orderlit@onsemi.com)

**N. American Technical Support:** 800-282-9855 Toll Free  
USA/Canada  
**Europe, Middle East and Africa Technical Support:**  
Phone: 421 33 790 2910  
**Japan Customer Focus Center**  
Phone: 81-3-5773-3850

**ON Semiconductor Website:** [www.onsemi.com](http://www.onsemi.com)

**Order Literature:** <http://www.onsemi.com/orderlit>

For additional information, please contact your local Sales Representative



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.