

### FEATURES

**Low  $V_{OS}$ :** 75  $\mu\text{V}$  maximum  
**Low  $V_{OS}$  drift:** 1.3  $\mu\text{V}/^\circ\text{C}$  maximum  
**Ultrastable vs. time:** 1.5  $\mu\text{V}$  per month maximum  
**Low noise:** 0.6  $\mu\text{V}$  p-p maximum  
**Wide input voltage range:**  $\pm 14\text{ V}$  typical  
**Wide supply voltage range:**  $\pm 3\text{ V}$  to  $\pm 18\text{ V}$   
**125 $^\circ\text{C}$  temperature-tested dice**

### APPLICATIONS

**Wireless base station control circuits**  
**Optical network control circuits**  
**Instrumentation**  
**Sensors and controls**  
     **Thermocouples**  
     **Resistor thermal detectors (RTDs)**  
     **Strain bridges**  
     **Shunt current measurements**  
**Precision filters**

### GENERAL DESCRIPTION

The OP07 has very low input offset voltage (75  $\mu\text{V}$  maximum for OP07E) that is obtained by trimming at the wafer stage. These low offset voltages generally eliminate any need for external nulling. The OP07 also features low input bias current ( $\pm 4\text{ nA}$  for the OP07E) and high open-loop gain (200 V/mV for the OP07E). The low offset and high open-loop gain make the OP07 particularly useful for high gain instrumentation applications.

### PIN CONFIGURATION





Figure 1.

The wide input voltage range of  $\pm 13\text{ V}$  minimum combined with a high CMRR of 106 dB (OP07E) and high input impedance provide high accuracy in the noninverting circuit configuration. Excellent linearity and gain accuracy can be maintained even at high closed-loop gains. Stability of offsets and gain with time or variations in temperature is excellent. The accuracy and stability of the OP07, even at high gain, combined with the freedom from external nulling have made the OP07 an industry standard for instrumentation applications.

The OP07 is available in two standard performance grades. The OP07E is specified for operation over the  $0^\circ\text{C}$  to  $70^\circ\text{C}$  range, and the OP07C is specified over the  $-40^\circ\text{C}$  to  $+85^\circ\text{C}$  temperature range.

The OP07 is available in epoxy 8-lead PDIP and 8-lead narrow SOIC packages. For CERDIP and TO-99 packages and standard microcircuit drawing (SMD) versions, see the OP77.

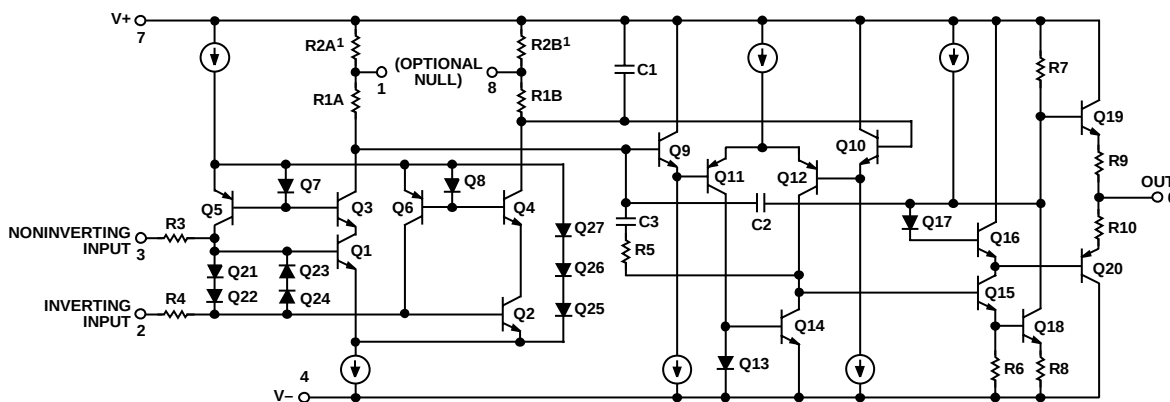

1R2A AND R2B ARE ELECTRONICALLY ADJUSTED ON CHIP AT FACTORY FOR MINIMUM INPUT OFFSET VOLTAGE.

Figure 2. Simplified Schematic

### Rev. G

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

## TABLE OF CONTENTS

|                                        |   |                                           |    |
|----------------------------------------|---|-------------------------------------------|----|
| Features .....                         | 1 | Absolute Maximum Ratings .....            | 6  |
| Applications.....                      | 1 | Thermal Resistance.....                   | 6  |
| General Description .....              | 1 | ESD Caution.....                          | 6  |
| Pin Configuration.....                 | 1 | Typical Performance Characteristics ..... | 7  |
| Revision History .....                 | 2 | Typical Applications.....                 | 11 |
| Specifications.....                    | 3 | Applications Information.....             | 12 |
| OP07E Electrical Characteristics ..... | 3 | Outline Dimensions .....                  | 13 |
| OP07C Electrical Characteristics ..... | 4 | Ordering Guide .....                      | 14 |

## REVISION HISTORY

### 10/11—Rev. F. to Rev G

|                                  |   |
|----------------------------------|---|
| Changes to Features Section..... | 1 |
|----------------------------------|---|

### 8/10—Rev. E. to Rev F

|                                 |    |
|---------------------------------|----|
| Changes to Ordering Guide ..... | 14 |
|---------------------------------|----|

### 7/09—Rev. D. to Rev E

|                                   |    |
|-----------------------------------|----|
| Changes to Figure 29 Caption..... | 11 |
| Changes to Ordering Guide .....   | 14 |

### 7/06—Rev. C. to Rev D

|                                                  |    |
|--------------------------------------------------|----|
| Changes to Features.....                         | 1  |
| Changes to General Description .....             | 1  |
| Changes to Specifications Section.....           | 3  |
| Changes to Table 4.....                          | 6  |
| Changes to Figure 6 and Figure 8.....            | 7  |
| Changes to Figure 13 and Figure 14.....          | 8  |
| Changes to Figure 20.....                        | 9  |
| Changes to Figure 21 to Figure 25.....           | 10 |
| Changes to Figure 26 and Figure 30.....          | 11 |
| Replaced Figure 28 .....                         | 11 |
| Changes to Applications Information Section..... | 12 |
| Updated Outline Dimensions .....                 | 13 |
| Changes to Ordering Guide .....                  | 14 |

### 8/03—Rev. B to Rev. C

|                                                  |    |
|--------------------------------------------------|----|
| Changes to OP07E Electrical Specifications.....  | 2  |
| Changes to OP07C Electrical Specifications ..... | 3  |
| Edits to Ordering Guide .....                    | 5  |
| Edits to Figure 6.....                           | 9  |
| Updated Outline Dimensions.....                  | 11 |

### 3/03—Rev. A to Rev. B

|                                 |           |
|---------------------------------|-----------|
| Updated Package Titles.....     | Universal |
| Updated Outline Dimensions..... | 11        |

### 2/02—Rev. 0 to Rev. A

|                                                             |     |
|-------------------------------------------------------------|-----|
| Edits to Features.....                                      | 1   |
| Edits to Ordering Guide .....                               | 1   |
| Edits to Pin Connection Drawings .....                      | 1   |
| Edits to Absolute Maximum Ratings.....                      | 2   |
| Deleted Electrical Characteristics .....                    | 2–3 |
| Deleted OP07D Column from Electrical Characteristics.....   | 4–5 |
| Edits to TPCs .....                                         | 7–9 |
| Edits to High-Speed, Low $V_{OS}$ Composite Amplifier ..... | 9   |

## SPECIFICATIONS

## OP07E ELECTRICAL CHARACTERISTICS

$V_S = \pm 15\text{ V}$ , unless otherwise noted.

Table 1.

| Parameter                                        | Symbol                | Conditions                                                                          | Min   | Typ   | Max  | Unit     |
|--------------------------------------------------|-----------------------|-------------------------------------------------------------------------------------|-------|-------|------|----------|
| INPUT CHARACTERISTICS                            |                       |                                                                                     |       |       |      |          |
| <b>T<sub>A</sub> = 25°C</b>                      |                       |                                                                                     |       |       |      |          |
| Input Offset Voltage <sup>1</sup>                | V <sub>OS</sub>       |                                                                                     |       | 30    | 75   | μV       |
| Long-Term V <sub>OS</sub> Stability <sup>2</sup> | V <sub>OS</sub> /Time |                                                                                     |       | 0.3   | 1.5  | μV/Month |
| Input Offset Current                             | I <sub>OS</sub>       |                                                                                     |       | 0.5   | 3.8  | nA       |
| Input Bias Current                               | I <sub>B</sub>        |                                                                                     |       | ±1.2  | ±4.0 | nA       |
| Input Noise Voltage                              | e <sub>n</sub> p-p    | 0.1 Hz to 10 Hz <sup>3</sup>                                                        |       | 0.35  | 0.6  | μV p-p   |
| Input Noise Voltage Density                      | e <sub>n</sub>        | f <sub>0</sub> = 10 Hz                                                              |       | 10.3  | 18.0 | nV/√Hz   |
|                                                  |                       | f <sub>0</sub> = 100 Hz <sup>3</sup>                                                |       | 10.0  | 13.0 | nV/√Hz   |
|                                                  |                       | f <sub>0</sub> = 1 kHz                                                              |       | 9.6   | 11.0 | nV/√Hz   |
|                                                  |                       |                                                                                     |       |       |      |          |
| Input Noise Current                              | I <sub>n</sub> p-p    |                                                                                     |       | 14    | 30   | pA p-p   |
| Input Noise Current Density                      | I <sub>n</sub>        | f <sub>0</sub> = 10 Hz                                                              |       | 0.32  | 0.80 | pA/√Hz   |
|                                                  |                       | f <sub>0</sub> = 100 Hz <sup>3</sup>                                                |       | 0.14  | 0.23 | pA/√Hz   |
|                                                  |                       | f <sub>0</sub> = 1 kHz                                                              |       | 0.12  | 0.17 | pA/√Hz   |
|                                                  |                       |                                                                                     |       |       |      |          |
| Input Resistance, Differential Mode <sup>4</sup> | R <sub>IN</sub>       |                                                                                     | 15    | 50    |      | MΩ       |
| Input Resistance, Common Mode                    | R <sub>INCM</sub>     |                                                                                     |       | 160   |      | GΩ       |
| Input Voltage Range                              | IVR                   |                                                                                     | ±13   | ±14   |      | V        |
| Common-Mode Rejection Ratio                      | CMRR                  | V <sub>CM</sub> = ±13 V                                                             | 106   | 123   |      | dB       |
| Power Supply Rejection Ratio                     | PSRR                  | V <sub>S</sub> = ±3 V to ±18 V                                                      |       | 5     | 20   | μV/V     |
| Large Signal Voltage Gain                        | A <sub>VO</sub>       | R <sub>L</sub> ≥ 2 kΩ, V <sub>O</sub> = ±10 V                                       | 200   | 500   |      | V/mV     |
|                                                  |                       | R <sub>L</sub> ≥ 500 Ω, V <sub>O</sub> = ±0.5 V, V <sub>S</sub> = ±3 V <sup>4</sup> | 150   | 400   |      | V/mV     |
| <b>0°C ≤ T<sub>A</sub> ≤ 70°C</b>                |                       |                                                                                     |       |       |      |          |
| Input Offset Voltage <sup>1</sup>                | V <sub>OS</sub>       |                                                                                     |       | 45    | 130  | μV       |
| Voltage Drift Without External Trim <sup>4</sup> | TCV <sub>OS</sub>     |                                                                                     |       | 0.3   | 1.3  | μV/°C    |
| Voltage Drift with External Trim <sup>3</sup>    | TCV <sub>OSN</sub>    | R <sub>P</sub> = 20 kΩ                                                              |       | 0.3   | 1.3  | μV/°C    |
| Input Offset Current                             | I <sub>OS</sub>       |                                                                                     |       | 0.9   | 5.3  | nA       |
| Input Offset Current Drift                       | TCI <sub>OS</sub>     |                                                                                     |       | 8     | 35   | pA/°C    |
| Input Bias Current                               | I <sub>B</sub>        |                                                                                     |       | ±1.5  | ±5.5 | nA       |
| Input Bias Current Drift                         | TCI <sub>B</sub>      |                                                                                     |       | 13    | 35   | pA/°C    |
| Input Voltage Range                              | IVR                   |                                                                                     | ±13   | ±13.5 |      | V        |
| Common-Mode Rejection Ratio                      | CMRR                  | V <sub>CM</sub> = ±13 V                                                             | 103   | 123   |      | dB       |
| Power Supply Rejection Ratio                     | PSRR                  | V <sub>S</sub> = ±3 V to ±18 V                                                      |       | 7     | 32   | μV/V     |
| Large Signal Voltage Gain                        | A <sub>VO</sub>       | R <sub>L</sub> ≥ 2 kΩ, V <sub>O</sub> = ±10 V                                       | 180   | 450   |      | V/mV     |
| OUTPUT CHARACTERISTICS                           |                       |                                                                                     |       |       |      |          |
| <b>T<sub>A</sub> = 25°C</b>                      |                       |                                                                                     |       |       |      |          |
| Output Voltage Swing                             | V <sub>O</sub>        | R <sub>L</sub> ≥ 10 kΩ                                                              | ±12.5 | ±13.0 |      | V        |
|                                                  |                       | R <sub>L</sub> ≥ 2 kΩ                                                               | ±12.0 | ±12.8 |      | V        |
|                                                  |                       | R <sub>L</sub> ≥ 1 kΩ                                                               | ±10.5 | ±12.0 |      | V        |
| <b>0°C ≤ T<sub>A</sub> ≤ 70°C</b>                |                       |                                                                                     |       |       |      |          |
| Output Voltage Swing                             | V <sub>O</sub>        | R <sub>L</sub> ≥ 2 kΩ                                                               | ±12   | ±12.6 |      | V        |

| Parameter                   | Symbol         | Conditions                             | Min | Typ | Max | Unit |
|-----------------------------|----------------|----------------------------------------|-----|-----|-----|------|
| <b>DYNAMIC PERFORMANCE</b>  |                |                                        |     |     |     |      |
| <b>T<sub>A</sub> = 25°C</b> |                |                                        |     |     |     |      |
| Slew Rate                   | SR             | R <sub>L</sub> ≥ 2 kΩ <sup>3</sup>     | 0.1 | 0.3 |     | V/μs |
| Closed-Loop Bandwidth       | BW             | A <sub>VOL</sub> = 1 <sup>5</sup>      | 0.4 | 0.6 |     | MHz  |
| Open-Loop Output Resistance | R <sub>O</sub> | V <sub>O</sub> = 0, I <sub>O</sub> = 0 |     | 60  |     | Ω    |
| Power Consumption           | P <sub>d</sub> | V <sub>S</sub> = ±15 V, No load        |     | 75  | 120 | mW   |
|                             |                | V <sub>S</sub> = ±3 V, No load         |     | 4   | 6   | mW   |
| Offset Adjustment Range     |                | R <sub>P</sub> = 20 kΩ                 |     | ±4  |     | mV   |

<sup>1</sup> Input offset voltage measurements are performed by automated test equipment approximately 0.5 seconds after application of power.

<sup>2</sup> Long-term input offset voltage stability refers to the averaged trend time of V<sub>OS</sub> vs. the time over extended periods after the first 30 days of operation. Excluding the initial hour of operation, changes in V<sub>OS</sub> during the first 30 operating days are typically 2.5 μV. Refer to the Typical Performance Characteristics section. Parameter is sample tested.

<sup>3</sup> Sample tested.

<sup>4</sup> Guaranteed by design.

<sup>5</sup> Guaranteed but not tested.

## OP07C ELECTRICAL CHARACTERISTICS

V<sub>S</sub> = ±15 V, unless otherwise noted.

Table 2.

| Parameter                                        | Symbol                | Conditions                                                                          | Min | Typ   | Max  | Unit     |
|--------------------------------------------------|-----------------------|-------------------------------------------------------------------------------------|-----|-------|------|----------|
| <b>INPUT CHARACTERISTICS</b>                     |                       |                                                                                     |     |       |      |          |
| <b>T<sub>A</sub> = 25°C</b>                      |                       |                                                                                     |     |       |      |          |
| Input Offset Voltage <sup>1</sup>                | V <sub>OS</sub>       |                                                                                     |     | 60    | 150  | μV       |
| Long-Term V <sub>OS</sub> Stability <sup>2</sup> | V <sub>OS</sub> /Time |                                                                                     |     | 0.4   | 2.0  | μV/Month |
| Input Offset Current                             | I <sub>OS</sub>       |                                                                                     |     | 0.8   | 6.0  | nA       |
| Input Bias Current                               | I <sub>B</sub>        |                                                                                     |     | ±1.8  | ±7.0 | nA       |
| Input Noise Voltage                              | e <sub>n</sub> p-p    | 0.1 Hz to 10 Hz <sup>3</sup>                                                        |     | 0.38  | 0.65 | μV p-p   |
| Input Noise Voltage Density                      | e <sub>n</sub>        | f <sub>O</sub> = 10 Hz                                                              |     | 10.5  | 20.0 | nV/√Hz   |
|                                                  |                       | f <sub>O</sub> = 100 Hz <sup>3</sup>                                                |     | 10.2  | 13.5 | nV/√Hz   |
|                                                  |                       | f <sub>O</sub> = 1 kHz                                                              |     | 9.8   | 11.5 | nV/√Hz   |
| Input Noise Current                              | I <sub>n</sub> p-p    |                                                                                     |     | 15    | 35   | pA p-p   |
| Input Noise Current Density                      | I <sub>n</sub>        | f <sub>O</sub> = 10 Hz                                                              |     | 0.35  | 0.90 | pA/√Hz   |
|                                                  |                       | f <sub>O</sub> = 100 Hz <sup>3</sup>                                                |     | 0.15  | 0.27 | pA/√Hz   |
|                                                  |                       | f <sub>O</sub> = 1 kHz                                                              |     | 0.13  | 0.18 | pA/√Hz   |
| Input Resistance, Differential Mode <sup>4</sup> | R <sub>IIN</sub>      |                                                                                     | 8   | 33    |      | MΩ       |
| Input Resistance, Common Mode                    | R <sub>IINCM</sub>    |                                                                                     |     | 120   |      | GΩ       |
| Input Voltage Range                              | IVR                   |                                                                                     | ±13 | ±14   |      | V        |
| Common-Mode Rejection Ratio                      | CMRR                  | V <sub>CM</sub> = ±13 V                                                             | 100 | 120   |      | dB       |
| Power Supply Rejection Ratio                     | PSRR                  | V <sub>S</sub> = ±3 V to ±18 V                                                      |     | 7     | 32   | μV/V     |
| Large Signal Voltage Gain                        | A <sub>VO</sub>       | R <sub>L</sub> ≥ 2 kΩ, V <sub>O</sub> = ±10 V                                       | 120 | 400   |      | V/mV     |
|                                                  |                       | R <sub>L</sub> ≥ 500 Ω, V <sub>O</sub> = ±0.5 V, V <sub>S</sub> = ±3 V <sup>4</sup> | 100 | 400   |      | V/mV     |
| <b>-40°C ≤ T<sub>A</sub> ≤ +85°C</b>             |                       |                                                                                     |     |       |      |          |
| Input Offset Voltage <sup>1</sup>                | V <sub>OS</sub>       |                                                                                     |     | 85    | 250  | μV       |
| Voltage Drift Without External Trim <sup>4</sup> | TCV <sub>OS</sub>     |                                                                                     |     | 0.5   | 1.8  | μV/°C    |
| Voltage Drift with External Trim <sup>3</sup>    | TCV <sub>OSN</sub>    | R <sub>P</sub> = 20 kΩ                                                              |     | 0.4   | 1.6  | μV/°C    |
| Input Offset Current                             | I <sub>OS</sub>       |                                                                                     |     | 1.6   | 8.0  | nA       |
| Input Offset Current Drift                       | TCI <sub>OS</sub>     |                                                                                     |     | 12    | 50   | pA/°C    |
| Input Bias Current                               | I <sub>B</sub>        |                                                                                     |     | ±2.2  | ±9.0 | nA       |
| Input Bias Current Drift                         | TCI <sub>B</sub>      |                                                                                     |     | 18    | 50   | pA/°C    |
| Input Voltage Range                              | IVR                   |                                                                                     | ±13 | ±13.5 |      | V        |
| Common-Mode Rejection Ratio                      | CMRR                  | V <sub>CM</sub> = ±13 V                                                             | 97  | 120   |      | dB       |
| Power Supply Rejection Ratio                     | PSRR                  | V <sub>S</sub> = ±3 V to ±18 V                                                      |     | 10    | 51   | μV/V     |
| Large Signal Voltage Gain                        | A <sub>VO</sub>       | R <sub>L</sub> ≥ 2 kΩ, V <sub>O</sub> = ±10 V                                       | 100 | 400   |      | V/mV     |

| Parameter                            | Symbol         | Conditions                             | Min   | Typ   | Max | Unit |
|--------------------------------------|----------------|----------------------------------------|-------|-------|-----|------|
| OUTPUT CHARACTERISTICS               |                |                                        |       |       |     |      |
| <b>T<sub>A</sub> = 25°C</b>          |                |                                        |       |       |     |      |
| Output Voltage Swing                 | V <sub>O</sub> | R <sub>L</sub> ≥ 10 kΩ                 | ±12.0 | ±13.0 |     | V    |
|                                      |                | R <sub>L</sub> ≥ 2 kΩ                  | ±11.5 | ±12.8 |     | V    |
|                                      |                | R <sub>L</sub> ≥ 1 kΩ                  |       | ±12.0 |     | V    |
| <b>−40°C ≤ T<sub>A</sub> ≤ +85°C</b> |                |                                        |       |       |     |      |
| Output Voltage Swing                 | V <sub>O</sub> | R <sub>L</sub> ≥ 2 kΩ                  | ±12   | ±12.6 |     | V    |
| DYNAMIC PERFORMANCE                  |                |                                        |       |       |     |      |
| <b>T<sub>A</sub> = 25°C</b>          |                |                                        |       |       |     |      |
| Slew Rate                            | SR             | R <sub>L</sub> ≥ 2 kΩ <sup>3</sup>     | 0.1   | 0.3   |     | V/μs |
| Closed-Loop Bandwidth                | BW             | A <sub>VOL</sub> = 1 <sup>5</sup>      | 0.4   | 0.6   |     | MHz  |
| Open-Loop Output Resistance          | R <sub>O</sub> | V <sub>O</sub> = 0, I <sub>O</sub> = 0 |       | 60    |     | Ω    |
| Power Consumption                    | P <sub>d</sub> | V <sub>S</sub> = ±15 V, No load        |       | 80    | 150 | mW   |
|                                      |                | V <sub>S</sub> = ±3 V, No load         |       | 4     | 8   | mW   |
| Offset Adjustment Range              |                | R <sub>P</sub> = 20 kΩ                 |       | ±4    |     | mV   |

<sup>1</sup> Input offset voltage measurements are performed by automated test equipment approximately 0.5 seconds after application of power.

<sup>2</sup> Long-term input offset voltage stability refers to the averaged trend time of V<sub>OS</sub> vs. the time over extended periods after the first 30 days of operation. Excluding the initial hour of operation, changes in V<sub>OS</sub> during the first 30 operating days are typically 2.5 μV. Refer to the Typical Performance Characteristics section. Parameter is sample tested.

<sup>3</sup> Sample tested.

<sup>4</sup> Guaranteed by design.

<sup>5</sup> Guaranteed but not tested.

## ABSOLUTE MAXIMUM RATINGS

Table 3.

| Parameter                            | Ratings                                         |
|--------------------------------------|-------------------------------------------------|
| Supply Voltage ( $V_S$ )             | $\pm 22$ V                                      |
| Input Voltage <sup>1</sup>           | $\pm 22$ V                                      |
| Differential Input Voltage           | $\pm 30$ V                                      |
| Output Short-Circuit Duration        | Indefinite                                      |
| Storage Temperature Range            |                                                 |
| S and P Packages                     | $-65^{\circ}\text{C}$ to $+125^{\circ}\text{C}$ |
| Operating Temperature Range          |                                                 |
| OP07E                                | $0^{\circ}\text{C}$ to $70^{\circ}\text{C}$     |
| OP07C                                | $-40^{\circ}\text{C}$ to $+85^{\circ}\text{C}$  |
| Junction Temperature                 | $150^{\circ}\text{C}$                           |
| Lead Temperature, Soldering (60 sec) | $300^{\circ}\text{C}$                           |

<sup>1</sup> For supply voltages less than  $\pm 22$  V, the absolute maximum input voltage is equal to the supply voltage.

Stresses above those listed under Absolute Maximum Ratings may cause permanent damage to the device. This is a stress rating only; functional operation of the device at these or any other conditions above those indicated in the operational section of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

## THERMAL RESISTANCE

$\theta_{JA}$  is specified for the worst-case conditions, that is, a device soldered in a circuit board for surface-mount packages.

Table 4. Thermal Resistance

| Package Type             | $\theta_{JA}$ | $\theta_{JC}$ | Unit                        |
|--------------------------|---------------|---------------|-----------------------------|
| 8-Lead PDIP (P-Suffix)   | 103           | 43            | $^{\circ}\text{C}/\text{W}$ |
| 8-Lead SOIC_N (S-Suffix) | 158           | 43            | $^{\circ}\text{C}/\text{W}$ |

## ESD CAUTION

ESD (electrostatic discharge) sensitive device. Electrostatic charges as high as 4000 V readily accumulate on the human body and test equipment and can discharge without detection. Although this product features proprietary ESD protection circuitry, permanent damage may occur on devices subjected to high energy electrostatic discharges. Therefore, proper ESD precautions are recommended to avoid performance degradation or loss of functionality.



## TYPICAL PERFORMANCE CHARACTERISTICS

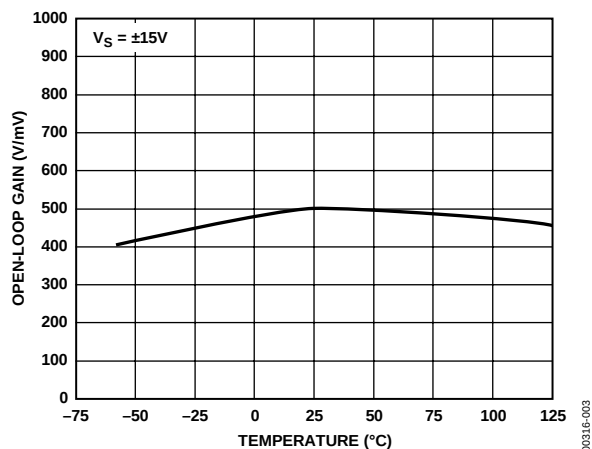


Figure 3. Open-Loop Gain vs. Temperature

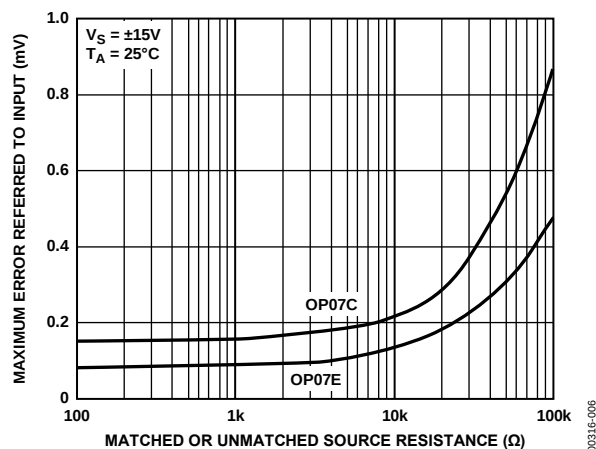


Figure 6. Maximum Error vs. Source Resistance

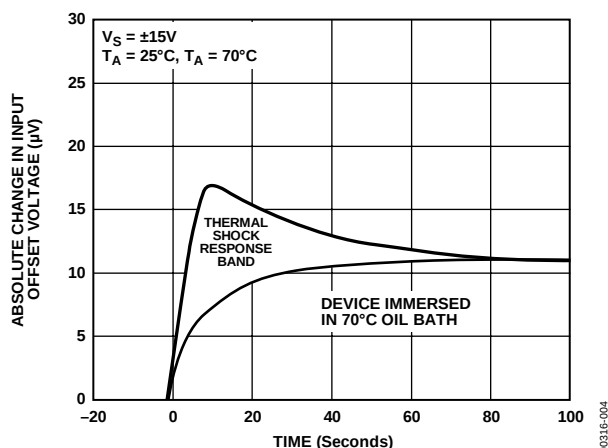


Figure 4. Offset Voltage Change due to Thermal Shock

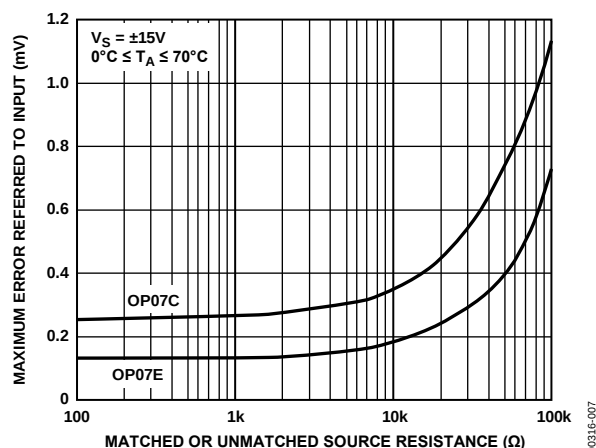


Figure 7. Maximum Error vs. Source Resistance

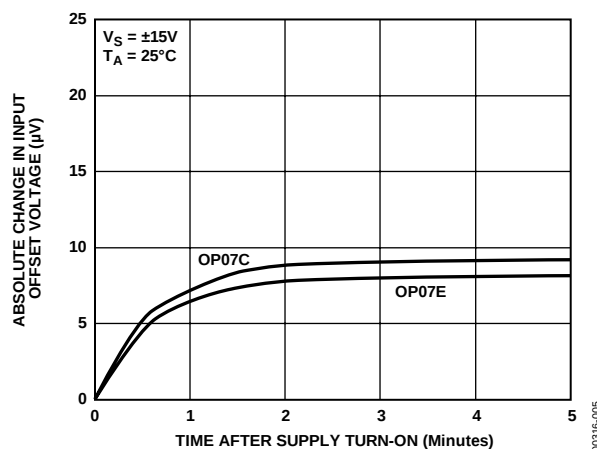


Figure 5. Warm-Up Drift

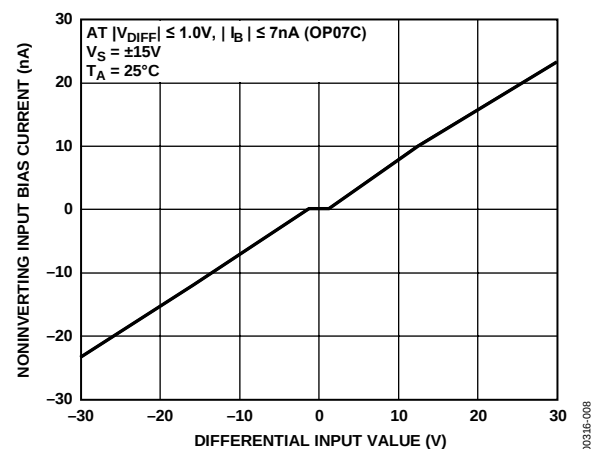


Figure 8. Input Bias Current vs. Differential Input Voltage

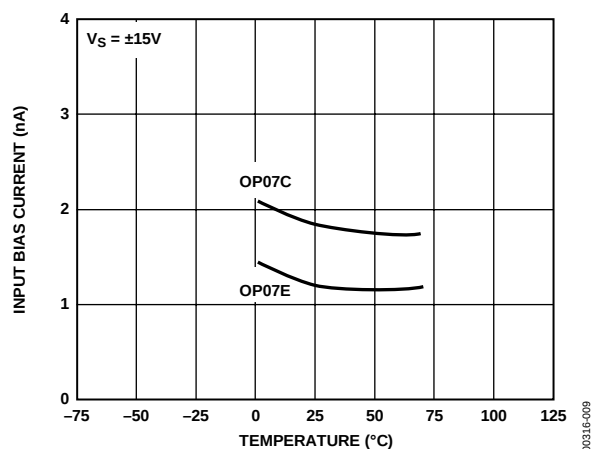


Figure 9. Input Bias Current vs. Temperature

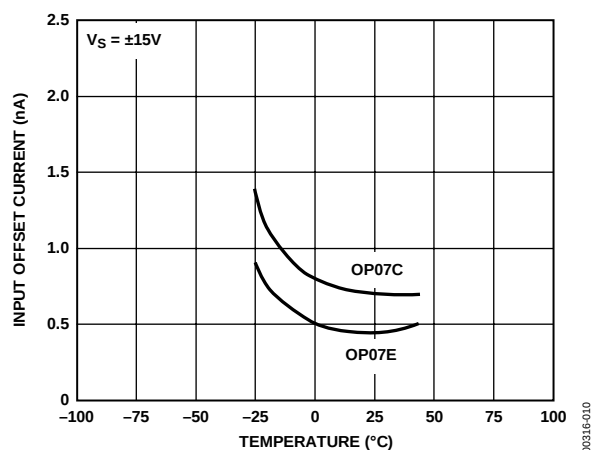


Figure 10. Input Offset Current vs. Temperature

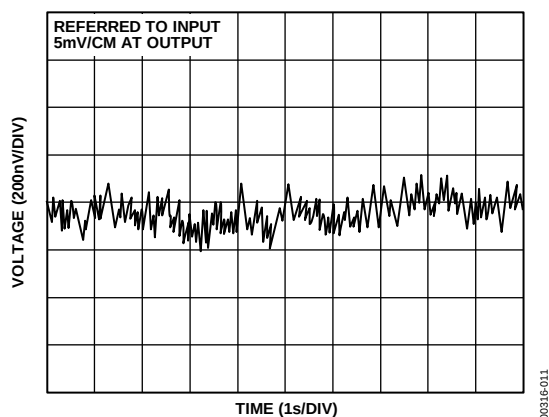


Figure 11. Low Frequency Noise

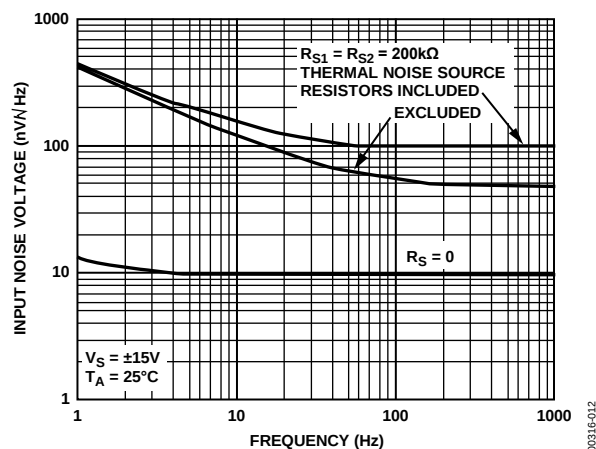


Figure 12. Total Input Noise Voltage vs. Frequency

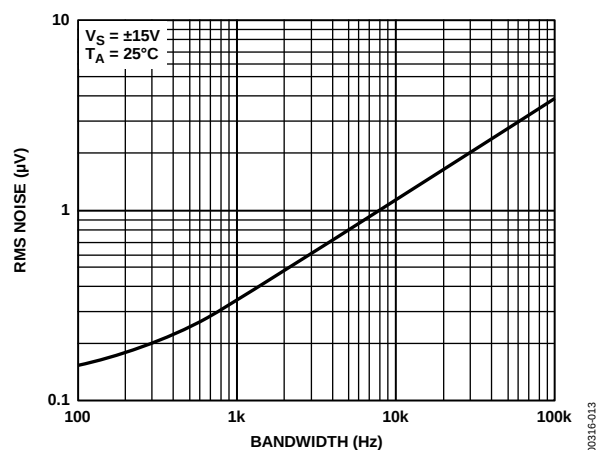


Figure 13. Input Wideband Noise vs. Bandwidth, 0.1 Hz to Frequency Indicated

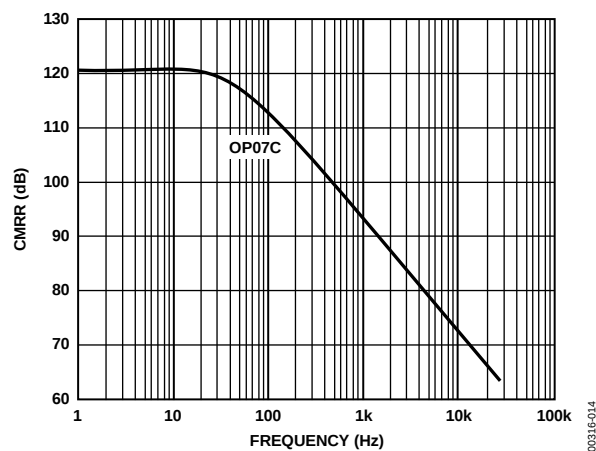


Figure 14. CMRR vs. Frequency

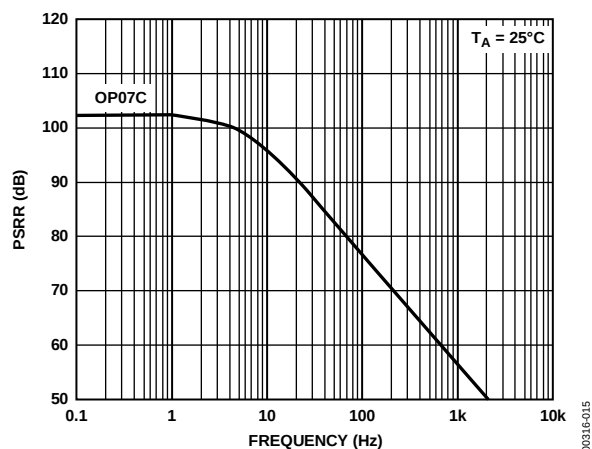


Figure 15. PSRR vs. Frequency

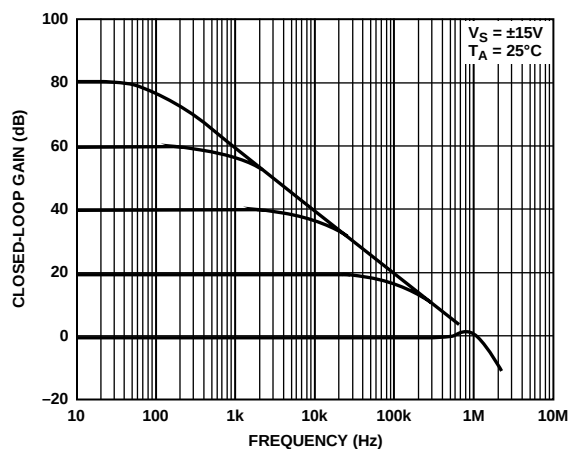


Figure 18. Closed-Loop Frequency Response for Various Gain Configurations

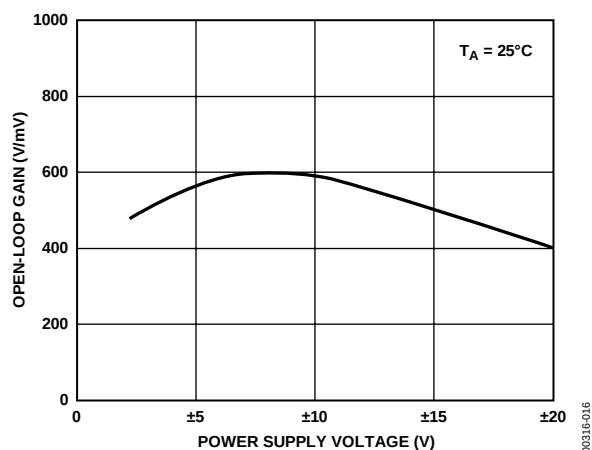


Figure 16. Open-Loop Gain vs. Power Supply Voltage

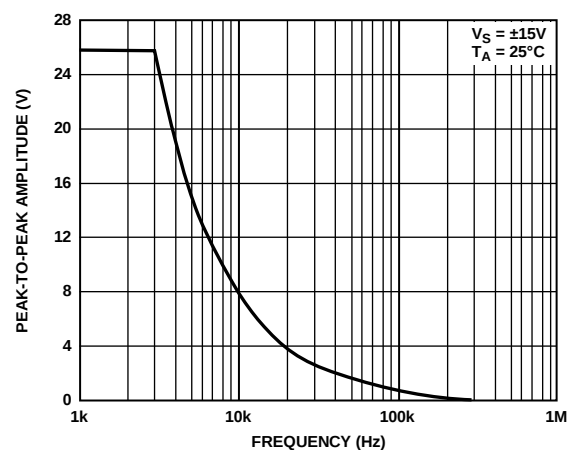


Figure 19. Maximum Output Swing vs. Frequency

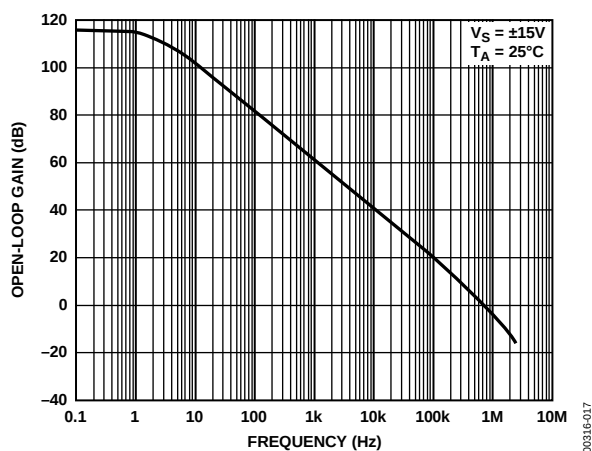


Figure 17. Open-Loop Frequency Response

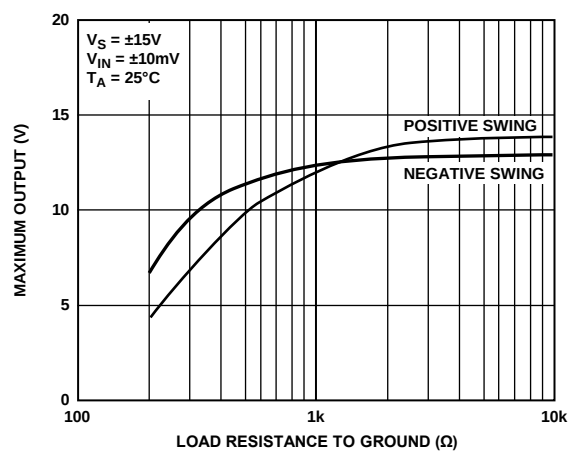


Figure 20. Maximum Output Voltage vs. Load Resistance

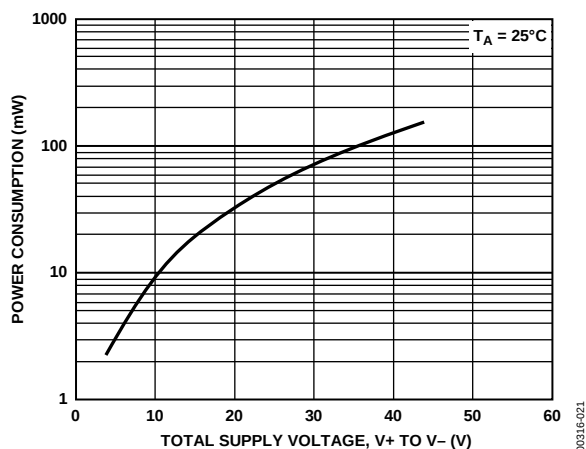


Figure 21. Power Consumption vs. Power Supply

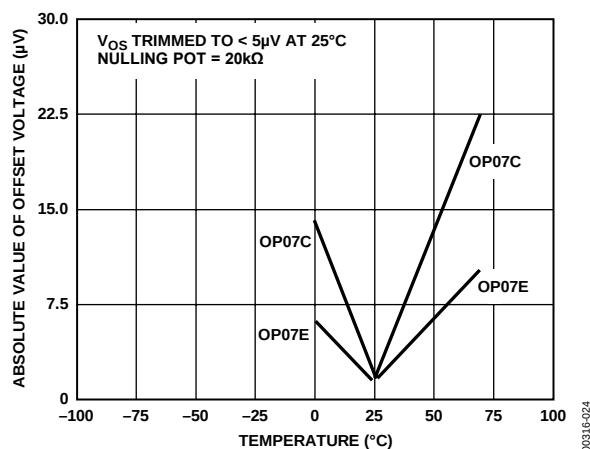


Figure 24. Trimmed Offset Voltage vs. Temperature

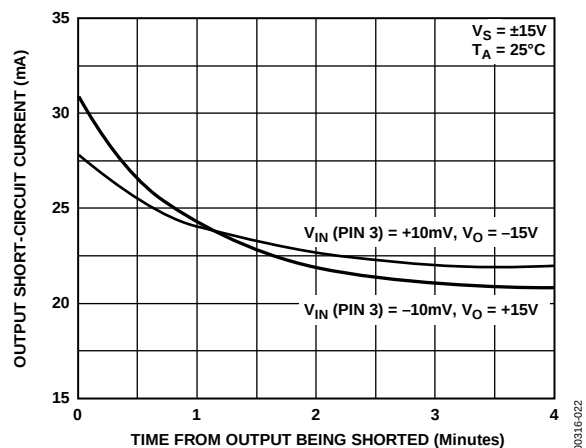


Figure 22. Output Short-Circuit Current vs. Time

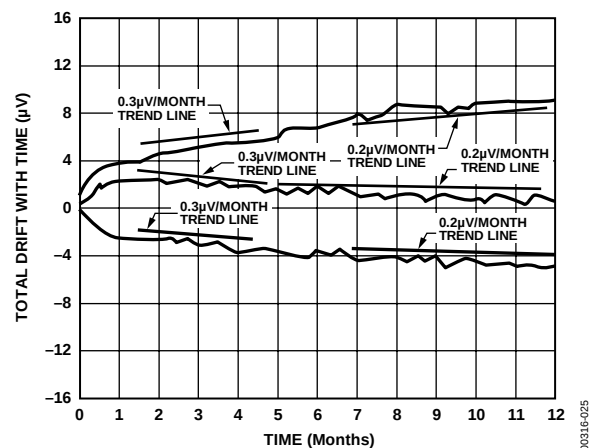


Figure 25. Offset Voltage Drift vs. Time

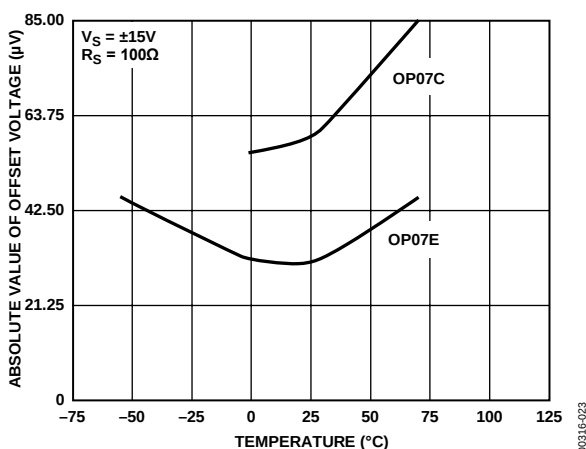


Figure 23. Untrimmed Offset Voltage vs. Temperature

## TYPICAL APPLICATIONS

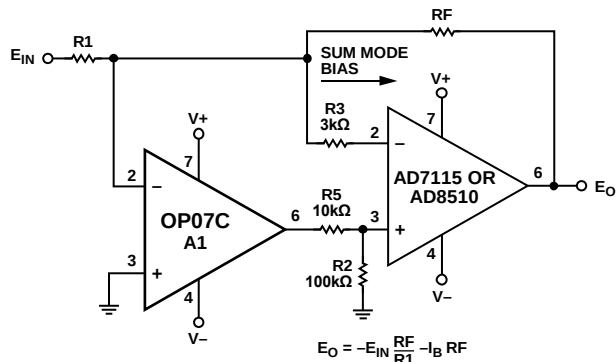


Figure 26. Typical Offset Voltage Test Circuit

00316-026

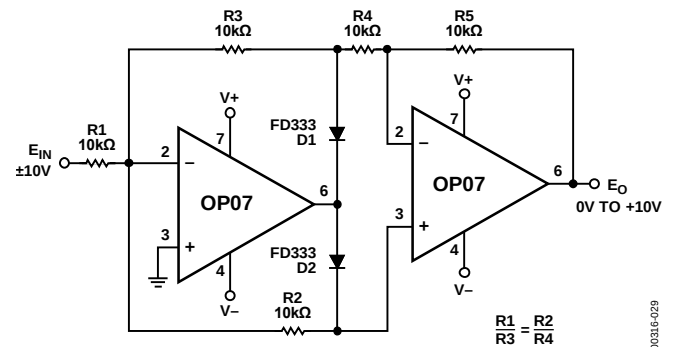


Figure 29. Absolute Value Circuit

00316-029


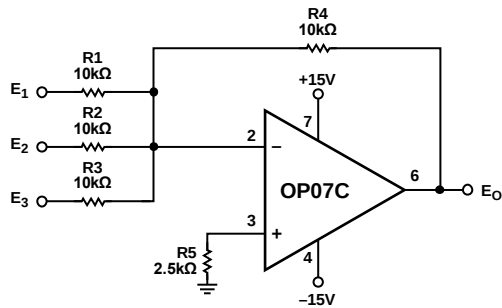


Figure 27. Typical Low Frequency Noise Circuit

00316-027

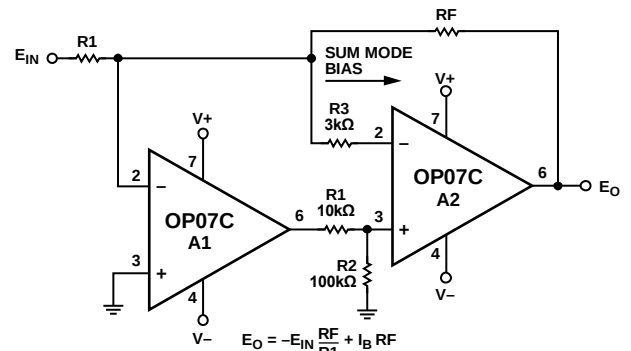

NOTES  
1. PINOUT SHOWN FOR P PACKAGE

Figure 30. High Speed, Low  $V_{OS}$  Composite Amplifier

00316-030





Figure 28. Optional Offset Nulling Circuit


00316-028

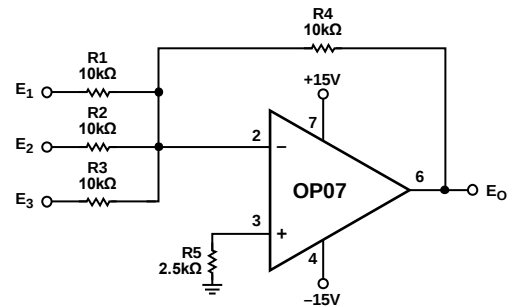

NOTES  
1. PINOUT SHOWN FOR P PACKAGE

Figure 31. Adjustment-Free Precision Summing Amplifier

00316-031

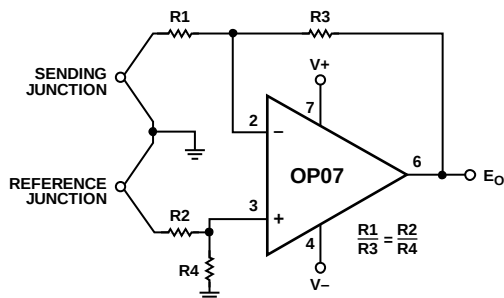

NOTES  
1. PINOUT SHOWN FOR P PACKAGE


Figure 32. High Stability Thermocouple Amplifier

00316-032

## APPLICATIONS INFORMATION

The OP07 provides stable operation with load capacitance of up to 500 pF and  $\pm 10$  V swings; larger capacitances should be decoupled with a 50  $\Omega$  decoupling resistor.

Stray thermoelectric voltages generated by dissimilar metals at the contacts to the input terminals can degrade drift performance. Therefore, best operation is obtained when both input contacts are maintained at the same temperature, preferably close to the package temperature.

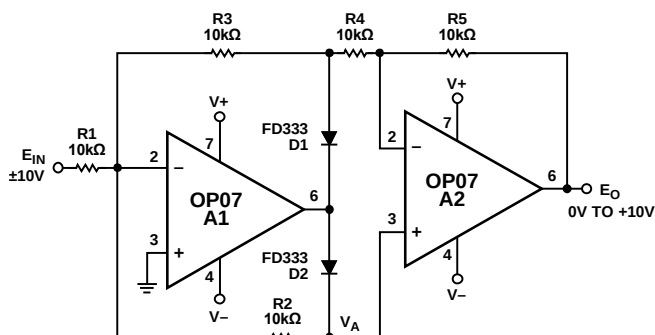


NOTES  
1. PINOUT SHOWN FOR P PACKAGE

Figure 33. Precision Absolute-Value Circuit

00316-033


## OUTLINE DIMENSIONS

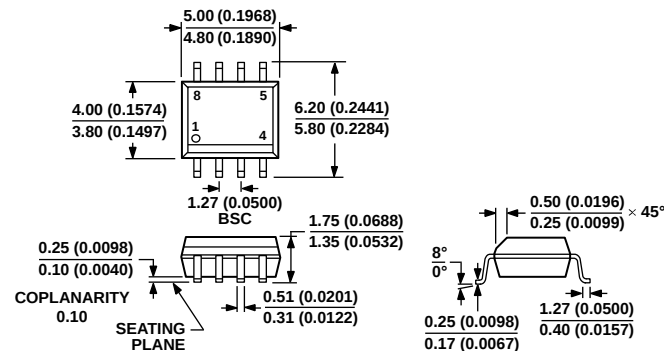

COMPLIANT TO JEDEC STANDARDS MS-012-AA  
CONTROLLING DIMENSIONS ARE IN MILLIMETERS; INCH DIMENSIONS  
(IN PARENTHESES) ARE ROUNDED-OFF MILLIMETER EQUIVALENTS FOR  
REFERENCE ONLY AND ARE NOT APPROPRIATE FOR USE IN DESIGN.

Figure 34. 8-Lead Standard Small Outline Package [SOIC\_N]  
Narrow Body S-Suffix  
(R-8)

Dimensions shown in millimeters and (inches)

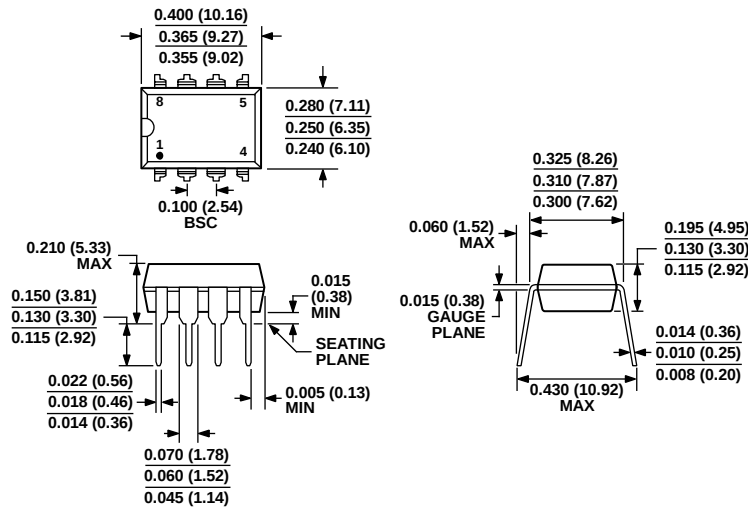

COMPLIANT TO JEDEC STANDARDS MS-001  
CONTROLLING DIMENSIONS ARE IN INCHES; MILLIMETER DIMENSIONS  
(IN PARENTHESES) ARE ROUNDED-OFF INCH EQUIVALENTS FOR  
REFERENCE ONLY AND ARE NOT APPROPRIATE FOR USE IN DESIGN.  
CORNER LEADS MAY BE CONFIGURED AS WHOLE OR HALF LEADS.

Figure 35. 8-Lead Plastic Dual-in-Line Package [PDIP]  
P-Suffix  
(N-8)

Dimensions shown in inches and (millimeters)

**ORDERING GUIDE**

| Model <sup>1</sup> | Temperature Range | Package Description | Package Option |
|--------------------|-------------------|---------------------|----------------|
| OP07EPZ            | 0°C to 70°C       | 8-Lead PDIP         | N-8 (P-Suffix) |
| OP07CPZ            | −40°C to +85°C    | 8-Lead PDIP         | N-8 (P-Suffix) |
| OP07CSZ            | −40°C to +85°C    | 8-Lead SOIC_N       | R-8 (S-Suffix) |
| OP07CSZ-REEL       | −40°C to +85°C    | 8-Lead SOIC_N       | R-8 (S-Suffix) |
| OP07CSZ-REEL7      | −40°C to +85°C    | 8-Lead SOIC_N       | R-8 (S-Suffix) |

<sup>1</sup> Z = RoHS Compliant Part.

**NOTES**

**NOTES**



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.