


# IB IL 24 DI 2 ...

## Inline Terminal With Two Digital Inputs

### AUTOMATIONWORX

Data Sheet  
5549\_en\_03

© PHOENIX CONTACT - 09/2006

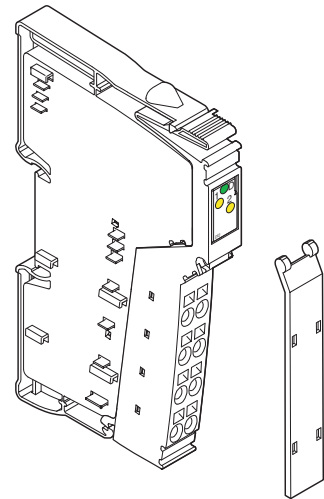

## Description

The terminal is designed for use within an Inline station. It is used to acquire digital input signals.

### Features

- Connections for two digital sensors
- Connection of sensors in 2, 3, and 4-wire technology
- Maximum permissible load current per sensor: 250 mA
- Maximum permissible load current from the terminal: 0.5 A
- Diagnostic and status indicators



This data sheet is only valid in association with the IB IL SYS PRO UM E user manual or the Inline system manual for your bus system.



Make sure you always use the latest documentation.  
It can be downloaded at [www.download.phoenixcontact.com](http://www.download.phoenixcontact.com).  
A conversion table is available on the Internet at  
[www.download.phoenixcontact.com/general/7000\\_en\\_00.pdf](http://www.download.phoenixcontact.com/general/7000_en_00.pdf).



This data sheet is valid for the products listed on the following page:

## Ordering Data

### Products

Description	Type	Order No.	Pcs./Pck.
Inline terminal with two digital inputs; including accessories (connectors and labeling field); transmission speed 500 kbps	IB IL 24 DI 2-PAC	2861221	1
Inline terminal with two digital inputs; without accessories transmission speed 500 kbps	IB IL 24 DI 2	2726201	1
Inline terminal with two digital inputs; without accessories; transmission speed 2 Mbps	IB IL 24 DI 2-2MBD	2819066	1
Inline terminal with two digital inputs; including accessories (connectors and labeling field); transmission speed 2 Mbps	IB IL 24 DI 2-2MBD-PAC	2861713	1



One of the listed connectors is needed for the complete fitting of the IB IL 24 DI 2 and IB IL 24 DI 2-2MBD terminals.

### Accessories

Description	Type	Order No.	Pcs./Pck.
Connector with eight spring-cage connections (green, w/o color print)	IB IL SCN-8	2726337	10
Connector with eight spring-cage connections (green, with color print)	IB IL SCN-8-CP	2727608	10

### Documentation

Description	Type	Order No.	Pcs./Pck.
"Configuring and Installing the INTERBUS Inline Product Range" user manual	IB IL SYS PRO UM E	2743048	1
"Automation Terminals of the Inline Product Range" user manual	IL SYS INST UM E	2698737	1

## Technical Data

### General Data

Housing dimensions (width x height x depth)	12.2 mm x 120 mm x 71.5 mm
Weight	53 g (with connector); 38 g (without connector)
Mode of operation	Process data mode with 2 bits
Connection method for sensors	2, 3, and 4-wire technology
Permissible temperature (operation)	-25°C to +55°C
Permissible temperature (storage/transport)	-25°C to +85°C
Permissible humidity (operation/storage/transport)	10% / 95% according to EN 61131-2
Permissible air pressure (operation/storage/transport)	70 kPa to 106 kPa (up to 3000 m above sea level)
Degree of protection	IP20 according to IEC 60529
Class of protection	Class 3 according to VDE 0106, IEC 60536
Connection data for Inline Connectors	
Connection type	Spring-cage terminals
Conductor cross section	0.2 mm <sup>2</sup> to 1.5 mm <sup>2</sup> (solid or stranded)

### Interface

Local bus	Through data routing
-----------	----------------------

### Transmission Speed

IB IL 24 DI 2, IB IL 24 DI 2-PAC	500 kbps
IB IL 24 DI 2-2MBD, IB IL 24 DI 2-2MBD-PAC	2 Mbps

**Power Consumption (500 kbps)**

Communications power	7.5 V
Current consumption at $U_L$	35 mA, maximum
Power consumption at $U_L$	0.27 W, maximum
Segment supply voltage $U_S$	24 V DC (nominal value)
Nominal current consumption at $U_S$	0.5 A (2 x 0.25 A), maximum

**Power Consumption (2 Mbps)**

Communications power	7.5 V
Current consumption at $U_L$	50 mA, maximum
Power consumption at $U_L$	0.375 W, maximum
Segment supply voltage $U_S$	24 V DC (nominal value)
Nominal current consumption at $U_S$	0.5 A (2 x 0.25 A), maximum

**Supply of the Module Electronics and I/O Through the Bus Coupler/Power Terminal**

Connection method	Through potential routing
-------------------	---------------------------

**Digital Inputs**

Number	2
Input design	According to EN 61131-2 Type 1
Definition of switching thresholds	
Maximum low-level voltage	$U_{Lmax} < 5 \text{ V}$
Minimum high-level voltage	$U_{Hmin} > 15 \text{ V}$
Common potentials	Segment supply, ground
Nominal input voltage $U_{IN}$	24 V DC
Permissible range	$-3 \text{ V} < U_{IN} < +30 \text{ V DC}$
Nominal input current for $U_{IN}$ (at 500 kbps)	5 mA
Nominal input current for $U_{IN}$ (at 2 Mbps)	3 mA, minimum
Current flow (500 kbps)	Linear in range $1 \text{ V} < U_{IN} < 30 \text{ V}$
Current flow (2 Mbps)	See table "Characteristic Curve (at 2 Mbps): Current Depending on the Input Voltage and the Ambient Temperature $T_A$ " on page 4
Delay time	None
Permissible cable length to the sensor	30 m
Use of AC sensors	AC sensors in the voltage range $< U_{IN}$ are limited in application

**Input Characteristic Curve (500 kbps)**

Input Voltage (V)	Typical Input Current (mA)
$-3 < U_{IN} < 0.7$	0
3	0.4
6	1.0
9	1.7
12	2.3
15	3.0
18	3.7
21	4.4
24	5.0
27	5.7
30	6.4

Characteristic Curve (at 2 Mbps): Current Depending on the Input Voltage and the Ambient Temperature $T_A$			
Supply Voltage	Input Current	Input Current acc. to $t \geq 20$ s	
		for $T_A = 25^\circ\text{C}$	for $T_A = 55^\circ\text{C}$
18 V	3.0 mA	2.9 mA	2.5 mA
24 V	3.9 mA	3.8 mA	3.5 mA
30 V	4.5 mA	4.2 mA	3.0 mA

The current is reduced depending on the ambient temperature  $T_A$  and the number of inputs that are switched on (module internal temperature).

### Power Dissipation

#### Formula to Calculate the Power Dissipation of the Electronics

##### 500 kbps

$$P_{EL} = 0.21 \text{ W} + \sum_{n=1}^2 \left[ U_{INn} \times \frac{U_{INn} - 1.8 \text{ V}}{4400 \Omega} \right]$$

##### 2 Mbps

$$P_{EL} = 0.375 \text{ W} + \sum_{n=1}^2 \left[ U_{INn} \times 0.003 \text{ A} \right]$$

Where

$P_{EL}$  Total power dissipation in the terminal  
 $n$  Index of the number of set inputs  $n = 1$  to 2  
 $U_{INn}$  Input voltage of the input  $n$

#### Power Dissipation of the Housing $P_{HOU}$

0.6 W (within the permissible operating temperature)

### Limitation of Simultaneity, Derating

Derating No limitation of simultaneity, no derating

### Safety Equipment

Overload in segment circuit No  
 Surge voltage Protective elements of the power terminal  
 Polarity reversal Protective elements of the power terminal

### Electrical Isolation/Isolation of the Voltage Areas



To provide electrical isolation between the logic level and the I/O area it is necessary to supply the station bus coupler and the digital input terminal via the bus coupler or a power terminal from separate power supply units. Interconnection of the power supply units in the 24 V area is not permitted. (See also user manual.)

### Common Potentials

The 24 V main voltage, 24 V segment voltage, and GND have the same potential. FE is a separate potential area.

### Separate Potentials in the System Consisting of Bus Coupler/Power Terminal and I/O Terminal

#### - Test Distance

5 V supply incoming remote bus / 7.5 V supply (bus logic)  
 5 V supply outgoing remote bus / 7.5 V supply (bus logic)  
 7.5 V supply (bus logic) / 24 V supply (I/O)  
 24 V supply (I/O) / functional earth ground

#### - Test Voltage

500 V AC, 50 Hz, 1 min  
 500 V AC, 50 Hz, 1 min  
 500 V AC, 50 Hz, 1 min  
 500 V AC, 50 Hz, 1 min


### Error Messages to the Higher-Level Control or Computer System

None

### Approvals

Information on current approvals can be found on the Internet at [www.download.phoenixcontact.com](http://www.download.phoenixcontact.com).

### Local Diagnostic and Status Indicators and Terminal Point Assignment

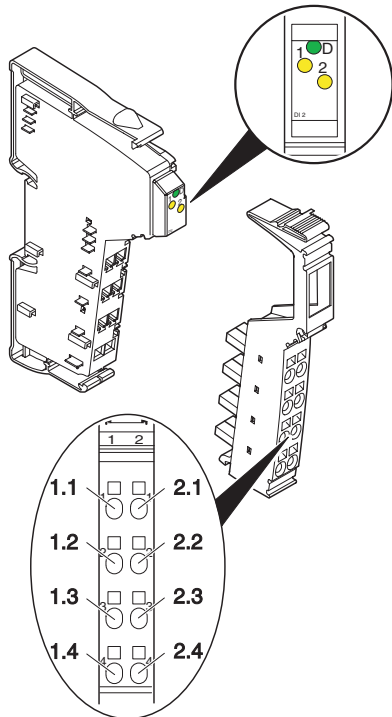

5549A002

Figure 1 Terminal with appropriate connectors

#### Local Diagnostic and Status Indicators

Desig.	Color	Meaning
D	Green	Diagnostics
1, 2	Yellow	Status indicators of the inputs

#### Function identification


Light blue

2 Mbps: white stripe in the vicinity of the D LED

#### Terminal Point Assignment

Terminal Point	Assignment
1.1, 2.1	Signal input (IN)
1.2, 2.2	Segment voltage $U_S$ for 2, 3, and 4-wire termination
1.3, 2.3	Ground contact (GND) for 3 and 4-wire termination
1.4, 2.4	FE connection for 4-wire termination





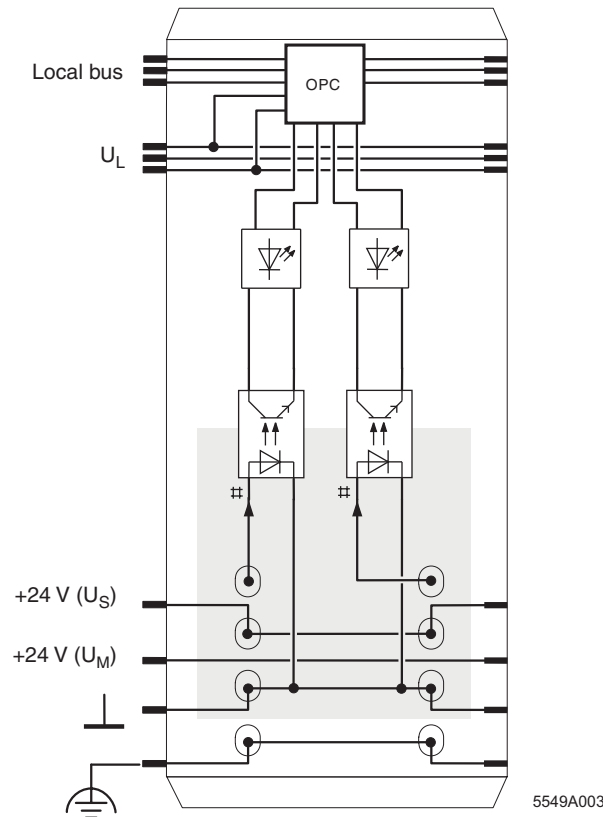
### Internal Circuit Diagram



5549A003

Figure 2 Internal wiring of the terminal points

Key:

-  Protocol chip (bus logic including voltage conditioning)
-  LED
-  Optocoupler
-  Digital input
-  Electrically isolated area




Other symbols used are explained in the IB IL SYS PRO UM E user manual or in the Inline system manual for your bus system.

### Connection Example



When connecting the sensors observe the assignment of the terminal points to the process data (see page 6).

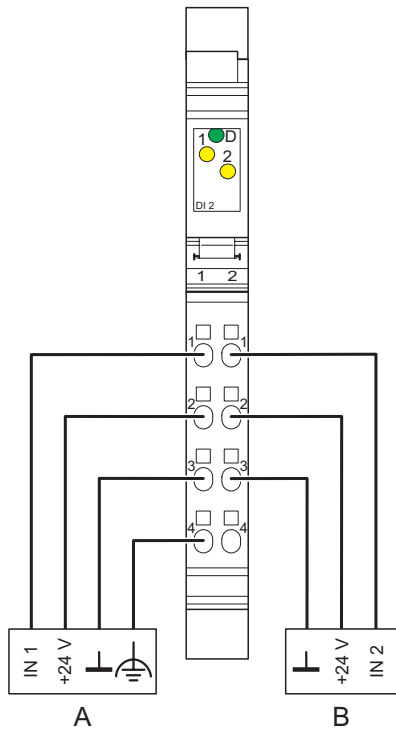

5549A004

Figure 3 Typical sensor connections

- A 4-wire termination
- B 3-wire termination

### Programming Data/Configuration Data

#### INTERBUS

ID code	BE <sub>hex</sub> (190 <sub>dec</sub> )
Length code	C2 <sub>hex</sub>
Process data channel	2 bits
Input address area	2 bits
Output address area	0 bits
Parameter channel (PCP)	0 bits
Register length (bus)	2 bits

#### Other Bus Systems



For the programming data/configuration data of other bus systems, please refer to the corresponding electronic device data sheet (e.g., GSD, EDS).

### Process Data

#### Assignment of the Terminal Points to the IN Process Data

(Byte.bit) view	Byte.bit	0.1	0.0
Module	Terminal point (signal)	2.1	1.1
	Terminal point (+24 V)	2.2	1.2
	Terminal point (GND)	2.3	1.3
	Terminal point (FE)	2.4	1.4
Status indicator	LED	2	1



For the assignment of the illustrated (byte.bit) view to your INTERBUS control or computer system, please refer to the DB GB IBS SYS ADDRESS data sheet, Order No. 9000990.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.