


## PSR – Phoenix Safety Relay PSR-THC4

- Two-hand and safety door control module according to EN 574 Type IIIC
- Safety Category 4, EN 954-1
- Plug-in screw-cage or spring-cage terminal blocks
- Two-channel circuit
- Safe isolation
- Cross-circuit detection
- Housing width 22.5 mm (0.886 in.)
- Two enable contacts
- One signaling contact
- Approvals:  US Listed;




### 1. Short Description

The PSR-...-24UC/THC4/2x1/1x2 safety relays can be used to monitor two-hand control systems according to EN 574 Type IIIC and safety doors.

The module monitors the simultaneity of both inputs in < 0.5 seconds. In this way, up to Safety Category 4 can be achieved in safety circuits according to VDE 0113 Part 1 and EN 954-1. External contactors or expansion modules can be monitored. The module has two enable current paths and one signaling current path with Stop Category 0 according to EN 60204-1/ VDE 0113 Part 1.

## 2. Technical Data

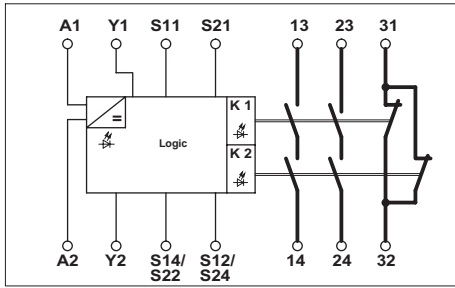

**PSR-THC4**



	solid	flexible	
	[mm <sup>2</sup> ]		AWG
Connection data:	0.2 - 2.5	0.2 - 2.5	25 - 14
Stripping length:	Screw-cage version 7 mm (0.28 in.)		
	Spring-cage version 10 mm (0.39 in.)		

Housing width 22.5 mm (0.886 in.)

Description	
Safety relay, Category 4	Screw-cage Spring-cage

Type	Order No.	Pcs. Pkt.
PSR-SCP-24UC/THC4/2X1/1X2	29 63 72 1	1
PSR-SPP-24UC/THC4/2X1/1X2	29 63 98 3	1

### Technical Data

Input Data	
Nominal input voltage $U_N$	
Permissible range	
Typical current consumption at $U_N$	
Voltage at input, start, and feedback circuit	
Typical response time (K1, K2) at $U_N$	
Typical release time (K1, K2) at $U_N$	
Simultaneity input 1/2	
Recovery time	
Output Data	
Contact version	
Contact material	
Maximum switching voltage	
Minimum switching voltage	
Limiting continuous current	
Maximum inrush current	
Minimum switching current	
Maximum shutdown power	
Minimum switching power	
Mechanical life	
Breaking capacity according to DIN EN 60947-5-1/VDE 0660 Part 20	Cycles: 360/h 3600/h
Short-circuit protection of the output circuits, external	

24 V AC/DC	
0.85 - 1.1 x $U_N$	
125 mA AC, 60 mA DC	
24 V DC, approximately	
50 ms	
20 ms	
< 0.5 s	
< 1 s	
2 enable current paths, 1 signaling current path	
Silver stannic oxide, gold-flashed (AgSnO <sub>2</sub> 0.2 μm Au)	
250 V AC/DC	
15 V AC/DC	
6 A (Form A contact/Form B contact)	
6 A	
25 mA	
Ohmic load	Inductive load
$\tau = 0$ ms	$\tau = 40$ ms
144 W	42 W
48 V DC	288 W
110 V DC	110 W
220 V DC	88 W
250 V AC	1500 VA
0.4 W	
10 <sup>7</sup> cycles, approximately	
24 V (DC 13) 4 A	
24 V (DC 13) 2.5 A	
6 A fast-blow	

**General Data**

Permissible ambient operating temperature	-20°C to +55°C (-4°F to +131°F)
Nominal operating mode	100% ED
Degree of protection	According to DIN EN 60529/VDE 0470 Part 1
- Housing	IP 40
- Connection terminal blocks	IP 20
- Mounting location	IP 54, minimum
Mounting position	Any
Mounting	Can be mounted without spacing
Air and creepance distances between circuits	According to DIN EN 50 178:1998-04, safe isolation, reinforced insulation
Impulse voltage withstand level	6 kV
Degree of pollution	2
Surge Voltage Category	III
Dimensions (W x H x D)	22.5 mm x 99 mm x 114.5 mm (0.886 x 3.898 x 4.508 in.)
Cable cross section	0.2 - 2.5 mm <sup>2</sup> (25 - 14 AWG)
Housing material	Polyamide PA, not reinforced

**Note:** When operating relay modules the operator must meet the requirements for emitted interference for electrical and electronic equipment (EN 50081-2) on the contact side and, if required, take appropriate measures.



### 3. Connection Notes and Safety Instructions

#### 3.1. Safety Instructions

- Please observe the safety regulations of electrical engineering and industrial safety and liability associations.
- Disregarding these safety regulations may result in death or serious damage to persons or property.
- Before working on the device, disconnect the power.
- Startup, mounting, modifications, and upgrades should only be carried out by a skilled electrical engineer.
- Protective covers must not be removed when operating electrical switching devices.
- During operation, parts of electrical switching devices carry hazardous voltages.
- Keep the instruction sheet in a safe place.
- In the event of an error, replace the device immediately.


#### 3.2. Connection Notes

To maintain the UL, use copper cables, which are designed for operating temperatures of 75°C (167°F). For reliable and safe contacts, strip the connector ends accordingly.

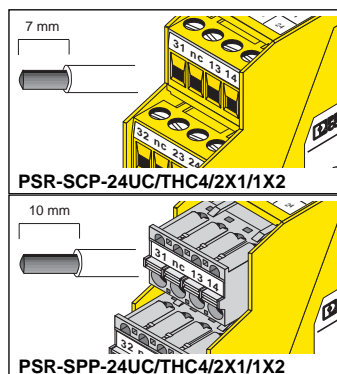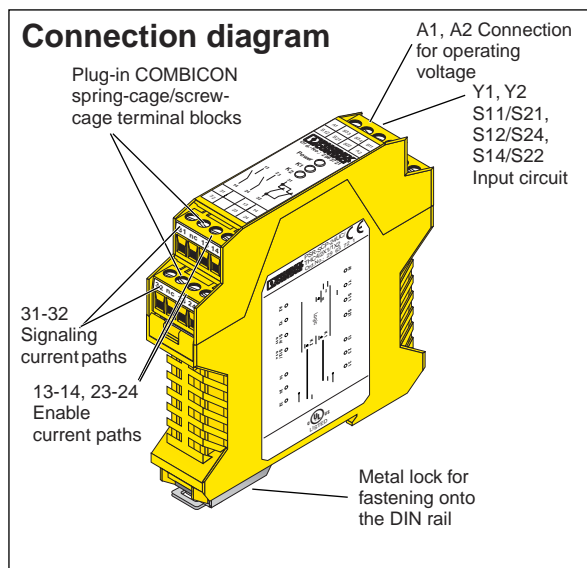


## 4. Connection Examples


Two-hand control system with equality monitoring < 0.5 s, corresponds to EN 574 Type IIIC, suitable for up to Safety Category 4.

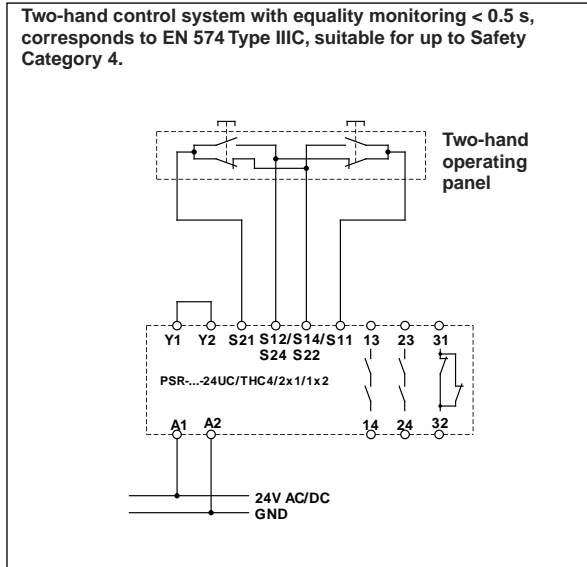

Monitoring of controlling isolating safety devices according to EN 1088 with equality monitoring < 0.5 s, suitable for up to Safety Category 4.

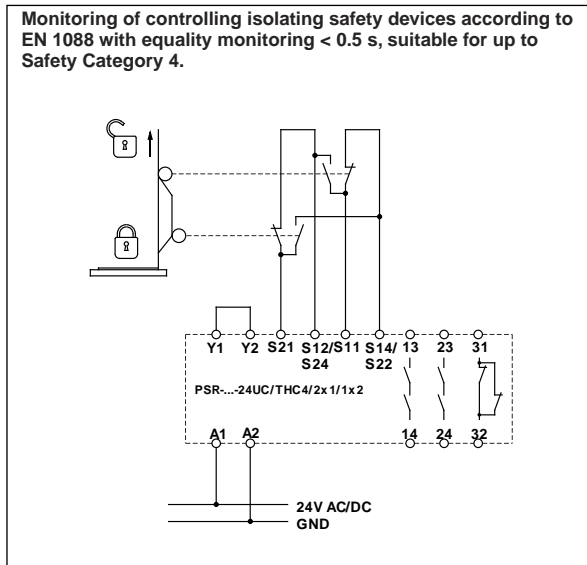

Two-hand control system with equality monitoring < 0.5 s and monitored contact expansion, corresponds to EN 574 Type IIIC, suitable for up to Safety Category 4.

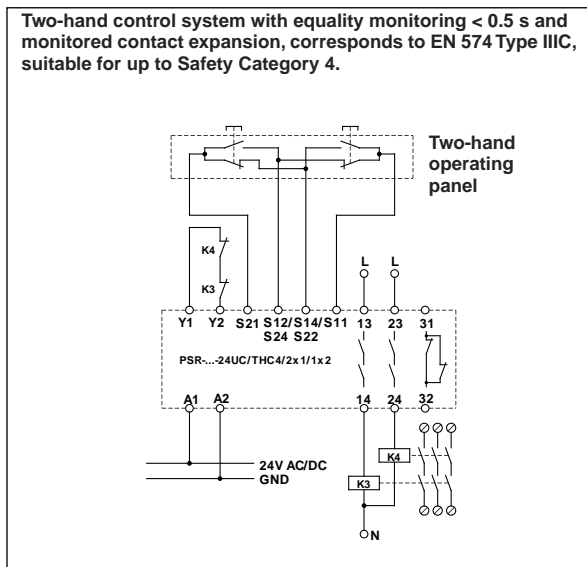



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.