

# PXI/DAQ/DAQe-2000 Series

4-CH 14/16-Bit Up to 2 MS/s Simultaneous-Sampling Multi-Function DAQ Cards



## Introduction

ADLINK's PXI/DAQ/DAQe-2000 series of products are simultaneous-sampling multi-function DAQ cards to meet a wide range of application requirements. The devices can simultaneously sample 4 AI channels with differential input configurations in order to achieve maximum noise elimination. They also provide 2-CH 12-bit analog outputs with waveform generation capability, which can be performed together with analog input functions. If more analog input or output channels are required, multiple cards can be synchronized through the SSI (System Synchronization Interface) bus. This makes the PXI/DAQ/DAQe-2000 series ideal for stimulus/response testing.

The PXI/DAQ/DAQe-2000 series also features analog and digital triggering, 24-CH programmable digital I/O lines, and 2-CH 16-bit general-purpose timer/counter. The auto-calibration functions adjust the gain and offset to within specified accuracies such that you do not have to adjust trimpots to calibrate the cards.

## Features

- Supports a 32-bit 3.3 V or 5 V PCI bus (DAQ-2000 series)
- x1 lane PCI Express® Interface (DAQe-2000 series)
- PXI specification Rev. 2.2 compliant (PXI-2000 series)
- 4-CH differential analog inputs
- Bipolar or unipolar analog input ranges
- Programmable gains of x1, x2, x4, x8
- Scatter-gather DMA for both analog inputs and outputs
- 2-CH 12-bit multiplying analog outputs with waveform generation
- 24-CH TTL digital input/output
- 2-CH 16-bit general-purpose timer/counter
- Analog and digital triggering
- Fully auto calibration
- Multiple cards synchronization through SSI (System Synchronization Interface) bus or PXI trigger bus

### Operating Systems

- Windows 7/Vista/XP/2000/2003 Server
- Linux

### Recommended Software

- AD-Logger
- VB.NET/VC.NET/VB/VB++/BCB/Delphi
- DAQBench

### Driver Support

- DAQPilot for LabVIEW™
- DAQ-MTLB for MATLAB®
- D2K-DASK for Windows
- D2K-DASK/X for Linux

## Terminal Boards & Cables

### DIN-68S-01

Terminal Board with One 68-pin SCSI-II Connector and DIN-Rail Mounting (Cables are not included.)

### ACL-10568-1

68-pin SCSI-VHDCI cable (mating with AMP-787082-7), 1 M


\* For more information on mating cables, please refer to P2-61/62.



## SSI Bus Cables (for multiple cards synchronization)

### ACL-SSI-2/3/4

SSI Bus cable for two, three, and four devices

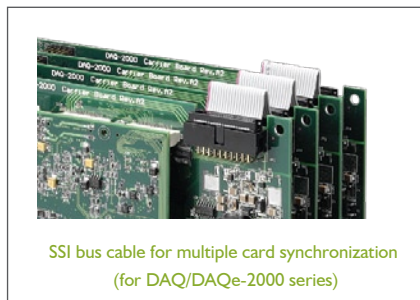

## Pin Assignment

### Connector Pin Assignment

CH0+	1	35	CH0-
CH1+	2	36	CH1-
CH2+	3	37	CH2-
CH3+	4	38	CH3-
EXTATRIG	5	39	AIGND
DA1OUT	6	40	AOGND
DA0OUT	7	41	AOGND
AOEXTREF	8	42	AOGND
SDI3_1 / NC*	9	43	SDI3_0 / NC*
SDI2_1 / NC*	10	44	SDI2_0 / NC*
SDI1_1 / NC*	11	45	SDI1_0 / NC*
SDI0_1 / NC*	12	46	SDI0_0 / NC*
AO_TRIG_OUT	13	47	EXTWFTRG
AI_TRIG_OUT	14	48	EXTDTRIG
GPTC1_SRC	15	49	DGND
GPTC0_SRC	16	50	DGND
GPTC0_GATE	17	51	GPTC1_GATE
GPTC0_OUT	18	52	GPTC1_OUT
GPTC0_UPDOWN	19	53	GPTC1_UPDOWN
EXTTIMEBASE	20	54	DGND
AF11	21	55	AF10
PB7	22	56	PB6
PB5	23	57	PB4
PB3	24	58	PB2
PB1	25	59	PB0
PC7	26	60	PC6
PC5	27	61	PC4
DGND	28	62	DGND
PC3	29	63	PC2
PC1	30	64	PC0
PA7	31	65	PA6
PA5	32	66	PA4
PA3	33	67	PA2
PA1	34	68	PA0

\*Pin 9-12 and pin 43-46 are SDI<0..3>\_n for 2010; NC for 2005, and 2006

## Ordering Information / Quick Selection Guide

Model Name	Analog Input				Analog Output			DIO	Timer/Counter
	No. of channels	Resolution	Sampling rate	Input range	No. of channels	Resolution	Update rate	No. of channels	No. of channels
PXI/DAQ/DAQe-2010	4-CH DI	14 bits	2 MS/s	±1.25 V to ±10 V	2	12 bits	1 MS/s	24-CH 8255 PIO	2-CH, 16-bit
PXI/DAQ/DAQe-2005	4-CH DI	16 bits	500 kS/s	±1.25 V to ±10 V	2	12 bits	1 MS/s	24-CH 8255 PIO	2-CH, 16-bit
PXI/DAQ/DAQe-2006	4-CH DI	16 bits	250 kS/s	±1.25 V to ±10 V	2	12 bits	1 MS/s	24-CH 8255 PIO	2-CH, 16-bit

## Specifications

Model Name	PXI/DAQ/DAQe-2010	PXI/DAQ/DAQe-2005	PXI/DAQ/DAQe-2006
<b>Analog Input</b>			
Resolution	14 bits	16 bits, no missing codes	16 bits, no missing codes
Number of channels	4 simultaneous-sampling channels with differential input		
Maximum sampling rate	2 MS/s	500 kS/s	250 kS/s
Programmable gain	1, 2, 4, 8		
Bipolar input ranges	±10 V, ±5 V, ±2.5 V, ±1.25 V		
Unipolar input ranges	0-10 V, 0-5 V, 0-2.5 V, 0-1.25 V		
Offset error	±3 mV	2 mV	±1 mV
Gain error	±0.1% of FSR	±0.04% of FSR	±0.03% of FSR
Input Coupling	DC		
Overvoltage protection	Power on: Continuous ±35 V, Power off: Continuous ±15 V		
Input Impedance	1 GΩ/100 pF		
CMRR (gain = 1)	85 dB		
-3 dB small signal bandwidth (gain = 1)	1 MHz	1 MHz	600 kHz
Trigger sources	Software, external digital/analog trigger, SSI bus		
Trigger modes	Pre-trigger, post-trigger, middle-trigger, delay-trigger, and repeated trigger		
FIFO buffer size	8 k samples	512 samples	512 samples
Data transfers	Polling, scatter-gather DMA		
<b>Analog Output</b>			
Number of channels	2 voltage outputs		
Resolution	12 bits		
Output ranges	0-10 V, ±10 V, 0-AOEXTREF, ±AOEXTREF		
Maximum update rate	1 μs		
Slew rate	20 V/μs		
Settling time	3 μs to ±0.5 LSB accuracy		
Offset error	±3mV	±1mV	±1mV
Gain error	±0.05% of max. output	±0.04% of max. output	±0.04% of max. output
Driving capacity	5 mA		
Stability	Any passive load, up to 1500 pF		
Trigger sources	Software, external digital/analog trigger, SSI bus		
Trigger modes	Post-trigger, delay-trigger, and repeated trigger		
FIFO buffer size	2 k samples		
Data transfers	Programmed I/O, scatter-gather DMA		
<b>Digital I/O</b>			
Number of channels	8255 24-bit programmable input/output		
Compatibility	5 V/TTL		
Data transfers	Programmed I/O		
<b>Timer/Counter</b>			
Number of channels	2		
Resolution	16 bits		
Compatibility	5 V/TTL		
Base clock available	40 MHz, external clock up to 10 MHz		
<b>Auto Calibration</b>			
Onboard reference	+5 V		
Temperature drift	±2 ppm/°C		
Stability	6 ppm/1000 Hrs		
<b>General Specifications</b>			
Dimensions	160 mm x 100 mm (not including connectors) (PXI-2000 series) 175 mm x 107 mm (not including connectors) (DAQ-2000 series) 168 mm x 107 mm (not including connectors) (DAQe-2000 series)		
Connector	68-pin VHDCI-type female		
Operating temperature	0 to 55°C		
Storage temperature	-20 to 70°C		
Humidity	5 to 95%, non-condensing		
Power requirements	+5 V 1.82 A typical (PXI/DAQ-2010) +3.3 V 1.246 A, +12 V 0.448 A typical (DAQe-2010)	+5 V 2.04 A typical (PXI/DAQ-2005) +3.3 V 1.03 A, +12 V 0.75 A typical (DAQe-2005)	+5 V 1.82 A typical (DAQ-2006) +3.3 V 1.02 A, +12 V 0.67 A typical (DAQe-2006)



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.