



**CONNECTORS  
(HIGH VOLTAGE,  
HIGH CURRENT,  
HYBRIDE)**

**STECKVER-  
BINDUNGEN  
(HOCH-  
SPANNUNG,  
HOCHSTROM,  
GEMISCHT)**



 **LEMO®**

# STECKVERBINDUNGEN | CONNECTORS

## INHALT | CONTENTS



|                                       |           |                                         |
|---------------------------------------|-----------|-----------------------------------------|
| <b>Bestellbeispiele</b>               | <b>3</b>  | <b>Part number examples</b>             |
| <b>Hochspannung</b>                   | <b>5</b>  | <b>High voltage</b>                     |
| Serie Y                               | 6-7       | Series Y                                |
| Serie 1Y.3Y                           | 8         | Series 1Y.3Y                            |
| Serie B                               | 9-10      | Series B                                |
| Serie 0S.1S                           | 11        | Series 0S.1S                            |
| Kontaktfiguration                     | 12-13     | Contactfiguration                       |
| Hochspannungskabel                    | 14        | High voltage cable                      |
| Konfektionierungsanleitung            | 15        | Assembling Instructions                 |
| <b>Technische Informationen</b>       | <b>16</b> | <b>Technical informations</b>           |
| <b>Hochspannungsfest</b>              | <b>17</b> | <b>High voltage firm</b>                |
| Serie S                               | 18-22     | Series S                                |
| Serie E                               | 23-25     | Series E                                |
| Kontaktfiguration                     | 26-27     | Contactfiguration                       |
| Konfektionierungsanleitung            | 28        | Assembling Instructions                 |
| <b>Einpolig Hochstrom</b>             | <b>29</b> | <b>Unipole high current</b>             |
| Serie S                               | 30-36     | Series S                                |
| Serie E                               | 36-39     | Series E                                |
| Kontaktfiguration                     | 40        | Contactfiguration                       |
| Konfektionierungsanleitung            | 41        | Assembling instructions                 |
| <b>Gemischt / Mehrpolig Hochstrom</b> | <b>43</b> | <b>Hybride / Multipole high current</b> |
| Serie S                               | 44-48     | Series S                                |
| Serie E                               | 48-51     | Series E                                |
| Serie B                               | 51/52     | Series B                                |
| Serie K                               | 53/54     | Series K                                |
| Kontaktfiguration                     | 55-58     | Contactfiguration                       |
| PVC-isolierte Kabel                   | 59        | PVC-insulated Cables                    |
| Konfektionierungsanleitung            | 60        | Assembling Instructions                 |
| <b>Materialien</b>                    | <b>61</b> | <b>Materials</b>                        |
| Serie Y                               | 61        | Series Y                                |
| Serie B+K                             | 62        | Series B+K                              |
| Serie S+E                             | 63        | Series S+E                              |
| <b>Spannzangen</b>                    | <b>64</b> | <b>Collets</b>                          |
| Serie Y                               | 64        | Series Y                                |
| Serie B                               | 65-66     | Series B                                |
| Serie K                               | 66-69     | Series K                                |
| Serie S                               | 70-76     | Series S                                |
| Serie E                               | 77-79     | Series E                                |
| <b>Zubehör</b>                        | <b>80</b> | <b>Accessories</b>                      |
| Knickschutztüllen                     | 80-81     | Bend Relief                             |
| Schutztüllen                          | 82        | Overall Bend Relief                     |



## BESTELLBEISPIELE | PART NUMBER EXAMPLES

### Straight plug




FFA.1Y.405.CLAC32 = straight plug with cable collet, 1Y series, high voltage 5kV, outer shell in chrome plated brass, PEEK insulator, 1 male solder contact, C type collet for a 3,2 mm diameter cable.

### Fixed socket



ERA.1Y.405.CTL = fixed socket, nut fixing, 1Y series, high voltage 5kV, outer shell in chrome plated brass, PTFE insulator, 1 female solder contact.

### Fixed coupler

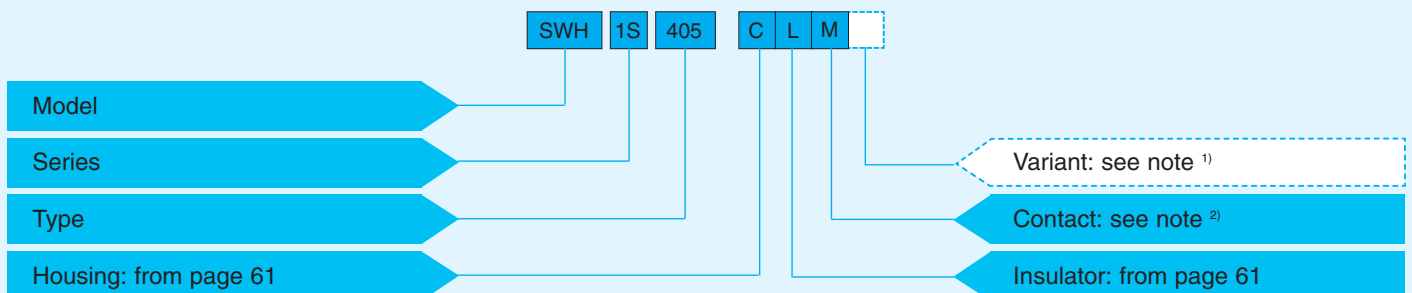

SWH.1S.405 = straight coupler, nut fixing, 1S series, high voltage firm, outer shell in chrome plated brass, PEEK insulator, 1 female contacts each end.

**Note:**  
<sup>1)</sup> the „Variant“ position in the reference is used to specify either the presence of a collet nut for fitting the bend relief or the anodized colour of the housing in aluminium alloy.  
 For models with collet nut for fitting the bend relief, a „Z“ should be indicated and a bend relief can be ordered separately as indicated in the „Accessories“ section. An order for a connector with bend relief should thus include two part numbers.  
 For the various housings available in colours, the corresponding letter in the part number for the colour see Unipole/Multipole catalogue.  
 For the watertight models of socket, the letter „P“ is used; for the vacuumtight models of socket the letters „PV“ shall be indicated.  
 For the plug and socket that should be fitted with an FPM O-ring the letter „H“ shall be indicated.  
<sup>2)</sup> Variants see Unipole/Multipole catalogue.

**Steckverbindungen**  
**Connectors**  
**Kontaktfiguration**  
**Contactfiguration**  
**Kabel**  
**Cable**  
**Konfektionierungsanleitung**  
**Assembling Instructions**



**HOCHSPANNUNG**  
**HIGH VOLTAGE**

# HOCHSPANNUNG | HIGH VOLTAGE

## BAUFORM Y-SERIE | MODEL Y-SERIES



### FFA Straight plug with cable collet



| Reference |        |       | Dimensions L (mm) |                |
|-----------|--------|-------|-------------------|----------------|
| Model     | Series | Type  | male contact      | female contact |
| FFA       | 1Y     | 405 ✓ | 54                | 66             |
| FFA       | 1Y     | 410 ✓ | 63                | 83             |



### ERA Fixed socket, nut fixing

| Reference |        |       | Dimensions L (mm) |                |
|-----------|--------|-------|-------------------|----------------|
| Model     | Series | Type  | male contact      | female contact |
| ERA       | 1Y     | 405 ✓ | 61                | 51             |
| ERA       | 1Y     | 410 ✓ | 79                | 69             |



### PSA Fixed socket, nut fixing, with cable collet

| Reference |        |       | Dimensions L (mm) |                |
|-----------|--------|-------|-------------------|----------------|
| Model     | Series | Type  | male contact      | female contact |
| PSA       | 1Y     | 405 ✓ | 71                | 74             |
| PSA       | 1Y     | 410 ✓ | 81                | 93             |



### FFA Straight plug with cable collet

| Reference |        |       | Dimensions L (mm) |                |
|-----------|--------|-------|-------------------|----------------|
| Model     | Series | Type  | male contact      | female contact |
| FFA       | 3Y     | 415 ✓ | 96                | 105            |
| FFA       | 3Y     | 430 ✓ | 113               | 198            |



Part number example see page 3



## HOCHSPANNUNG | HIGH VOLTAGE BAUFORM Y-SERIE | MODEL Y-SERIES

### ERA Fixed socket, nut fixing

| Reference |        |       | Dimensions L (mm) |                |
|-----------|--------|-------|-------------------|----------------|
| Model     | Series | Type  | male contact      | female contact |
| ERA       | 3Y     | 415 ✓ | 77                | 109            |
| ERA       | 3Y     | 430 ✓ | 108               | 150            |



### ERA.3Y.260.CZZ Microswitch for fitting onto fixed socket



### PSA Fixed socket, nut fixing, with cable collet

| Reference |        |       | Dimensions L (mm) |                |
|-----------|--------|-------|-------------------|----------------|
| Model     | Series | Type  | male contact      | female contact |
| PSA       | 3Y     | 430 ✓ | -                 | 146            |



### FFB.6Y Straight plug with cable collet and safety nut

50 kV Version, technische Daten auf Anfrage.  
50 kV version, technical informations on request.



### ERA.6Y Fixed socket, nut fixing

50 kV Version, technische Daten auf Anfrage.  
50 kV version, technical informations on request.



# HOCHSPANNUNG | HIGH VOLTAGE

## BAUFORM 1Y.3Y-SERIE | MODEL 1Y.3Y-SERIES



**FFR** Straight plug for cable crimping,  
with bend relief and safety ring

| Reference |        |
|-----------|--------|
| Model     | Series |
| FFR       | 1Y ✓   |
| FFR       | 3Y ✓   |


| Dimensions (mm) |     |    |    |
|-----------------|-----|----|----|
| A               | L   | M  | S2 |
| 13              | 83  | 65 | 9  |
| 19              | 114 | 84 | 15 |



**ERA** Fixed socket, nut fixing

| Reference |        |
|-----------|--------|
| Model     | Series |
| ERA       | 1Y ✓   |
| ERA       | 3Y ✓   |


| Dimensions (mm) |      |         |    |    |     |      |    |
|-----------------|------|---------|----|----|-----|------|----|
| A               | B    | e       | E  | L  | M   | S1   | S3 |
| 20              | 22.0 | M16x1.0 | 8  | 34 | 4.5 | 14.5 | 19 |
| 31              | 34.5 | M24x1.0 | 12 | 50 | 6.5 | 22.5 | 30 |



**PEP** Fixed socket, nut fixing, with cable collet nut  
(back panel mounting)

| Reference |        |
|-----------|--------|
| Model     | Series |
| PEP       | 3Y ✓   |

| Dimensions (mm) |    |         |    |    |    |     |    |      |    |    |    |
|-----------------|----|---------|----|----|----|-----|----|------|----|----|----|
| A               | B  | e       | E  | H  | L  | M   | N  | S1   | S2 | S3 | S4 |
| 35              | 31 | M24x1.0 | 13 | 24 | 86 | 3.5 | 62 | 22.5 | 20 | 30 | 20 |



**VCP** Fixed socket, nut fixing, with key, vacuumtight  
(back panel mounting)

| Reference |        |
|-----------|--------|
| Model     | Series |
| VCP       | 1Y     |
| VCP       | 3Y ✓   |

| Dimensions (mm) |      |         |    |    |     |    |    |    |  |
|-----------------|------|---------|----|----|-----|----|----|----|--|
| A               | B    | e       | E  | L  | M   | N  | S2 | S3 |  |
| 20              | 22.0 | M16x1.0 | 8  | 42 | 3.0 | 24 | 9  | 19 |  |
| 31              | 34.5 | M24x1.0 | 12 | 60 | 3.5 | 36 | 15 | 30 |  |

**Note:** HGP (flange version)  
VPP (watertight version)



Part number example see page 3



## HOCHSPANNUNG | HIGH VOLTAGE BAUFORM B-SERIE | MODEL B-SERIES

### FCJ Straight plug with cable clamp and safety ring, keyway (J)

| Reference |        | Dimensions (mm) |    |     |    |    |    |
|-----------|--------|-----------------|----|-----|----|----|----|
| Model     | Series | A               | H  | L   | M  | S1 | S2 |
| FCJ       | 4B ✓   | 25              | 24 | 77  | 59 | 21 | 20 |
| FCJ       | 5B ✓   | 35              | 34 | 107 | 82 | 31 | 30 |



### EGJ Fixed socket, nut fixing, with keyway (J)

| Reference |        | Dimensions (mm) |    |         |      |    |     |      |
|-----------|--------|-----------------|----|---------|------|----|-----|------|
| Model     | Series | A               | B  | e       | E    | L  | M   | S1   |
| EGJ       | 4B ✓   | 28              | 32 | M25x1.0 | 12.5 | 38 | 2.5 | 23.5 |
| EGJ       | 5B ✓   | 40              | 40 | M35x1.0 | 11.0 | 43 | 3.0 | 33.5 |



### ECJ Fixed socket, with two nuts and keyway (J) (back panel mounting)

| Reference |        | Dimensions (mm) |    |         |      |    |     |      |    |
|-----------|--------|-----------------|----|---------|------|----|-----|------|----|
| Model     | Series | A               | B  | e       | E    | L  | M   | S1   | S4 |
| ECJ       | 4B ✓   | 30              | 32 | M25x1.0 | 10.5 | 38 | 4.5 | 23.5 | 27 |
| ECJ       | 5B     | 41              | 40 | M35x1.0 | 9.0  | 43 | 5.0 | 33.5 | 37 |



### PFJ Fixed socket, with two nuts cable clamp and keyway (J) (back panel mounting)

| Reference |        | Dimensions (mm) |    |         |      |    |     |     |      |    |    |
|-----------|--------|-----------------|----|---------|------|----|-----|-----|------|----|----|
| Model     | Series | A               | B  | e       | E    | H  | L   | M   | S1   | S2 | S4 |
| PFJ       | 4B ✓   | 30              | 32 | M25x1.0 | 10.5 | 24 | 75  | 4.5 | 23.5 | 20 | 27 |
| PFJ       | 5B ✓   | 41              | 40 | M35x1.0 | 9.0  | 34 | 103 | 5.0 | 33.5 | 30 | 37 |



# HOCHSPANNUNG | HIGH VOLTAGE

## BAUFORM B-SERIE | MODEL B-SERIES



### PHJ Free socket with cable clamp and keyway (J)



| Reference |        |
|-----------|--------|
| Model     | Series |
| PHJ       | 4B ✓   |
| PHJ       | 5B ✓   |

| Dimensions (mm) |    |     |    |    |
|-----------------|----|-----|----|----|
| A               | H  | L   | S1 | S2 |
| 24.4            | 24 | 75  | 21 | 20 |
| 34.2            | 34 | 103 | 31 | 31 |

### VEJ Fixed socket, nut fixing, with keyway (J) vacuumtight (back panel mounting)



| Reference |        |
|-----------|--------|
| Model     | Series |
| VEJ       | 4B ✓   |
| VEJ       | 5B     |

| Dimensions (mm) |    |    |    |       |       |    |     |      |      |    |
|-----------------|----|----|----|-------|-------|----|-----|------|------|----|
| A               | B  | C  | E  | e     | e1    | L  | M   | N    | S1   | S3 |
| 32              | 32 | 25 | 13 | M25x1 | M22x1 | 58 | 3.5 | 34.5 | 23.5 | 30 |
| 40              | 45 | 34 | 13 | M35x1 | M30x1 | 73 | 5.0 | 42.0 | 33.5 | -  |

### VPJ Fixed socket, nut fixing, with cable clamp and keyway (J) vacuumtight (back panel mounting)



| Reference |        |
|-----------|--------|
| Model     | Series |
| VPJ       | 4B ✓   |
| VPJ       | 5B     |

| Dimensions (mm) |    |    |    |       |    |     |     |      |      |    |    |
|-----------------|----|----|----|-------|----|-----|-----|------|------|----|----|
| A               | B  | C  | E  | e     | H  | L   | M   | N    | S1   | S2 | S4 |
| 32              | 32 | 25 | 13 | M25x1 | 24 | 91  | 3.5 | 67.5 | 23.5 | 20 | 21 |
| 40              | 45 | 34 | 13 | M35x1 | 34 | 112 | 5.0 | 81.0 | 33.5 | 30 | 31 |

## BAUFORM 0S.1S-SERIE | MODEL 0S.1S-SERIES

### FFR Straight plug for cable crimping with safety ring



| Reference |        |
|-----------|--------|
| Model     | Series |
| FFR       | 0S ✓   |
| FFR       | 1S ✓   |

| Dimensions (mm) |    |    |     |
|-----------------|----|----|-----|
| A               | L  | M  | S1  |
| 9               | 42 | 32 | 6.5 |
| 12              | 53 | 42 | 8.5 |



Part number example see page 3




# HOCHSPANNUNG | HIGH VOLTAGE

## BAUFORM 0S.1S-SERIE | MODEL 0S.1S-SERIES


### ERA Fixed socket, nut fixing

| Reference |        | Dimensions (mm) |      |         |   |    |     |      |    |
|-----------|--------|-----------------|------|---------|---|----|-----|------|----|
| Model     | Series | A               | B    | e       | E | L  | M   | S1   | S3 |
| ERA       | 0S ✓   | 10              | 12.5 | M9x0.6  | 7 | 25 | 1.2 | 8.2  | 11 |
| ERA       | 1S ✓   | 14              | 16.0 | M12x1.0 | 7 | 30 | 1.5 | 10.5 | 14 |




### PCS Free socket for cable crimping

| Reference |        | Dimensions (mm) |    |     |
|-----------|--------|-----------------|----|-----|
| Model     | Series | A               | L  | S1  |
| PCS       | 0S ✓   | 9               | 38 | 6.5 |
| PCS       | 1S ✓   | 12              | 52 | 8.5 |




### PSS Fixed socket for cable crimping, nut fixing

| Reference |        | Dimensions (mm) |      |         |   |    |     |      |     |    |
|-----------|--------|-----------------|------|---------|---|----|-----|------|-----|----|
| Model     | Series | A               | B    | e       | E | L  | M   | S1   | S2  | S3 |
| PSS       | 0S ✓   | 10              | 12.5 | M9x0.6  | 7 | 38 | 1.2 | 8.2  | 6.5 | 11 |
| PSS       | 1S ✓   | 14              | 16.0 | M12x1.0 | 7 | 52 | 1.5 | 10.5 | 8.5 | 14 |



### EWB Fixed socket, nut fixing, vacuumtight

| Reference |        | Dimensions (mm) |      |         |    |    |     |    |    |
|-----------|--------|-----------------|------|---------|----|----|-----|----|----|
| Model     | Series | A               | B    | e       | E  | L  | M   | S3 | S4 |
| EWB       | 0S ✓   | 13              | 12.5 | M9x0.6  | 10 | 34 | 3.5 | 9  | 11 |
| EWB       | 1S ✓   | 18              | 16.0 | M12x1.0 | 10 | 40 | 4.0 | 11 | 14 |



# HOCHSPANNUNG | HIGH VOLTAGE

## KONTAKTFIGURATION SERIE Y | CONTACTFIGURATION SERIES Y



| Soldersided seen                                                                 |                                                                                   | Order-No. | Size | Number of contacts | Contact-ø | Dielectric-ø max. | Conductor-ø max. | Supply voltage <sup>2</sup><br>(kV ~) DC | Supply voltage <sup>2</sup><br>(kV ~) AC | Test voltage <sup>3</sup><br>(kV ~) DC | Test voltage <sup>3</sup><br>(kV ~) AC | Rated current <sup>4</sup> |
|----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------|------|--------------------|-----------|-------------------|------------------|------------------------------------------|------------------------------------------|----------------------------------------|----------------------------------------|----------------------------|
| Male contact                                                                     | Female contact                                                                    |           |      |                    |           |                   |                  |                                          |                                          |                                        |                                        |                            |
|  |  | 405       | 1    | 1                  | 1.3       | 3.2               | 1.15             | 7                                        | 5.0                                      | 10.5                                   | 7.5                                    | 8                          |
|  |  | 410       | 1    | 1                  | 1.3       | 3.2               | 1.15             | 10                                       | 7.0                                      | 15.0                                   | 10.5                                   | 8                          |
|  |  | 415       | 3    | 1                  | 4.5       | 7.3               | 2.45             | 15                                       | 10.5                                     | 22.5                                   | 16.0                                   | 15                         |
|  |  | 430       | 3    | 1                  | 4.5       | 7.3               | 2.45             | 30                                       | 21.0                                     | 45.0                                   | 32.0                                   | 15                         |
|  |  | 450       | 6    | 1                  | 7.0       | 23                | 6.6              | 50                                       | -                                        | 70                                     | -                                      | 25                         |

## BAUFORM 1Y.3Y-SERIE | MODEL 1Y.3Y-SERIES

| Soldersided seen                                                                   |                                                                                     | Order-No. | Size | Number of contacts | Contact-ø | Supply voltage <sup>1</sup><br>(kVrms) | Supply voltage <sup>1</sup><br>(kV dc) | Supply voltage <sup>2</sup><br>(kVrms) | Supply voltage <sup>2</sup><br>(kV dc) | Test voltage <sup>3</sup><br>(kVrms) | Test voltage <sup>3</sup><br>(kV dc) | Rated current <sup>4</sup> |
|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-----------|------|--------------------|-----------|----------------------------------------|----------------------------------------|----------------------------------------|----------------------------------------|--------------------------------------|--------------------------------------|----------------------------|
| Male contact                                                                       | Female contact                                                                      |           |      |                    |           |                                        |                                        |                                        |                                        |                                      |                                      |                            |
|  |  | 416       | 1    | 1                  | 0.9       | 11.2                                   | 16                                     | 16.0                                   | 23                                     | 25                                   | 35                                   | 6                          |
|  |  | 425       | 3    | 1                  | 1.6       | 17.5                                   | 25                                     | 24.5                                   | 35                                     | 37                                   | 52                                   | 8                          |

## BAUFORM 0S.1S-SERIE | MODEL 0S.1S-SERIES

|                                                                                    |                                                                                     |     |   |   |     |     |   |     |    |      |    |   |
|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-----|---|---|-----|-----|---|-----|----|------|----|---|
|  |  | 405 | 0 | 1 | 0.7 | 3.5 | 5 | 5.6 | 8  | 8.5  | 12 | 4 |
|  |  | 408 | 1 | 1 | 0.9 | 5.6 | 8 | 8.5 | 12 | 12.7 | 18 | 6 |



Part number example see page 3



## HOCHSPANNUNG | HIGH VOLTAGE

## KONTAKTFIGURATION SERIE B | CONTACTFIGURATION SERIES B

| Soldersided seen |                | Order-No. | Size |
|------------------|----------------|-----------|------|
| Male contact     | Female contact |           |      |
|                  |                | 460       | 4    |
|                  |                | 464       | 4    |
|                  |                | 467       | 4    |
|                  |                | 474       | 5    |
|                  |                | 481       | 5    |

| Number of contacts | Contact-ø | Supply voltage <sup>1</sup><br>(kV rms) | Supply voltage <sup>1</sup><br>(kV dc) | Supply voltage <sup>2</sup><br>(kV rms) | Supply voltage <sup>2</sup><br>(kV dc) | Test voltage <sup>3</sup><br>(kV rms) | Test voltage <sup>3</sup><br>(kV dc) | Rated current <sup>4</sup> |
|--------------------|-----------|-----------------------------------------|----------------------------------------|-----------------------------------------|----------------------------------------|---------------------------------------|--------------------------------------|----------------------------|
|                    | mm        | kV                                      | kV                                     | kV                                      | kV                                     | kV                                    | kV                                   | A                          |
| 10                 | 0.9       | 3.5                                     | 5                                      | 5.6                                     | 8                                      | 8.5                                   | 12                                   | 3                          |
| 4                  | 0.9       | 5.6                                     | 8                                      | 8.5                                     | 12                                     | 12.7                                  | 18                                   | 4                          |
| 7                  | 0.9       | 5.6                                     | 8                                      | 8.5                                     | 12                                     | 12.7                                  | 18                                   | 4                          |
| 14                 | 0.9       | 5.6                                     | 8                                      | 8.5                                     | 12                                     | 12.7                                  | 18                                   | 4                          |
| 21                 | 0.9       | 5.6                                     | 8                                      | 8.5                                     | 12                                     | 12.7                                  | 18                                   | 4                          |

### Test norms:

<sup>1</sup> IEC 130.1 §14.5 a)  $U_s = \frac{U_e - 1.5}{2}$

<sup>2</sup> IEC 130.1 §14.5 b)  $U_s = \frac{U_e}{1.5}$

<sup>3</sup> MIL

<sup>4</sup> IEC 512-3

# HOCHSPANNUNG | HIGH VOLTAGE

## HOCHSPANNUNGSKABEL | HIGH VOLTAGE CABLE



Special LEMO-HV-cables with small outer diameters matching exactly our LEMO-HV-connectors

|                                                                                  | Lead Time |      | Suitable Size | Price | Order-No. |
|----------------------------------------------------------------------------------|-----------|------|---------------|-------|-----------|
|                                                                                  | Stk.      | Req. |               |       |           |
|  | x         | -    | 0-2           | 0.41  | 140 470   |

| Conductor resistance | Insulation resistance | Operating Voltage $U_{max}$ | Testing Voltage $U_{max}$ | Temperature range |     | Inner conductor |         |      | Insulation |      | Outer sheath |          |
|----------------------|-----------------------|-----------------------------|---------------------------|-------------------|-----|-----------------|---------|------|------------|------|--------------|----------|
|                      |                       |                             |                           | from              | to  | Mat.            | Struct. | Ø    | Mat.       | Ø    | Mat.         | Ø (±0,2) |
| Ω/km                 | MΩ/km                 | kV dc                       | kV dc                     | °C                | °C  |                 |         | mm   |            | mm   |              | mm       |
| 50.0                 | 104                   | 3                           | 5                         | -15               | +70 | Cu Sn           | 7x0.25  | 0.75 | PE wt      | 2.05 | PVC          | 3.0      |

|                                                                                    | Lead Time |      | Suitable Size | Price | Order-No.            |
|------------------------------------------------------------------------------------|-----------|------|---------------|-------|----------------------|
|                                                                                    | Stk.      | Req. |               |       |                      |
|  | x         | -    | 0-2           | 1.00  | 150 470              |
|  | x         | -    | 1-3           | 0.87  | 106 330              |
|  | x         | -    | 3-5           | 1.72  | 315 650              |
|  | x         | -    | 1-4           | 1.52  | 130 660              |
|  | -         | x    | 1-4           | 2.22  | 130666 <sup>1</sup>  |
|  | x         | -    | 2-4           | 7.54  | 201 340 <sup>1</sup> |

| Capacitance | Conductor resistance | Insulation resistance | Operating Voltage $U_{max}$ | Testing Voltage $U_{max}$ | Temperature range |      | Inner conductor |         |      | Insulation |      | Screen |      | Outer sheath |                 |
|-------------|----------------------|-----------------------|-----------------------------|---------------------------|-------------------|------|-----------------|---------|------|------------|------|--------|------|--------------|-----------------|
|             |                      |                       |                             |                           | from              | to   | Mat.            | Struct. | Ø    | Mat.       | Ø    | Mat.   | Ø    | Mat.         | Ø (±0,2)        |
| pF/m        | Ω/km                 | MΩ/km                 | kV dc                       | kV dc                     | °C                | °C   |                 |         | mm   |            | mm   |        | mm   |              | mm              |
| 83.1        | 38.2                 | 220                   | 3                           | 6                         | -5                | +70  | Cu bl           | 7x0.25  | 0.75 | PE nat     | 2.05 | Cu bl  | 2.4  | PVCrd        | 4.0             |
| 84.0        | 77.5                 | 5,000                 | 9                           | 18                        | -10               | +70  | Cu bl           | 14x0.15 | 0.60 | PE nat     | 2.80 | Cu bl  | 3.5  | PVCrd        | 4.6             |
| 85.0        | 15.0                 | 5,000                 | 18                          | 25                        | -10               | +70  | Cu blk          | -       | 1.50 | PE nat     | 6.50 | Cu bl  | 7.3  | PVCgr        | 8.8             |
| 82.7        | 55.8                 | 5,000                 | 30                          | 60                        | -25               | +90  | Cu Sn           | 7x0.25  | 0.75 | PErd       | 3.90 | Cu bl  | 4.4  | PVCrd        | 5.4 (+0.2/-0.0) |
| 82.7        | 55.8                 | 5,000                 | 30                          | 60                        | -25               | +90  | Cu Sn           | 7x0.25  | 0.75 | PErd       | 3.90 | Cu bl  | 4.4  | PVCrd        | 6±0,1           |
| -           | 56.1                 | 1,000                 | 50                          | 75                        | -20               | +105 | Cu Sn           | 7x0.25  | 0.75 | PE nat     | 3.15 | Cu Sn  | 5.45 | PVCrd        | 7.25            |

Note: <sup>1</sup> High voltage cable according to UL-style

<sup>1</sup> Hochspannungskabel gemäß UL-Ausführung



# HOCHSPANNUNG | HIGH VOLTAGE

## KONFEKTIONIERUNGSANLEITUNG | ASSEMBLING INSTRUCTIONS



| Reference |        |      | Unisolated length (mm) |    |    |
|-----------|--------|------|------------------------|----|----|
| Model     | Series | Type | A                      | B  | C  |
| FFA       | 1Y     | 405  | 8                      | 28 | 34 |
| FFA       | 1Y     | 405X | 8                      | 26 | 31 |
| PSA       | 1Y     | 405  | size on request        |    |    |
| PSA       | 1Y     | 405X | size on request        |    |    |
| FFA       | 1Y     | 410  | 8                      | 34 | 40 |
| FFA       | 1Y     | 410X | 8                      | 34 | 40 |
| PSA       | 1Y     | 410  | 8                      | 33 | 40 |
| PSA       | 1Y     | 410X | 8                      | 33 | 40 |
| FFA       | 3Y     | 415  | 15                     | 62 | 72 |
| FFA       | 3Y     | 415X | 7                      | 32 | 43 |
| PSA       | 3Y     | 415  | size on request        |    |    |
| PSA       | 3Y     | 415X | size on request        |    |    |
| FFA       | 3Y     | 430  | 14                     | 82 | 92 |
| FFA       | 3Y     | 430X | 12                     | 88 | 95 |
| PSA       | 3Y     | 430  | 8                      | 40 | 50 |
| PSA       | 3Y     | 430X | size on request        |    |    |



**Note:** The dimensions are standard values and may vary depending on the cable quality.

Die Abmessungen sind Richtwerte und können sich je nach Kabelqualität ändern.

# TECHNISCHE INFORMATIONEN | TECHNICAL INFORMATION

## SERIE Y | SERIES Y



|                                                                                                                                                                                             |                                                                                                                                                                                     |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Die Hochspannungsserie Y besitzt das LEMO Push-Pull Verriegelungssystem mit hohem Sicherheitsfaktor.                                                                                        | The high voltage Y-series with the LEMO Push-Pull Self Latching Connection System provides high security.                                                                           |
| <ul style="list-style-type: none"> <li>Stecker und Buchse sind mit männlichen oder weiblichen Kontakten lieferbar.</li> </ul>                                                               | <ul style="list-style-type: none"> <li>Plug and socket are available with male or female contacts.</li> </ul>                                                                       |
| <ul style="list-style-type: none"> <li>Die Luft- und Kriechstrecken sind nach DIN EN 61010 gewährleistet.</li> </ul>                                                                        | <ul style="list-style-type: none"> <li>The creepage distance and air clearance are guaranteed according to DIN EN 61010.</li> </ul>                                                 |
| <ul style="list-style-type: none"> <li>Einfache Kabelmontage.</li> </ul>                                                                                                                    | <ul style="list-style-type: none"> <li>Simple cable assembly.</li> </ul>                                                                                                            |
| <ul style="list-style-type: none"> <li>Die Serie Y ist für gepulste Spannungen geeignet, auf Wunsch führen wir einen Langzeittest exakt nach Ihren Spannungsverhältnissen durch.</li> </ul> | <ul style="list-style-type: none"> <li>The Y-series is appropriate for pulsed voltage, on request long-term tests are conducted exactly according to your voltage ratio.</li> </ul> |



### Fixed socket

- 1) outer shell
- 2) earthing crown
- 3) castellated ring
- 4) hexagonal nut
- 5) locking ring
- 6) insulator
- 7) female contact
- 8) sealing ring

### Straight plug

- 1) outer shell
- 2) inner shell
- 3) latch sleeve
- 4) collet nut
- 5) centre-piece
- 6) insulator
- 7) male contact
- 8) circlip
- 9) collet

### Electrical Datas

| Characteristic         | Units  | Series            |        |        |        |        | Standards     | Methode |
|------------------------|--------|-------------------|--------|--------|--------|--------|---------------|---------|
|                        |        | 1Y.405            | 1Y.410 | 3Y.415 | 3Y.430 | 6Y.450 |               |         |
| Operating Voltage      | kV dc  | 7                 | 10     | 15     | 30     | 50     | IEC 130.1     |         |
|                        | kV eff | 5                 | 7      | 10.5   | 21     | –      |               |         |
| Contact resistance     | mΩ     | <3                | <3     | <2     | <2     | <0.4   | MIL-STD-202   | 307     |
| Insulations resistance | Ω      | >10 <sup>12</sup> |        |        |        |        | MIL-STD-1344A | 3003.1  |

### Mechanical Datas and Temperature Informations

| Characteristic           | Units  | Series                    |      |      | Standards     | Methode |
|--------------------------|--------|---------------------------|------|------|---------------|---------|
|                          |        | 1Y                        | 3Y   | 6Y   |               |         |
| Contact-pullout strength | N      | <24                       | <60  | –    | MIL-STD-1344A | 2007.1  |
| Cable-tensile strength   | N      | <300                      | <550 | <800 | MIL-STD-1344A | 2009.1  |
| Mechanical Lifetime      | Cycles | <1000                     |      |      | MIL-STD-1344A | 2016    |
|                          | °C     | -55 +230 (-67 °F +446 °F) |      |      |               |         |

### Panel Cut out



| Series | Dimensions (mm) |      | Torque (Nm) |
|--------|-----------------|------|-------------|
|        | øA              | L    |             |
| 1Y     | 16.1            | 22.0 | 14          |
| 3Y     | 24.2            | 35.5 | 25          |
| 6Y     | 55.3            | 67.5 | 55          |

Zubehörteile und Werkzeuge siehe Unipole/Multipole Katalog.  
Accessories and Tools see Unipole/Multipole Catalogue.

1N = 0.102 Kg

**Steckverbindungen  
Connectors  
Kontaktfiguration  
Contactfiguration  
Konfektionierungsanleitung  
Assembling Instructions**



**HOCHSPANNUNGSFEST  
HIGH VOLTAGE FIRM**

# HOCHSPANNUNGSFEST | HIGH VOLTAGE FIRM

## BAUFORM S-SERIE | MODEL S-SERIES



### FFA Straight plug, cable collet



| Reference |        | Dimensions (mm) |       |      |      |
|-----------|--------|-----------------|-------|------|------|
| Model     | Series | A               | L     | M    | S2   |
| FFA       | 0S     | 9.0             | 34.5  | 24.5 | 6.5  |
| FFA       | 1S ✓   | 12.0            | 42.5  | 31.5 | 8.5  |
| FFA       | 2S     | 14.8            | 52.0  | 40.0 | 11.0 |
| FFA       | 3S ✓   | 17.8            | 61.0  | 46.0 | 14.0 |
| FFA       | 4S ✓   | 24.8            | 77.0  | 59.0 | 19.0 |
| FFA       | 5S ✓   | 35.1            | 103.0 | 78.0 | 29.0 |


### FFA Straight plug with oversize cable collet



| Reference |        | Dimensions (mm) |      |       |       |      |      |
|-----------|--------|-----------------|------|-------|-------|------|------|
| Model     | Series | A               | B    | L     | M     | S1   | S2   |
| FFA       | 0S ✓   | 9.0             | 10.0 | 45.5  | 35.5  | 9.0  | 8.5  |
| FFA       | 1S ✓   | 12.0            | 13.0 | 57.0  | 46.0  | 12.0 | 11.0 |
| FFA       | 2S ✓   | 14.8            | 18.0 | 67.0  | 55.0  | 14.0 | 14.0 |
| FFA       | 3S ✓   | 17.8            | 21.0 | 85.0  | 70.0  | 19.0 | 19.0 |
| FFA       | 4S ✓   | 24.8            | 31.8 | 107.0 | 89.0  | 28.5 | 29.0 |
| FFA       | 5S ✓   | 35.1            | 41.8 | 138.0 | 113.0 | 37.5 | 38.0 |

**Note:** the fitting of oversize collets onto this model allows them to be fitted to the cables that can be accommodated by the next housing size up

### FFA Straight plug, cable collet and nut for fitting a bend relief

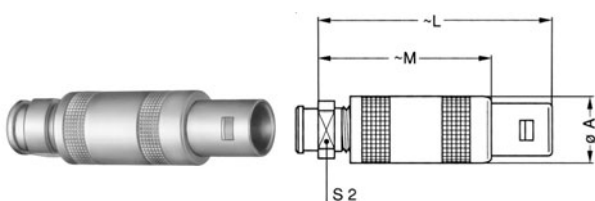


| Reference |        | Dimensions (mm) |      |      |    |
|-----------|--------|-----------------|------|------|----|
| Model     | Series | A               | L    | M    | S2 |
| FFA       | 0S ✓   | 9.0             | 34.5 | 24.5 | 7  |
| FFA       | 1S ✓   | 12.0            | 42.5 | 31.5 | 9  |
| FFA       | 2S ✓   | 14.8            | 52.0 | 40.0 | 12 |
| FFA       | 3S ✓   | 17.8            | 61.0 | 46.0 | 14 |
| FFA       | 4S ✓   | 24.8            | 77.0 | 59.0 | 20 |

**Note:** the bend relief must be ordered separately (see page 80)

### FFP Straight plug, cable collet and inner anti-rotating device



| Reference |        | Dimensions (mm) |      |      |      |
|-----------|--------|-----------------|------|------|------|
| Model     | Series | A               | L    | M    | S2   |
| FFP       | 0S     | 9.0             | 34.5 | 24.5 | 6.5  |
| FFP       | 1S     | 12.0            | 42.5 | 31.5 | 8.5  |
| FFP       | 2S     | 14.8            | 52.0 | 40.0 | 11.0 |
| FFP       | 3S ✓   | 17.8            | 61.0 | 46.0 | 14.0 |
| FFP       | 4S     | 24.8            | 77.0 | 59.0 | 19.0 |



Part number example see page 3




## HOCHSPANNUNGSFEST | HIGH VOLTAGE FIRM

### BAUFORM S-SERIE | MODEL S-SERIES


#### FFB Straight plug, cable collet and safety locking ring

| Reference |        | Dimensions (mm) |      |      |      |
|-----------|--------|-----------------|------|------|------|
| Model     | Series | A               | L    | M    | S2   |
| FFB       | 0S ✓   | 9.0             | 36.8 | 26.8 | 6.5  |
| FFB       | 1S ✓   | 12.0            | 45.0 | 34.0 | 8.5  |
| FFB       | 2S ✓   | 14.8            | 55.5 | 43.5 | 11.0 |
| FFB       | 3S ✓   | 17.8            | 65.0 | 50.0 | 14.0 |

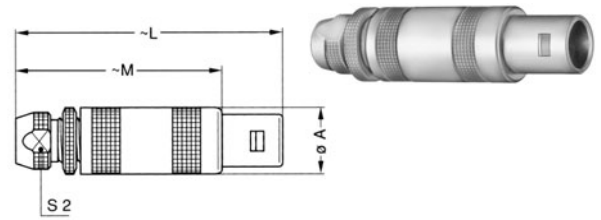

#### FFB Straight plug, cable collet and safety locking ring and nut for fitting a bend relief


| Reference |        | Dimensions (mm) |      |      |    |
|-----------|--------|-----------------|------|------|----|
| Model     | Series | A               | L    | M    | S2 |
| FFB       | 0S     | 9.0             | 36.8 | 26.8 | 7  |
| FFB       | 1S ✓   | 12.0            | 45.0 | 34.0 | 9  |
| FFB       | 2S     | 14.8            | 55.5 | 43.5 | 12 |
| FFB       | 3S     | 17.8            | 65.0 | 50.0 | 14 |

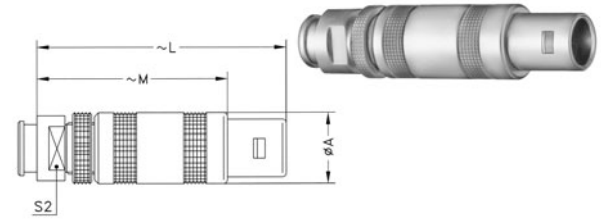

**Note:** series 0S, 2S and 3S are available on request  
the bend relief must be ordered separately (see page 80)


#### FZP Straight plug for remote handling, cable collet and inner anti-rotating device

| Reference |        | Dimensions (mm) |       |      |    |      |    |
|-----------|--------|-----------------|-------|------|----|------|----|
| Model     | Series | A               | L     | M    | N  | S2   | S3 |
| FZP       | 1S     | 16              | 42.5  | 31.5 | 15 | 8.5  | 12 |
| FZP       | 2S ✓   | 24              | 52.0  | 40.0 | 21 | 11.0 | 18 |
| FZP       | 3S ✓   | 24              | 61.0  | 46.0 | 24 | 14.0 | 18 |
| FZP       | 4S     | 35              | 77.0  | 59.0 | 30 | 19.0 | 28 |
| FZP       | 5S     | 43              | 103.0 | 78.0 | 44 | 29.0 | 35 |
| FZP       | 6S     | 60              | 106.0 | 81.0 | 44 | 38.0 | 50 |

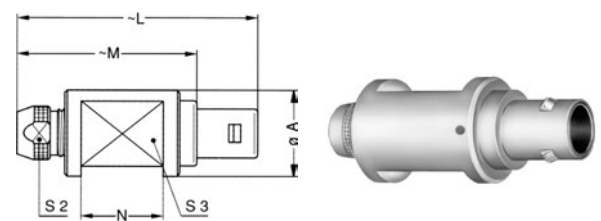

#### FAA Fixed plug non-latching, nut fixing

| Reference |        | Dimensions (mm) |      |         |     |      |      |      |      |    |
|-----------|--------|-----------------|------|---------|-----|------|------|------|------|----|
| Model     | Series | A               | B    | e       | E   | L    | L'   | M    | S1   | S3 |
| FAA       | 0S ✓   | 10              | 12.5 | M9x0.6  | 2.0 | 18.5 | 18.0 | 11.2 | 8.2  | 11 |
| FAA       | 1S ✓   | 14              | 16.0 | M12x1.0 | 2.5 | 22.5 | 21.7 | 12.5 | 10.5 | 14 |
| FAA       | 2S     | 18              | 19.5 | M15x1.0 | 4.0 | 25.0 | 25.3 | 13.8 | 13.5 | 17 |
| FAA       | 3S ✓   | 22              | 25.2 | M18x1.0 | 4.0 | 31.0 | 29.0 | 17.0 | 16.5 | 22 |
| FAA       | 4S     | 28              | 32.0 | M25x1.0 | 2.5 | 35.5 | 39.0 | 20.5 | 23.5 | 30 |
| FAA       | 5S     | 40              | 40.0 | M35x1.0 | 2.5 | 45.0 | -    | 28.0 | 33.5 | -  |

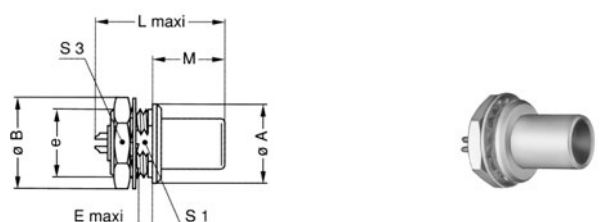

**Note:** <sup>1</sup> unipole model

# HOCHSPANNUNGSFEST | HIGH VOLTAGE FIRM

## BAUFORM S-SERIE | MODEL S-SERIES



### FLA Elbow (90°) plug, cable collet



| Reference |        | Dimensions (mm) |    |      |      |      |    |      |
|-----------|--------|-----------------|----|------|------|------|----|------|
| Model     | Series | A               | A1 | H    | L    | M    | S1 | S2   |
| FLA       | 0S ✓   | 13              | 13 | 24.5 | 23.0 | 13.0 | 8  | 6.5  |
| FLA       | 1S     | 16              | 16 | 28.5 | 26.5 | 15.5 | 10 | 8.5  |
| FLA       | 2S ✓   | 20              | 20 | 37.0 | 31.0 | 19.0 | 13 | 11.0 |
| FLA       | 3S ✓   | 21              | 21 | 44.0 | 38.5 | 23.5 | 15 | 14.0 |
| FLA       | 4S     | 28              | 28 | 56.0 | 49.0 | 31.0 | 20 | 19.0 |
| FLA       | 5S ✓   | -               | 37 | 76.5 | 65.0 | 40.0 | 30 | 29.0 |

**Note:** fig.1 is used for the unipole type. fig.2 is used for the multipole type

### ERA Fixed socket, nut fixing



| Reference |        | Dimensions (mm) |      |         |      |      |      |     |      |
|-----------|--------|-----------------|------|---------|------|------|------|-----|------|
| Model     | Series | A               | B    | e       | E    | L    | L'   | M   | S1   |
| ERA       | 0S ✓   | 10              | 12.5 | M9x0.6  | 7.0  | 17.5 | 18.5 | 1.2 | 8.2  |
| ERA       | 1S ✓   | 14              | 16.0 | M12x1.0 | 7.5  | 20.2 | 21.5 | 1.5 | 10.5 |
| ERA       | 2S ✓   | 18              | 19.5 | M15x1.0 | 8.5  | 24.5 | 26.0 | 1.8 | 13.5 |
| ERA       | 3S ✓   | 22              | 25.2 | M18x1.0 | 11.5 | 29.0 | 30.0 | 2.0 | 16.5 |
| ERA       | 4S ✓   | 28              | 32.0 | M25x1.0 | 12.0 | 34.0 | 36.0 | 2.5 | 23.5 |
| ERA       | 5S ✓   | 40              | 40.0 | M35x1.0 | 15.5 | 45.0 | 78.5 | 3.0 | 33.5 |

**Note:** the 5S series is delivered with a tapered washer and a round nut.  
' unipole model

### EHP Fixed socket, nut fixing, protruding shell



| Reference |        | Dimensions (mm) |      |         |     |      |      |      |     |
|-----------|--------|-----------------|------|---------|-----|------|------|------|-----|
| Model     | Series | A               | B    | e       | E   | L    | L'   | M    | S1  |
| EHP       | 0S ✓   | 10              | 12.5 | M9x0.6  | 2.5 | 17.5 | 18.5 | 12.5 | 8.2 |
| EHP       | 1S ✓   | 14              | 16.0 | M12x1.0 | 3.5 | 20.2 | 21.5 | 12.0 | -   |
| EHP       | 3S ✓   | 22              | 25.2 | M18x1.0 | 4.0 | 29.0 | 30.0 | 18.7 | -   |

**Note:** ' unipole model



Part number example see page 3



## HOCHSPANNUNGSFEST | HIGH VOLTAGE FIRM

### BAUFORM S-SERIE | MODEL S-SERIES

#### PCA Free socket, cable collet

| Reference |        | Dimensions (mm) |      |      |
|-----------|--------|-----------------|------|------|
| Model     | Series | A               | L    | S2   |
| PCA       | 0S ✓   | 8.9             | 33.5 | 6.5  |
| PCA       | 1S ✓   | 11.9            | 40.5 | 8.5  |
| PCA       | 2S ✓   | 14.8            | 50.0 | 11.0 |
| PCA       | 3S ✓   | 17.8            | 59.0 | 14.0 |
| PCA       | 4S ✓   | 24.8            | 75.0 | 19.0 |
| PCA       | 5S ✓   | 34.7            | 99.0 | 29.0 |



#### PCA Free socket with oversize cable collet

| Reference |        | Dimensions (mm) |      |       |      |      |
|-----------|--------|-----------------|------|-------|------|------|
| Model     | Series | A               | B    | L     | S1   | S2   |
| PCA       | 0S ✓   | 8.9             | 10.0 | 44.5  | 9.0  | 8.5  |
| PCA       | 1S ✓   | 11.9            | 13.0 | 55.0  | 12.0 | 11.0 |
| PCA       | 2S ✓   | 14.8            | 18.0 | 65.0  | 14.0 | 14.0 |
| PCA       | 3S ✓   | 17.8            | 21.0 | 83.0  | 19.0 | 19.0 |
| PCA       | 4S ✓   | 24.8            | 31.8 | 105.0 | 28.5 | 29.0 |



**Note:** the fitting of oversize collets onto this model allows it to be fitted to the cables that can be accommodated by the next housing size up.

#### PCA Free socket, cable collet and nut for fitting a bend relief

| Reference |        | Dimensions (mm) |      |      |
|-----------|--------|-----------------|------|------|
| Model     | Series | A               | L    | S2   |
| PCA       | 0S ✓   | 8.9             | 33.5 | 7.0  |
| PCA       | 1S ✓   | 11.9            | 40.5 | 9.0  |
| PCA       | 2S ✓   | 14.8            | 50.0 | 12.0 |
| PCA       | 3S ✓   | 17.8            | 59.0 | 14.0 |
| PCA       | 4S ✓   | 24.8            | 75.0 | 20.0 |



**Note:** the bend relief must be ordered separately (see page 80)

#### PCP Free socket, cable collet and inner anti-rotating device

| Reference |        | Dimensions (mm) |      |      |
|-----------|--------|-----------------|------|------|
| Model     | Series | A               | L    | S2   |
| PCP       | 0S ✓   | 8.9             | 33.5 | 6.5  |
| PCP       | 1S ✓   | 11.9            | 40.5 | 8.5  |
| PCP       | 2S ✓   | 14.8            | 50.0 | 11.0 |
| PCP       | 3S ✓   | 17.8            | 59.0 | 14.0 |
| PCP       | 4S ✓   | 24.8            | 75.0 | 19.0 |



# HOCHSPANNUNGSFEST | HIGH VOLTAGE FIRM

## BAUFORM S-SERIE | MODEL S-SERIES



### PSA Fixed socket, nut fixing, cable collet



| Reference |        | Dimensions (mm) |      |         |      |      |     |      |      |    |
|-----------|--------|-----------------|------|---------|------|------|-----|------|------|----|
| Model     | Series | A               | B    | e       | E    | L    | M   | S1   | S2   | S3 |
| PSA       | 0S ✓   | 10              | 12.5 | M9x0.6  | 7.0  | 33.5 | 1.2 | 8.2  | 6.5  | 11 |
| PSA       | 1S ✓   | 14              | 16.0 | M12x1.0 | 7.5  | 40.5 | 1.5 | 10.5 | 8.5  | 14 |
| PSA       | 2S ✓   | 18              | 19.5 | M15x1.0 | 8.5  | 50.0 | 1.8 | 13.5 | 11.0 | 17 |
| PSA       | 3S ✓   | 22              | 25.2 | M18x1.0 | 11.5 | 59.0 | 2.0 | 16.5 | 14.0 | 22 |
| PSA       | 4S ✓   | 28              | 32.0 | M25x1.0 | 12.0 | 75.0 | 2.5 | 27.5 | 19.0 | 30 |
| PSA       | 5S ✓   | 40              | 40.0 | M35x1.0 | 15.5 | 99.0 | 3.0 | 33.5 | 29.0 | -  |

**Note:** the 5S series is delivered with a tapered washer and a round nut.

### PSP Fixed socket, nut fixing, cable collet and inner anti-rotating device



| Reference |        | Dimensions (mm) |      |         |      |      |     |      |      |    |
|-----------|--------|-----------------|------|---------|------|------|-----|------|------|----|
| Model     | Series | A               | B    | e       | E    | L    | M   | S1   | S2   | S3 |
| PSP       | 0S ✓   | 10              | 12.5 | M9x0.6  | 7.0  | 33.5 | 1.2 | 8.2  | 6.5  | 11 |
| PSP       | 1S ✓   | 14              | 16.0 | M12x1.0 | 7.5  | 40.5 | 1.5 | 10.5 | 8.5  | 14 |
| PSP       | 2S ✓   | 18              | 19.5 | M15x1.0 | 8.5  | 50.0 | 1.8 | 13.5 | 11.0 | 17 |
| PSP       | 3S ✓   | 22              | 25.2 | M18x1.0 | 11.5 | 59.0 | 2.0 | 16.5 | 14.0 | 22 |
| PSP       | 4S ✓   | 28              | 32.0 | M25x1.0 | 12.0 | 75.0 | 2.5 | 23.5 | 19.0 | 30 |

### RAD Fixed coupler, nut fixing



| Reference |        | Dimensions (mm) |      |         |      |      |     |      |    |
|-----------|--------|-----------------|------|---------|------|------|-----|------|----|
| Model     | Series | A               | B    | e       | E    | L    | M   | S1   | S2 |
| RAD       | 0S ✓   | 10              | 12.5 | M9x0.6  | 7.0  | 25.0 | 1.2 | 8.2  | 11 |
| RAD       | 1S ✓   | 14              | 16.0 | M12x1.0 | 7.5  | 28.5 | 1.5 | 10.5 | 14 |
| RAD       | 2S ✓   | 18              | 19.5 | M15x1.0 | 8.5  | 31.5 | 1.8 | 13.5 | 17 |
| RAD       | 3S ✓   | 22              | 25.2 | M18x1.0 | 11.5 | 38.5 | 2.0 | 16.5 | 22 |
| RAD       | 4S ✓   | 28              | 32.0 | M25x1.0 | 12.0 | 46.5 | 2.5 | -    | 30 |
| RAD       | 5S ✓   | 40              | 40.0 | M35x1.0 | 15.5 | 60.5 | 3.0 | -    | -  |

**Note:** the 5S series is delivered with a tapered washer and a round nut.

### SWH Fixed coupler, nut fixing watertight or vacuumtight



| Reference |        | Dimensions (mm) |      |          |    |    |     |      |    |
|-----------|--------|-----------------|------|----------|----|----|-----|------|----|
| Model     | Series | A               | B    | e        | E  | L  | M   | S1   | S3 |
| SWH       | 0S ✓   | 14              | 13.8 | M10x0.75 | 17 | 34 | 2.0 | 9.0  | 12 |
| SWH       | 1S ✓   | 17              | 16.0 | M12x1.00 | 28 | 39 | 2.5 | 10.5 | 14 |
| SWH       | 2S ✓   | 20              | 21.8 | M16x1.00 | 25 | 44 | 4.0 | 15.0 | 19 |
| SWH       | 3S ✓   | 25              | 27.0 | M20x1.00 | 30 | 53 | 4.0 | 18.5 | 24 |
| SWH       | 4S ✓   | 34              | 32.0 | M25x1.00 | 50 | 65 | 4.0 | 23.5 | 30 |
| SWH       | 5S ✓   | 45              | 40.0 | M35x1.00 | 58 | 80 | 5.0 | 33.5 | -  |

**Note:** see page 26 for the available plug and contact configurations and in order to ensure correct contact alignment.  
The 5S series is delivered with a round nut.



Part number example see page 3




## HOCHSPANNUNGSFEST | HIGH VOLTAGE FIRM

### BAUFORM E-SERIE | MODEL E-SERIES

#### FFA Straight plug, cable collet – watertight

| Reference |        | Dimensions (mm) |    |      |    |
|-----------|--------|-----------------|----|------|----|
| Model     | Series | A               | L  | M    | S2 |
| FFA       | 0E ✓   | 11              | 34 | 23.0 | 8  |
| FFA       | 1E ✓   | 13              | 42 | 28.0 | 9  |
| FFA       | 2E ✓   | 16              | 52 | 36.0 | 12 |
| FFA       | 3E ✓   | 19              | 61 | 41.0 | 15 |
| FFA       | 4E     | 25              | 71 | 50.5 | 19 |
| FFA       | 5E ✓   | 38              | 92 | 67.0 | 32 |

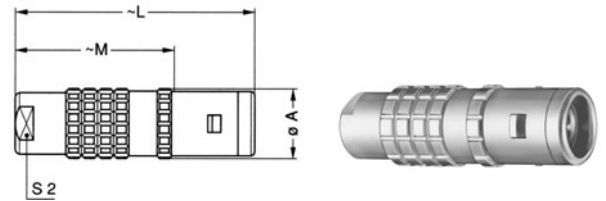

#### FFA Straight plug with oversize cable collet – watertight


| Reference |        | Dimensions (mm) |      |     |    |    |    |
|-----------|--------|-----------------|------|-----|----|----|----|
| Model     | Series | A               | B    | L   | M  | S1 | S2 |
| FFA       | 1E ✓   | 13              | 14.5 | 55  | 41 | 12 | 12 |
| FFA       | 2E ✓   | 16              | 17.0 | 65  | 49 | 15 | 15 |
| FFA       | 3E ✓   | 19              | 22.0 | 80  | 60 | 19 | 19 |
| FFA       | 4E ✓   | 25              | 36.0 | 105 | 84 | 30 | 32 |



**Note:** the fitting of oversize collets onto this model allows them to be fitted to the cables that can be accommodated by the next housing size up

#### FFA Straight plug, cable collet and nut for fitting a bend relief – watertight

| Reference |        | Dimensions (mm) |    |      |    |
|-----------|--------|-----------------|----|------|----|
| Model     | Series | A               | L  | M    | S2 |
| FFA       | 0E ✓   | 11              | 34 | 23.0 | 7  |
| FFA       | 1E ✓   | 13              | 42 | 28.0 | 9  |
| FFA       | 2E ✓   | 16              | 52 | 36.0 | 12 |
| FFA       | 3E ✓   | 19              | 60 | 40.0 | 15 |
| FFA       | 4E ✓   | 25              | 71 | 50.5 | 19 |

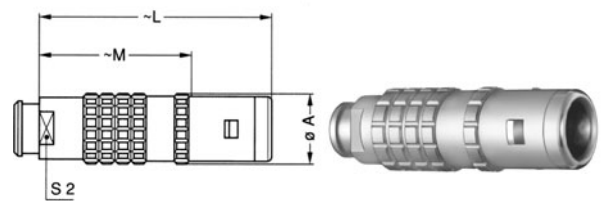

**Note:** the bend relief must be ordered separately (see page 80)

#### EBR Fixed socket with round flange, watertight, protruding shell and screw fixing

| Reference |        | Dimensions (mm) |    |     |      |      |      |      |    |    |
|-----------|--------|-----------------|----|-----|------|------|------|------|----|----|
| Model     | Series | A               | B  | C   | H1   | H2   | L    | L'   | M  | N  |
| EBR       | 2E ✓   | 28              | 19 | 2.8 | 11.8 | 20.4 | 32.5 | 28.0 | 19 | 15 |



**Note:** this model is only available in a watertight version  
 1 unipole model

# HOCHSPANNUNGSFEST | HIGH VOLTAGE FIRM

## BAUFORM E-SERIE | MODEL E-SERIES



### ERA Fixed socket, nut fixing – watertight



| Reference |        | Dimensions (mm) |      |         |      |      |      |     |      |    |
|-----------|--------|-----------------|------|---------|------|------|------|-----|------|----|
| Model     | Series | A               | B    | e       | E    | L    | L'   | M   | S1   | S3 |
| ERA       | 0E ✓   | 18              | 19.5 | M14x1.0 | 7.0  | 19.5 | 20.5 | 4.0 | 12.5 | 17 |
| ERA       | 1E ✓   | 20              | 21.5 | M16x1.0 | 9.0  | 24.0 | 25.3 | 4.5 | 14.5 | 19 |
| ERA       | 2E ✓   | 25              | 27.5 | M20x1.0 | 9.0  | 28.5 | 30.0 | 5.0 | 18.5 | 24 |
| ERA       | 3E ✓   | 31              | 34.5 | M24x1.0 | 11.0 | 34.0 | 35.0 | 6.0 | 22.5 | 30 |
| ERA       | 4E ✓   | 37              | 41.5 | M30x1.0 | 9.0  | 36.0 | 38.0 | 6.5 | 28.5 | 36 |
| ERA       | 5E ✓   | 55              | 54.0 | M45x1.5 | 10.0 | 44.5 | 78.0 | 9.0 | 42.5 | -  |

**Note:** the 5E series is delivered with a tapered washer and a round nut  
 1 unipole model

### PCA Free socket, cable collet – watertight



| Reference |        | Dimensions (mm) |      |    |
|-----------|--------|-----------------|------|----|
| Model     | Series | A               | L    | S2 |
| PCA       | 0E     | 13              | 34.0 | 8  |
| PCA       | 1E ✓   | 15              | 45.0 | 9  |
| PCA       | 2E ✓   | 19              | 54.0 | 12 |
| PCA       | 3E     | 23              | 65.0 | 15 |
| PCA       | 4E ✓   | 29              | 75.5 | 19 |
| PCA       | 5E     | 42              | 95.0 | 32 |




### PCA Free socket with oversize cable collet – watertight

| Reference |        | Dimensions (mm) |      |     |    |    |
|-----------|--------|-----------------|------|-----|----|----|
| Model     | Series | A               | B    | L   | S1 | S2 |
| PCA       | 1E ✓   | 15              | 14.5 | 58  | 12 | 12 |
| PCA       | 2E ✓   | 19              | 17.0 | 67  | 15 | 15 |
| PCA       | 3E ✓   | 23              | 22.0 | 84  | 19 | 19 |
| PCA       | 4E ✓   | 29              | 36.0 | 109 | 30 | 32 |

**Note:** the fitting of oversize collets onto this model allows them to be fitted to the cables that can be accommodated by the next housing size up

### PCA Free socket, cable collet and nut for fitting a bend relief – watertight

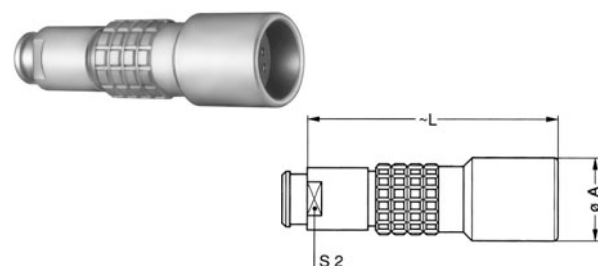

| Reference |        | Dimensions (mm) |      |    |
|-----------|--------|-----------------|------|----|
| Model     | Series | A               | L    | S2 |
| PCA       | 0E ✓   | 13              | 34.0 | 7  |
| PCA       | 1E ✓   | 15              | 45.0 | 9  |
| PCA       | 2E ✓   | 19              | 54.0 | 12 |
| PCA       | 3E ✓   | 23              | 64.0 | 15 |
| PCA       | 4E ✓   | 29              | 75.5 | 19 |

**Note:** the bend relief must be ordered separately (see page 80)



Part number example see page 3



## HOCHSPANNUNGSFEST | HIGH VOLTAGE FIRM

### BAUFORM E-SERIE | MODEL E-SERIES

#### RMA Free coupler – watertight

| Reference |        | Dimensions (mm) |    |
|-----------|--------|-----------------|----|
| Model     | Series | A               | L  |
| RMA       | 0E ✓   | 14              | 30 |
| RMA       | 1E ✓   | 16              | 40 |
| RMA       | 2E ✓   | 20              | 44 |
| RMA       | 3E     | 25              | 54 |
| RMA       | 4E ✓   | 30              | 57 |
| RMA       | 5E     | 44              | 67 |


**Note:** see page 26 for the available plug and contact configurations and in order to ensure correct contact alignment



#### SWH Fixed coupler, nut fixing, watertight and vacuumtight

| Reference |        | Dimensions (mm) |      |         |    |      |     |      |    |
|-----------|--------|-----------------|------|---------|----|------|-----|------|----|
| Model     | Series | A               | B    | e       | E  | L    | M   | S1   | S3 |
| SWH       | 0E     | 18              | 19.5 | M14x1.0 | 21 | 36.0 | 4.0 | 12.5 | 17 |
| SWH       | 1E ✓   | 20              | 21.5 | M16x1.0 | 29 | 47.0 | 4.5 | 14.5 | 19 |
| SWH       | 2E     | 25              | 27.5 | M20x1.0 | 28 | 52.5 | 5.0 | 18.5 | 24 |
| SWH       | 3E     | 31              | 34.5 | M24x1.0 | 33 | 64.0 | 6.0 | 22.5 | 30 |
| SWH       | 4E     | 37              | 41.5 | M30x1.0 | 43 | 70.0 | 6.5 | 28.5 | 36 |
| SWH       | 5E ✓   | 55              | 54.0 | M45x1.5 | 45 | 81.0 | 9.0 | 42.5 | -  |


**Note:** The 5E series are delivered with a round nut. See page 26 for the available plug and contact configurations and in order to ensure correct contact alignment.

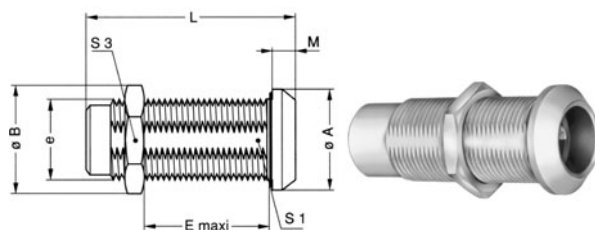

#### HGP Fixed socket, nut fixing, watertight and vacuumtight

| Reference |        | Dimensions (mm) |      |         |      |      |      |     |      |    |
|-----------|--------|-----------------|------|---------|------|------|------|-----|------|----|
| Model     | Series | A               | B    | e       | E    | L    | L'   | M   | S1   | S3 |
| HGP       | 0E     | 18              | 19.5 | M14x1.0 | 7.0  | 23.5 | 22.0 | 4.0 | 12.5 | 17 |
| HGP       | 1E     | 20              | 21.5 | M16x1.0 | 9.0  | 28.0 | 28.0 | 4.5 | 14.5 | 19 |
| HGP       | 2E     | 25              | 27.5 | M20x1.0 | 10.5 | 32.5 | 28.0 | 5.0 | 18.5 | 24 |
| HGP       | 3E     | 31              | 34.5 | M24x1.0 | 15.5 | 39.5 | 38.5 | 6.0 | 22.5 | 30 |
| HGP       | 4E ✓   | 37              | 41.5 | M30x1.0 | 17.5 | 43.0 | 44.0 | 6.5 | 28.5 | 36 |
| HGP       | 5E ✓   | 55              | 54.0 | M45x1.5 | 20.0 | 52.0 | 76.0 | 9.0 | 42.5 | -  |

**Note:** the 5E series are delivered with a round nut  
' unipole model

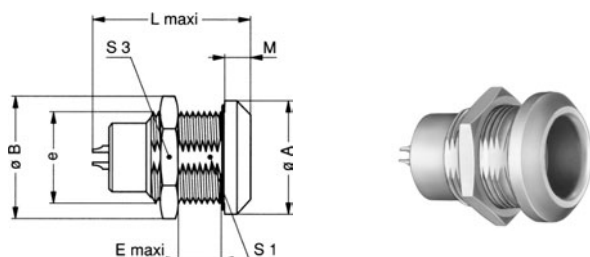

**HOCHSPANNUNGSFEST | HIGH VOLTAGE FIRM**
**KONTAKTFIGURATION SERIE S+E | CONTACTFIGURATION SERIES S+E**


| Soldersided seen                                                                   |                                                                                     | Order-No. | Size | Impedance | Contact-ø | Max. conductor-ø | Valid current | Supply voltage<br>U <sub>s</sub> (kV dc) |     | Test voltage<br>U <sub>e</sub> (kV dc) |           | Cable-order-no. | Type of insulation | Delivery time |
|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-----------|------|-----------|-----------|------------------|---------------|------------------------------------------|-----|----------------------------------------|-----------|-----------------|--------------------|---------------|
| Male contact                                                                       | Female contact                                                                      |           |      |           |           |                  |               |                                          |     |                                        |           |                 |                    |               |
|    |    | 403       | 0    | -         | 0.9       | 0.8              | 4             | -                                        | 4   | -                                      | 6         | RG-174A/U       | high voltage       | ●             |
|    |    | 405       | 1    | -         | 1.35      | 1.1              | 8             | -                                        | 7   | -                                      | 10.5      | 106 330         | high voltage       | ●             |
|    |    | 405X      | 1    | -         | 1.35      | 1.1              | 10            | -                                        | 7   | -                                      | 10.5      | 106 330         | high voltage       | ●             |
|    |    | 408       | 2    | -         | 2         | 1.8              | 10            | -                                        | 8   | -                                      | 12.0      | 130 660         | high voltage       | ●             |
|    |    | 408X      | 2    | -         | 2         | 1.8              | 10            | -                                        | 8   | -                                      | 12.0      | 130 660         | high voltage       | ●             |
|   |   | 405       | 3    | -         | 4         | 3.5              | 15            | -                                        | 7   | -                                      | 10.6      | 130 660         | high voltage       | ●             |
|  |  | 410       | 3    | -         | 2         | 1.8              | 10            | -                                        | 10  | -                                      | 15.0      | 130 660         | high voltage       | ●             |
|  |  | 410X      | 3    | -         | 2         | 1.8              | 6             | -                                        | 10  | -                                      | 15.0      | 130 660         | high voltage       | ●             |
|  |  | 415       | 3    | -         | 1.3       | 1.0              | 8             | -                                        | 15  | -                                      | 21.0      | 130 660         | high voltage       | ●             |
|  |  | 415X      | 3    | -         | 1.3       | 1.0              | 2             | -                                        | 15  | -                                      | 21.0      | 210 440         | high voltage       | ●             |
|  |  | 432       | 3    | -         | 1.3       | 1.0              | 3             | 3                                        | 3   | 4.5 <sup>1</sup><br>8                  | 4.5<br>8  | on request      | high voltage       | ●             |
|  |  | 410       | 4    | -         | 2.5       | 3.2              | 12            | -                                        | 10  | -                                      | 15        | on request      | high voltage       | ●             |
|  |  | 433       | 4    | -         | 2         | 1.8              | 14            | 2.1                                      | 3   | 3.1 <sup>1</sup><br>8                  | 4.5<br>8  | on request      | high voltage       | ●             |
|  |  | 434       | 4    | -         | 2         | 1.8              | 14            | 2.1                                      | 3   | 3.1 <sup>1</sup><br>8                  | 4.5<br>8  | on request      | high voltage       | ●             |
|  |  | 442       | 4    | -         | 1.3       | 1                | 14            | 3.5                                      | 5.0 | 5.2 <sup>1</sup><br>14                 | 7.5<br>14 | on request      | high voltage       | ●             |



**Note:** <sup>1</sup> Test nach CEI 130.1 § 14.5b  $U_s = \frac{U_0}{1.5}$

# HOCHSPANNUNGSFEST | HIGH VOLTAGE FIRM

## KONFEKTIONIERUNGSANLEITUNG | ASSEMBLING INSTRUCTIONS



| Reference |      |       | Contact<br>ø (mm) | Unisolated length (mm) |      |      |
|-----------|------|-------|-------------------|------------------------|------|------|
| Series    | Type | Cable |                   | A                      | B    | C    |
| 0S/0E     | 403  | HS    | 0.9               | 4.0                    | 6.0  | 9.0  |
| 0S/0E     | 403X | HS    | 0.9               | 4.0                    | 6.0  | 9.0  |
| 1S/1E     | 405  | HS    | 1.35              | 5.0                    | 10.5 | 14.0 |
| 1S/1E     | 405X | HS    | 1.35              | 5.0                    | 10.5 | 14.0 |
| 2S/2E     | 408  | HS    | 2.0               | 7.0                    | 14.0 | 18.0 |
| 2S/2E     | 408X | HS    | 2.0               | 7.0                    | 14.0 | 18.0 |
| 3S/3E     | 405  | HS    | 4.0               | 6.5                    | 12.0 | 17.0 |
| 3S/3E     | 405X | HS    | 4.0               | 6.5                    | 12.0 | 17.0 |
| 3S/3E     | 410  | HS    | 2.0               | 7.5                    | 19.0 | 24.0 |
| 3S/3E     | 410X | HS    | 2.0               | 7.5                    | 19.0 | 24.0 |
| 3S/3E     | 415  | HS    | 1.3               | 6.5                    | 27.0 | 32.0 |
| 3S/3E     | 415X | HS    | 1.3               | 6.5                    | 27.0 | 32.0 |
| 4S/4E     | 410  | HS    | 2.5               | 10.0                   | 20.0 | 26.0 |
| 4S/4E     | 410X | HS    | 2.5               | 10.0                   | 20.0 | 26.0 |

**Note:** The dimensions are standard values and may vary depending on the cable quality.

Die Abmessungen sind Richtwerte und können sich je nach Kabelqualität ändern.

Technische Informationen, Zubehörteile und Werkzeuge siehe Unipole/Multipole Katalog.  
Technical Informations, Accessories and Tools see Unipole/Multipole Catalogue.

The background of the entire page is a solid blue color. At the top, there is a white technical line drawing of a connector assembly, showing various components like pins, sockets, and a grid-like structure. A white lightning bolt graphic starts from the top right and extends downwards towards the center of the page.

**Steckverbindungen**  
**Connectors**  
**Kontaktfiguration**  
**Contactfiguration**  
**Konfektionierungsanleitung**  
**Assembling Instructions**



**EINPOLIG HOCHSTROM**  
**UNIPOLE HIGH CURRENT**

# EINPOLIG / HOCHSTROM | UNIPOLE / HIGH CURRENT BAUFORM S-SERIE | MODEL S-SERIES



## FFA Straight plug, cable collet



| Reference |        | Dimensions (mm) |       |      |      |
|-----------|--------|-----------------|-------|------|------|
| Model     | Series | A               | L     | M    | S2   |
| FFA       | 00 ✓   | 6.4             | 26.0  | 18.0 | 4.5  |
| FFA       | 0S ✓   | 9.0             | 34.5  | 24.5 | 6.5  |
| FFA       | 1S ✓   | 12.0            | 42.5  | 31.5 | 8.5  |
| FFA       | 2S ✓   | 14.8            | 52.0  | 40.0 | 11.0 |
| FFA       | 3S ✓   | 17.8            | 61.0  | 46.0 | 14.0 |
| FFA       | 4S ✓   | 24.8            | 77.0  | 59.0 | 19.0 |
| FFA       | 5S ✓   | 35.1            | 103.0 | 78.0 | 29.0 |

## FFA Straight plug with oversize cable collet



| Reference |        | Dimensions (mm) |      |       |       |      |      |
|-----------|--------|-----------------|------|-------|-------|------|------|
| Model     | Series | A               | B    | L     | M     | S1   | S2   |
| FFA       | 00 ✓   | 6.4             | 8.0  | 34.0  | 26.0  | 7.0  | 6.5  |
| FFA       | 0S ✓   | 9.0             | 10.0 | 45.5  | 35.5  | 9.0  | 8.5  |
| FFA       | 1S ✓   | 12.0            | 13.0 | 57.0  | 46.0  | 12.0 | 11.0 |
| FFA       | 2S ✓   | 14.8            | 18.0 | 67.0  | 55.0  | 14.0 | 14.0 |
| FFA       | 3S ✓   | 17.8            | 21.0 | 85.0  | 70.0  | 19.0 | 19.0 |
| FFA       | 4S ✓   | 24.8            | 31.8 | 107.0 | 89.0  | 28.5 | 29.0 |
| FFA       | 5S ✓   | 35.1            | 41.8 | 138.0 | 113.0 | 37.5 | 38.0 |

**Note:** the fitting of oversize collets onto this model allows them to be fitted to the cables that can be accommodated by the next housing size up

## FFA Straight plug, cable collet and nut for fitting a bend relief



| Reference |        | Dimensions (mm) |      |      |    |
|-----------|--------|-----------------|------|------|----|
| Model     | Series | A               | L    | M    | S2 |
| FFA       | 00 ✓   | 6.4             | 26.0 | 18.0 | 6  |
| FFA       | 0S ✓   | 9.0             | 34.5 | 24.5 | 7  |
| FFA       | 1S ✓   | 12.0            | 42.5 | 31.5 | 9  |
| FFA       | 2S ✓   | 14.8            | 52.0 | 40.0 | 12 |
| FFA       | 3S ✓   | 17.8            | 61.0 | 46.0 | 14 |
| FFA       | 4S ✓   | 24.8            | 77.0 | 59.0 | 20 |

**Note:** the bend relief must be ordered separately (see page 80)



Part number example see page 3



## EINPOLIG / HOCHSTROM | UNIPOLE / HIGH CURRENT

### BAUFORM S-SERIE | MODEL S-SERIES

#### FFP Straight plug, cable collet and inner anti-rotating device

| Reference |        | Dimensions (mm) |      |      |      |
|-----------|--------|-----------------|------|------|------|
| Model     | Series | A               | L    | M    | S2   |
| FFP       | 0S     | 9.0             | 34.5 | 24.5 | 6.5  |
| FFP       | 1S     | 12.0            | 42.5 | 31.5 | 8.5  |
| FFP       | 2S     | 14.8            | 52.0 | 40.0 | 11.0 |
| FFP       | 3S ✓   | 17.8            | 61.0 | 46.0 | 14.0 |
| FFP       | 4S     | 24.8            | 77.0 | 59.0 | 19.0 |



#### FFB Straight plug, cable collet and safety locking ring

| Reference |        | Dimensions (mm) |      |      |      |
|-----------|--------|-----------------|------|------|------|
| Model     | Series | A               | L    | M    | S2   |
| FFB       | 0S     | 9.0             | 36.8 | 26.8 | 6.5  |
| FFB       | 1S ✓   | 12.0            | 45.0 | 34.0 | 8.5  |
| FFB       | 2S     | 14.8            | 55.5 | 43.5 | 11.0 |
| FFB       | 3S ✓   | 17.8            | 65.0 | 50.0 | 14.0 |



#### FFB Straight plug, cable collet and safety locking ring and nut for fitting a bend relief

| Reference |        | Dimensions (mm) |      |      |    |
|-----------|--------|-----------------|------|------|----|
| Model     | Series | A               | L    | M    | S2 |
| FFB       | 0S     | 9.0             | 36.8 | 26.8 | 7  |
| FFB       | 1S ✓   | 12.0            | 45.0 | 34.0 | 9  |
| FFB       | 2S     | 14.8            | 55.5 | 43.5 | 12 |
| FFB       | 3S     | 17.8            | 65.0 | 50.0 | 14 |



**Note:** series 0S, 2S and 3S are available on request  
the bend relief must be ordered separately (see page 80)

#### FFF Straight plug, non-latching, cable collet

| Reference |        | Dimensions (mm) |      |      |      |
|-----------|--------|-----------------|------|------|------|
| Model     | Series | A               | L    | M    | S2   |
| FFF       | 00 ✓   | 6.4             | 26.0 | 18.0 | 4.5  |
| FFF       | 0S ✓   | 9.0             | 34.5 | 24.5 | 6.5  |
| FFF       | 1S     | 12.0            | 42.5 | 31.5 | 8.5  |
| FFF       | 2S     | 14.8            | 52.0 | 40.0 | 11.0 |




# EINPOLIG / HOCHSTROM | UNIPOLE / HIGH CURRENT BAUFORM S-SERIE | MODEL S-SERIES




## FFS Straight plug for cable crimping

| Reference |        | Dimensions (mm) |    |    |     |     |
|-----------|--------|-----------------|----|----|-----|-----|
| Model     | Series | A               | L  | M  | S1  | S2  |
| FFS       | 00 ✓   | 6.4             | 31 | 23 | 5.5 | 5.5 |

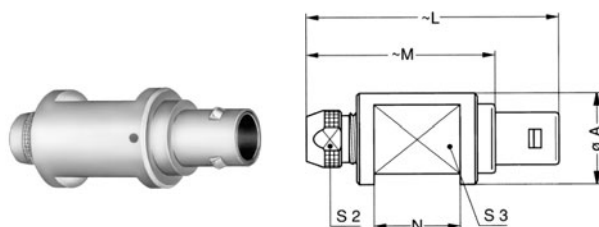

## FZP Straight plug for remote handling, cable collet and inner anti-rotating device

| Reference |        | Dimensions (mm) |       |      |    |      |    |
|-----------|--------|-----------------|-------|------|----|------|----|
| Model     | Series | A               | L     | M    | N  | S2   | S3 |
| FZP       | 1S     | 16              | 42.5  | 31.5 | 15 | 8.5  | 12 |
| FZP       | 2S     | 24              | 52.0  | 40.0 | 21 | 11.0 | 18 |
| FZP       | 3S     | 24              | 61.0  | 46.0 | 24 | 14.0 | 18 |
| FZP       | 4S     | 35              | 77.0  | 59.0 | 30 | 19.0 | 28 |
| FZP       | 5S ✓   | 43              | 103.0 | 78.0 | 44 | 29.0 | 35 |

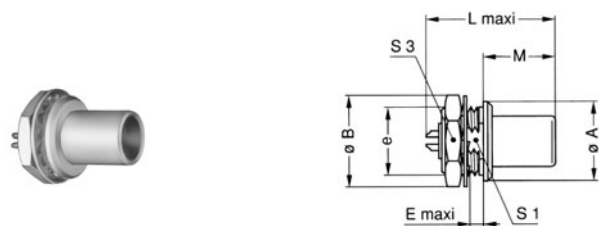

## FAA Fixed plug non-latching, nut fixing

| Reference |        | Dimensions (mm) |      |         |     |      |      |      |      |    |
|-----------|--------|-----------------|------|---------|-----|------|------|------|------|----|
| Model     | Series | A               | B    | e       | E   | L    | L'   | M    | S1   | S3 |
| FAA       | 00 ✓   | 8               | 10.3 | M7x0.5  | 2.0 | -    | 15.5 | 9.0  | 6.3  | 9  |
| FAA       | 0S ✓   | 10              | 12.5 | M9x0.6  | 2.0 | 18.5 | 18.0 | 11.2 | 8.2  | 11 |
| FAA       | 1S ✓   | 14              | 16.0 | M12x1.0 | 2.5 | 22.5 | 21.7 | 12.5 | 10.5 | 14 |
| FAA       | 2S ✓   | 18              | 19.5 | M15x1.0 | 4.0 | 25.0 | 25.3 | 13.8 | 13.5 | 17 |
| FAA       | 3S ✓   | 22              | 25.2 | M18x1.0 | 4.0 | 31.0 | 29.0 | 17.0 | 16.5 | 22 |
| FAA       | 4S     | 28              | 32.0 | M25x1.0 | 2.5 | 35.5 | 39.0 | 20.5 | 23.5 | 30 |
| FAA       | 5S     | 40              | 40.0 | M35x1.0 | 2.5 | 45.0 | -    | 28.0 | 33.5 | -  |

Note: <sup>1</sup> unipole model



## FLA Elbow (90°) plug, cable collet

| Reference |        | Dimensions (mm) |    |      |      |      |    |      |
|-----------|--------|-----------------|----|------|------|------|----|------|
| Model     | Series | A               | A1 | H    | L    | M    | S1 | S2   |
| FLA       | 00 ✓   | 9               | -  | 16.0 | 17.5 | 9.5  | -  | 4.5  |
| FLA       | 0S ✓   | 13              | 13 | 24.5 | 23.0 | 13.0 | 8  | 6.5  |
| FLA       | 1S ✓   | 16              | 16 | 28.5 | 26.5 | 15.5 | 10 | 8.5  |
| FLA       | 2S ✓   | 20              | 20 | 37.0 | 31.0 | 19.0 | 13 | 11.0 |
| FLA       | 3S ✓   | 21              | 21 | 44.0 | 38.5 | 23.5 | 15 | 14.0 |
| FLA       | 4S ✓   | 28              | 28 | 56.0 | 49.0 | 31.0 | 20 | 19.0 |
| FLA       | 5S     | -               | 37 | 76.5 | 65.0 | 40.0 | 30 | 29.0 |

Note: fig.1 is used for the unipole type, fig.2 is used for the multipole type



Part number example see page 3




## EINPOLIG / HOCHSTROM | UNIPOLE / HIGH CURRENT

### BAUFORM S-SERIE | MODEL S-SERIES

#### FLS Elbow (90°) plug for cable crimping


| Reference |        | Dimensions (mm) |    |      |     |
|-----------|--------|-----------------|----|------|-----|
| Model     | Series | A               | H  | L    | M   |
| FLS       | 00 ✓   | 9               | 16 | 17.5 | 9.5 |

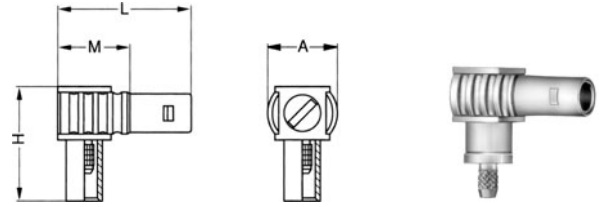

#### ERA Fixed socket, nut fixing

| Reference |        | Dimensions (mm) |      |         |      |      |      |     |      |    |
|-----------|--------|-----------------|------|---------|------|------|------|-----|------|----|
| Model     | Series | A               | B    | e       | E    | L    | L'   | M   | S1   | S3 |
| ERA       | 00 ✓   | 8               | 10.3 | M7x0.5  | 5.5  | -    | 15.2 | 1.0 | 6.3  | 9  |
| ERA       | 0S ✓   | 10              | 12.5 | M9x0.6  | 7.0  | 17.5 | 18.5 | 1.2 | 8.2  | 11 |
| ERA       | 1S ✓   | 14              | 16.0 | M12x1.0 | 7.5  | 20.2 | 21.5 | 1.5 | 10.5 | 14 |
| ERA       | 2S ✓   | 18              | 19.5 | M15x1.0 | 8.5  | 24.5 | 26.0 | 1.8 | 13.5 | 17 |
| ERA       | 3S ✓   | 22              | 25.2 | M18x1.0 | 11.5 | 29.0 | 30.0 | 2.0 | 16.5 | 22 |
| ERA       | 4S ✓   | 28              | 32.0 | M25x1.0 | 12.0 | 34.0 | 36.0 | 2.5 | 23.5 | 30 |
| ERA       | 5S ✓   | 40              | 40.0 | M35x1.0 | 15.5 | 45.0 | 78.5 | 3.0 | 33.5 | -  |


**Note:** the 5S series is delivered with a tapered washer and a round nut  
 ' unipole model

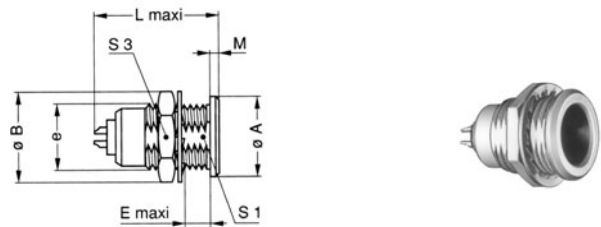

#### ERN Fixed socket, nut fixing, with earthing tag

| Reference |        | Dimensions (mm) |      |         |      |      |      |     |      |    |
|-----------|--------|-----------------|------|---------|------|------|------|-----|------|----|
| Model     | Series | A               | B    | e       | E    | L    | L'   | M   | S1   | S3 |
| ERN       | 0S ✓   | 10              | 12.5 | M9x0.6  | 7.0  | 19.3 | 19.3 | 1.2 | 8.2  | 11 |
| ERN       | 1S ✓   | 14              | 16.0 | M12x1.0 | 7.5  | 23.0 | 23.0 | 1.5 | 10.5 | 14 |
| ERN       | 2S     | 18              | 19.5 | M15x1.0 | 8.5  | 26.3 | 26.3 | 1.8 | 13.5 | 17 |
| ERN       | 3S ✓   | 22              | 25.2 | M18x1.0 | 11.5 | 29.8 | 30.0 | 2.0 | 16.5 | 22 |


**Note:** ' unipole model

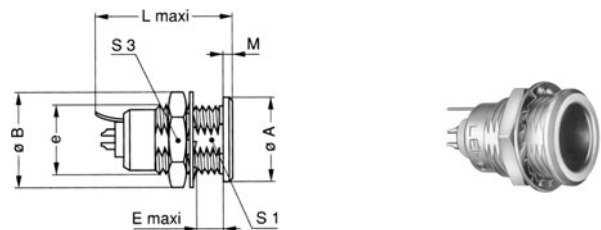


#### ERC Fixed socket, nut fixing with slot in the flange

| Reference |        | Dimensions (mm) |      |         |     |     |      |      |     |      |    |
|-----------|--------|-----------------|------|---------|-----|-----|------|------|-----|------|----|
| Model     | Series | A               | B    | e       | E   | F   | L    | L¹   | M   | S1   | S3 |
| ERC       | 00 ✓   | 8               | 10.3 | M7x0.5  | 5.5 | 1.6 | -    | 15.1 | 1.0 | 6.3  | 9  |
| ERC       | 0S     | 10              | 12.5 | M9x0.6  | 7.0 | 2.0 | 17.5 | 18.5 | 1.2 | 8.2  | 11 |
| ERC       | 1S     | 14              | 16.0 | M12x1.0 | 7.5 | 2.5 | 20.2 | 21.5 | 1.5 | 10.5 | 14 |

**Note:** ' unipole model

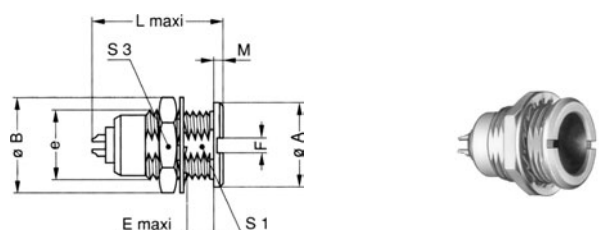


# EINPOLIG / HOCHSTROM | UNIPOLE / HIGH CURRENT BAUFORM S-SERIE | MODEL S-SERIES



## EHP Fixed socket, nut fixing, protruding shell

| Reference |        | Dimensions (mm) |      |         |     |      |      |      |     |    |
|-----------|--------|-----------------|------|---------|-----|------|------|------|-----|----|
| Model     | Series | A               | B    | e       | E   | L    | L'   | M    | S1  | S3 |
| EHP       | 0S ✓   | 10              | 12.5 | M9x0.6  | 2.5 | 17.5 | 18.5 | 12.5 | 8.2 | 11 |
| EHP       | 1S     | 14              | 16.0 | M12x1.0 | 3.5 | 20.2 | 21.5 | 12.0 | -   | 14 |
| EHP       | 3S ✓   | 22              | 25.2 | M18x1.0 | 4.0 | 29.0 | 30.0 | 18.7 | -   | 22 |

**Note:** <sup>1</sup> unipole model



## ERD Fixed socket with two nuts (back panel mounting)

| Reference |        | Dimensions (mm) |      |         |      |      |      |     |      |    |
|-----------|--------|-----------------|------|---------|------|------|------|-----|------|----|
| Model     | Series | A               | B    | e       | E    | L    | L'   | M   | S1   | S3 |
| ERD       | 0S ✓   | 12              | 12.5 | M9x0.6  | 5.5  | 17.5 | 18.5 | 2.5 | 8.2  | 11 |
| ERD       | 1S ✓   | 16              | 16.0 | M12x1.0 | 6.0  | 20.2 | 21.5 | 3.5 | 10.5 | 14 |
| ERD       | 2S ✓   | 20              | 19.5 | M15x1.0 | 6.5  | 24.5 | 26.0 | 3.5 | 13.5 | 17 |
| ERD       | 3S     | 24              | 25.2 | M18x1.0 | 9.0  | 29.0 | 30.0 | 4.5 | 16.5 | 22 |
| ERD       | 4S     | 30              | 32.0 | M25x1.0 | 10.0 | 34.0 | 36.0 | 4.5 | 23.5 | 30 |

**Note:** the 3S and 4S series are delivered with a conical nut  
<sup>1</sup> unipole model



## RMA Free coupler

| Reference |        | Dimensions (mm) |      |
|-----------|--------|-----------------|------|
| Model     | Series | A               | L    |
| RMA       | 00 ✓   | 6.4             | 22.0 |
| RMA       | 0S ✓   | 8.9             | 25.0 |
| RMA       | 1S     | 11.9            | 28.5 |
| RMA       | 2S     | 14.8            | 31.5 |
| RMA       | 3S ✓   | 17.8            | 38.5 |
| RMA       | 4S ✓   | 24.8            | 46.5 |
| RMA       | 5S     | 34.7            | 60.5 |

**Note:** see page 40 for the available plug and contact configurations and in order to ensure correct contact alignment



Part number example see page 3



## EINPOLIG / HOCHSTROM | UNIPOLE / HIGH CURRENT

### BAUFORM S-SERIE | MODEL S-SERIES

#### RAD Fixed coupler, nut fixing

| Reference |        | Dimensions (mm) |      |         |      |      |     |      |    |
|-----------|--------|-----------------|------|---------|------|------|-----|------|----|
| Model     | Series | A               | B    | e       | E    | L    | M   | S1   | S2 |
| RAD       | 00 ✓   | 8               | 10.3 | M7x0.5  | 5.5  | 22.0 | 1.0 | 6.3  | 9  |
| RAD       | 0S     | 10              | 12.5 | M9x0.6  | 7.0  | 25.0 | 1.2 | 8.2  | 11 |
| RAD       | 1S     | 14              | 16.0 | M12x1.0 | 7.5  | 28.5 | 1.5 | 10.5 | 14 |
| RAD       | 2S     | 18              | 19.5 | M15x1.0 | 8.5  | 31.5 | 1.8 | 13.5 | 17 |
| RAD       | 3S     | 22              | 25.2 | M18x1.0 | 11.5 | 38.5 | 2.0 | 16.5 | 22 |
| RAD       | 4S ✓   | 28              | 32.0 | M25x1.0 | 12.0 | 46.5 | 2.5 | -    | 30 |
| RAD       | 5S     | 40              | 40.0 | M35x1.0 | 15.5 | 60.5 | 3.0 | -    | -  |

**Note:** the 5S series is delivered with a tapered washer and a round nut  
see page 40 for the available plug and contact configurations and in order  
to ensure correct contact alignment



#### SWH Fixed coupler, nut fixing watertight or vacuumtight

| Reference |        | Dimensions (mm) |      |          |    |    |     |      |    |
|-----------|--------|-----------------|------|----------|----|----|-----|------|----|
| Model     | Series | A               | B    | e        | E  | L  | M   | S1   | S3 |
| SWH       | 0S ✓   | 14              | 13.8 | M10x0.75 | 17 | 34 | 2.0 | 9.0  | 12 |
| SWH       | 1S ✓   | 17              | 16.0 | M12x1.00 | 28 | 39 | 2.5 | 10.5 | 14 |
| SWH       | 2S ✓   | 20              | 21.8 | M16x1.00 | 25 | 44 | 4.0 | 15.0 | 19 |
| SWH       | 3S ✓   | 25              | 27.0 | M20x1.00 | 30 | 53 | 4.0 | 18.5 | 24 |
| SWH       | 4S ✓   | 34              | 32.0 | M25x1.00 | 50 | 65 | 4.0 | 23.5 | 30 |
| SWH       | 5S ✓   | 45              | 40.0 | M35x1.00 | 58 | 80 | 5.0 | 33.5 | -  |

**Note:** see page 40 for the available plug and contact configurations and in order  
to ensure correct contact alignment.  
The 5S series is delivered with a round nut.



#### PCA Free socket, cable collet


| Reference |        | Dimensions (mm) |      |      |
|-----------|--------|-----------------|------|------|
| Model     | Series | A               | L    | S2   |
| PCA       | 00 ✓   | 6.5             | 25.0 | 4.5  |
| PCA       | 0S ✓   | 8.9             | 33.5 | 6.5  |
| PCA       | 1S ✓   | 11.9            | 40.5 | 8.5  |
| PCA       | 2S     | 14.8            | 50.0 | 11.0 |
| PCA       | 3S ✓   | 17.8            | 59.0 | 14.0 |
| PCA       | 4S ✓   | 24.8            | 75.0 | 19.0 |
| PCA       | 5S     | 34.7            | 99.0 | 29.0 |



#### PCA Free socket with oversize cable collet


| Reference |        | Dimensions (mm) |      |       |      |      |
|-----------|--------|-----------------|------|-------|------|------|
| Model     | Series | A               | B    | L     | S1   | S2   |
| PCA       | 00 ✓   | 6.5             | 8.0  | 33.0  | 7.0  | 6.5  |
| PCA       | 0S ✓   | 8.9             | 10.0 | 44.5  | 9.0  | 8.5  |
| PCA       | 1S ✓   | 11.9            | 13.0 | 55.0  | 12.0 | 11.0 |
| PCA       | 2S ✓   | 14.8            | 18.0 | 65.0  | 14.0 | 14.0 |
| PCA       | 3S ✓   | 17.8            | 21.0 | 83.0  | 19.0 | 19.0 |
| PCA       | 4S ✓   | 24.8            | 31.8 | 105.0 | 28.5 | 29.0 |

**Note:** the fitting of oversize collets onto this model allows them to be fitted to  
the cables that can be accommodated by the next housing size up

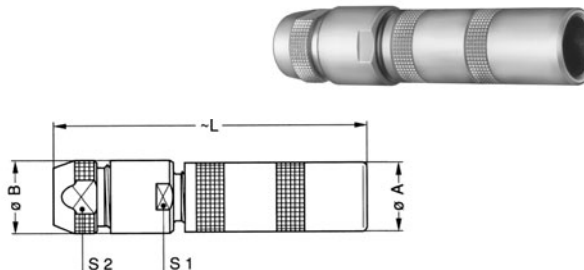

## EINPOLIG / HOCHSTROM | UNIPOLE / HIGH CURRENT


### BAUFORM S-SERIE | MODEL S-SERIES



**PCA** Free socket, cable collet  
and nut for fitting a bend relief

| Reference |        | Dimensions (mm) |      |    |
|-----------|--------|-----------------|------|----|
| Model     | Series | A               | L    | S2 |
| PCA       | 00 ✓   | 6.5             | 25.0 | 6  |
| PCA       | 0S ✓   | 8.9             | 33.5 | 7  |
| PCA       | 1S ✓   | 11.9            | 40.5 | 9  |
| PCA       | 2S ✓   | 14.8            | 50.0 | 12 |
| PCA       | 3S ✓   | 17.8            | 59.0 | 14 |
| PCA       | 4S ✓   | 24.8            | 75.0 | 20 |

**Note:** the bend relief must be ordered separately (see page 80)




**PSA** Fixed socket, nut fixing, cable collet

| Reference |        | Dimensions (mm) |      |         |      |      |     |      |      |    |
|-----------|--------|-----------------|------|---------|------|------|-----|------|------|----|
| Model     | Series | A               | B    | e       | E    | L    | M   | S1   | S2   | S3 |
| PSA       | 00 ✓   | 8               | 10.3 | M7x0.5  | 5.5  | 25.0 | 1.0 | 6.3  | 4.5  | 9  |
| PSA       | 0S ✓   | 10              | 12.5 | M9x0.6  | 7.0  | 33.5 | 1.2 | 8.2  | 6.5  | 11 |
| PSA       | 1S ✓   | 14              | 16.0 | M12x1.0 | 7.5  | 40.5 | 1.5 | 10.5 | 8.5  | 14 |
| PSA       | 2S ✓   | 18              | 19.5 | M15x1.0 | 8.5  | 50.0 | 1.8 | 13.5 | 11.0 | 17 |
| PSA       | 3S ✓   | 22              | 25.2 | M18x1.0 | 11.5 | 59.0 | 2.0 | 16.5 | 14.0 | 22 |
| PSA       | 4S ✓   | 28              | 32.0 | M25x1.0 | 12.0 | 75.0 | 2.5 | 23.5 | 19.0 | 30 |
| PSA       | 5S     | 40              | 40.0 | M35x1.0 | 15.5 | 99.0 | 3.0 | 33.5 | 29.0 | -  |

**Note:** the 5S series is delivered with a tapered washer and a round nut.

## BAUFORM E-SERIE | MODEL E-SERIES



**FFA** Straight plug, cable collet – watertight

| Reference |        | Dimensions (mm) |    |      |    |
|-----------|--------|-----------------|----|------|----|
| Model     | Series | A               | L  | M    | S2 |
| FFA       | 0E ✓   | 11              | 34 | 23.0 | 8  |
| FFA       | 1E ✓   | 13              | 42 | 28.0 | 9  |
| FFA       | 2E ✓   | 16              | 52 | 36.0 | 12 |
| FFA       | 3E ✓   | 19              | 61 | 41.0 | 15 |
| FFA       | 4E ✓   | 25              | 71 | 50.5 | 19 |
| FFA       | 5E ✓   | 38              | 92 | 67.0 | 32 |



Part number example see page 3



## EINPOLIG / HOCHSTROM | UNIPOLE / HIGH CURRENT

### BAUFORM E-SERIE | MODEL E-SERIES

#### FFA Straight plug with oversize cable collet – watertight

| Reference |        | Dimensions (mm) |      |     |    |    |    |
|-----------|--------|-----------------|------|-----|----|----|----|
| Model     | Series | A               | B    | L   | M  | S1 | S2 |
| FFA       | 1E ✓   | 13              | 14.5 | 55  | 41 | 12 | 12 |
| FFA       | 2E ✓   | 16              | 17.0 | 65  | 49 | 15 | 15 |
| FFA       | 3E ✓   | 19              | 22.0 | 80  | 60 | 19 | 19 |
| FFA       | 4E ✓   | 25              | 36.0 | 105 | 84 | 30 | 32 |

**Note:** the fitting of oversize collets onto this model allows them to be fitted to the cables that can be accommodated by the next housing size up



#### FFA Straight plug, cable collet and nut for fitting a bend relief – watertight

| Reference |        | Dimensions (mm) |    |      |    |
|-----------|--------|-----------------|----|------|----|
| Model     | Series | A               | L  | M    | S2 |
| FFA       | 0E ✓   | 11              | 34 | 23.0 | 7  |
| FFA       | 1E ✓   | 13              | 42 | 28.0 | 9  |
| FFA       | 2E ✓   | 16              | 52 | 36.0 | 12 |
| FFA       | 3E ✓   | 19              | 60 | 40.0 | 15 |
| FFA       | 4E ✓   | 25              | 71 | 50.5 | 19 |

**Note:** the bend relief must be ordered separately (see page 80)



#### FFF Straight plug non-latching, cable collet – watertight

| Reference |        | Dimensions (mm) |    |    |    |
|-----------|--------|-----------------|----|----|----|
| Model     | Series | A               | L  | M  | S2 |
| FFF       | 0E     | 11              | 34 | 23 | 8  |
| FFF       | 1E ✓   | 13              | 42 | 28 | 9  |



#### FLA Elbow (90°) plug, cable collet – watertight


| Reference |        | Dimensions (mm) |      |    |    |      |    |    |    |
|-----------|--------|-----------------|------|----|----|------|----|----|----|
| Model     | Series | A               | D    | H  | L  | M    | S1 | S2 | S3 |
| FLA       | 0E     | 11.5            | 7.6  | 27 | 36 | 25.0 | 10 | 8  | 8  |
| FLA       | 1E     | 14.0            | 8.8  | 33 | 43 | 29.0 | 12 | 9  | 10 |
| FLA       | 2E     | 17.5            | 10.5 | 40 | 51 | 35.0 | 15 | 12 | 13 |
| FLA       | 3E ✓   | 21.0            | 11.5 | 47 | 60 | 40.0 | 18 | 15 | 15 |
| FLA       | 4E     | 27.5            | 15.5 | 57 | 72 | 51.5 | 24 | 19 | 20 |



# EINPOLIG / HOCHSTROM | UNIPOLE / HIGH CURRENT BAUFORM E-SERIE | MODEL E-SERIES




## ERA Fixed socked, nut fixing – watertight

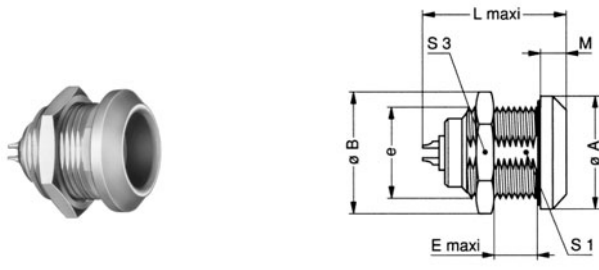


| Reference |        | Dimensions (mm) |      |         |    |      |      |     |      |    |
|-----------|--------|-----------------|------|---------|----|------|------|-----|------|----|
| Model     | Series | A               | B    | e       | E  | L    | L'   | M   | S1   | S3 |
| ERA       | 0E ✓   | 18              | 19.5 | M14x1.0 | 7  | 19.5 | 20.5 | 4.0 | 12.5 | 17 |
| ERA       | 1E ✓   | 20              | 21.5 | M16x1.0 | 9  | 24.0 | 25.3 | 4.5 | 14.5 | 19 |
| ERA       | 2E ✓   | 25              | 27.5 | M20x1.0 | 9  | 28.5 | 30.0 | 5.0 | 18.5 | 24 |
| ERA       | 3E ✓   | 31              | 34.5 | M24x1.0 | 11 | 34.0 | 35.0 | 6.0 | 22.5 | 30 |
| ERA       | 4E ✓   | 37              | 41.5 | M30x1.0 | 9  | 36.0 | 38.0 | 6.5 | 28.5 | 36 |
| ERA       | 5E ✓   | 55              | 54.0 | M45x1.5 | 10 | 44.5 | 78.0 | 9.0 | 42.5 | -  |

**Note:** the 5E series is delivered with a round nut  
'unipole model

## PCA Free socket, cable collet – watertight

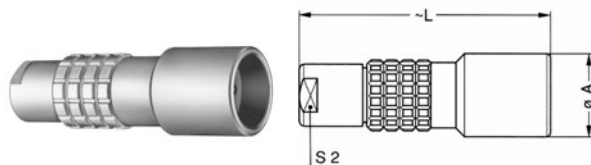

| Reference |        | Dimensions (mm) |      |    |
|-----------|--------|-----------------|------|----|
| Model     | Series | A               | L    | S2 |
| PCA       | 0E ✓   | 13              | 34.0 | 8  |
| PCA       | 1E ✓   | 15              | 45.0 | 9  |
| PCA       | 2E ✓   | 19              | 54.0 | 12 |
| PCA       | 3E ✓   | 23              | 65.0 | 15 |
| PCA       | 4E     | 29              | 75.5 | 19 |
| PCA       | 5E     | 42              | 95.0 | 32 |

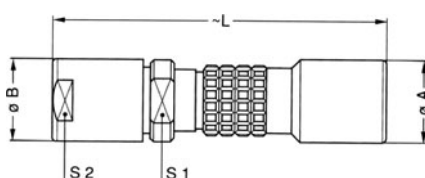

## PCA Free socket with oversize cable collet – watertight

| Reference |        | Dimensions (mm) |      |     |    |    |
|-----------|--------|-----------------|------|-----|----|----|
| Model     | Series | A               | B    | L   | S1 | S2 |
| PCA       | 1E ✓   | 15              | 14.5 | 58  | 12 | 12 |
| PCA       | 2E ✓   | 19              | 17.0 | 67  | 15 | 15 |
| PCA       | 3E ✓   | 23              | 22.0 | 84  | 19 | 19 |
| PCA       | 4E ✓   | 29              | 36.0 | 109 | 30 | 32 |

**Note:** the fitting of oversize collets onto this model allows them to be fitted to the cables that can be accommodated by the next housing size up



Part number example see page 3




## EINPOLIG / HOCHSTROM | UNIPOLE / HIGH CURRENT

### BAUFORM E-SERIE | MODEL E-SERIES

**PCA** Free socket, cable collet and nut  
for fitting a bend relief – watertight

| Reference |        | Dimensions (mm) |      |    |
|-----------|--------|-----------------|------|----|
| Model     | Series | A               | L    | S2 |
| PCA       | 0E ✓   | 13              | 34.0 | 7  |
| PCA       | 1E ✓   | 15              | 45.0 | 9  |
| PCA       | 2E ✓   | 19              | 54.0 | 12 |
| PCA       | 3E ✓   | 23              | 64.0 | 15 |
| PCA       | 4E ✓   | 29              | 75.5 | 19 |


**Note:** the bend relief must be ordered separately (see page 80)

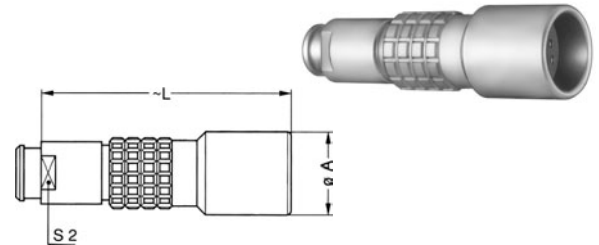

**HGP** Fixed socket, nut fixing, watertight and vacuumtight

| Reference |        | Dimensions (mm) |      |         |      |      |      |     |      |    |
|-----------|--------|-----------------|------|---------|------|------|------|-----|------|----|
| Model     | Series | A               | B    | e       | E    | L    | L'   | M   | S1   | S3 |
| HGP       | 0E ✓   | 18              | 19.5 | M14x1.0 | 7.0  | 23.5 | 22.0 | 4.0 | 12.5 | 17 |
| HGP       | 1E ✓   | 20              | 21.5 | M16x1.0 | 9.0  | 28.0 | 28.0 | 4.5 | 14.5 | 19 |
| HGP       | 2E     | 25              | 27.5 | M20x1.0 | 10.5 | 32.5 | 28.0 | 5.0 | 18.5 | 24 |
| HGP       | 3E     | 31              | 34.5 | M24x1.0 | 15.5 | 39.5 | 38.5 | 6.0 | 22.5 | 30 |
| HGP       | 4E     | 37              | 41.5 | M30x1.0 | 17.5 | 43.0 | 44.0 | 6.5 | 28.5 | 36 |
| HGP       | 5E     | 55              | 54.0 | M45x1.5 | 20.0 | 52.0 | 76.0 | 9.0 | 42.5 | -  |

**Note:** the 5E series is delivered with a round nut  
' unipole model

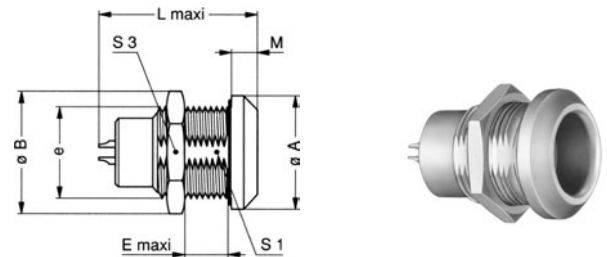

## EINPOLIG / HOCHSTROM | UNIPOLE / HIGH CURRENT

## KONTAKTFIGURATION SERIE E+S | CONTACTFIGURATION SERIES E+S




| Soldersided seen                                                                   |                                                                                     | Order-No. | Size | Impedance | Contact-ø (øA) | Max. conductor-ø | Valid current | Supply voltage<br>U <sub>s</sub> (kV dc) |     | Test voltage<br>U <sub>e</sub> (kV dc) |     | Cable-order-no. | Type of insulation | Delivery time |
|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-----------|------|-----------|----------------|------------------|---------------|------------------------------------------|-----|----------------------------------------|-----|-----------------|--------------------|---------------|
| Male contact                                                                       | Female contact                                                                      |           |      |           |                |                  |               |                                          |     |                                        |     |                 |                    |               |
|    |    | 113       | 00   | -         | 1.3            | 1.0              | 8             | 0.25                                     | 0.4 | 0.8                                    | 1.2 | RG-174/U        | unipole            | ●             |
|    |    | 116       | 0    | -         | 1.6            | 1.4              | 12            | -                                        | 0.7 | -                                      | 2.1 | RG-174/U        | unipole            | ●             |
|    |    | 120       | 1    | -         | 2              | 1.8              | 18            | -                                        | 0.9 | -                                      | 2.7 | RG-174 A/U      | unipole            | ●             |
|    |    | 130       | 1    | -         | 3              | 2.7              | 25            | -                                        | 0.7 | -                                      | 2.1 | 140 470         | unipole            | ●             |
|    |    | 130       | 2    | -         | 3              | 2.7              | 30            | -                                        | 1.0 | -                                      | 3.0 | on request      | unipole            | ●             |
|  |  | 140       | 2    | -         | 4              | 3.7              | 40            | -                                        | 0.8 | -                                      | 2.4 | on request      | unipole            | ●             |
|  |  | 140       | 3    | -         | 4              | 3.7              | 43            | -                                        | 1.1 | -                                      | 3.3 | on request      | unipole            | ●             |
|  |  | 160       | 3    | -         | 6              | 5.5              | 65            | -                                        | 0.8 | -                                      | 2.4 | on request      | unipole            | ●             |
|  |  | 140       | 4    | -         | 4              | 3.7              | 46            | -                                        | 1.4 | -                                      | 4.2 | on request      | unipole            | ◐             |
|  |  | 160       | 4    | -         | 6              | 5.5              | 70            | -                                        | 1.3 | -                                      | 3.9 | on request      | unipole            | ◐             |
|  |  | 112       | 5    | -         | 12             | 12               | 230           | -                                        | 0.7 | -                                      | 2.1 | on request      | unipole            | ○             |



# EINPOLIG / HOCHSTROM | UNIPOLE / HIGH CURRENT KONFEKTIONIERUNGSANLEITUNG | ASSEMBLING INSTRUCTIONS



| Reference |      |          | Contact<br>ø (mm) | Unisolated length (mm) |     |      |
|-----------|------|----------|-------------------|------------------------|-----|------|
| Series    | Type | Cable    |                   | A                      | B   | C    |
| 0S/0E     | 116  | one-lead | 1.6               | 3.0                    | 4.5 | 6.0  |
| 1S/1E     | 120  | one-lead | 2.0               | 3.0                    | 5.0 | 7.0  |
| 1S/1E     | 130  | one-lead | 3.0               | 3.0                    | 5.0 | 7.0  |
| 2S/2E     | 130  | one-lead | 3.0               | 5.0                    | 6.0 | 9.0  |
| 2S/2E     | 140  | one-lead | 4.0               | 4.0                    | 6.0 | 9.0  |
| 3S/3E     | 140  | one-lead | 4.0               | 4.0                    | 9.0 | 12.0 |
| 3S/3E     | 160  | one-lead | 6.0               | 5.0                    | 9.0 | 12.0 |
| 4S/4E     | 140  | one-lead | 4.0               | 3.5                    | 8.0 | 12.0 |
| 4S/4E     | 160  | one-lead | 6.0               | 5.5                    | 8.0 | 12.0 |
| 5S/5E     | 112  | one-lead | 12.0              | 16.0                   | -   | 19.0 |

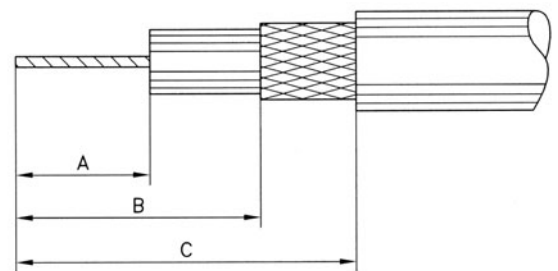

**Note:** The dimensions are standard values and may vary depending on the cable quality.

Die Abmessungen sind Richtwerte und können sich je nach Kabelqualität ändern.

**Steckverbindungen  
Connectors  
Kontaktfiguration  
Contactfiguration  
Kabel  
Cable  
Konfektionierungsanleitung  
Assembling Instructions**



**GEMISCHT / MEHRPOLIG HOCHSTROM  
HYBRID / MULTIPOLE HIGH CURRENT**

# GEMISCHT/MEHRPOLIG HOCHSTROM | HYBRIDE/MULTIPOLE HIGH CURRENT


## BAUFORM S-SERIE | MODEL S-SERIES



### FFA Straight plug, cable collet



| Reference |        | Dimensions (mm) |     |    |    |
|-----------|--------|-----------------|-----|----|----|
| Model     | Series | A               | L   | M  | S2 |
| FFA       | 2S     | 14.8            | 52  | 40 | 11 |
| FFA       | 3S ✓   | 17.8            | 61  | 46 | 14 |
| FFA       | 4S ✓   | 24.8            | 77  | 59 | 19 |
| FFA       | 5S ✓   | 35.1            | 103 | 78 | 29 |

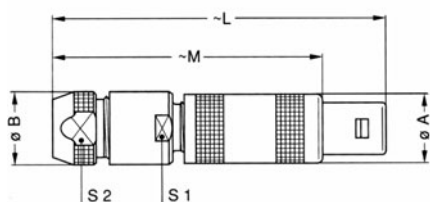


### FFA Straight plug with oversize cable collet

| Reference |        | Dimensions (mm) |      |     |     |      |    |
|-----------|--------|-----------------|------|-----|-----|------|----|
| Model     | Series | A               | B    | L   | M   | S1   | S2 |
| FFA       | 2S ✓   | 14.8            | 18.0 | 67  | 55  | 14.0 | 14 |
| FFA       | 3S ✓   | 17.8            | 21.0 | 85  | 70  | 19.0 | 19 |
| FFA       | 4S ✓   | 24.8            | 31.8 | 107 | 89  | 28.5 | 29 |
| FFA       | 5S ✓   | 35.1            | 41.8 | 138 | 113 | 37.5 | 38 |

**Note:** the fitting of oversize collets onto this model allows them to be fitted to the cables that can be accommodated by the next housing size up


### FFA Straight plug, cable collet and nut for fitting a bend relief

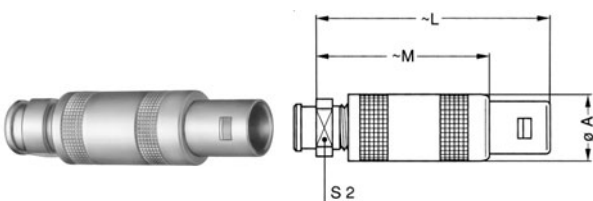

| Reference |        | Dimensions (mm) |    |    |    |
|-----------|--------|-----------------|----|----|----|
| Model     | Series | A               | L  | M  | S2 |
| FFA       | 2S ✓   | 14.8            | 52 | 40 | 12 |
| FFA       | 3S ✓   | 17.8            | 61 | 46 | 14 |
| FFA       | 4S ✓   | 24.8            | 77 | 59 | 20 |

**Note:** the bend relief must be ordered separately (see page 80)

### FFP Straight plug, cable collet and inner anti-rotating device

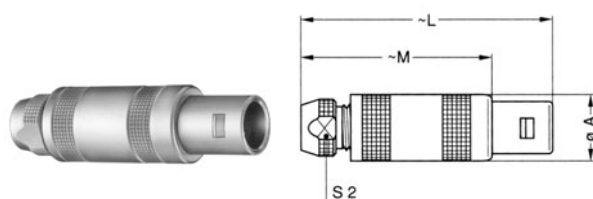

| Reference |        | Dimensions (mm) |    |    |    |
|-----------|--------|-----------------|----|----|----|
| Model     | Series | A               | L  | M  | S2 |
| FFP       | 2S     | 14.8            | 52 | 40 | 11 |
| FFP       | 3S ✓   | 17.8            | 61 | 46 | 14 |
| FFP       | 4S ✓   | 24.8            | 77 | 59 | 19 |




# GEMISCHT/MEHRPOLIG HOCHSTROM | HYBRIDE/MULTIPOLE HIGH CURRENT

## BAUFORM S-SERIE | MODEL S-SERIES


### FFB Straight plug, cable collet and safety locking ring

| Reference |        | Dimensions (mm) |      |      |      |
|-----------|--------|-----------------|------|------|------|
| Model     | Series | A               | L    | M    | S2   |
| FFB       | 2S ✓   | 14.8            | 55.5 | 43.5 | 11.0 |
| FFB       | 3S ✓   | 17.8            | 65.0 | 50.0 | 14.0 |

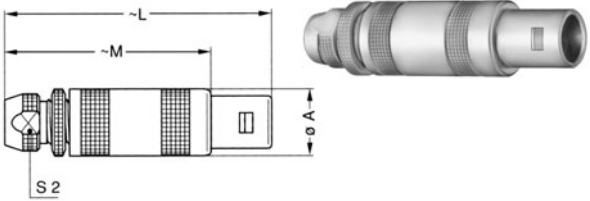

### FFB Straight plug, cable collet and safety locking ring and nut for fitting a bend relief


| Reference |        | Dimensions (mm) |      |      |    |
|-----------|--------|-----------------|------|------|----|
| Model     | Series | A               | L    | M    | S2 |
| FFB       | 2S     | 14.8            | 55.5 | 43.5 | 12 |
| FFB       | 3S     | 17.8            | 65.0 | 50.0 | 14 |

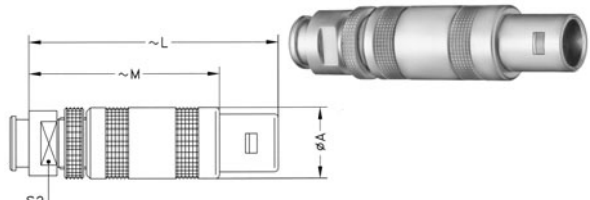

**Note:** series 2S and 3S are available on request  
the bend relief must be ordered separately (see page 80)

### FLA Elbow (90°) plug, cable collet


| Reference |        | Dimensions (mm) |    |      |      |      |    |    |
|-----------|--------|-----------------|----|------|------|------|----|----|
| Model     | Series | A               | A1 | H    | L    | M    | S1 | S2 |
| FLA       | 2S     | 20              | 20 | 37.0 | 31.0 | 19.0 | 13 | 11 |
| FLA       | 3S     | 21              | 21 | 44.0 | 38.5 | 23.5 | 15 | 14 |
| FLA       | 4S ✓   | 28              | 28 | 56.0 | 49.0 | 31.0 | 20 | 19 |
| FLA       | 5S ✓   | -               | 37 | 76.5 | 65.0 | 40.0 | 30 | 29 |

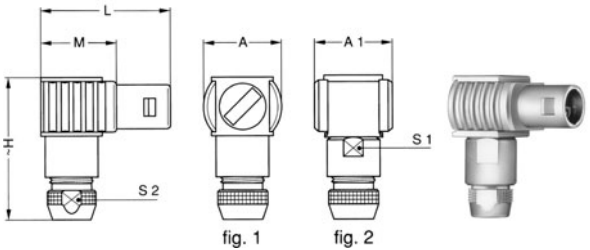

**Note:** fig.1 is used for the unipole type; fig.2 is used for the multipole type

### ERA Fixed socket, nut fixing

| Reference |        | Dimensions (mm) |      |         |      |      |      |     |      |    |
|-----------|--------|-----------------|------|---------|------|------|------|-----|------|----|
| Model     | Series | A               | B    | e       | E    | L    | L'   | M   | S1   | S3 |
| ERA       | 2S     | 18              | 19.5 | M15x1.0 | 8.5  | 24.5 | 26.0 | 1.8 | 13.5 | 17 |
| ERA       | 3S ✓   | 22              | 25.2 | M18x1.0 | 11.5 | 29.0 | 30.0 | 2.0 | 16.5 | 22 |
| ERA       | 4S ✓   | 28              | 32.0 | M25x1.0 | 12.0 | 34.0 | 36.0 | 2.5 | 23.5 | 30 |
| ERA       | 5S ✓   | 40              | 40.0 | M35x1.0 | 15.5 | 45.0 | 78.5 | 3.0 | 33.5 | -  |

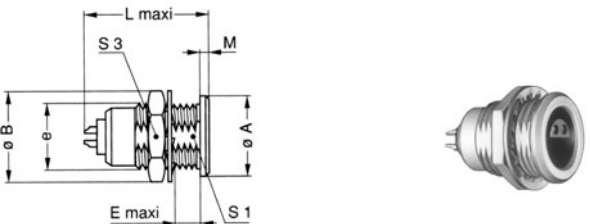

**Note:** the 5S series is delivered with a tapered washer and a round nut  
unipole model

# GEMISCHT/MEHRPOLIG HOCHSTROM | HYBRIDE/MULTIPOLE HIGH CURRENT

## BAUFORM S-SERIE | MODEL S-SERIES



### ERN Fixed socket, nut fixing, with earthing tag

| Reference |        | Dimensions (mm) |      |         |      |      |      |     |      |    |
|-----------|--------|-----------------|------|---------|------|------|------|-----|------|----|
| Model     | Series | A               | B    | e       | E    | L    | L'   | M   | S1   | S3 |
| ERN       | 2S ✓   | 18              | 19.5 | M15x1.0 | 8.5  | 26.3 | 26.3 | 1.8 | 13.5 | 17 |
| ERN       | 3S     | 22              | 25.2 | M18x1.0 | 11.5 | 29.8 | 30.0 | 2.0 | 16.5 | 22 |

Note: <sup>1</sup> unipole model



### EHP Fixed socket, nut fixing, protruding shell

| Reference |        | Dimensions (mm) |      |         |   |    |    |      |    |    |
|-----------|--------|-----------------|------|---------|---|----|----|------|----|----|
| Model     | Series | A               | B    | e       | E | L  | L' | M    | S1 | S3 |
| EHP       | 3S ✓   | 22              | 25.2 | M18x1.0 | 4 | 29 | 30 | 18.7 | -  | 22 |

Note: <sup>1</sup> unipole model



### EBC Fixed socket with square flange, protruding shell and screw fixing

| Reference |        | Dimensions (mm) |    |     |      |      |      |      |     |
|-----------|--------|-----------------|----|-----|------|------|------|------|-----|
| Model     | Series | A               | B  | C   | H    | L    | L'   | M    | N   |
| EBC       | 2S     | 22              | 15 | 3.2 | 15.5 | 24.5 | 26.0 | 18.5 | 4.4 |
| EBC       | 3S     | 25              | 18 | 3.2 | 18.0 | 29.0 | 30.0 | 23.5 | 3.0 |
| EBC       | 5S ✓   | 45              | 40 | 4.3 | 36.8 | 45.0 | 53.5 | 15.0 | 4.0 |

Note: <sup>1</sup> unipole model



### ERD Fixed socket with two nuts (back panel mounting)

| Reference |        | Dimensions (mm) |      |         |      |      |    |     |      |    |
|-----------|--------|-----------------|------|---------|------|------|----|-----|------|----|
| Model     | Series | A               | B    | e       | E    | L    | L' | M   | S1   | S3 |
| ERD       | 2S     | 20              | 19.5 | M15x1.0 | 6.5  | 24.5 | 26 | 3.5 | 13.5 | 17 |
| ERD       | 3S ✓   | 24              | 25.2 | M18x1.0 | 9.0  | 29.0 | 30 | 4.5 | 16.5 | 22 |
| ERD       | 4S     | 30              | 32.0 | M25x1.0 | 10.0 | 34.0 | 36 | 4.5 | 23.5 | 30 |

Note: the 3S and 4S series are delivered with a conical nut  
<sup>1</sup> unipole model



Part number example see page 3



## GEMISCHT/MEHRPOLIG HOCHSTROM | HYBRIDE/MULTIPOLE HIGH CURRENT

### BAUFORM S-SERIE | MODEL S-SERIES

**ECP** Fixed socket with two nuts, long threaded shell, with straight contact for printed circuit (back panel mounting)

| Reference |        | Dimensions (mm) |      |         |    |     |    |      |    |
|-----------|--------|-----------------|------|---------|----|-----|----|------|----|
| Model     | Series | A               | B    | e       | E  | M   | N  | S1   | S3 |
| ECP       | 2S ✓   | 20              | 19.5 | M15x1.0 | 11 | 3.5 | 20 | 13.5 | 17 |
| ECP       | 3S ✓   | 24              | 25.2 | M18x1.0 | 14 | 4.5 | 24 | 16.5 | 22 |

**Note:** This contact type is available for all EXX socket models. Length 'L' depends on the number of contacts. The 3S-series is delivered with a conical nut.



### PCA Free socket, cable collet


| Reference |        | Dimensions (mm) |    |    |
|-----------|--------|-----------------|----|----|
| Model     | Series | A               | L  | S2 |
| PCA       | 2S     | 14.8            | 50 | 11 |
| PCA       | 3S ✓   | 17.8            | 59 | 14 |
| PCA       | 4S ✓   | 24.8            | 75 | 19 |
| PCA       | 5S ✓   | 34.7            | 99 | 29 |



### PCA Free socket with oversize cable collet

| Reference |        | Dimensions (mm) |      |     |      |    |
|-----------|--------|-----------------|------|-----|------|----|
| Model     | Series | A               | B    | L   | S1   | S2 |
| PCA       | 2S ✓   | 14.8            | 18.0 | 65  | 14.0 | 14 |
| PCA       | 3S ✓   | 17.8            | 21.0 | 83  | 19.0 | 19 |
| PCA       | 4S ✓   | 24.8            | 31.8 | 105 | 28.5 | 29 |

**Note:** the fitting of oversize collets onto this model allows it to be fitted to the cables that can be accommodated by the next housing size up

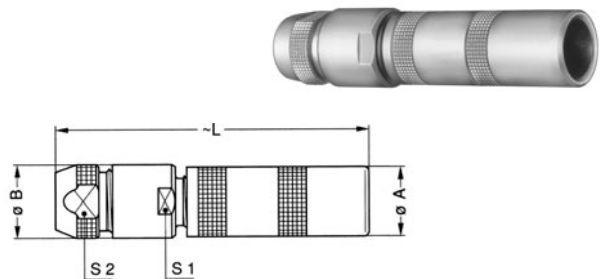

### PCA Free socket, cable collet and nut for fitting a bend relief

| Reference |        | Dimensions (mm) |    |    |
|-----------|--------|-----------------|----|----|
| Model     | Series | A               | L  | S2 |
| PCA       | 2S ✓   | 14.8            | 50 | 12 |
| PCA       | 3S ✓   | 17.8            | 59 | 14 |
| PCA       | 4S ✓   | 24.8            | 75 | 20 |

**Note:** the bend relief must be ordered separately (see page 80)



# GEMISCHT/MEHRPOLIG HOCHSTROM | HYBRIDE/MULTIPOLE HIGH CURRENT

## BAUFORM S-SERIE | MODEL S-SERIES



### PSA Fixed socket, nut fixing, cable collet



| Reference |        | Dimensions (mm) |      |         |      |    |     |      |    |    |
|-----------|--------|-----------------|------|---------|------|----|-----|------|----|----|
| Model     | Series | A               | B    | e       | E    | L  | M   | S1   | S2 | S3 |
| PSA       | 2S     | 18              | 19.5 | M15x1.0 | 8.5  | 50 | 1.8 | 13.5 | 11 | 17 |
| PSA       | 3S ✓   | 22              | 25.2 | M18x1.0 | 11.5 | 59 | 2.0 | 16.5 | 14 | 22 |
| PSA       | 4S ✓   | 28              | 32.0 | M25x1.0 | 12.0 | 75 | 2.5 | 23.5 | 19 | 30 |
| PSA       | 5S ✓   | 40              | 40.0 | M35x1.0 | 15.5 | 99 | 3.0 | 33.5 | 29 | -  |

**Note:** the 5S series is delivered with a tapered washer and a round nut

### PSP Fixed socket, nut fixing, cable collet and inner anti-rotating device




| Reference |        | Dimensions (mm) |      |         |      |    |     |      |    |    |
|-----------|--------|-----------------|------|---------|------|----|-----|------|----|----|
| Model     | Series | A               | B    | e       | E    | L  | M   | S1   | S2 | S3 |
| PSP       | 2S     | 18              | 19.5 | M15x1.0 | 8.5  | 50 | 1.8 | 13.5 | 11 | 17 |
| PSP       | 3S     | 22              | 25.2 | M18x1.0 | 11.5 | 59 | 2.0 | 16.5 | 14 | 22 |
| PSP       | 4S ✓   | 28              | 32.0 | M25x1.0 | 12.0 | 75 | 2.5 | 23.5 | 19 | 30 |

## BAUFORM E-SERIE | MODEL E-SERIES

### FFA Straight plug, cable collet – watertight



| Reference |        | Dimensions (mm) |    |      |    |
|-----------|--------|-----------------|----|------|----|
| Model     | Series | A               | L  | M    | S2 |
| FFA       | 2E ✓   | 16              | 52 | 36.0 | 12 |
| FFA       | 3E ✓   | 19              | 61 | 41.0 | 15 |
| FFA       | 4E ✓   | 25              | 71 | 50.5 | 19 |
| FFA       | 5E     | 38              | 92 | 67.0 | 32 |

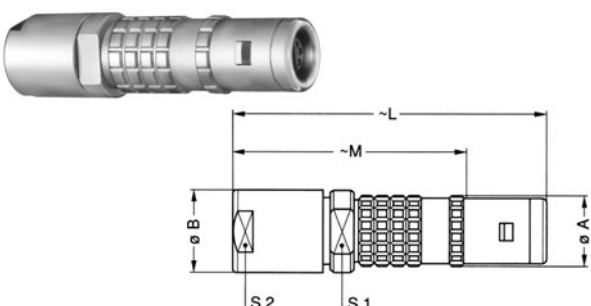

### FFA Straight plug with oversize cable collet – watertight

| Reference |        | Dimensions (mm) |    |     |    |    |    |
|-----------|--------|-----------------|----|-----|----|----|----|
| Model     | Series | A               | B  | L   | M  | S1 | S2 |
| FFA       | 2E ✓   | 16              | 17 | 65  | 49 | 15 | 15 |
| FFA       | 3E ✓   | 19              | 22 | 80  | 60 | 19 | 19 |
| FFA       | 4E ✓   | 25              | 36 | 105 | 84 | 30 | 32 |

**Note:** the fitting of oversize collets onto this model allows them to be fitted to the cables that can be accommodated by the next housing size up

✓ Bei Lemo vorhanden | available at Lemo



Part number example see page 3



## GEMISCHT/MEHRPOLIG HOCHSTROM

## HYBRIDE/MULTIPOLE HIGH CURRENT

### BAUFORM E-SERIE

### MODEL E-SERIE

**FFA straight plug, cable collet and nut for fitting a bend relief – watertight**

| Reference |        | Dimensions (mm) |    |      |    |
|-----------|--------|-----------------|----|------|----|
| Model     | Series | A               | L  | M    | S2 |
| FFA       | 2E ✓   | 16              | 52 | 36.0 | 12 |
| FFA       | 3E ✓   | 19              | 60 | 40.0 | 15 |
| FFA       | 4E ✓   | 25              | 71 | 50.5 | 19 |

**Note:** the bend relief must be ordered separately (see page 80)



**FAA Fixed plug non-latching, nut fixing – watertight**

| Reference |        | Dimensions (mm) |      |         |     |      |      |      |      |
|-----------|--------|-----------------|------|---------|-----|------|------|------|------|
| Model     | Series | A               | B    | e       | E   | L    | L'   | M    | S1   |
| FAA       | 2E     | 25              | 27.5 | M20x1.0 | 4.0 | 27.0 | 27.0 | 18.0 | 18.5 |
| FAA       | 3E ✓   | 31              | 34.5 | M24x1.0 | 4.5 | 32.5 | 32.5 | 22.5 | 22.5 |

**Note:** <sup>1</sup> unipole model



**FLA Elbow (90°) plug, cable collet – watertight**

| Reference |        | Dimensions (mm) |      |    |    |      |    |    |    |
|-----------|--------|-----------------|------|----|----|------|----|----|----|
| Model     | Series | A               | D    | H  | L  | M    | S1 | S2 | S3 |
| FLA       | 2E     | 17.5            | 10.5 | 40 | 51 | 35.0 | 15 | 12 | 13 |
| FLA       | 3E ✓   | 21.0            | 11.5 | 47 | 60 | 40.0 | 18 | 15 | 15 |
| FLA       | 4E     | 27.5            | 15.5 | 57 | 72 | 51.5 | 24 | 19 | 20 |



**ERA Fixed socket, nut fixing – watertight**

| Reference |        | Dimensions (mm) |      |         |    |      |    |     |      |
|-----------|--------|-----------------|------|---------|----|------|----|-----|------|
| Model     | Series | A               | B    | e       | E  | L    | L' | M   | S1   |
| ERA       | 2E ✓   | 25              | 27.5 | M20x1.0 | 9  | 28.5 | 30 | 5.0 | 18.5 |
| ERA       | 3E ✓   | 31              | 34.5 | M24x1.0 | 11 | 34.0 | 35 | 6.0 | 22.5 |
| ERA       | 4E ✓   | 37              | 41.5 | M30x1.0 | 9  | 36.0 | 38 | 6.5 | 28.5 |
| ERA       | 5E     | 55              | 54.0 | M45x1.5 | 10 | 44.5 | 78 | 9.0 | 42.5 |

**Note:** the 5E series is delivered with a round nut.  
<sup>1</sup> unipole model



# GEMISCHT/MEHRPOLIG HOCHSTROM | HYBRIDE/MULTIPOLE HIGH CURRENT

## BAUFORM E-SERIE | MODEL E-SERIES




**EEP Fixed socket, nut fixing, with straight contact for printed circuit (back panel mounting) – watertight**


| Reference |        | Dimensions (mm) |    |         |   |     |      |    |      |
|-----------|--------|-----------------|----|---------|---|-----|------|----|------|
| Model     | Series | A               | B  | e       | E | M   | N    | P  | S1   |
| EEP       | 2E ✓   | 25              | 25 | M20x1.0 | 5 | 3.5 | 25.5 | 10 | 18.5 |
| EEP       | 3E ✓   | 30              | 31 | M24x1.0 | 7 | 4.5 | 30.5 | 12 | 22.5 |

**Note:** length 'L' depends on the number of contacts

**PCA Free socket, cable collet – watertight**

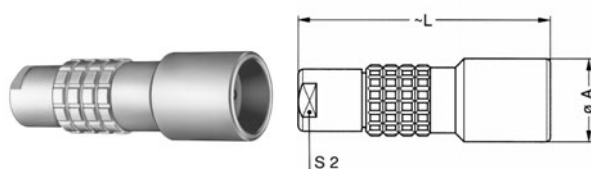


| Reference |        | Dimensions (mm) |      |    |
|-----------|--------|-----------------|------|----|
| Model     | Series | A               | L    | S2 |
| PCA       | 2E ✓   | 19              | 54.0 | 12 |
| PCA       | 3E ✓   | 23              | 65.0 | 15 |
| PCA       | 4E ✓   | 29              | 75.5 | 19 |
| PCA       | 5E     | 42              | 95.0 | 32 |

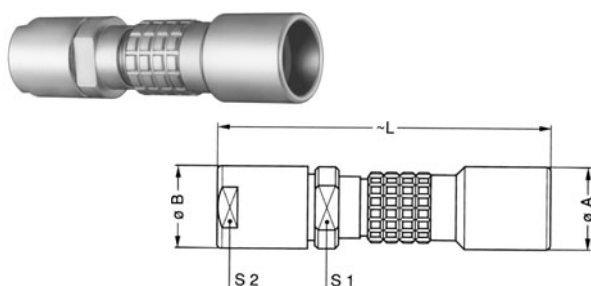

**PCA Free socket with oversize cable collet – watertight**

| Reference |        | Dimensions (mm) |    |     |    |    |
|-----------|--------|-----------------|----|-----|----|----|
| Model     | Series | A               | B  | L   | S1 | S2 |
| PCA       | 2E ✓   | 19              | 17 | 67  | 15 | 15 |
| PCA       | 3E ✓   | 23              | 22 | 84  | 19 | 19 |
| PCA       | 4E ✓   | 29              | 36 | 109 | 30 | 32 |

**Note:** the fitting of oversize collets onto this model allows them to be fitted to the cables that can be accommodated by the next housing size up

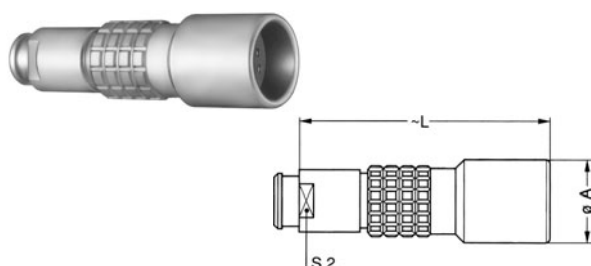

**PCA Free socket, cable collet and nut for fitting a bend relief – watertight**

| Reference |        | Dimensions (mm) |      |    |
|-----------|--------|-----------------|------|----|
| Model     | Series | A               | L    | S2 |
| PCA       | 2E ✓   | 19              | 54.0 | 12 |
| PCA       | 3E ✓   | 23              | 64.0 | 15 |
| PCA       | 4E ✓   | 29              | 75.5 | 19 |

**Note:** the bend relief must be ordered separately (see page 80)



Part number example see page 3



## GEMISCHT/MEHRPOLIG HOCHSTROM | HYBRIDE/MULTIPOLE HIGH CURRENT

### BAUFORM E-SERIE | MODEL E-SERIES

#### PSA Fixed socket, nut fixing, cable collet – watertight

| Reference |        | Dimensions (mm) |      |         |    |      |     |      |    |    |
|-----------|--------|-----------------|------|---------|----|------|-----|------|----|----|
| Model     | Series | A               | B    | e       | E  | L    | M   | S1   | S2 | S3 |
| PSA       | 2E     | 25              | 27.5 | M20x1.0 | 9  | 54.0 | 5.0 | 18.5 | 12 | 24 |
| PSA       | 3E     | 31              | 34.5 | M24x1.0 | 11 | 65.0 | 6.0 | 22.5 | 15 | 30 |
| PSA       | 4E ✓   | 37              | 41.5 | M30x1.5 | 9  | 75.5 | 6.5 | 28.5 | 19 | 36 |
| PSA       | 5E     | 51              | 54.0 | M45x1.5 | 10 | 95.0 | 9.0 | -    | 32 | 54 |

**Note:** the 5E series is delivered with a round nut



#### HGP Fixed socket, nut fixing, watertight and vacuumtight

| Reference |        | Dimensions (mm) |      |         |      |      |      |     |      |    |
|-----------|--------|-----------------|------|---------|------|------|------|-----|------|----|
| Model     | Series | A               | B    | e       | E    | L    | L'   | M   | S1   | S3 |
| HGP       | 2E ✓   | 25              | 27.5 | M20x1.0 | 10.5 | 32.5 | 28.0 | 5.0 | 18.5 | 24 |
| HGP       | 3E ✓   | 31              | 34.5 | M24x1.0 | 15.5 | 39.5 | 38.5 | 6.0 | 22.5 | 30 |
| HGP       | 4E     | 37              | 41.5 | M30x1.0 | 17.5 | 43.0 | 44.0 | 6.5 | 28.5 | 36 |
| HGP       | 5E     | 55              | 54.0 | M45x1.5 | 20.0 | 52.0 | 76.0 | 9.0 | 42.5 | -  |

**Note:** the 5E series is delivered with a round nut  
' unipole model



## BAUFORM B-SERIE | MODEL B-SERIES

#### FGG Straight plug with key (G) or keys (code A to M and R)

| Reference |        | Dimensions (mm) |     |    |    |    |
|-----------|--------|-----------------|-----|----|----|----|
| Model     | Series | A               | L   | M  | S1 | S2 |
| FGG       | 1B ✓   | 12              | 43  | 32 | 10 | 9  |
| FGG       | 2B ✓   | 15              | 49  | 37 | 13 | 12 |
| FGG       | 3B ✓   | 18              | 58  | 43 | 15 | 14 |
| FGG       | 4B ✓   | 25              | 75  | 57 | 21 | 20 |
| FGG       | 5B ✓   | 35              | 103 | 78 | 31 | 30 |



# GEMISCHT/MEHRPOLIG HOCHSTROM | HYBRIDE/MULTIPOLE HIGH CURRENT

## BAUFORM B-SERIE | MODEL B-SERIES



**EGG** Fixed socket with nut fixing and key (G) or keys (code A to M and R)



| Reference |        | Dimensions (mm) |    |         |      |      |     |      |      |    |
|-----------|--------|-----------------|----|---------|------|------|-----|------|------|----|
| Model     | Series | A               | B  | e       | E    | L    | M   | N    | S1   | S3 |
| EGG       | 1B ✓   | 14              | 16 | M12x1.0 | 7.5  | 21.7 | 1.5 | 19.5 | 10.5 | 14 |
| EGG       | 2B ✓   | 18              | 20 | M15x1.0 | 8.5  | 25.0 | 1.8 | 21.5 | 13.5 | 17 |
| EGG       | 3B ✓   | 22              | 25 | M18x1.0 | 11.5 | 30.0 | 2.0 | 25.5 | 16.5 | 22 |
| EGG       | 4B ✓   | 28              | 32 | M25x1.0 | 12.0 | 34.5 | 2.5 | 30.5 | 23.5 | 30 |
| EGG       | 5B ✓   | 40              | 40 | M35x1.0 | 15.5 | 45.5 | 3.0 | 36.5 | 33.5 | -  |

**PKG** Fixed socket with nut fixing and key (G) or keys (code A to M and R) and cable collet



| Reference |        | Dimensions (mm) |      |         |      |      |     |      |    |    |
|-----------|--------|-----------------|------|---------|------|------|-----|------|----|----|
| Model     | Series | A               | B    | e       | E    | L    | M   | S1   | S2 | S3 |
| PKG       | 1B ✓   | 14              | 16.0 | M12x1.0 | 7.5  | 40.5 | 1.5 | 10.5 | 9  | 14 |
| PKG       | 2B ✓   | 18              | 19.5 | M15x1.0 | 8.5  | 47.0 | 1.8 | 13.5 | 12 | 17 |
| PKG       | 3B ✓   | 22              | 25.0 | M18x1.0 | 11.5 | 56.0 | 2.0 | 16.5 | 14 | 22 |
| PKG       | 4B ✓   | 28              | 32.0 | M25x1.0 | 12.5 | 73.0 | 2.5 | 23.5 | 20 | 30 |
| PKG       | 5B ✓   | 40              | 40.0 | M35x1.0 | 11.0 | 99.0 | 3.0 | 33.5 | 30 | -  |

**PFG** Fixed socket with two nuts, key (G) or keys (code A to M and R) and cable collet



| Reference |        | Dimensions (mm) |    |         |      |      |     |      |    |    |
|-----------|--------|-----------------|----|---------|------|------|-----|------|----|----|
| Model     | Series | A               | B  | e       | E    | L    | M   | S1   | S2 | S3 |
| PFG       | 1B ✓   | 16              | 16 | M12x1.0 | 5.0  | 40.5 | 3.5 | 10.5 | 9  | 14 |
| PFG       | 2B ✓   | 20              | 20 | M15x1.0 | 6.5  | 47.0 | 3.5 | 13.5 | 12 | 17 |
| PFG       | 3B ✓   | 24              | 25 | M18x1.0 | 9.0  | 56.0 | 4.5 | 16.5 | 14 | 22 |
| PFG       | 4B ✓   | 30              | 32 | M25x1.0 | 11.0 | 73.0 | 4.5 | 23.5 | 20 | 30 |

**PHG** Free socket with key (G) or keys (code A to M and R) and cable collet



| Reference |        | Dimensions (mm) |      |    |    |
|-----------|--------|-----------------|------|----|----|
| Model     | Series | A               | L    | S1 | S2 |
| PHG       | 1B ✓   | 12.5            | 40.5 | 10 | 9  |
| PHG       | 2B ✓   | 16.5            | 47.0 | 13 | 12 |
| PHG       | 3B ✓   | 19.0            | 56.0 | 15 | 14 |
| PHG       | 4B ✓   | 24.4            | 73.0 | 21 | 20 |
| PHG       | 5B ✓   | 34.2            | 99.0 | 31 | 30 |



Part number example see page 3



## GEMISCHT/MEHRPOLIG HOCHSTROM | HYBRIDE/MULTIPOLE HIGH CURRENT

### BAUFORM K-SERIE | MODEL K-SERIES

**FGG** Straight plug with key (G) or keys (code A to F and L) and cable collet – watertight

| Reference |        | Dimensions (mm) |      |    |      |      |
|-----------|--------|-----------------|------|----|------|------|
| Model     | Series | A               | C    | L  | M    | S2   |
| FGG       | 1K ✓   | 13              | 7.1  | 42 | 28.0 | 8.9  |
| FGG       | 2K ✓   | 16              | 9.2  | 52 | 36.0 | 11.9 |
| FGG       | 3K ✓   | 19              | 10.5 | 61 | 41.0 | 14.9 |
| FGG       | 4K ✓   | 25              | 14.0 | 71 | 50.5 | 18.9 |
| FGG       | 5K ✓   | 38              | 23.5 | 92 | 67.0 | 31.9 |



**FGG** Straight plug with key (G) or keys (code A to F and L) and oversize collet – watertight

| Reference |        | Dimensions (mm) |      |      |     |    |      |      |  |
|-----------|--------|-----------------|------|------|-----|----|------|------|--|
| Model     | Series | A               | B    | C    | L   | M  | S1   | S2   |  |
| FGG       | 1K ✓   | 13              | 14.5 | 9.2  | 55  | 41 | 11.9 | 11.9 |  |
| FGG       | 2K ✓   | 16              | 17.0 | 10.5 | 65  | 49 | 14.9 | 14.9 |  |
| FGG       | 3K ✓   | 19              | 22.0 | 15.3 | 80  | 60 | 18.9 | 18.9 |  |
| FGG       | 4K ✓   | 25              | 36.0 | 23.5 | 105 | 84 | 30.0 | 31.9 |  |



**FGG** Straight plug with key (G) or keys (code A to F and L) and bend relief – watertight

| Reference |        | Dimensions (mm) |      |      |      |      |
|-----------|--------|-----------------|------|------|------|------|
| Model     | Series | A               | C    | L    | M    | S2   |
| FGG       | 1K ✓   | 13              | 7.1  | 45.0 | 31.0 | 9.0  |
| FGG       | 2K ✓   | 16              | 8.7  | 49.0 | 33.0 | 11.9 |
| FGG       | 3K ✓   | 19              | 10.8 | 62.0 | 42.0 | 15.0 |
| FGG       | 4K ✓   | 25              | 15.3 | 78.5 | 50.5 | 18.9 |




**Note:** the bend relief must be ordered separately (see page 82)

**EGG** Fixed socket with nut fixing and key (G) or keys (code A to F and L) – watertight

| Reference |        | Dimensions (mm) |      |         |    |      |     |      |    |  |
|-----------|--------|-----------------|------|---------|----|------|-----|------|----|--|
| Model     | Series | A               | B    | e       | E  | L    | M   | S1   | S3 |  |
| EGG       | 1K ✓   | 20              | 21.5 | M16x1.0 | 9  | 26.0 | 4.5 | 14.5 | 19 |  |
| EGG       | 2K ✓   | 25              | 27.5 | M20x1.0 | 9  | 29.0 | 5.0 | 18.5 | 24 |  |
| EGG       | 3K ✓   | 31              | 34.5 | M24x1.0 | 11 | 34.5 | 6.0 | 22.5 | 30 |  |
| EGG       | 4K ✓   | 37              | 41.5 | M30x1.0 | 9  | 35.0 | 6.5 | 28.5 | 36 |  |
| EGG       | 5K ✓   | 54              | 54.0 | M45x1.5 | 10 | 43.5 | 9.0 | 42.5 | 54 |  |





**PHG** Free socket, nut fixing, with key (G) or keys (code A to F and L) and cable collet – watertight

**PHG** Free socket, nut fixing, with key (G) or keys (code A to F and L) and oversize collet – watertight

**PHG** Free socket, nut fixing, with key (G) or keys (code A to F and L) and nut for fitting a bend relief – watertight

**Note:** the bend relief must be ordered separately (see page 80)



Part number example see page 3



# GEMISCHT/MEHRPOLIG HOCHSTROM | HYBRIDE/MULTIPOLE HIGH CURRENT

## KONTAKTFIGURATION SERIE S+E | CONTACTFIGURATION SERIES S+E

| Soldersided seen |                | Order-No. | Size |
|------------------|----------------|-----------|------|
| Male contact     | Female contact |           |      |
|                  |                | 702       | 2    |
|                  |                | 702       | 3    |
|                  |                | 703       | 3    |
|                  |                | 704       | 3    |
|                  |                | 705       | 3    |
|                  |                | 706       | 3    |
|                  |                | 707       | 3    |
|                  |                | 708       | 3    |
|                  |                | 732       | 3    |
|                  |                | 734       | 3    |
|                  |                | 702       | 4    |
|                  |                | 703       | 4    |
|                  |                | 704       | 4    |

| Impedance | Contact-ø         | Max. conductor-ø  | Valid current | Supply voltage<br>U <sub>s</sub> (kV dc) |            | Test voltage<br>U <sub>e</sub> (kV dc) |                   | Cable-order-no.    | Type of insulation | Delivery time |
|-----------|-------------------|-------------------|---------------|------------------------------------------|------------|----------------------------------------|-------------------|--------------------|--------------------|---------------|
| Ω         | mm                | mm                | A             | K-K                                      | K-M        | K-K                                    | K-M               |                    |                    |               |
| -         | 1.3<br>3.0        | 1.0<br>2.7        | 15<br>-       | 0.6<br>3.5                               | 0.8<br>5.0 | 1.8<br>-                               | 2.4<br>-          | 020 140<br>106 330 | mixed              | ●             |
| -         | 1.3<br>2.0<br>2.0 | 1.0<br>1.8<br>1.8 | 10<br>18      | 3.0<br>0.35                              | 3.0<br>0.5 | 4.5<br>8.0<br>1.0                      | 4.5<br>8.0<br>1.5 | 317 440            | mixed              | ●○            |
| -         | 1.3<br>1.3        | 1.0<br>1.0        | 3<br>14       | 3.0<br>0.7                               | 3.0<br>1.0 | 4.5<br>8.0<br>2.1                      | 4.5<br>8.0<br>3.0 | 317 440            | mixed              | ●○            |
| -         | 1.3<br>1.3        | 1.0<br>1.0        | 3<br>10       | 3.0<br>0.35                              | 3.0<br>0.5 | 4.5<br>8.0<br>1.0                      | 4.5<br>8.0<br>1.5 | 317 440            | mixed              | ●             |
| -         | 1.3<br>1.3        | 1.0<br>1.0        | 3<br>9        | 3.0<br>0.35                              | 3.0<br>0.5 | 4.5<br>8.0<br>1.0                      | 4.5<br>8.0<br>1.5 | 317 480            | mixed              | ●             |
| -         | 1.3<br>1.3        | 1.0<br>1.0        | 3<br>8        | 3.0<br>0.35                              | 3.0<br>0.5 | 4.5<br>8.0<br>1.0                      | 4.5<br>8.0<br>1.5 | 317 480            | mixed              | ●             |
| -         | 1.3<br>1.3        | 1.0<br>1.0        | 3<br>8        | 3.0<br>0.35                              | 3.0<br>0.5 | 4.5<br>8.0<br>1.0                      | 4.5<br>8.0<br>1.5 | 317 480            | mixed              | ●             |
| -         | 1.3<br>0.9        | 1.0<br>0.8        | 3<br>6        | 3.0<br>0.25                              | 3.0<br>0.4 | 4.5<br>8.0<br>0.8                      | 4.5<br>8.0<br>1.2 | 317 480            | mixed              | ●             |
| -         | 1.3<br>1.3        | 1.0<br>1.0        | 10<br>14      | 3.0<br>0.7                               | 3.0<br>1.0 | 4.5<br>8.0<br>2.1                      | 4.5<br>8.0<br>3.0 | 321 740            | mixed              | ●             |
| -         | 1.3<br>1.3        | 1.0<br>1.0        | 3<br>10       | 3.0<br>0.7                               | 3.0<br>1.0 | 4.5<br>8.0<br>2.1                      | 4.5<br>8.0<br>3.0 | 321 740            | mixed              | ●             |
| -         | 2.0<br>3.0        | 1.8<br>2.7        | 6<br>22       | 3.0<br>0.7                               | 3.0<br>1.0 | 4.5<br>8.0<br>2.1                      | 4.5<br>8.0<br>3.0 | RG-cable           | mixed              | ●             |
| -         | 2.0<br>2.0        | 1.8<br>1.8        | 6<br>16       | 3.0<br>0.7                               | 3.0<br>1.0 | 4.5<br>8.0<br>2.1                      | 4.5<br>8.0<br>3.0 | on request         | mixed              | ●             |
| -         | 2.0<br>1.3        | 1.8<br>1.0        | 6<br>13       | 3.0<br>0.9                               | 3.0<br>1.3 | 4.5<br>8.0<br>2.7                      | 4.5<br>8.0<br>3.9 | on request         | mixed              | ●             |

# GEMISCHT/MEHRPOLIG HOCHSTROM | HYBRIDE/MULTIPOLE HIGH CURRENT

## KONTAKTFIGURATION SERIE S+E | CONTACTFIGURATION SERIES S+E



| Soldersided seen                                                                    |                                                                                     | Order-No. | Size | Impedance | Contact-ø | Max. conductor-ø | Valid current | Supply voltage<br>U <sub>s</sub> (kV dc) |     | Test voltage<br>U <sub>e</sub> (kV dc) |      | Cable-order-no. | Type of insulation | Delivery time                                                                         |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-----------|------|-----------|-----------|------------------|---------------|------------------------------------------|-----|----------------------------------------|------|-----------------|--------------------|---------------------------------------------------------------------------------------|
| Male contact                                                                        | Female contact                                                                      |           |      |           |           |                  |               |                                          |     |                                        |      |                 |                    |                                                                                       |
|    |    | 705       | 4    | -         | 2.0       | 1.8              | 6             | 3.0                                      | 3.0 | 4.5                                    | 4.5  | on request      | mixed              |    |
|                                                                                     |                                                                                     |           |      | -         | 1.3       | 1.0              | 11            | 0.7                                      | 1.0 | 8.0                                    | 8.0  |                 |                    |                                                                                       |
|    |    | 706       | 4    | -         | 2.0       | 1.8              | 6             | 3.0                                      | 3.0 | 4.5                                    | 4.5  | on request      | mixed              |    |
|                                                                                     |                                                                                     |           |      | -         | 1.3       | 1.0              | 9             | 0.7                                      | 1.0 | 8.0                                    | 8.0  |                 |                    |                                                                                       |
|   |   | 707       | 4    | -         | 2.0       | 1.8              | 6             | 3.0                                      | 3.0 | 4.5                                    | 4.5  | on request      | mixed              |    |
|                                                                                     |                                                                                     |           |      | -         | 1.3       | 1.0              | 9             | 0.7                                      | 1.0 | 8.0                                    | 8.0  |                 |                    |                                                                                       |
|  |  | 708       | 4    | -         | 2.0       | 1.8              | 6             | 3.0                                      | 3.0 | 4.5                                    | 4.5  | on request      | mixed              |  |
|                                                                                     |                                                                                     |           |      | -         | 1.3       | 1.0              | 9             | 0.7                                      | 1.0 | 8.0                                    | 8.0  |                 |                    |                                                                                       |
|  |  | 709       | 4    | -         | 2.0       | 1.8              | 6             | 3.0                                      | 3.0 | 4.5                                    | 4.5  | on request      | mixed              |  |
|                                                                                     |                                                                                     |           |      | -         | 0.9       | 0.7              | 7             | 0.7                                      | 1.0 | 2.1                                    | 3.0  |                 |                    |                                                                                       |
|  |  | 712       | 4    | -         | 2.0       | 1.8              | 6             | 3.0                                      | 3.0 | 4.5                                    | 4.5  | on request      | mixed              |  |
|                                                                                     |                                                                                     |           |      | -         | 0.9       | 0.8              | 7             | 0.7                                      | 1.0 | 2.1                                    | 3.0  |                 |                    |                                                                                       |
|  |  | 734       | 4    | -         | 2.0       | 1.8              | 14            | 3.0                                      | 3.0 | 4.5                                    | 4.5  | on request      | mixed              |  |
|                                                                                     |                                                                                     |           |      | -         | 1.3       | 1.0              | 13            | 0.7                                      | 1.0 | 2.1                                    | 3.1  |                 |                    |                                                                                       |
|  |  | 714       | 4    | -         | 2.0       | 1.8              | 14            | 3.0                                      | 3.0 | 4.5                                    | 4.5  | on request      | mixed              |  |
|                                                                                     |                                                                                     |           |      | -         | 0.9       | 0.8              | 7             | 0.7                                      | 1.0 | 2.1                                    | 3.0  |                 |                    |                                                                                       |
|  |  | 735       | 4    | -         | 2.0       | 1.8              | 14            | 3.0                                      | 3.0 | 4.5                                    | 4.5  | on request      | mixed              |  |
|                                                                                     |                                                                                     |           |      | -         | 1.3       | 1.0              | 11            | 0.7                                      | 1.0 | 2.1                                    | 3.0  |                 |                    |                                                                                       |
|  |  | 737       | 4    | -         | 2.0       | 1.8              | 14            | 3.0                                      | 3.0 | 4.5                                    | 4.5  | on request      | mixed              |  |
|                                                                                     |                                                                                     |           |      | -         | 1.3       | 1.0              | 9             | 0.7                                      | 1.0 | 2.1                                    | 3.0  |                 |                    |                                                                                       |
|  |  | 742       | 4    | -         | 2.0       | 1.8              | 15            | 3.0                                      | 3.0 | 4.5                                    | 4.5  | on request      | mixed              |  |
|                                                                                     |                                                                                     |           |      | -         | 0.9       | 1.0              | 7             | 0.7                                      | 1.0 | 2.1                                    | 3.0  |                 |                    |                                                                                       |
|  |  | 706       | 5    | -         | 2.0       | 1.8              | 10            | 5.0                                      | 5.0 | 7.5                                    | 7.5  | on request      | mixed              |  |
|                                                                                     |                                                                                     |           |      | -         | 2.0       | 1.8              | 10            | 0.8                                      | 1.0 | 14.0                                   | 14.0 |                 |                    |                                                                                       |



Part number example see page 3



## GEMISCHT/MEHRPOLIG HOCHSTROM | HYBRIDE/MULTIPOLE HIGH CURRENT

### KONTAKTFIGURATION SERIE S+E | CONTACTFIGURATION SERIES S+E


| Soldersided seen |                | Order-No. | Size |
|------------------|----------------|-----------|------|
| Male contact     | Female contact |           |      |
|                  |                | 708       | 5    |
|                  |                | 710       | 5    |
|                  |                | 724       | 5    |
|                  |                | 730       | 5    |
|                  |                | 733       | 5    |
|                  |                | 736       | 5    |
|                  |                | 738       | 5    |
|                  |                | 740       | 5    |
|                  |                | 754       | 5    |
|                  |                | 746       | 5S   |
|                  |                | 760       | 5S   |

| Impedance | Contact-ø | Max. conductor-ø | Valid current | Supply voltage<br>U <sub>S</sub> (kV dc) |     | Test voltage<br>U <sub>E</sub> (kV dc) |      | Cable-order-no.    | Type of insulation | Delivery time |
|-----------|-----------|------------------|---------------|------------------------------------------|-----|----------------------------------------|------|--------------------|--------------------|---------------|
| Ω         | mm        | mm               | A             | K-K                                      | K-M | K-K                                    | K-M  |                    |                    |               |
| -         | 2         | 1.8              | 10            | 5.0                                      | 5.0 | 7.5                                    | 7.5  | on request         | mixed              |               |
| -         | 2         | 1.8              | 15            | 0.4                                      | 0.6 | 14.0                                   | 14.0 |                    |                    |               |
| -         | 2         | 1.8              | 20            | 5.0                                      | 5.0 | 7.5                                    | 7.5  | on request         | mixed              |               |
| -         | 1.6       | 1.4              | 11            | 0.6                                      | 0.8 | 14.0                                   | 14.0 |                    |                    |               |
| -         | 2         | 1.8              | 10            | 5.0                                      | 5.0 | 7.5                                    | 7.5  | on request         | mixed              |               |
| -         | 1.3       | 1.0              | 6             | 0.4                                      | 0.6 | 14.0                                   | 14.0 |                    |                    |               |
| -         | 3         | 2.7              | 12            | 10                                       | 10  | 15                                     | 15   | on request         | mixed              |               |
| -         | 2         | 1.8              | 15            | 0.4                                      | 0.6 | 29                                     | 29   |                    |                    |               |
| -         | 2         | 1.8              | 6             | 5.0                                      | 5.0 | 7.5                                    | 7.5  | see catalogue      | mixed              |               |
| -         | 3         | 2.7              | 10            | 0.2                                      | 1.0 | 14.0                                   | 14.0 |                    |                    |               |
| -         | 2         | 1.8              | 15            | 5.0                                      | 5.0 | 7.5                                    | 7.5  | see catalogue      | mixed              |               |
| -         | 2         | 1.8              | 18            | 0.7                                      | 1.0 | 14.0                                   | 14.0 |                    |                    |               |
| -         | 2         | 1.8              | 6             | 5.0                                      | 5.0 | 7.5                                    | 7.5  | see catalogue      | mixed              |               |
| -         | 2         | 1.8              | 15            | 0.7                                      | 1.0 | 14.0                                   | 14.0 |                    |                    |               |
| -         | 2         | 1.8              | 20            | 5.0                                      | 5.0 | 7.5                                    | 7.5  | see catalogue      | mixed              |               |
| -         | 1.6       | 1.4              | 11            | 0.6                                      | 0.8 | 14.0                                   | 14.0 |                    |                    |               |
| -         | 2         | 1.8              | 6             | 5.0                                      | 5.0 | 7.5                                    | 7.5  | catalogue          | mixed              |               |
| -         | 1.3       | 1.0              | 6             | 0.4                                      | 0.6 | 14.0                                   | 14.0 |                    |                    |               |
| -         | 1.3       | 1.0              | 6             | 0.4                                      | 0.6 | 1.6                                    | 2.2  | 316 250<br>106 330 | mixed              |               |
| -         | 2.0       | 1.8              | -             | 3.5                                      | 5.0 | -                                      | -    |                    |                    |               |
| -         | 1.3       | 1.0              | 6             | 0.4                                      | 0.6 | 1.2                                    | 1.8  | 430 250<br>106 330 | mixed              |               |
| -         | 2.0       | 1.8              | -             | 3.5                                      | 5.0 | -                                      | -    |                    |                    |               |

# GEMISCHT/MEHRPOLIG HOCHSTROM | HYBRIDE/MULTIPOLE HIGH CURRENT

## KONTAKTFIGURATION SERIE B+K | CONTACTFIGURATION SERIES B+K



| Soldersided seen                                                                    |                                                                                     | Order-No. | Standart Group | Watertight Group | High Voltage (HV) |              |         |                |            | Low Voltage (LV) |            |              |          |                |              |                          |                      |               |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-----------|----------------|------------------|-------------------|--------------|---------|----------------|------------|------------------|------------|--------------|----------|----------------|--------------|--------------------------|----------------------|---------------|
|     |    |           |                |                  | Nb of contacts    | ø Dielectric | AWG max | Us (kV r.m.s.) | Us (kV dc) | Nb of contacts   | ø A        | Contact Type |          | Us (kV r.m.s.) | Us (kV dc)   | Test Voltage (kV r.m.s.) | Test Voltage (kV dc) | Rated Current |
| Male contact                                                                        | Female contact                                                                      |           |                |                  |                   | mm           |         | kV             | kV         |                  | mm         | To solder    | To crimp | kV             | kV           | kV                       | kV                   | A             |
|    |    | 702       | 1B             | 1K               | 1                 | 2.0          | 26      | 2.1            | 3.0        | 2                | 1.3        | ●            | ○        | 0.40           | 0.60         | 1.2                      | 1.8                  | 12.0          |
|    |    | 731       | 1B             | 1K               | 2                 | 0.7          | -       | -              | -          | 1                | 1.3        | ●            | ○        | 0.40           | 0.60         | 1.2                      | 1.8                  | 12.0          |
|    |    | 704       | 2B             | 2K               | 1                 | 2.0          | 20      | 2.1            | 3.0        | 4                | 0.7        | ●            | ○        | 0.40           | 0.60         | 1.2                      | 1.8                  | 5.0           |
|    |    | 718       | 3B             | -                | 1                 | 2.0          | 22      | 3.0            | -          | 18               | 0.7        | ●            | ●        | -              | 0.60         | -                        | 2.0                  | 5.5           |
|    |    | 740       | 3B             | -                | 2                 | 2.0          | 22      | 3.0            | -          | 10               | 0.7        | ●            | ●        | -              | 0.60         | -                        | 2.0                  | 5.5           |
|    |    | 745       | 4B             | 4K               | 2                 | 2.0          | 22      | 5.6            | 8.0        | 16               | 0.9        | ●            | ●        | 0.63           | 0.90         | 1.9                      | 2.7                  | 7.0           |
|  |  | 752       | 5B             | 5K               | 2                 | 3.8          | 14      | 1.5            | 2.2        | 20<br>2          | 1.3<br>1.6 | ●<br>●       | ●<br>○   | 0.53<br>0.90   | 0.70<br>1.30 | 1.6<br>2.9               | 2.3<br>4.1           | 10.0<br>10.0  |
|  |  | 759       | 5B             | 5K               | 2                 | 2.0          | 22      | 5.6            | 8.0        | 54               | 0.9        | ●            | ●        | 0.53           | 0.70         | 1.6                      | 2.3                  | 3.0           |



**GEMISCHT/MEHRPOLIG HOCHSTROM | HYBRIDE/MULTIPOLE HIGH CURRENT**  
**PVC-ISOLIERTE KOMBINATIONSKABEL | PVC-INSULATED COMBINATION CABLES**

|                                                                                     | Lead Time |      | Price | Order-No. |
|-------------------------------------------------------------------------------------|-----------|------|-------|-----------|
|                                                                                     | Stk.      | Req. | €/m   |           |
|    | x         | -    | 3.38  | 317 440   |
|    | x         | -    | 4.97  | 317 480   |
|  | x         | -    | 6.03  | 417 410   |
|  | x         | -    | 5.58  | 321 740   |

| Amount of Order | Wave impedance   | Constructed of                                                                                               | Twisting                    | Tape           | Screen | Outer Sheath |             |
|-----------------|------------------|--------------------------------------------------------------------------------------------------------------|-----------------------------|----------------|--------|--------------|-------------|
| m               | $\Omega (\pm 2)$ |                                                                                                              |                             |                | Mat.   | Mat.         | $\emptyset$ |
| 20/100          | 50               | 1 coax cable type RG 174 A/U<br>as well as 4 control wires 14x0.15 mm<br>cross section 0.25 mm <sup>2</sup>  | RG 174+<br>control<br>wires | PETP-<br>Folie | CuSn   | PVC gr       | 7.2         |
| 20/100          | 50               | 1 coax cable type RG 174 A/U<br>as well as 8 control wires 14x0.15 mm<br>cross section 0.25 mm <sup>2</sup>  | RG 174+<br>control<br>wires | PETP-<br>Folie | CuSn   | PVC gr       | 7.3         |
| 20/100          | 50               | 1 coax cable type RG 174 A/U<br>as well as 14 control wires 14x0.15 mm<br>cross section 0.25 mm <sup>2</sup> | RG 174+<br>control<br>wires | PETP-<br>Folie | CuSn   | PVC gr       | 10.0        |
| 20/100          | 50               | 1 coax cable type RG 174 A/U<br>as well as 6 control wires 18x0.10 mm<br>cross section 0.14 mm <sup>2</sup>  | RG 174+<br>control<br>wires | PETP-<br>Folie | CuSn   | PVC bk       | 8.0         |

# GEMISCHT/MEHRPOLIG HOCHSTROM | HYBRIDE/MULTIPOLE HIGH CURRENT

## KONFEKTIONIERUNGSANLEITUNG | ASSEMBLING INSTRUCTIONS




Due to different cables,  
please ask for the stripping length





## MATERIALIEN | MATERIALS


### SERIE-Y | SERIES-Y



### Housings (Y-series)

| Reference | Material |
|-----------|----------|
| C         | Brass    |


Detailed characteristics of these materials are presented on table.



### Insulators (Y-series)

| Reference | Material or form | Note |
|-----------|------------------|------|
| L         | PEEK             | ●    |
| T         | PTFE             | ●    |

Detailed characteristics of these materials are presented on table.



### Contacts (Y-series)

### Contacts for plugs, free or fixed sockets

| Reference | Contact type  |
|-----------|---------------|
| A         | Male solder   |
| L         | Female solder |

### Material and treatment

| Component<br>(see picture page 16) | Material (Standard)          | Surface treatment (μm) |    |     |     |
|------------------------------------|------------------------------|------------------------|----|-----|-----|
|                                    |                              | Cu                     | Ni | Cr  | Au  |
| Outer shell and collet nut         | Brass (ASTM C 385)           | 0.5                    | 3  | 0.3 |     |
| Earthing crown                     | Cu-Be (FS-QQ-C-530)          | 0.5                    | 3  |     | 1.5 |
| Latch sleeve                       | Special brass                | 0.5                    | 3  | 0.3 |     |
| Locking ring                       | Brass (ASTM C 385)           | 0.5                    | 3  |     |     |
| Inner sleeve                       | Brass (ASTM C 385)           | 0.5                    | 3  |     |     |
| Other metallic parts               | Brass (ASTM C 385)           | 0.5                    | 3  |     |     |
| O-ring                             | Silicone rubber (ASTM D 200) |                        |    |     |     |
| Insulator                          | PTFE (ASTM D 1457-83)        |                        |    |     |     |
|                                    | PEEK (MIL-P-46183)           |                        |    |     |     |
| Male contact                       | Brass (ASTM C 385)           | 0.5                    | 3  |     | 1.5 |
| Female contact                     | Cu-Be (FS-QQ-C-530)          | 0.5                    | 3  |     | 2.0 |

The surface treatment standards are as follows:

- Nickel FS-QQ-N-290A
- Chrome FS-QQ-C-320B
- Gold MIL-G-45204C type I, class 1.

# MATERIALIEN | MATERIALS

## SERIE B+K | SERIES B+K



### Housings (B + K series)

| Ref.     | Material                      | Surface treatment          |                                 | Note |
|----------|-------------------------------|----------------------------|---------------------------------|------|
|          |                               | Outer shell and collet nut | Latch sleeve and earthing crown |      |
| <b>C</b> | Brass                         | chrome                     | nickel                          | ●    |
| <b>N</b> | Brass                         | nickel                     | nickel                          | ○    |
| <b>K</b> | Brass                         | black chrome               | nickel                          | ○    |
| <b>S</b> | Stainless steel               | without treatment          | nickel-plated brass             | ○    |
| <b>T</b> | Stainless steel               | without treatment          | stainless steel                 | ○    |
| <b>U</b> | Stainless steel <sup>1)</sup> | without treatment          | stainless steel                 | ○    |
| <b>L</b> | Aluminium alloy <sup>2)</sup> | anodized                   | nickel-plated brass             | ○    |
| <b>G</b> | PEEK <sup>3)</sup>            | without treatment          | nickel-plated brass             | ○    |
| <b>P</b> | PSU <sup>4)</sup>             | without treatment          | nickel-plated brass             | ○    |
| <b>R</b> | PPSU <sup>5)</sup>            | without treatment          | nickel-plated brass             | ○    |
| <b>X</b> | Avional <sup>6)</sup>         | nickel                     | nickel-plated brass             | ○    |

#### Note:

detailed characteristics of these materials and treatments are presented on Unipole/Multipole catalogue.

<sup>1)</sup> the other metallic parts are in stainless steel.

<sup>2)</sup> the „variant“ position of the reference is used to specify the anodized colour.

<sup>3)</sup> only available for FGG and ENG models of the B series.

<sup>4)</sup> only available for ENY and FGY models of the B series. For the colour, see the „variant“ position.

<sup>5)</sup> only available for ENY and FGY models of the B series.

<sup>6)</sup> anthracite colour.

● First choice alternative


○ Special order alternative



### Insulators (B + K series)

| Reference | Material |
|-----------|----------|
| <b>L</b>  | PEEK     |

Detailed characteristics of these materials are presented on Unipole/Multipole catalogue.



### Contacts (B + K series)

#### Contacts for plugs, free or fixed sockets

| Reference | Contact type                     |
|-----------|----------------------------------|
| <b>A</b>  | Male solder                      |
| <b>C</b>  | Male crimp (fig.1) <sup>1)</sup> |
| <b>B</b>  | Male crimp (fig.2) <sup>1)</sup> |
| <b>G</b>  | Male crimp (fig.2) <sup>1)</sup> |

| Reference | Contact type                       |
|-----------|------------------------------------|
| <b>L</b>  | Female solder                      |
| <b>M</b>  | Female crimp (fig.1) <sup>1)</sup> |
| <b>P</b>  | Female crimp (fig.2) <sup>1)</sup> |
| <b>U</b>  | Female crimp (fig.2) <sup>1)</sup> |

#### Note:

<sup>1)</sup> there are two forms of crimp barrels. Please consult adjacent table for contact selection and see Unipole/Multipole catalogue.



## MATERIALIEN | MATERIALS

### SERIE S+E | SERIES S+E



Part number example see page 3

## Housings (S + E series)

| Ref. | Material                      | Surface treatment          |                                 | Note |
|------|-------------------------------|----------------------------|---------------------------------|------|
|      |                               | Outer shell and collet nut | Latch sleeve and earthing crown |      |
| C    | Brass <sup>1)</sup>           | chrome                     | nickel                          | ●    |
| D    | Brass                         | gold-plated                | nickel                          | ○    |
| N    | Brass                         | nickel                     | nickel                          | ○    |
| K    | Brass                         | black chrome               | nickel                          | ○    |
| S    | Stainless steel               | without treatment          | nickel-plated brass             | ○    |
| T    | Stainless steel               | without treatment          | stainless steel                 | ○    |
| U    | Stainless steel <sup>2)</sup> | without treatment          | stainless steel                 | ○    |
| L    | Aluminium alloy <sup>3)</sup> | anodized                   | nickel-plated brass             | ○    |
| B    | POM black <sup>4)</sup>       | without treatment          | nickel-plated brass             | ○    |
| G    | PEEK <sup>4)</sup>            | without treatment          | nickel-plated brass             | ○    |
| P    | PSU <sup>5)</sup>             | without treatment          | nickel-plated brass             | ○    |
| R    | PPSU <sup>6)</sup>            | without treatment          | nickel-plated brass             | ○    |

### Note:

detailed characteristics of these materials are presented on Unipole/Multipole catalogue.

<sup>1)</sup> in the E series the latch sleeve is chrome-plated.

<sup>2)</sup> the other metallic components are in stainless steel.

<sup>3)</sup> the „variant“ position of the reference is used to specify the anodized colour.

<sup>4)</sup> only available for FFP, ERN and PCP models of the S series.

<sup>5)</sup> available only for the FFL model of the S series.

<sup>6)</sup> See colours in „variant“ position. available only for the FFL model of the S series.

● First choice alternative  
○ Special order alternative



Part number example see page 3

## Insulators (S + E series)

| Reference | Material or form   | Note |
|-----------|--------------------|------|
| L         | PEEK               | ●    |
| T         | PTFE <sup>1)</sup> | ●    |

### Note:

detailed characteristics of these materials are presented on Unipole/Multipole catalogue.

<sup>1)</sup> only for unipole types.

● First choice alternative      ○ Special order alternative



Part number example see page 3

## Contacts (S + E series)

### Contacts for plugs, free or fixed sockets

| Ref. | Contact type                  |
|------|-------------------------------|
| A    | Male solder                   |
| C    | Male crimp <sup>1) 4)</sup>   |
| L    | Female solder                 |
| M    | Female crimp <sup>2) 4)</sup> |

### Note:

<sup>1)</sup> for the FFS model of the 00 series and FFA or FFL models of the S series.

<sup>2)</sup> for the PSS model of the 00 series and PCA or PSA models of the S series.

<sup>3)</sup> for the FTA model of the S series.

<sup>4)</sup> for conductor range that can fit with crimp contacts consult Unipole/ Multipole catalogue.

### Contacts for couplers


| Ref. | Contact type    | unipole | multipole |
|------|-----------------|---------|-----------|
| A    | Male - Female   | ○       | —         |
| L    | Female - Male   | ○       | ●         |
| M    | Female - Female | ●       | ○         |

Multipole connectors are fitted with hermaphroditic inserts including male and female contacts. However, by convention, the letter indicating the contact type in the part number composition will be the male contact (reference A) for plugs and female contact (reference A) for sockets. In case of an odd number of contacts, the letter of reference corresponds to the one with the large number of contacts. For example, a 309 type connector with contact (reference A) will include 5 male and 4 female contacts.

**For RAD and SWH fixed couplers, the first contact type mentioned is always the one at the flange end.** Connectors can be configured „inverted“ i.e. plugs equipped with female contacts (reference L), sockets with male contacts (reference A). This solution is particularly useful when plugs are mated to a coupler and it is essential to respect contact alignment.

# SPANNZANGEN | COLLETS

## SERIE Y | SERIES Y



| Reference |    | Serie | ø Collet (mm) |      | ø Cable (mm) |      | Part number of the collet <sup>1)</sup> | Lead time |
|-----------|----|-------|---------------|------|--------------|------|-----------------------------------------|-----------|
| Type      | ø  |       | ø A           | ø B  | max.         | min. |                                         |           |
| C         | 17 | 1Y    | 1.7           | –    | 1.6          | 1.3  | FFA.1S.717.CN                           | ○         |
| C         | 22 |       | 2.2           | –    | 2.1          | 1.7  | FFA.1S.722.CN                           | ○         |
| C         | 27 |       | 2.7           | –    | 2.6          | 2.2  | FFA.1S.727.CN                           | ●         |
| C         | 32 |       | 3.2           | –    | 3.1          | 2.6  | FFA.1S.732.CN                           | ●         |
| C         | 37 |       | 3.7           | –    | 3.6          | 2.7  | FFA.1S.737.CN                           | ●         |
| C         | 42 |       | 4.2           | –    | 4.1          | 3.3  | FFA.1S.742.CN                           | ●         |
| C         | 47 |       | 4.7           | –    | 4.6          | 3.8  | FFA.1S.747.CN                           | ●         |
| C         | 52 |       | 5.2           | –    | 5.1          | 4.3  | FFA.1S.752.CN                           | ●         |
| C         | 57 |       | 5.7           | –    | 5.6          | 4.8  | FFA.1S.757.CN                           | ●         |
| C         | 62 |       | 6.2           | 5.2  | 6.1          | 5.3  | FFA.1S.762.CN                           | ●         |
| C         | 66 |       | 6.6           | 5.5  | 6.5          | 5.9  | FFA.1S.766.CN                           | ●         |
| C         | 68 |       | 6.8           | 5.5  | 6.7          | 6.0  | FFA.1S.768.CN                           | ○         |
| C         | 42 | 3Y    | 4.2           | –    | 4.0          | 3.1  | FFA.3S.742.CN                           | ○         |
| C         | 52 |       | 5.2           | –    | 5.0          | 4.1  | FFA.3S.752.CN                           | ●         |
| C         | 57 |       | 5.7           | –    | 5.5          | 4.6  | FFA.3S.757.CN                           | ●         |
| C         | 62 |       | 6.2           | –    | 6.0          | 5.1  | FFA.3S.762.CN                           | ●         |
| C         | 67 |       | 6.7           | –    | 6.5          | 5.6  | FFA.3S.767.CN                           | ●         |
| C         | 72 |       | 7.2           | –    | 7.0          | 6.1  | FFA.3S.772.CN                           | ●         |
| C         | 77 |       | 7.7           | –    | 7.5          | 6.6  | FFA.3S.777.CN                           | ●         |
| C         | 82 |       | 8.2           | –    | 8.0          | 7.1  | FFA.3S.782.CN                           | ●         |
| C         | 87 |       | 8.7           | –    | 8.5          | 7.6  | FFA.3S.787.CN                           | ●         |
| C         | 92 |       | 9.2           | 8.7  | 9.0          | 8.1  | FFA.3S.792.CN                           | ●         |
| C         | 97 |       | 9.7           | 8.7  | 9.5          | 9.1  | FFA.3S.797.CN                           | ●         |
| C         | 10 |       | 10.2          | 8.7  | 10.0         | 9.6  | FFA.3S.710.CN                           | ○         |
| C         | 11 |       | 10.7          | 8.7  | 10.5         | 10.1 | FFA.3S.711.CN                           | ●         |
| C         | 12 | 6Y    | 12.2          | 12.2 | 12.0         | 11.1 | FFB.6Y.712.CN                           | ●         |
| C         | 14 |       | 14.2          | 14.2 | 14.0         | 13.1 | FFB.6Y.714.CN                           | ●         |
| C         | 21 |       | 21.2          | 21.2 | 21.0         | 20.0 | FFB.6Y.721.CN                           | ●         |
| C         | 27 |       | 26.6          | 23.0 | 26.4         | 25.5 | FFB.6Y.727.CN                           | ○         |
| C         | 29 |       | 29.0          | 24.5 | 28.8         | 27.9 | FFB.6Y.729.CN                           | ○         |
| C         | 30 |       | 30.2          | 27.2 | 30.0         | 29.1 | FFB.6Y.730.CN                           | ●         |

### Note:

<sup>1)</sup> for ordering collets separately.

● on stock

○ on request



Part number example see page 3

# SPANNZANGEN | COLLETS SERIE B | SERIES B



## D and M type collets

|  |    |       |               |      |              |  |  |  |                                                |                               |
|-----------------------------------------------------------------------------------|----|-------|---------------|------|--------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|------------------------------------------------|-------------------------------|
| Reference                                                                         |    | Serie | ø Collet (mm) |      | ø Cable (mm) |                                                                                     | Part number of the collet <sup>1)</sup>                                             | Part number of the reducer <sup>2)</sup>                                            | Part number of the reducing cone <sup>2)</sup> | Part number of the collet nut |
| Type                                                                              | ø  |       | ø A           | ø B  | max.         | min.                                                                                |                                                                                     |                                                                                     |                                                |                               |
| M                                                                                 | 27 | 1B    | 2.7           | –    | 2.6          | 2.2                                                                                 | FFC.00.727.CN                                                                       | FGG.1B.138.LN                                                                       | FGG.1B.158.LN                                  | FGG.1B.130.LC                 |
| M                                                                                 | 31 |       | 3.1           | –    | 3.0          | 2.6                                                                                 | FFC.00.731.CN                                                                       | FGG.1B.138.LN                                                                       | FGG.1B.158.LN                                  | FGG.1B.130.LC                 |
| D                                                                                 | 42 |       | 4.2           | –    | 4.0          | 3.1                                                                                 | FGG.1B.742.DN                                                                       | –                                                                                   | –                                              | FGG.1B.130.LC                 |
| D                                                                                 | 52 |       | 5.2           | –    | 5.0          | 4.1                                                                                 | FGG.1B.752.DN                                                                       | –                                                                                   | –                                              | FGG.1B.130.LC                 |
| D                                                                                 | 62 |       | 6.2           | –    | 6.0          | 5.1                                                                                 | FGG.1B.762.DN                                                                       | –                                                                                   | –                                              | FGG.1B.130.LC                 |
| D                                                                                 | 72 |       | 7.2           | 6.7  | 7.0          | 6.1                                                                                 | FGG.1B.772.DN                                                                       | –                                                                                   | –                                              | FGG.1B.130.LC                 |
| D                                                                                 | 76 |       | 7.6           | 6.7  | 7.5          | 7.1                                                                                 | FGG.1B.776.DN <sup>3)</sup>                                                         | –                                                                                   | –                                              | FGG.1B.132.LC                 |
| M                                                                                 | 21 | 2B    | 2.1           | –    | 2.0          | 1.5                                                                                 | FGG.0B.721.DN                                                                       | FGG.2B.138.LN                                                                       | FGG.2B.158.LN                                  | FGG.2B.130.LC                 |
| M                                                                                 | 31 |       | 3.1           | –    | 3.0          | 2.1                                                                                 | FGG.0B.731.DN                                                                       | FGG.2B.138.LN                                                                       | FGG.2B.158.LN                                  | FGG.2B.130.LC                 |
| M                                                                                 | 42 |       | 4.2           | –    | 4.0          | 3.1                                                                                 | FGG.0B.742.DN                                                                       | FGG.2B.138.LN                                                                       | FGG.2B.158.LN                                  | FGG.2B.130.LC                 |
| D                                                                                 | 52 |       | 5.2           | –    | 5.0          | 4.1                                                                                 | FGG.2B.752.DN                                                                       | –                                                                                   | –                                              | FGG.2B.130.LC                 |
| D                                                                                 | 62 |       | 6.2           | –    | 6.0          | 5.1                                                                                 | FGG.2B.762.DN                                                                       | –                                                                                   | –                                              | FGG.2B.130.LC                 |
| D                                                                                 | 72 |       | 7.2           | –    | 7.0          | 6.1                                                                                 | FGG.2B.772.DN                                                                       | –                                                                                   | –                                              | FGG.2B.130.LC                 |
| D                                                                                 | 82 |       | 8.2           | –    | 8.0          | 7.1                                                                                 | FGG.2B.782.DN                                                                       | –                                                                                   | –                                              | FGG.2B.130.LC                 |
| D                                                                                 | 92 |       | 9.2           | 8.6  | 9.0          | 8.1                                                                                 | FGG.2B.792.DN                                                                       | –                                                                                   | –                                              | FGG.2B.130.LC                 |
| D                                                                                 | 99 |       | 9.9           | 8.6  | 9.7          | 9.1                                                                                 | FGG.2B.799.DN <sup>3)</sup>                                                         | –                                                                                   | –                                              | FGG.2B.132.LC                 |
| M                                                                                 | 52 | 3B    | 5.2           | –    | 5.0          | 4.1                                                                                 | FGG.1B.752.DN                                                                       | FGG.3B.138.LN                                                                       | FGG.3B.158.LN                                  | FGG.3B.130.LC                 |
| D                                                                                 | 62 |       | 6.2           | –    | 6.0          | 5.1                                                                                 | FGG.3B.762.DN                                                                       | –                                                                                   | –                                              | FGG.3B.130.LC                 |
| D                                                                                 | 72 |       | 7.2           | –    | 7.0          | 6.1                                                                                 | FGG.3B.772.DN                                                                       | –                                                                                   | –                                              | FGG.3B.130.LC                 |
| D                                                                                 | 82 |       | 8.2           | –    | 8.0          | 7.1                                                                                 | FGG.3B.782.DN                                                                       | –                                                                                   | –                                              | FGG.3B.130.LC                 |
| D                                                                                 | 92 |       | 9.2           | –    | 9.0          | 8.1                                                                                 | FGG.3B.792.DN                                                                       | –                                                                                   | –                                              | FGG.3B.130.LC                 |
| D                                                                                 | 10 |       | 10.2          | –    | 10.0         | 9.1                                                                                 | FGG.3B.710.DN                                                                       | –                                                                                   | –                                              | FGG.3B.130.LC                 |
| D                                                                                 | 11 |       | 11.2          | 10.2 | 11.0         | 10.1                                                                                | FGG.3B.711.DN                                                                       | –                                                                                   | –                                              | FGG.3B.130.LC                 |
| D                                                                                 | 12 |       | 11.9          | 10.2 | 11.7         | 11.1                                                                                | FGG.3B.712.DN <sup>3)</sup>                                                         | –                                                                                   | –                                              | FGG.3B.132.LC                 |

### Note:

<sup>1)</sup> for ordering collets separately.

<sup>2)</sup> for ordering an M type collet, a reducer and its reducing cone should also be ordered.

<sup>3)</sup> these collets cannot be used for connector models with nut for fitting a bend relief.

All dimensions are in millimetres.

## SPANNZANGEN | COLLETS

### SERIE B | SERIES B



### D and M type collets

| Reference |    | Serie | ø Collet (mm) |      | ø Cable (mm) |      | Part number of the collet <sup>1)</sup> | Part number of the reducer <sup>2)</sup> | Part number of the reducing cone <sup>2)</sup> | Part number of the collet nut |
|-----------|----|-------|---------------|------|--------------|------|-----------------------------------------|------------------------------------------|------------------------------------------------|-------------------------------|
| Type      | ø  |       | ø A           | ø B  | max.         | min. |                                         |                                          |                                                |                               |
| M         | 62 | 4B    | 6.2           | –    | 6.0          | 5.1  | FGG.2B.762.DN                           | FGG.4B.138.LN                            | FGG.4B.158.LN                                  | FGG.4B.130.LC                 |
| M         | 72 |       | 7.2           | –    | 7.0          | 6.1  | FGG.2B.772.DN                           | FGG.4B.138.LN                            | FGG.4B.158.LN                                  | FGG.4B.130.LC                 |
| M         | 82 |       | 8.2           | –    | 8.0          | 7.1  | FGG.2B.782.DN                           | FGG.4B.138.LN                            | FGG.4B.158.LN                                  | FGG.4B.130.LC                 |
| M         | 92 |       | 9.2           | 8.6  | 9.0          | 8.1  | FGG.2B.792.DN                           | FGG.4B.138.LN                            | FGG.4B.158.LN                                  | FGG.4B.130.LC                 |
| D         | 10 |       | 10.8          | –    | 10.5         | 9.1  | FGG.4B.710.DN                           | –                                        | –                                              | FGG.4B.130.LC                 |
| D         | 12 |       | 12.3          | –    | 12.0         | 10.6 | FGG.4B.712.DN                           | –                                        | –                                              | FGG.4B.130.LC                 |
| D         | 13 |       | 13.8          | 12.5 | 13.5         | 12.1 | FGG.4B.713.DN                           | –                                        | –                                              | FGG.4B.130.LC                 |
| D         | 15 |       | 15.3          | 12.5 | 15.0         | 13.6 | FGG.4B.715.DN                           | –                                        | –                                              | FGG.4B.130.LC                 |
| D         | 16 |       | 16.3          | 12.5 | 16.0         | 15.1 | FGG.4B.716.DN <sup>3)</sup>             | –                                        | –                                              | FGG.4B.132.LC                 |
| D         | 11 | 5B    | 11.8          | –    | 11.5         | 9.6  | FGG.5B.711.DN                           | –                                        | –                                              | FGG.5B.130.LC                 |
| D         | 13 |       | 13.8          | –    | 13.5         | 11.6 | FGG.5B.713.DN                           | –                                        | –                                              | FGG.5B.130.LC                 |
| D         | 15 |       | 15.8          | –    | 15.5         | 13.6 | FGG.5B.715.DN                           | –                                        | –                                              | FGG.5B.130.LC                 |
| D         | 17 |       | 17.8          | –    | 17.5         | 15.6 | FGG.5B.717.DN <sup>3)</sup>             | –                                        | –                                              | FGG.5B.130.LC                 |
| D         | 19 |       | 19.8          | –    | 19.5         | 17.6 | FGG.5B.719.DN <sup>3)</sup>             | –                                        | –                                              | FGG.5B.130.LC                 |
| D         | 21 |       | 21.8          | –    | 21.5         | 19.6 | FGG.5B.721.DN <sup>3)</sup>             | –                                        | –                                              | FGG.5B.130.LC                 |
| D         | 23 |       | 23.8          | 21.8 | 23.5         | 21.6 | FGG.5B.723.DN <sup>3)</sup>             | –                                        | –                                              | FGG.5B.130.LC                 |
| D         | 25 |       | 25.3          | 21.8 | 25.0         | 23.6 | FGG.5B.725.DN <sup>3)</sup>             | –                                        | –                                              | FGG.5B.132.LC                 |

### Bend relief collet nut and bend relief



| Reference |           | Serie | Part number of the collet nut | Bend relief to be used <sup>1)</sup> |
|-----------|-----------|-------|-------------------------------|--------------------------------------|
| Type      | ø         |       |                               |                                      |
| M         | 27 and 31 | 1B    | FFM.1B.130.LC                 | GMA.1B.***.●●                        |
| D         | 42 to 72  |       | FFM.1B.130.LC                 | GMA.1B.***.●●                        |
| M         | 21 and 31 | 2B    | FFM.2B.132.LC                 | GMA.0B.***.●●                        |
| M         | 42        |       | FFM.2B.130.LC                 | GMA.2B.***.●●                        |
| D         | 52 to 92  |       | FFM.2B.130.LC                 | GMA.2B.***.●●                        |
| M         | 52        | 3B    | FFM.3B.131.LC                 | GMA.1B.***.●●                        |
| D         | 62 to 11  |       | FFM.3B.130.LC                 | GMA.3B.***.●●                        |
| M         | 62 and 72 | 4B    | FFM.4B.132.LC                 | GMA.2B.***.●●                        |
| M         | 82 and 92 |       | FFM.4B.130.LC                 | GMA.4B.***.●●                        |
| D         | 10 to 15  |       | FFM.4B.130.LC                 | GMA.4B.***.●●                        |
| D         | 11 to 15  | 5B    | FFM.5B.130.LC                 | GMA.4B.***.●●                        |

#### Note:

- <sup>1)</sup> for ordering collet separately.
- <sup>2)</sup> for ordering an M type collet, a reducer and its reducing cone should also be ordered.
- <sup>3)</sup> these collets cannot be used for connector models with collet nut for fitting a bend relief.

#### Note:


- <sup>1)</sup> the bend relief is to be ordered separately (see page 80). All dimensions are in millimetres.



Part number example see page 3

# SPANNZANGEN | COLLETS SERIE K | SERIES K

## C + K type collets

|  |    |       |               |      |              |      |  |                                                                                     |  |
|-----------------------------------------------------------------------------------|----|-------|---------------|------|--------------|------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| Reference                                                                         |    | Serie | ø Collet (mm) |      | ø Cable (mm) |      | Part number of the collet system <sup>1)</sup>                                      | Part number of the oversize collet and of the two split centre-pieces <sup>2)</sup> | Part number of the collet nut <sup>2)</sup>                                         |
| Type                                                                              | ø  |       | ø A           | ø B  | max.         | min. |                                                                                     |                                                                                     |                                                                                     |
| C                                                                                 | 15 | 1K    | 1.6           | –    | 1.5          | 1.3  | FFA.1E.715.CNS                                                                      | –                                                                                   | FFA.1E.130.LC                                                                       |
| C                                                                                 | 20 |       | 2.2           | –    | 2.0          | 1.6  | FFA.1E.720.CNS                                                                      | –                                                                                   | FFA.1E.130.LC                                                                       |
| C                                                                                 | 25 |       | 3.2           | –    | 2.5          | 2.1  | FFA.1E.725.CNS                                                                      | –                                                                                   | FFA.1E.130.LC                                                                       |
| C                                                                                 | 30 |       | 3.2           | –    | 3.0          | 2.6  | FFA.1E.730.CNS                                                                      | –                                                                                   | FFA.1E.130.LC                                                                       |
| C                                                                                 | 35 |       | 4.2           | –    | 3.5          | 3.1  | FFA.1E.735.CNS                                                                      | –                                                                                   | FFA.1E.130.LC                                                                       |
| C                                                                                 | 40 |       | 4.2           | –    | 4.0          | 3.6  | FFA.1E.740.CNS                                                                      | –                                                                                   | FFA.1E.130.LC                                                                       |
| C                                                                                 | 45 |       | 5.2           | –    | 4.5          | 4.1  | FFA.1E.745.CNS                                                                      | –                                                                                   | FFA.1E.130.LC                                                                       |
| C                                                                                 | 50 |       | 5.2           | –    | 5.0          | 4.6  | FFA.1E.750.CNS                                                                      | –                                                                                   | FFA.1E.130.LC                                                                       |
| C                                                                                 | 55 |       | 6.2           | 6.2  | 5.5          | 5.1  | FFA.1E.755.CNS                                                                      | –                                                                                   | FFA.1E.130.LC                                                                       |
| C                                                                                 | 60 |       | 6.2           | 6.2  | 6.0          | 5.6  | FFA.1E.760.CNS                                                                      | –                                                                                   | FFA.1E.130.LC                                                                       |
| C                                                                                 | 65 |       | 7.2           | 6.7  | 6.5          | 6.1  | FFA.1E.765.CNS                                                                      | –                                                                                   | FFA.1E.130.LC                                                                       |
| K                                                                                 | 70 |       | 7.2           | –    | 7.0          | 6.6  | FFA.2E.770.CNS                                                                      | FFA.1K.137.LCN                                                                      | FFA.2E.130.LC <sup>2)</sup>                                                         |
| K                                                                                 | 75 |       | 8.2           | 8.2  | 7.5          | 7.1  | FFA.2E.775.CNS                                                                      | FFA.1K.137.LCN                                                                      | FFA.2E.130.LC <sup>2)</sup>                                                         |
| K                                                                                 | 80 |       | 8.2           | 8.2  | 8.0          | 7.6  | FFA.2E.780.CNS                                                                      | FFA.1K.137.LCN                                                                      | FFA.2E.130.LC <sup>2)</sup>                                                         |
| K                                                                                 | 85 |       | 9.2           | 8.6  | 8.5          | 8.1  | FFA.2E.785.CNS                                                                      | FFA.1K.137.LCN                                                                      | FFA.2E.130.LC <sup>2)</sup>                                                         |
| C                                                                                 | 15 | 2K    | 2.2           | –    | 1.5          | 1.3  | FFA.2E.715.CNS                                                                      | –                                                                                   | FFA.2E.130.LC                                                                       |
| C                                                                                 | 20 |       | 2.2           | –    | 2.0          | 1.6  | FFA.2E.720.CNS                                                                      | –                                                                                   | FFA.2E.130.LC                                                                       |
| C                                                                                 | 25 |       | 3.2           | –    | 2.5          | 2.1  | FFA.2E.725.CNS                                                                      | –                                                                                   | FFA.2E.130.LC                                                                       |
| C                                                                                 | 30 |       | 3.2           | –    | 3.0          | 2.6  | FFA.2E.730.CNS                                                                      | –                                                                                   | FFA.2E.130.LC                                                                       |
| C                                                                                 | 35 |       | 4.2           | –    | 3.5          | 3.1  | FFA.2E.735.CNS                                                                      | –                                                                                   | FFA.2E.130.LC                                                                       |
| C                                                                                 | 40 |       | 4.2           | –    | 4.0          | 3.6  | FFA.2E.740.CNS                                                                      | –                                                                                   | FFA.2E.130.LC                                                                       |
| C                                                                                 | 45 |       | 5.2           | –    | 4.5          | 4.1  | FFA.2E.745.CNS                                                                      | –                                                                                   | FFA.2E.130.LC                                                                       |
| C                                                                                 | 50 |       | 5.2           | –    | 5.0          | 4.6  | FFA.2E.750.CNS                                                                      | –                                                                                   | FFA.2E.130.LC                                                                       |
| C                                                                                 | 55 |       | 6.2           | –    | 5.5          | 5.1  | FFA.2E.755.CNS                                                                      | –                                                                                   | FFA.2E.130.LC                                                                       |
| C                                                                                 | 60 |       | 6.2           | –    | 6.0          | 5.6  | FFA.2E.760.CNS                                                                      | –                                                                                   | FFA.2E.130.LC                                                                       |
| C                                                                                 | 65 |       | 7.2           | –    | 6.5          | 6.1  | FFA.2E.765.CNS                                                                      | –                                                                                   | FFA.2E.130.LC                                                                       |
| C                                                                                 | 70 |       | 7.2           | –    | 7.0          | 6.6  | FFA.2E.770.CNS                                                                      | –                                                                                   | FFA.2E.130.LC                                                                       |
| C                                                                                 | 75 |       | 8.2           | 8.2  | 7.5          | 7.1  | FFA.2E.775.CNS                                                                      | –                                                                                   | FFA.2E.130.LC                                                                       |
| C                                                                                 | 80 |       | 8.2           | 8.2  | 8.0          | 7.6  | FFA.2E.780.CNS                                                                      | –                                                                                   | FFA.2E.130.LC                                                                       |
| C                                                                                 | 85 |       | 9.2           | 8.6  | 8.5          | 8.1  | FFA.2E.785.CNS                                                                      | –                                                                                   | FFA.2E.130.LC                                                                       |
| K                                                                                 | 90 |       | 9.2           | –    | 9.0          | 8.6  | FFA.3E.790.CNS                                                                      | FFA.2K.137.LCN                                                                      | FFA.3E.130.LC <sup>2)</sup>                                                         |
| K                                                                                 | 95 |       | 10.2          | 10.2 | 9.5          | 9.1  | FFA.3E.795.CNS                                                                      | FFA.2K.137.LCN                                                                      | FFA.3E.130.LC <sup>2)</sup>                                                         |
| K                                                                                 | 10 |       | 10.2          | 10.2 | 10.0         | 9.6  | FFA.3E.710.CNS                                                                      | FFA.2K.137.LCN                                                                      | FFA.3E.130.LC <sup>2)</sup>                                                         |
| K                                                                                 | 11 |       | 11.2          | 10.6 | 11.0         | 10.1 | FFA.3E.711.CNS                                                                      | FFA.2K.137.LCN                                                                      | FFA.3E.130.LC <sup>2)</sup>                                                         |

### Note:

<sup>1)</sup> for ordering the collet system separately.

<sup>2)</sup> for ordering the K type collet, the oversize collet and the split centre-pieces, as well as the corresponding collet nut should also be ordered.  
All dimensions are in millimetres.

# SPANNZANGEN COLLETS

## SERIE K SERIES K



### C + K type collets



| Reference |    | Serie | Ø Collet (mm) |      | Ø Cable (mm) |      | Part number of the collet system <sup>1)</sup> | Part number of the oversize collet and of the two split centre-pieces <sup>2)</sup> | Part number of the collet nut <sup>2)</sup> |
|-----------|----|-------|---------------|------|--------------|------|------------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------|
| Type      | Ø  |       | Ø A           | Ø B  | max.         | min. |                                                |                                                                                     |                                             |
| C         | 30 | 3K    | 3.2           | –    | 3.0          | 2.6  | FFA.3E.730.CNS                                 | –                                                                                   | FFA.3E.130.LC                               |
| C         | 35 |       | 4.2           | –    | 3.5          | 3.1  | FFA.3E.735.CNS                                 | –                                                                                   | FFA.3E.130.LC                               |
| C         | 40 |       | 4.2           | –    | 4.0          | 3.6  | FFA.3E.740.CNS                                 | –                                                                                   | FFA.3E.130.LC                               |
| C         | 45 |       | 5.2           | –    | 4.5          | 4.1  | FFA.3E.745.CNS                                 | –                                                                                   | FFA.3E.130.LC                               |
| C         | 50 |       | 5.2           | –    | 5.0          | 4.6  | FFA.3E.750.CNS                                 | –                                                                                   | FFA.3E.130.LC                               |
| C         | 55 |       | 6.2           | –    | 5.5          | 5.1  | FFA.3E.755.CNS                                 | –                                                                                   | FFA.3E.130.LC                               |
| C         | 60 |       | 6.2           | –    | 6.0          | 5.6  | FFA.3E.760.CNS                                 | –                                                                                   | FFA.3E.130.LC                               |
| C         | 65 |       | 7.2           | –    | 6.5          | 6.1  | FFA.3E.765.CNS                                 | –                                                                                   | FFA.3E.130.LC                               |
| C         | 70 |       | 7.2           | –    | 7.0          | 6.6  | FFA.3E.770.CNS                                 | –                                                                                   | FFA.3E.130.LC                               |
| C         | 75 |       | 8.2           | –    | 7.5          | 7.1  | FFA.3E.775.CNS                                 | –                                                                                   | FFA.3E.130.LC                               |
| C         | 80 |       | 8.2           | –    | 8.0          | 7.6  | FFA.3E.780.CNS                                 | –                                                                                   | FFA.3E.130.LC                               |
| C         | 85 |       | 9.2           | –    | 8.5          | 8.1  | FFA.3E.785.CNS                                 | –                                                                                   | FFA.3E.130.LC                               |
| C         | 90 |       | 9.2           | –    | 9.0          | 8.6  | FFA.3E.790.CNS                                 | –                                                                                   | FFA.3E.130.LC                               |
| C         | 95 |       | 10.2          | 10.2 | 9.5          | 9.1  | FFA.3E.795.CNS                                 | –                                                                                   | FFA.3E.130.LC                               |
| C         | 10 |       | 10.2          | 10.2 | 10.0         | 9.6  | FFA.3E.710.CNS                                 | –                                                                                   | FFA.3E.130.LC                               |
| C         | 11 |       | 11.2          | 11.2 | 10.5         | 10.1 | FFA.3E.711.CNS                                 | –                                                                                   | FFA.3E.130.LC                               |
| K         | 11 |       | 12.3          | –    | 12.0         | 10.6 | FFA.4E.711.CNS                                 | FFA.3K.137.LCN                                                                      | FFA.4E.130.LC <sup>2)</sup>                 |
| K         | 12 |       | 13.8          | 13.8 | 12.8         | 12.1 | FFA.4E.712.CNS                                 | FFA.3K.137.LCN                                                                      | FFA.4E.130.LC <sup>2)</sup>                 |
| K         | 13 |       | 13.8          | 13.8 | 13.5         | 12.9 | FFA.4E.713.CNS                                 | FFA.3K.137.LCN                                                                      | FFA.4E.130.LC <sup>2)</sup>                 |
| K         | 14 |       | 15.3          | 15.3 | 14.0         | 13.6 | FFA.4E.714.CNS                                 | FFA.3K.137.LCN                                                                      | FFA.4E.130.LC <sup>2)</sup>                 |
| K         | 15 |       | 15.3          | 15.3 | 15.0         | 14.1 | FFA.4E.715.CNS                                 | FFA.3K.137.LCN                                                                      | FFA.4E.130.LC <sup>2)</sup>                 |
| C         | 50 | 4K    | 6.3           | –    | 5.0          | 4.8  | FFA.4E.750.CNS                                 | –                                                                                   | FFA.4E.130.LC                               |
| C         | 55 |       | 6.3           | –    | 5.5          | 5.1  | FFA.4E.755.CNS                                 | –                                                                                   | FFA.4E.130.LC                               |
| C         | 60 |       | 6.3           | –    | 6.0          | 5.6  | FFA.4E.760.CNS                                 | –                                                                                   | FFA.4E.130.LC                               |
| C         | 65 |       | 7.3           | –    | 6.5          | 6.1  | FFA.4E.765.CNS                                 | –                                                                                   | FFA.4E.130.LC                               |
| C         | 70 |       | 7.3           | –    | 7.0          | 6.6  | FFA.4E.770.CNS                                 | –                                                                                   | FFA.4E.130.LC                               |
| C         | 75 |       | 8.3           | –    | 7.5          | 7.1  | FFA.4E.775.CNS                                 | –                                                                                   | FFA.4E.130.LC                               |
| C         | 80 |       | 8.3           | –    | 8.0          | 7.6  | FFA.4E.780.CNS                                 | –                                                                                   | FFA.4E.130.LC                               |
| C         | 85 |       | 9.3           | –    | 8.5          | 8.1  | FFA.4E.785.CNS                                 | –                                                                                   | FFA.4E.130.LC                               |
| C         | 90 |       | 9.3           | –    | 9.0          | 8.6  | FFA.4E.790.CNS                                 | –                                                                                   | FFA.4E.130.LC                               |
| C         | 95 |       | 10.8          | –    | 9.5          | 9.1  | FFA.4E.795.CNS                                 | –                                                                                   | FFA.4E.130.LC                               |
| C         | 10 |       | 10.8          | –    | 10.5         | 9.6  | FFA.4E.710.CNS                                 | –                                                                                   | FFA.4E.130.LC                               |
| C         | 11 |       | 12.3          | –    | 12.0         | 10.6 | FFA.4E.711.CNS                                 | –                                                                                   | FFA.4E.130.LC                               |
| C         | 12 |       | 13.8          | 13.8 | 12.8         | 12.1 | FFA.4E.712.CNS                                 | –                                                                                   | FFA.4E.130.LC                               |
| C         | 13 |       | 13.8          | 13.8 | 13.5         | 12.9 | FFA.4E.713.CNS                                 | –                                                                                   | FFA.4E.130.LC                               |
| C         | 14 |       | 15.3          | 15.3 | 14.0         | 13.6 | FFA.4E.714.CNS                                 | –                                                                                   | FFA.4E.130.LC                               |
| C         | 15 |       | 15.3          | 15.3 | 15.0         | 14.1 | FFA.4E.715.CNS                                 | –                                                                                   | FFA.4E.130.LC                               |
| K         | 16 |       | 17.8          | –    | 16.5         | 15.6 | FFA.4K.716.CNS                                 | FFA.4K.137.LCN <sup>3)</sup>                                                        | FFA.4K.136.LC <sup>2)</sup>                 |
| K         | 17 |       | 17.8          | –    | 17.5         | 16.6 | FFA.4K.717.CNS                                 | FFA.4K.137.LCN                                                                      | FFA.4K.136.LC <sup>2)</sup>                 |
| K         | 18 |       | 19.8          | –    | 18.5         | 17.6 | FFA.4K.718.CNS                                 | FFA.4K.137.LCN                                                                      | FFA.4K.136.LC <sup>2)</sup>                 |
| K         | 19 |       | 19.8          | –    | 19.5         | 18.6 | FFA.4K.719.CNS                                 | FFA.4K.137.LCN                                                                      | FFA.4K.136.LC <sup>2)</sup>                 |
| K         | 20 |       | 21.8          | –    | 20.5         | 19.6 | FFA.4K.720.CNS                                 | FFA.4K.137.LCN                                                                      | FFA.4K.136.LC <sup>2)</sup>                 |
| K         | 21 |       | 21.8          | –    | 21.5         | 20.6 | FFA.4K.721.CNS                                 | FFA.4K.137.LCN                                                                      | FFA.4K.136.LC <sup>2)</sup>                 |
| K         | 22 |       | 23.8          | 23.8 | 22.5         | 21.6 | FFA.4K.722.CNS                                 | FFA.4K.137.LCN                                                                      | FFA.4K.136.LC <sup>2)</sup>                 |
| K         | 23 |       | 23.8          | 23.8 | 23.5         | 22.6 | FFA.4K.723.CNS                                 | FFA.4K.137.LCN                                                                      | FFA.4K.136.LC <sup>2)</sup>                 |

**Note:** <sup>1)</sup> for ordering the collet system separately.  
<sup>2)</sup> for ordering the K type collet, the oversize collet and the split centre-pieces, as well as the corresponding collet nut should also be ordered.

<sup>3)</sup> in 4K series, the centre-piece is made of one piece.

All dimensions are in millimetres.



Part number example see page 3

# SPANNZANGEN | COLLETS SERIE K | SERIES K

## C type collets

|  |    |       |               |      |              |      |  |                               |
|-----------------------------------------------------------------------------------|----|-------|---------------|------|--------------|------|-------------------------------------------------------------------------------------|-------------------------------|
| Reference                                                                         |    | Serie | ø Collet (mm) |      | ø Cable (mm) |      | Part number of the collet system <sup>1)</sup>                                      | Part number of the collet nut |
| Type                                                                              | ø  |       | ø A           | ø B  | max.         | min. |                                                                                     |                               |
| C                                                                                 | 10 | 5K    | 11.8          | –    | 10.5         | 9.6  | FFA.5K.710.CNS                                                                      | FFA.5K.130.LC                 |
| C                                                                                 | 11 |       | 11.8          | –    | 11.5         | 10.6 | FFA.5K.711.CNS                                                                      | FFA.5K.130.LC                 |
| C                                                                                 | 12 |       | 13.8          | –    | 12.5         | 11.6 | FFA.5K.712.CNS                                                                      | FFA.5K.130.LC                 |
| C                                                                                 | 13 |       | 13.8          | –    | 13.5         | 12.6 | FFA.5K.713.CNS                                                                      | FFA.5K.130.LC                 |
| C                                                                                 | 14 |       | 15.8          | –    | 14.5         | 13.6 | FFA.5K.714.CNS                                                                      | FFA.5K.130.LC                 |
| C                                                                                 | 15 |       | 15.8          | –    | 15.5         | 14.6 | FFA.5K.715.CNS                                                                      | FFA.5K.130.LC                 |
| C                                                                                 | 16 |       | 17.8          | –    | 16.5         | 15.6 | FFA.5K.716.CNS                                                                      | FFA.5K.130.LC                 |
| C                                                                                 | 17 |       | 17.8          | –    | 17.5         | 16.6 | FFA.5K.717.CNS                                                                      | FFA.5K.130.LC                 |
| C                                                                                 | 18 |       | 19.8          | –    | 18.5         | 17.6 | FFA.5K.718.CNS                                                                      | FFA.5K.130.LC                 |
| C                                                                                 | 19 |       | 19.8          | –    | 19.5         | 18.6 | FFA.5K.719.CNS                                                                      | FFA.5K.130.LC                 |
| C                                                                                 | 20 |       | 21.8          | –    | 20.5         | 19.6 | FFA.5K.720.CNS                                                                      | FFA.5K.130.LC                 |
| C                                                                                 | 21 |       | 21.8          | –    | 21.5         | 20.6 | FFA.5K.721.CNS                                                                      | FFA.5K.130.LC                 |
| C                                                                                 | 22 |       | 23.8          | 23.8 | 22.5         | 21.6 | FFA.5K.722.CNS                                                                      | FFA.5K.130.LC                 |
| C                                                                                 | 23 |       | 23.8          | 23.8 | 23.5         | 22.6 | FFA.5K.723.CNS                                                                      | FFA.5K.130.LC                 |

**Note:**

<sup>1)</sup> for ordering the collet system separately.

## Bend relief collet nut and bend relief

|  |          |       |  |                                      |  |
|-------------------------------------------------------------------------------------|----------|-------|---------------------------------------------------------------------------------------|--------------------------------------|--|
| Reference                                                                           |          | Serie | Part number of the collet nut                                                         | Bend relief to be used <sup>1)</sup> |  |
| Type                                                                                | ø        |       |                                                                                       |                                      |  |
| C                                                                                   | 15 to 65 | 1K    | FFM.1E.130.LC                                                                         | GMA.1B.●●●.●●                        |  |
| K                                                                                   | 70 to 85 |       | FFM.2E.130.LC                                                                         | GMA.2B.●●●.●●                        |  |
| C                                                                                   | 15 to 85 | 2K    | FFM.2E.130.LC                                                                         | GMA.2B.●●●.●●                        |  |
| K                                                                                   | 90 to 11 |       | FFM.3E.130.LC                                                                         | GMA.3B.●●●.●●                        |  |
| C                                                                                   | 30 to 10 | 3K    | FFM.3E.130.LC                                                                         | GMA.3B.●●●.●●                        |  |
| K                                                                                   | 11 to 15 |       | FFM.4E.130.LC                                                                         | GMA.4B.●●●.●●                        |  |
| C                                                                                   | 50 to 15 | 4K    | FFM.4E.130.LC                                                                         | GMA.4B.●●●.●●                        |  |

**Note:**


<sup>1)</sup> the bend relief is to be ordered separately (see page 80).  
All dimensions are in millimetres.

# SPANNZANGEN | COLLETS

## SERIE S | SERIES S



### C, K and L type collets

|  |    |  |               |  |              |  |                                         |                                                                                 |                                                |
|-----------------------------------------------------------------------------------|----|-----------------------------------------------------------------------------------|---------------|-------------------------------------------------------------------------------------|--------------|-------------------------------------------------------------------------------------|-----------------------------------------|---------------------------------------------------------------------------------|------------------------------------------------|
| C or K type collets                                                               |    | L type collet                                                                     |               |                                                                                     |              |                                                                                     |                                         |                                                                                 |                                                |
| Reference                                                                         |    | Serie                                                                             | ø Collet (mm) |                                                                                     | ø Cable (mm) |                                                                                     | Part number of the collet <sup>1)</sup> | Part number of the oversize collet and of the split centre-pieces <sup>3)</sup> | Part number of the collet nut <sup>3) 5)</sup> |
| Type                                                                              | ø  |                                                                                   | ø A           | ø B                                                                                 | max.         | min.                                                                                |                                         |                                                                                 |                                                |
| C                                                                                 | 17 | OS                                                                                | 1.7           | –                                                                                   | 1.6          | 1.3                                                                                 | FFA.OS.717.CN                           | –                                                                               | FFA.OS.130.LC                                  |
| C                                                                                 | 22 |                                                                                   | 2.2           | –                                                                                   | 2.1          | 1.7                                                                                 | FFA.OS.722.CN                           | –                                                                               | FFA.OS.130.LC                                  |
| C                                                                                 | 27 |                                                                                   | 2.7           | –                                                                                   | 2.6          | 2.2                                                                                 | FFA.OS.727.CN                           | –                                                                               | FFA.OS.130.LC                                  |
| C                                                                                 | 32 |                                                                                   | 3.2           | –                                                                                   | 3.1          | 2.7                                                                                 | FFA.OS.732.CN                           | –                                                                               | FFA.OS.130.LC                                  |
| C                                                                                 | 37 |                                                                                   | 3.7           | –                                                                                   | 3.6          | 3.0                                                                                 | FFA.OS.737.CN                           | –                                                                               | FFA.OS.130.LC                                  |
| C                                                                                 | 42 |                                                                                   | 4.2           | 3.7                                                                                 | 4.1          | 3.3                                                                                 | FFA.OS.742.CN                           | –                                                                               | FFA.OS.130.LC                                  |
| C                                                                                 | 44 |                                                                                   | 4.4           | 3.7                                                                                 | 4.3          | 3.5                                                                                 | FFA.OS.744.CN                           | –                                                                               | FFA.OS.132.LC                                  |
| K                                                                                 | 47 |                                                                                   | 4.7           | –                                                                                   | 4.6          | 3.8                                                                                 | FFA.1S.747.CN                           | FFA.OS.137.LCN                                                                  | FFA.1S.130.LC                                  |
| K                                                                                 | 52 |                                                                                   | 5.2           | –                                                                                   | 5.1          | 4.3                                                                                 | FFA.1S.752.CN                           | FFA.OS.137.LCN                                                                  | FFA.1S.130.LC                                  |
| K                                                                                 | 57 |                                                                                   | 5.7           | –                                                                                   | 5.6          | 4.8                                                                                 | FFA.1S.757.CN                           | FFA.OS.137.LCN                                                                  | FFA.1S.130.LC                                  |
| K                                                                                 | 62 |                                                                                   | 6.2           | 5.2                                                                                 | 6.1          | 5.3                                                                                 | FFA.1S.762.CN                           | FFA.OS.137.LCN                                                                  | FFA.1S.130.LC                                  |
| K                                                                                 | 66 |                                                                                   | 6.6           | 5.4                                                                                 | 6.5          | 5.9                                                                                 | FFA.1S.766.CN                           | FFA.OS.137.LCN                                                                  | FFA.1S.131.LC                                  |
| K                                                                                 | 68 |                                                                                   | 6.8           | –                                                                                   | 6.7          | 6.0                                                                                 | FFA.1S.768.CN                           | FFA.OS.137.LCN                                                                  | FFA.1S.131.LC                                  |
| C                                                                                 | 17 |                                                                                   | 1.7           | –                                                                                   | 1.6          | 1.3                                                                                 | FLA.OS.717.CN <sup>4)</sup>             | –                                                                               | FFA.OS.130.LC                                  |
| C                                                                                 | 22 |                                                                                   | 2.2           | –                                                                                   | 2.1          | 1.7                                                                                 | FLA.OS.722.CN <sup>4)</sup>             | –                                                                               | FFA.OS.130.LC                                  |
| C                                                                                 | 27 |                                                                                   | 2.7           | –                                                                                   | 2.6          | 2.2                                                                                 | FLA.OS.727.CN <sup>4)</sup>             | –                                                                               | FFA.OS.130.LC                                  |
| C                                                                                 | 32 |                                                                                   | 3.2           | –                                                                                   | 3.1          | 2.7                                                                                 | FLA.OS.732.CN <sup>4)</sup>             | –                                                                               | FFA.OS.130.LC                                  |
| C                                                                                 | 37 |                                                                                   | 3.7           | –                                                                                   | 3.6          | 3.0                                                                                 | FLA.OS.737.CN <sup>4)</sup>             | –                                                                               | FFA.OS.130.LC                                  |
| C                                                                                 | 42 |                                                                                   | 4.2           | 3.7                                                                                 | 4.1          | 3.3                                                                                 | FLA.OS.742.CN <sup>4)</sup>             | –                                                                               | FFA.OS.130.LC                                  |
| C                                                                                 | 44 |                                                                                   | 4.4           | 3.7                                                                                 | 4.3          | 3.5                                                                                 | FLA.OS.744.CN <sup>4)</sup>             | –                                                                               | FFA.OS.132.LC                                  |
| L                                                                                 | 17 |                                                                                   | 1.7           | –                                                                                   | 1.6          | 1.3                                                                                 | FFA.OS.717.LN                           | –                                                                               | FFA.OS.130.LC                                  |
| L                                                                                 | 22 |                                                                                   | 2.2           | –                                                                                   | 2.1          | 1.7                                                                                 | FFA.OS.722.LN                           | –                                                                               | FFA.OS.130.LC                                  |
| L                                                                                 | 27 |                                                                                   | 2.7           | –                                                                                   | 2.6          | 2.2                                                                                 | FFA.OS.727.LN                           | –                                                                               | FFA.OS.130.LC                                  |
| L                                                                                 | 32 |                                                                                   | 3.2           | –                                                                                   | 3.1          | 2.7                                                                                 | FFA.OS.732.LN                           | –                                                                               | FFA.OS.130.LC                                  |
| L                                                                                 | 37 |                                                                                   | 3.7           | –                                                                                   | 3.6          | 3.0                                                                                 | FFA.OS.737.LN                           | –                                                                               | FFA.OS.130.LC                                  |
| L                                                                                 | 42 |                                                                                   | 4.2           | –                                                                                   | 4.1          | 3.3                                                                                 | FFA.OS.742.LN                           | –                                                                               | FFA.OS.130.LC                                  |
| L                                                                                 | 44 |                                                                                   | 4.4           | –                                                                                   | 4.3          | 3.5                                                                                 | FFA.OS.744.LN                           | –                                                                               | FFA.OS.132.LC                                  |

**Note:** see following page for text of notes <sup>1)</sup> through <sup>5)</sup>.  
All dimensions are in millimetres.



Part number example see page 3

# SPANNZANGEN | COLLETS SERIE S | SERIES S



## C, K and L type collets



| Reference |    | Serie | ø Collet (mm) |     | ø Cable (mm) |      | Part number of the collet <sup>1)</sup> | Part number of the oversize collet and of the split centre-pieces <sup>3)</sup> | Part number of the collet nut <sup>3) 5)</sup> |
|-----------|----|-------|---------------|-----|--------------|------|-----------------------------------------|---------------------------------------------------------------------------------|------------------------------------------------|
| Type      | ø  |       | ø A           | ø B | max.         | min. |                                         |                                                                                 |                                                |
| C         | 17 | 1S    | 1.7           | –   | 1.6          | 1.3  | FFA.1S.717.CN                           | –                                                                               | FFA.1S.130.LC                                  |
| C         | 22 |       | 2.2           | –   | 2.1          | 1.7  | FFA.1S.722.CN                           | –                                                                               | FFA.1S.130.LC                                  |
| C         | 27 |       | 2.7           | –   | 2.6          | 2.2  | FFA.1S.727.CN                           | –                                                                               | FFA.1S.130.LC                                  |
| C         | 32 |       | 3.2           | –   | 3.1          | 2.6  | FFA.1S.732.CN                           | –                                                                               | FFA.1S.130.LC                                  |
| C         | 37 |       | 3.7           | –   | 3.6          | 2.7  | FFA.1S.737.CN                           | –                                                                               | FFA.1S.130.LC                                  |
| C         | 42 |       | 4.2           | –   | 4.1          | 3.3  | FFA.1S.742.CN                           | –                                                                               | FFA.1S.130.LC                                  |
| C         | 47 |       | 4.7           | –   | 4.6          | 3.8  | FFA.1S.747.CN                           | –                                                                               | FFA.1S.130.LC                                  |
| C         | 52 |       | 5.2           | –   | 5.1          | 4.3  | FFA.1S.752.CN                           | –                                                                               | FFA.1S.130.LC                                  |
| C         | 57 |       | 5.7           | –   | 5.6          | 4.8  | FFA.1S.757.CN                           | –                                                                               | FFA.1S.130.LC                                  |
| C         | 62 |       | 6.2           | 5.2 | 6.1          | 5.3  | FFA.1S.762.CN                           | –                                                                               | FFA.1S.130.LC                                  |
| C         | 66 |       | 6.6           | 5.4 | 6.5          | 5.9  | FFA.1S.766.CN                           | –                                                                               | FFA.1S.131.LC                                  |
| C         | 68 |       | 6.8           | –   | 6.7          | 6.0  | FFA.1S.768.CN                           | –                                                                               | FFA.1S.131.LC                                  |
| K         | 72 |       | 7.2           | 6.7 | 7.0          | 6.1  | FFA.2S.772.CN                           | FFA.1S.137.LCN                                                                  | FFA.2S.130.LC                                  |
| K         | 77 |       | 7.7           | 6.7 | 7.5          | 7.1  | FFA.2S.777.CN                           | FFA.1S.137.LCN                                                                  | FFA.2S.130.LC                                  |
| K         | 82 |       | 8.2           | 6.7 | 8.0          | 7.6  | FFA.2S.782.CN                           | FFA.1S.137.LCN                                                                  | FFA.2S.130.LC                                  |
| K         | 87 |       | 8.7           | 6.7 | 8.5          | 8.1  | FFA.2S.787.CN                           | FFA.1S.137.LCN                                                                  | FFA.2S.130.LC                                  |
| C         | 17 |       | 1.7           | –   | 1.6          | 1.3  | FLA.1S.717.CN <sup>4)</sup>             | –                                                                               | FFA.1S.130.LC                                  |
| C         | 22 |       | 2.2           | –   | 2.1          | 1.7  | FLA.1S.722.CN <sup>4)</sup>             | –                                                                               | FFA.1S.130.LC                                  |
| C         | 27 |       | 2.7           | –   | 2.6          | 2.2  | FLA.1S.727.CN <sup>4)</sup>             | –                                                                               | FFA.1S.130.LC                                  |
| C         | 32 |       | 3.2           | –   | 3.1          | 2.6  | FLA.1S.732.CN <sup>4)</sup>             | –                                                                               | FFA.1S.130.LC                                  |
| C         | 37 |       | 3.7           | –   | 3.6          | 2.7  | FLA.1S.737.CN <sup>4)</sup>             | –                                                                               | FFA.1S.130.LC                                  |
| C         | 42 |       | 4.2           | –   | 4.1          | 3.3  | FLA.1S.742.CN <sup>4)</sup>             | –                                                                               | FFA.1S.130.LC                                  |
| C         | 47 |       | 4.7           | –   | 4.6          | 3.8  | FLA.1S.747.CN <sup>4)</sup>             | –                                                                               | FFA.1S.130.LC                                  |
| C         | 52 |       | 5.2           | –   | 5.1          | 4.3  | FLA.1S.752.CN <sup>4)</sup>             | –                                                                               | FFA.1S.130.LC                                  |
| C         | 57 |       | 5.7           | –   | 5.6          | 4.8  | FLA.1S.757.CN <sup>4)</sup>             | –                                                                               | FFA.1S.130.LC                                  |
| C         | 62 |       | 6.2           | 5.2 | 6.1          | 5.3  | FLA.1S.762.CN <sup>4)</sup>             | –                                                                               | FFA.1S.130.LC                                  |
| C         | 66 |       | 6.6           | 5.4 | 6.5          | 5.9  | FLA.1S.766.CN <sup>4)</sup>             | –                                                                               | FFA.1S.131.LC                                  |
| C         | 68 |       | 6.8           | 5.5 | 6.7          | 6.0  | FLA.1S.768.CN <sup>4)</sup>             | –                                                                               | FFA.1S.131.LC                                  |
| L         | 17 |       | 1.7           | –   | 1.6          | 1.3  | FFA.1S.717.LN                           | –                                                                               | FFA.1S.130.LC                                  |
| L         | 22 |       | 2.2           | –   | 2.1          | 1.7  | FFA.1S.722.LN                           | –                                                                               | FFA.1S.130.LC                                  |
| L         | 27 |       | 2.7           | –   | 2.6          | 2.2  | FFA.1S.727.LN                           | –                                                                               | FFA.1S.130.LC                                  |
| L         | 32 |       | 3.2           | –   | 3.1          | 2.6  | FFA.1S.732.LN                           | –                                                                               | FFA.1S.130.LC                                  |
| L         | 37 |       | 3.7           | –   | 3.6          | 2.7  | FFA.1S.737.LN                           | –                                                                               | FFA.1S.130.LC                                  |
| L         | 42 |       | 4.2           | –   | 4.1          | 3.3  | FFA.1S.742.LN                           | –                                                                               | FFA.1S.130.LC                                  |
| L         | 47 |       | 4.7           | –   | 4.6          | 3.8  | FFA.1S.747.LN                           | –                                                                               | FFA.1S.130.LC                                  |
| L         | 50 |       | 5.0           | –   | 4.9          | 4.7  | FFA.1S.750.LN                           | –                                                                               | FFA.1S.130.LC                                  |
| L         | 52 |       | 5.2           | –   | 5.1          | 4.3  | FFA.1S.752.LN                           | –                                                                               | FFA.1S.130.LC                                  |
| L         | 57 |       | 5.7           | –   | 5.6          | 4.8  | FFA.1S.757.LN                           | –                                                                               | FFA.1S.130.LC                                  |
| L         | 62 |       | 6.2           | –   | 6.1          | 5.3  | FFA.1S.762.LN                           | –                                                                               | FFA.1S.130.LC                                  |
| L         | 66 |       | 6.6           | –   | 6.5          | 5.9  | FFA.1S.766.LN                           | –                                                                               | FFA.1S.131.LC                                  |

### Note:

- <sup>1)</sup> for ordering collets separately.
  - <sup>2)</sup> these collets can only be used with the FLA model.
  - <sup>3)</sup> for ordering a K type collet separately, the oversize collet and the corresponding collet nut should also be ordered.
  - <sup>4)</sup> these collets should be used with FLA, FFP and PCP models.
  - <sup>5)</sup> for models with bend relief, the FFM.●●.130.LC collet nut should be ordered (see page 76).
- All dimensions are in millimetres.

# SPANNZANGEN | COLLETS

## SERIE S | SERIES S



### C, K and L type collets



| Reference |    | Serie | ø Collet (mm) |     | ø Cable (mm) |      | Part number of the collet <sup>1)</sup> | Part number of the oversize collet and of the split centre-pieces <sup>3)</sup> | Part number of the collet nut <sup>3) 5)</sup> |
|-----------|----|-------|---------------|-----|--------------|------|-----------------------------------------|---------------------------------------------------------------------------------|------------------------------------------------|
| Type      | ø  |       | ø A           | ø B | max.         | min. |                                         |                                                                                 |                                                |
| C         | 17 | 2S    | 1.7           | –   | 1.6          | 1.3  | FFA.2S.717.CN                           | –                                                                               | FFA.2S.130.LC                                  |
| C         | 27 |       | 2.7           | –   | 2.5          | 1.7  | FFA.2S.727.CN                           | –                                                                               | FFA.2S.130.LC                                  |
| C         | 32 |       | 3.2           | –   | 3.0          | 2.5  | FFA.2S.732.CN                           | –                                                                               | FFA.2S.130.LC                                  |
| C         | 42 |       | 4.2           | –   | 4.0          | 3.1  | FFA.2S.742.CN                           | –                                                                               | FFA.2S.130.LC                                  |
| C         | 52 |       | 5.2           | –   | 5.0          | 4.1  | FFA.2S.752.CN                           | –                                                                               | FFA.2S.130.LC                                  |
| C         | 62 |       | 6.2           | –   | 6.0          | 5.1  | FFA.2S.762.CN                           | –                                                                               | FFA.2S.130.LC                                  |
| C         | 72 |       | 7.2           | 6.7 | 7.0          | 6.1  | FFA.2S.772.CN                           | –                                                                               | FFA.2S.130.LC                                  |
| C         | 77 |       | 7.7           | 6.7 | 7.5          | 7.1  | FFA.2S.777.CN                           | –                                                                               | FFA.2S.130.LC                                  |
| C         | 82 |       | 8.2           | 6.7 | 8.0          | 7.6  | FFA.2S.782.CN                           | –                                                                               | FFA.2S.130.LC                                  |
| C         | 87 |       | 8.7           | 6.7 | 8.5          | 8.1  | FFA.2S.787.CN                           | –                                                                               | FFA.2S.130.LC                                  |
| K         | 92 |       | 9.2           | 8.7 | 9.0          | 8.1  | FFA.3S.792.CN                           | FFA.2S.137.LCN                                                                  | FFA.3S.130.LC                                  |
| K         | 97 |       | 9.7           | 8.7 | 9.5          | 9.1  | FFA.3S.797.CN                           | FFA.2S.137.LCN                                                                  | FFA.3S.130.LC                                  |
| K         | 10 |       | 10.2          | 8.7 | 10.0         | 9.6  | FFA.3S.710.CN                           | FFA.2S.137.LCN                                                                  | FFA.3S.130.LC                                  |
| K         | 11 |       | 10.7          | 9.0 | 10.5         | 10.1 | FFA.3S.711.CN                           | FFA.2S.137.LCN                                                                  | FFA.3S.130.LC                                  |
| C         | 17 |       | 1.7           | –   | 1.6          | 1.3  | FLA.2S.717.CN <sup>4)</sup>             | –                                                                               | FFA.2S.130.LC                                  |
| C         | 27 |       | 2.7           | –   | 2.5          | 1.7  | FLA.2S.727.CN <sup>4)</sup>             | –                                                                               | FFA.2S.130.LC                                  |
| C         | 32 |       | 3.2           | –   | 3.0          | 2.5  | FLA.2S.732.CN <sup>4)</sup>             | –                                                                               | FFA.2S.130.LC                                  |
| C         | 42 |       | 4.2           | –   | 4.0          | 3.1  | FLA.2S.742.CN <sup>4)</sup>             | –                                                                               | FFA.2S.130.LC                                  |
| C         | 52 |       | 5.2           | –   | 5.0          | 4.1  | FLA.2S.752.CN <sup>4)</sup>             | –                                                                               | FFA.2S.130.LC                                  |
| C         | 62 |       | 6.2           | –   | 6.0          | 5.1  | FLA.2S.762.CN <sup>4)</sup>             | –                                                                               | FFA.2S.130.LC                                  |
| C         | 72 |       | 7.2           | 6.7 | 7.0          | 6.1  | FLA.2S.772.CN <sup>4)</sup>             | –                                                                               | FFA.2S.130.LC                                  |
| C         | 77 |       | 7.7           | 6.7 | 7.5          | 7.1  | FLA.2S.777.CN <sup>4)</sup>             | –                                                                               | FFA.2S.130.LC                                  |
| C         | 82 |       | 8.2           | 6.7 | 8.0          | 7.6  | FLA.2S.782.CN <sup>4)</sup>             | –                                                                               | FFA.2S.130.LC                                  |
| C         | 87 |       | 8.7           | 6.7 | 8.5          | 8.1  | FLA.2S.787.CN <sup>4)</sup>             | –                                                                               | FFA.2S.130.LC                                  |
| L         | 27 |       | 2.7           | –   | 2.5          | 1.7  | FFA.2S.727.LN                           | –                                                                               | FFA.2S.130.LC                                  |
| L         | 32 |       | 3.2           | –   | 3.0          | 2.5  | FFA.2S.732.LN                           | –                                                                               | FFA.2S.130.LC                                  |
| L         | 42 |       | 4.2           | –   | 4.0          | 3.1  | FFA.2S.742.LN                           | –                                                                               | FFA.2S.130.LC                                  |
| L         | 52 |       | 5.2           | –   | 5.0          | 4.1  | FFA.2S.752.LN                           | –                                                                               | FFA.2S.130.LC                                  |
| L         | 62 |       | 6.2           | –   | 6.0          | 5.1  | FFA.2S.762.LN                           | –                                                                               | FFA.2S.130.LC                                  |
| L         | 72 |       | 7.2           | –   | 7.0          | 6.1  | FFA.2S.772.LN                           | –                                                                               | FFA.2S.130.LC                                  |
| L         | 77 |       | 7.9           | –   | 7.5          | 7.1  | FFA.2S.777.LN                           | –                                                                               | FFA.2S.130.LC                                  |
| L         | 82 |       | 8.2           | –   | 8.0          | 7.6  | FFA.2S.782.LN                           | –                                                                               | FFA.2S.130.LC                                  |
| L         | 87 |       | 8.7           | –   | 8.5          | 8.1  | FFA.2S.787.LN                           | –                                                                               | FFA.2S.130.LC                                  |

#### Note:

<sup>1)</sup> for ordering collets separately.

<sup>3)</sup> for ordering a K type collet separately, the oversize collet and the corresponding collet nut should also be ordered.

<sup>4)</sup> these collets should be used with FLA, FFP and PCP models.

<sup>5)</sup> for models with bend relief, the FFM.●●.130.LC collet nut should be ordered (see page 76).

All dimensions are in millimetres.



C or K type collets



L type collet



**Note:**

All dimensions are in millimetres.

# SPANNZANGEN COLLETS

## SERIE S SERIES S



### C, K and L type collets



| Reference |    | Serie | ø Collet (mm) |      | ø Cable (mm) |      | Part number of the collet <sup>1)</sup> | Part number of the oversize collet and of the split centre-pieces <sup>3)</sup> | Part number of the collet nut <sup>3) 5)</sup> |
|-----------|----|-------|---------------|------|--------------|------|-----------------------------------------|---------------------------------------------------------------------------------|------------------------------------------------|
| Type      | ø  |       | ø A           | ø B  | max.         | min. |                                         |                                                                                 |                                                |
| C         | 52 | 4S    | 5.2           | –    | 5.0          | 4.1  | FFA.4S.752.CN                           | –                                                                               | FFA.4S.130.LC                                  |
| C         | 62 |       | 6.2           | –    | 6.0          | 5.1  | FFA.4S.762.CN                           | –                                                                               | FFA.4S.130.LC                                  |
| C         | 72 |       | 7.2           | –    | 7.0          | 6.1  | FFA.4S.772.CN                           | –                                                                               | FFA.4S.130.LC                                  |
| C         | 82 |       | 8.2           | –    | 8.0          | 7.1  | FFA.4S.782.CN                           | –                                                                               | FFA.4S.130.LC                                  |
| C         | 92 |       | 9.2           | –    | 9.0          | 8.1  | FFA.4S.792.CN                           | –                                                                               | FFA.4S.130.LC                                  |
| C         | 10 |       | 10.2          | –    | 10.0         | 9.1  | FFA.4S.710.CN                           | –                                                                               | FFA.4S.130.LC                                  |
| C         | 11 |       | 11.2          | –    | 11.0         | 10.1 | FFA.4S.711.CN                           | –                                                                               | FFA.4S.130.LC                                  |
| C         | 12 |       | 12.2          | –    | 12.0         | 11.1 | FFA.4S.712.CN                           | –                                                                               | FFA.4S.130.LC                                  |
| C         | 13 |       | 13.2          | 12.2 | 13.0         | 12.6 | FFA.4S.713.CN                           | –                                                                               | FFA.4S.130.LC                                  |
| K         | 14 |       | 14.2          | –    | 14.0         | 13.1 | FFA.5S.714.CN                           | FFA.4S.137.LCN                                                                  | FFA.5S.130.LC                                  |
| K         | 15 |       | 15.2          | –    | 15.0         | 14.1 | FFA.5S.715.CN                           | FFA.4S.137.LCN                                                                  | FFA.5S.130.LC                                  |
| K         | 16 |       | 16.2          | –    | 16.0         | 15.1 | FFA.5S.716.CN                           | FFA.4S.137.LCN                                                                  | FFA.5S.130.LC                                  |
| K         | 17 |       | 17.2          | –    | 17.0         | 16.1 | FFA.5S.717.CN                           | FFA.4S.137.LCN                                                                  | FFA.5S.130.LC                                  |
| K         | 18 |       | 18.2          | –    | 18.0         | 17.1 | FFA.5S.718.CN                           | FFA.4S.137.LCN                                                                  | FFA.5S.130.LC                                  |
| K         | 19 |       | 19.2          | –    | 19.0         | 18.1 | FFA.5S.719.CN                           | FFA.4S.137.LCN                                                                  | FFA.5S.130.LC                                  |
| K         | 20 |       | 20.2          | 19.7 | 20.0         | 19.1 | FFA.5S.720.CN                           | FFA.4S.137.LCN                                                                  | FFA.5S.130.LC                                  |
| K         | 21 |       | 21.2          | 19.7 | 21.0         | 20.1 | FFA.5S.721.CN                           | FFA.4S.137.LCN                                                                  | FFA.5S.130.LC                                  |
| K         | 22 |       | 22.2          | 19.7 | 22.0         | 21.1 | FFA.5S.722.CN                           | FFA.4S.137.LCN                                                                  | FFA.5S.130.LC                                  |
| C         | 52 |       | 5.2           | –    | 5.0          | 4.1  | FLA.4S.752.CN <sup>4)</sup>             | –                                                                               | FFA.4S.130.LC                                  |
| C         | 62 |       | 6.2           | –    | 6.0          | 5.1  | FLA.4S.762.CN <sup>4)</sup>             | –                                                                               | FFA.4S.130.LC                                  |
| C         | 72 |       | 7.2           | –    | 7.0          | 6.1  | FLA.4S.772.CN <sup>4)</sup>             | –                                                                               | FFA.4S.130.LC                                  |
| C         | 82 |       | 8.2           | –    | 8.0          | 7.1  | FLA.4S.782.CN <sup>4)</sup>             | –                                                                               | FFA.4S.130.LC                                  |
| C         | 92 |       | 9.2           | –    | 9.0          | 8.1  | FLA.4S.792.CN <sup>4)</sup>             | –                                                                               | FFA.4S.130.LC                                  |
| C         | 10 |       | 10.2          | –    | 10.0         | 9.1  | FLA.4S.710.CN <sup>4)</sup>             | –                                                                               | FFA.4S.130.LC                                  |
| C         | 11 |       | 11.2          | –    | 11.0         | 10.1 | FLA.4S.711.CN <sup>4)</sup>             | –                                                                               | FFA.4S.130.LC                                  |
| C         | 12 |       | 12.2          | –    | 12.0         | 11.1 | FLA.4S.712.CN <sup>4)</sup>             | –                                                                               | FFA.4S.130.LC                                  |
| C         | 13 |       | 13.2          | 12.2 | 13.0         | 12.6 | FLA.4S.713.CN <sup>4)</sup>             | –                                                                               | FFA.4S.130.LC                                  |
| L         | 52 |       | 5.2           | –    | 5.0          | 4.1  | FFA.4S.752.LN                           | –                                                                               | FFA.4S.130.LC                                  |
| L         | 62 |       | 6.2           | –    | 6.0          | 5.1  | FFA.4S.762.LN                           | –                                                                               | FFA.4S.130.LC                                  |
| L         | 72 |       | 7.2           | –    | 7.0          | 6.1  | FFA.4S.772.LN                           | –                                                                               | FFA.4S.130.LC                                  |
| L         | 82 |       | 8.2           | –    | 8.0          | 7.1  | FFA.4S.782.LN                           | –                                                                               | FFA.4S.130.LC                                  |
| L         | 92 |       | 9.2           | –    | 9.0          | 8.1  | FFA.4S.792.LN                           | –                                                                               | FFA.4S.130.LC                                  |
| L         | 10 |       | 10.2          | –    | 10.0         | 9.1  | FFA.4S.710.LN                           | –                                                                               | FFA.4S.130.LC                                  |
| L         | 11 |       | 11.2          | –    | 11.0         | 10.1 | FFA.4S.711.LN                           | –                                                                               | FFA.4S.130.LC                                  |
| L         | 12 |       | 12.2          | –    | 12.0         | 11.1 | FFA.4S.712.LN                           | –                                                                               | FFA.4S.130.LC                                  |
| L         | 13 |       | 13.2          | –    | 13.0         | 12.6 | FFA.4S.713.LN                           | –                                                                               | FFA.4S.130.LC                                  |

#### Note:

<sup>1)</sup> for ordering collets separately.

<sup>3)</sup> for ordering a K type collet separately, the oversize collet and the corresponding collet nut should also be ordered.

<sup>4)</sup> these collets should be used with FLA, FFP and PCP models.

<sup>5)</sup> for models with bend relief, the FFM.●●.130.LC collet nut should be ordered (see page 76).

All dimensions are in millimetres. These notes also apply to the following page.



Part number example see page 3



# SPANNZANGEN | COLLETS SERIE S | SERIES S

## C and K type collets



C or K type collet



| Reference |    | Serie | ø Collet (mm) |      | ø Cable (mm) |      | Part number of the collet <sup>1)</sup> | Part number of the oversize collet and of the split centre-pieces <sup>3)</sup> | Part number of the collet nut <sup>3)</sup> |
|-----------|----|-------|---------------|------|--------------|------|-----------------------------------------|---------------------------------------------------------------------------------|---------------------------------------------|
| Type      | ø  |       | ø A           | ø B  | max.         | min. |                                         |                                                                                 |                                             |
| C         | 72 | 5S    | 7.2           | –    | 7.0          | 6.1  | FFA.5S.772.CN                           | –                                                                               | FFA.5S.130.LC                               |
| C         | 82 |       | 8.2           | –    | 8.0          | 7.1  | FFA.5S.782.CN                           | –                                                                               | FFA.5S.130.LC                               |
| C         | 92 |       | 9.2           | –    | 9.0          | 8.1  | FFA.5S.792.CN                           | –                                                                               | FFA.5S.130.LC                               |
| C         | 10 |       | 10.2          | –    | 10.0         | 9.1  | FFA.5S.710.CN                           | –                                                                               | FFA.5S.130.LC                               |
| C         | 11 |       | 11.2          | –    | 11.0         | 10.1 | FFA.5S.711.CN                           | –                                                                               | FFA.5S.130.LC                               |
| C         | 12 |       | 12.2          | –    | 12.0         | 11.1 | FFA.5S.712.CN                           | –                                                                               | FFA.5S.130.LC                               |
| C         | 13 |       | 13.2          | –    | 13.0         | 12.1 | FFA.5S.713.CN                           | –                                                                               | FFA.5S.130.LC                               |
| C         | 14 |       | 14.2          | –    | 14.0         | 13.1 | FFA.5S.714.CN                           | –                                                                               | FFA.5S.130.LC                               |
| C         | 15 |       | 15.2          | –    | 15.0         | 14.1 | FFA.5S.715.CN                           | –                                                                               | FFA.5S.130.LC                               |
| C         | 16 |       | 16.2          | –    | 16.0         | 15.1 | FFA.5S.716.CN                           | –                                                                               | FFA.5S.130.LC                               |
| C         | 17 |       | 17.2          | –    | 17.0         | 16.1 | FFA.5S.717.CN                           | –                                                                               | FFA.5S.130.LC                               |
| C         | 18 |       | 18.2          | –    | 18.0         | 17.1 | FFA.5S.718.CN                           | –                                                                               | FFA.5S.130.LC                               |
| C         | 19 |       | 19.2          | –    | 19.0         | 18.1 | FFA.5S.719.CN                           | –                                                                               | FFA.5S.130.LC                               |
| C         | 20 |       | 20.2          | 19.7 | 20.0         | 19.1 | FFA.5S.720.CN                           | –                                                                               | FFA.5S.130.LC                               |
| C         | 21 |       | 21.2          | 19.7 | 21.0         | 20.1 | FFA.5S.721.CN                           | –                                                                               | FFA.5S.130.LC                               |
| C         | 22 |       | 22.2          | 19.7 | 22.0         | 21.1 | FFA.5S.722.CN                           | –                                                                               | FFA.5S.130.LC                               |
| K         | 23 |       | 23.2          | –    | 23.0         | 22.1 | FFA.6S.723.CN                           | FFA.5S.137.LCN                                                                  | FFA.6S.130.LC                               |
| K         | 24 |       | 24.2          | –    | 24.0         | 23.1 | FFA.6S.724.CN                           | FFA.5S.137.LCN                                                                  | FFA.6S.130.LC                               |
| K         | 25 |       | 25.2          | –    | 25.0         | 24.1 | FFA.6S.725.CN                           | FFA.5S.137.LCN                                                                  | FFA.6S.130.LC                               |
| K         | 26 |       | 26.2          | –    | 26.0         | 25.1 | FFA.6S.726.CN                           | FFA.5S.137.LCN                                                                  | FFA.6S.130.LC                               |
| K         | 27 |       | 27.2          | –    | 27.0         | 26.1 | FFA.6S.727.CN                           | FFA.5S.137.LCN                                                                  | FFA.6S.130.LC                               |
| K         | 28 |       | 28.2          | 27.2 | 28.0         | 27.1 | FFA.6S.728.CN                           | FFA.5S.137.LCN                                                                  | FFA.6S.130.LC                               |
| K         | 29 |       | 29.2          | 27.2 | 29.0         | 28.1 | FFA.6S.729.CN                           | FFA.5S.137.LCN                                                                  | FFA.6S.130.LC                               |
| K         | 30 |       | 30.2          | 27.2 | 30.0         | 29.1 | FFA.6S.730.CN                           | FFA.5S.137.LCN                                                                  | FFA.6S.130.LC                               |
| C         | 72 |       | 7.2           | –    | 7.0          | 6.1  | FLA.5S.772.CN <sup>2)</sup>             | –                                                                               | FFA.5S.130.LC                               |
| C         | 82 |       | 8.2           | –    | 8.0          | 7.1  | FLA.5S.782.CN <sup>2)</sup>             | –                                                                               | FFA.5S.130.LC                               |
| C         | 92 |       | 9.2           | –    | 9.0          | 8.1  | FLA.5S.792.CN <sup>2)</sup>             | –                                                                               | FFA.5S.130.LC                               |
| C         | 10 |       | 10.2          | –    | 10.0         | 9.1  | FLA.5S.710.CN <sup>2)</sup>             | –                                                                               | FFA.5S.130.LC                               |
| C         | 11 |       | 11.2          | –    | 11.0         | 10.1 | FLA.5S.711.CN <sup>2)</sup>             | –                                                                               | FFA.5S.130.LC                               |
| C         | 12 |       | 12.2          | –    | 12.0         | 11.1 | FLA.5S.712.CN <sup>2)</sup>             | –                                                                               | FFA.5S.130.LC                               |
| C         | 13 |       | 13.2          | –    | 13.0         | 12.1 | FLA.5S.713.CN <sup>2)</sup>             | –                                                                               | FFA.5S.130.LC                               |
| C         | 14 |       | 14.2          | –    | 14.0         | 13.1 | FLA.5S.714.CN <sup>2)</sup>             | –                                                                               | FFA.5S.130.LC                               |
| C         | 15 |       | 15.2          | –    | 15.0         | 14.1 | FLA.5S.715.CN <sup>2)</sup>             | –                                                                               | FFA.5S.130.LC                               |
| C         | 16 |       | 16.2          | –    | 16.0         | 15.1 | FLA.5S.716.CN <sup>2)</sup>             | –                                                                               | FFA.5S.130.LC                               |
| C         | 17 |       | 17.2          | –    | 17.0         | 16.1 | FLA.5S.717.CN <sup>2)</sup>             | –                                                                               | FFA.5S.130.LC                               |
| C         | 18 |       | 18.2          | –    | 18.0         | 17.1 | FLA.5S.718.CN <sup>2)</sup>             | –                                                                               | FFA.5S.130.LC                               |
| C         | 19 |       | 19.2          | –    | 19.0         | 18.1 | FLA.5S.719.CN <sup>2)</sup>             | –                                                                               | FFA.5S.130.LC                               |
| C         | 20 |       | 20.2          | 19.7 | 20.0         | 19.1 | FLA.5S.720.CN <sup>2)</sup>             | –                                                                               | FFA.5S.130.LC                               |
| C         | 21 |       | 21.2          | 19.7 | 21.0         | 20.1 | FLA.5S.721.CN <sup>2)</sup>             | –                                                                               | FFA.5S.130.LC                               |
| C         | 22 |       | 22.2          | 19.7 | 22.0         | 21.1 | FLA.5S.722.CN <sup>2)</sup>             | –                                                                               | FFA.5S.130.LC                               |

Continuation on page 76

# SPANNZANGEN COLLETS

## SERIE S SERIES S



### L type collet

| <br>L type collet |    |       |               |     |              |      |  |  |                                             |
|----------------------------------------------------------------------------------------------------|----|-------|---------------|-----|--------------|------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------|
| Reference                                                                                          |    | Serie | ø Collet (mm) |     | ø Cable (mm) |      | Part number of the collet <sup>1)</sup>                                             | Part number of the oversize collet and of the split centre-pieces <sup>3)</sup>     | Part number of the collet nut <sup>3)</sup> |
| Type                                                                                               | ø  |       | ø A           | ø B | max.         | min. |                                                                                     |                                                                                     |                                             |
| L                                                                                                  | 92 | 5S    | 9.2           | –   | 9.0          | 8.1  | FFA.5S.792.LN                                                                       | –                                                                                   | FFA.5S.130.LC                               |
| L                                                                                                  | 10 |       | 10.2          | –   | 10.0         | 9.1  | FFA.5S.710.LN                                                                       | –                                                                                   | FFA.5S.130.LC                               |
| L                                                                                                  | 11 |       | 11.2          | –   | 11.0         | 10.1 | FFA.5S.711.LN                                                                       | –                                                                                   | FFA.5S.130.LC                               |
| L                                                                                                  | 12 |       | 12.2          | –   | 12.0         | 11.1 | FFA.5S.712.LN                                                                       | –                                                                                   | FFA.5S.130.LC                               |
| L                                                                                                  | 13 |       | 13.2          | –   | 13.0         | 12.1 | FFA.5S.713.LN                                                                       | –                                                                                   | FFA.5S.130.LC                               |
| L                                                                                                  | 14 |       | 14.2          | –   | 14.0         | 13.1 | FFA.5S.714.LN                                                                       | –                                                                                   | FFA.5S.130.LC                               |
| L                                                                                                  | 15 |       | 15.2          | –   | 15.0         | 14.1 | FFA.5S.715.LN                                                                       | –                                                                                   | FFA.5S.130.LC                               |
| L                                                                                                  | 16 |       | 16.2          | –   | 16.0         | 15.1 | FFA.5S.716.LN                                                                       | –                                                                                   | FFA.5S.130.LC                               |
| L                                                                                                  | 17 |       | 17.2          | –   | 17.0         | 16.1 | FFA.5S.717.LN                                                                       | –                                                                                   | FFA.5S.130.LC                               |
| L                                                                                                  | 18 |       | 18.2          | –   | 18.0         | 17.1 | FFA.5S.718.LN                                                                       | –                                                                                   | FFA.5S.130.LC                               |
| L                                                                                                  | 19 |       | 19.2          | –   | 19.0         | 18.1 | FFA.5S.719.LN                                                                       | –                                                                                   | FFA.5S.130.LC                               |
| L                                                                                                  | 20 |       | 20.2          | –   | 20.0         | 19.1 | FFA.5S.720.LN                                                                       | –                                                                                   | FFA.5S.130.LC                               |
| L                                                                                                  | 21 |       | 21.2          | –   | 21.0         | 20.1 | FFA.5S.721.LN                                                                       | –                                                                                   | FFA.5S.130.LC                               |

### Bend relief nut and bend relief

|  |          |       |                               |  |  |
|-------------------------------------------------------------------------------------|----------|-------|-------------------------------|---------------------------------------------------------------------------------------|--|
| Reference                                                                           |          | Serie | Part number of the collet nut | Bend relief to be used <sup>1)</sup>                                                  |  |
| Type                                                                                | ø        |       |                               |                                                                                       |  |
| C                                                                                   | 27 to 42 | 0S    | FFM.0S.130.LC                 | GMA.0B.0••.D•                                                                         |  |
| K                                                                                   | 47 to 62 |       | FFM.1S.130.LC                 | GMA.1B.0••.D•                                                                         |  |
| L                                                                                   | 27 to 42 |       | FFM.0S.130.LC                 | GMA.0B.0••.D•                                                                         |  |
| C                                                                                   | 27 to 62 | 1S    | FFM.1S.130.LC                 | GMA.1B.0••.D•                                                                         |  |
| K                                                                                   | 72 to 82 |       | FFM.2S.130.LC                 | GMA.2B.0••.D•                                                                         |  |
| L                                                                                   | 27 to 62 |       | FFM.1S.130.LC                 | GMA.1B.0••.D•                                                                         |  |
| C                                                                                   | 42 to 82 | 2S    | FFM.2S.130.LC                 | GMA.2B.0••.D•                                                                         |  |
| K                                                                                   | 92 to 10 |       | FFM.3S.130.LC                 | GMA.3B.0••.D•                                                                         |  |
| L                                                                                   | 42 to 82 |       | FFM.2S.130.LC                 | GMA.2B.0••.D•                                                                         |  |
| C                                                                                   | 52 to 10 | 3S    | FFM.3S.130.LC                 | GMA.3B.0••.D•                                                                         |  |
| K                                                                                   | 12 to 13 |       | FFM.4S.130.LC                 | GMA.4B.0••.D•                                                                         |  |
| L                                                                                   | 52 to 10 |       | FFM.3S.130.LC                 | GMA.3B.0••.D•                                                                         |  |
| C                                                                                   | 82 to 13 | 4S    | FFM.4S.130.LC                 | GMA.4B.0••.D•                                                                         |  |
| L                                                                                   | 82 to 13 |       | FFM.4S.130.LC                 | GMA.4B.0••.D•                                                                         |  |

Note:

<sup>1)</sup> the bend relief is to be ordered separately (see page 80).




Part number example see page 3



## SPANNZANGEN | COLLETS

### SERIE E | SERIES E

### C and K type collets

|  |    |       |               |      |              |      |  |                                                                                 |  |
|-----------------------------------------------------------------------------------|----|-------|---------------|------|--------------|------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| Reference                                                                         |    | Serie | ø Collet (mm) |      | ø Cable (mm) |      | Part number of the collet system <sup>1)</sup>                                      | Part number of the oversize collet and of the split centre-pieces <sup>2)</sup> | Part number of the collet nut <sup>2)</sup>                                         |
| Type                                                                              | ø  |       | ø A           | ø B  | max.         | min. |                                                                                     |                                                                                 |                                                                                     |
| C                                                                                 | 10 | 0E    | 1.6           | –    | 1.2          | 1.0  | FFA.0E.710.CNS                                                                      | –                                                                               | FFA.00.130.LC                                                                       |
| C                                                                                 | 15 |       | 1.6           | –    | 1.5          | 1.3  | FFA.0E.715.CNS                                                                      | –                                                                               | FFA.00.130.LC                                                                       |
| C                                                                                 | 20 |       | 2.1           | –    | 2.0          | 1.6  | FFA.0E.720.CNS                                                                      | –                                                                               | FFA.00.130.LC                                                                       |
| C                                                                                 | 25 |       | 3.1           | –    | 2.5          | 2.1  | FFA.0E.725.CNS                                                                      | –                                                                               | FFA.00.130.LC                                                                       |
| C                                                                                 | 30 |       | 3.1           | –    | 3.0          | 2.6  | FFA.0E.730.CNS                                                                      | –                                                                               | FFA.00.130.LC                                                                       |
| C                                                                                 | 35 |       | 4.2           | 4.2  | 3.5          | 3.1  | FFA.0E.735.CNS                                                                      | –                                                                               | FFA.00.130.LC                                                                       |
| C                                                                                 | 40 |       | 4.2           | 4.2  | 4.0          | 3.6  | FFA.0E.740.CNS                                                                      | –                                                                               | FFA.00.130.LC                                                                       |
| C                                                                                 | 45 |       | 5.2           | 5.2  | 4.5          | 4.1  | FFA.0E.745.CNS                                                                      | –                                                                               | FFA.00.130.LC                                                                       |
| C                                                                                 | 50 |       | 5.2           | 5.2  | 5.0          | 4.6  | FFA.0E.750.CNS                                                                      | –                                                                               | FFA.00.130.LC                                                                       |
| C                                                                                 | 15 | 1E    | 1.6           | –    | 1.5          | 1.3  | FFA.1E.715.CNS                                                                      | –                                                                               | FFA.1E.130.LC                                                                       |
| C                                                                                 | 20 |       | 2.2           | –    | 2.0          | 1.6  | FFA.1E.720.CNS                                                                      | –                                                                               | FFA.1E.130.LC                                                                       |
| C                                                                                 | 25 |       | 3.2           | –    | 2.5          | 2.1  | FFA.1E.725.CNS                                                                      | –                                                                               | FFA.1E.130.LC                                                                       |
| C                                                                                 | 30 |       | 3.2           | –    | 3.0          | 2.6  | FFA.1E.730.CNS                                                                      | –                                                                               | FFA.1E.130.LC                                                                       |
| C                                                                                 | 35 |       | 4.2           | –    | 3.5          | 3.1  | FFA.1E.735.CNS                                                                      | –                                                                               | FFA.1E.130.LC                                                                       |
| C                                                                                 | 40 |       | 4.2           | –    | 4.0          | 3.6  | FFA.1E.740.CNS                                                                      | –                                                                               | FFA.1E.130.LC                                                                       |
| C                                                                                 | 45 |       | 5.2           | –    | 4.5          | 4.1  | FFA.1E.745.CNS                                                                      | –                                                                               | FFA.1E.130.LC                                                                       |
| C                                                                                 | 50 |       | 5.2           | –    | 5.0          | 4.6  | FFA.1E.750.CNS                                                                      | –                                                                               | FFA.1E.130.LC                                                                       |
| C                                                                                 | 55 |       | 6.2           | 6.2  | 5.5          | 5.1  | FFA.1E.755.CNS                                                                      | –                                                                               | FFA.1E.130.LC                                                                       |
| C                                                                                 | 60 |       | 6.2           | 6.2  | 6.0          | 5.6  | FFA.1E.760.CNS                                                                      | –                                                                               | FFA.1E.130.LC                                                                       |
| C                                                                                 | 65 |       | 7.2           | 6.7  | 6.5          | 6.1  | FFA.1E.765.CNS                                                                      | –                                                                               | FFA.1E.130.LC                                                                       |
| K                                                                                 | 70 |       | 7.2           | –    | 7.0          | 6.6  | FFA.2E.770.CNS                                                                      | FFA.1E.137.LCN                                                                  | FFA.2E.130.LC                                                                       |
| K                                                                                 | 75 |       | 8.2           | 8.2  | 7.5          | 7.1  | FFA.2E.775.CNS                                                                      | FFA.1E.137.LCN                                                                  | FFA.2E.130.LC                                                                       |
| K                                                                                 | 80 |       | 8.2           | 8.2  | 8.0          | 7.6  | FFA.2E.780.CNS                                                                      | FFA.1E.137.LCN                                                                  | FFA.2E.130.LC                                                                       |
| K                                                                                 | 85 |       | 9.2           | 8.6  | 8.5          | 8.1  | FFA.2E.785.CNS                                                                      | FFA.1E.137.LCN                                                                  | FFA.2E.130.LC                                                                       |
| C                                                                                 | 15 | 2E    | 2.2           | –    | 1.5          | 1.3  | FFA.2E.715.CNS                                                                      | –                                                                               | FFA.2E.130.LC                                                                       |
| C                                                                                 | 20 |       | 2.2           | –    | 2.0          | 1.6  | FFA.2E.720.CNS                                                                      | –                                                                               | FFA.2E.130.LC                                                                       |
| C                                                                                 | 25 |       | 3.2           | –    | 2.5          | 2.1  | FFA.2E.725.CNS                                                                      | –                                                                               | FFA.2E.130.LC                                                                       |
| C                                                                                 | 30 |       | 3.2           | –    | 3.0          | 2.6  | FFA.2E.730.CNS                                                                      | –                                                                               | FFA.2E.130.LC                                                                       |
| C                                                                                 | 35 |       | 4.2           | –    | 3.5          | 3.1  | FFA.2E.735.CNS                                                                      | –                                                                               | FFA.2E.130.LC                                                                       |
| C                                                                                 | 40 |       | 4.2           | –    | 4.0          | 3.6  | FFA.2E.740.CNS                                                                      | –                                                                               | FFA.2E.130.LC                                                                       |
| C                                                                                 | 45 |       | 5.2           | –    | 4.5          | 4.1  | FFA.2E.745.CNS                                                                      | –                                                                               | FFA.2E.130.LC                                                                       |
| C                                                                                 | 50 |       | 5.2           | –    | 5.0          | 4.6  | FFA.2E.750.CNS                                                                      | –                                                                               | FFA.2E.130.LC                                                                       |
| C                                                                                 | 55 |       | 6.2           | –    | 5.5          | 5.1  | FFA.2E.755.CNS                                                                      | –                                                                               | FFA.2E.130.LC                                                                       |
| C                                                                                 | 60 |       | 6.2           | –    | 6.0          | 5.6  | FFA.2E.760.CNS                                                                      | –                                                                               | FFA.2E.130.LC                                                                       |
| C                                                                                 | 65 |       | 7.2           | –    | 6.5          | 6.1  | FFA.2E.765.CNS                                                                      | –                                                                               | FFA.2E.130.LC                                                                       |
| C                                                                                 | 70 |       | 7.2           | –    | 7.0          | 6.6  | FFA.2E.770.CNS                                                                      | –                                                                               | FFA.2E.130.LC                                                                       |
| C                                                                                 | 75 |       | 8.2           | 8.2  | 7.5          | 7.1  | FFA.2E.775.CNS                                                                      | –                                                                               | FFA.2E.130.LC                                                                       |
| C                                                                                 | 80 |       | 8.2           | 8.2  | 8.0          | 7.6  | FFA.2E.780.CNS                                                                      | –                                                                               | FFA.2E.130.LC                                                                       |
| C                                                                                 | 85 |       | 9.2           | 8.6  | 8.5          | 8.1  | FFA.2E.785.CNS                                                                      | –                                                                               | FFA.2E.130.LC                                                                       |
| K                                                                                 | 90 |       | 9.2           | –    | 9.0          | 8.6  | FFA.3E.790.CNS                                                                      | FFA.2E.137.LCN                                                                  | FFA.3E.130.LC                                                                       |
| K                                                                                 | 95 |       | 10.2          | 10.2 | 9.5          | 9.1  | FFA.3E.795.CNS                                                                      | FFA.2E.137.LCN                                                                  | FFA.3E.130.LC                                                                       |
| K                                                                                 | 10 |       | 10.2          | 10.2 | 10.0         | 9.6  | FFA.3E.710.CNS                                                                      | FFA.2E.137.LCN                                                                  | FFA.3E.130.LC                                                                       |
| K                                                                                 | 11 |       | 11.2          | 10.6 | 11.0         | 10.1 | FFA.3E.711.CNS                                                                      | FFA.2E.137.LCN                                                                  | FFA.3E.130.LC                                                                       |

#### Note:

<sup>1)</sup> for ordering the collet system separately.

<sup>2)</sup> for ordering a K type collet separately, the oversize collet and the corresponding collet nut should also be ordered (see page 79).

All dimensions are in millimetres.

# SPANNZANGEN COLLETS

## SERIE E SERIES E



### C and K type collets



| Reference |    | Serie | ø Collet (mm) |      | ø Cable (mm) |      | Part number of the collet system <sup>1)</sup> | Part number of the oversize collet and of the split centre-pieces <sup>2)</sup> | Part number of the collet nut <sup>2)</sup> |
|-----------|----|-------|---------------|------|--------------|------|------------------------------------------------|---------------------------------------------------------------------------------|---------------------------------------------|
| Type      | ø  |       | ø A           | ø B  | max.         | min. |                                                |                                                                                 |                                             |
| C         | 30 | 3E    | 3.2           | –    | 3.0          | 2.6  | FFA.3E.730.CNS                                 | –                                                                               | FFA.3E.130.LC                               |
| C         | 35 |       | 4.2           | –    | 3.5          | 3.1  | FFA.3E.735.CNS                                 | –                                                                               | FFA.3E.130.LC                               |
| C         | 40 |       | 4.2           | –    | 4.0          | 3.6  | FFA.3E.740.CNS                                 | –                                                                               | FFA.3E.130.LC                               |
| C         | 45 |       | 5.2           | –    | 4.5          | 4.1  | FFA.3E.745.CNS                                 | –                                                                               | FFA.3E.130.LC                               |
| C         | 50 |       | 5.2           | –    | 5.0          | 4.6  | FFA.3E.750.CNS                                 | –                                                                               | FFA.3E.130.LC                               |
| C         | 55 |       | 6.2           | –    | 5.5          | 5.1  | FFA.3E.755.CNS                                 | –                                                                               | FFA.3E.130.LC                               |
| C         | 60 |       | 6.2           | –    | 6.0          | 5.6  | FFA.3E.760.CNS                                 | –                                                                               | FFA.3E.130.LC                               |
| C         | 65 |       | 7.2           | –    | 6.5          | 6.1  | FFA.3E.765.CNS                                 | –                                                                               | FFA.3E.130.LC                               |
| C         | 70 |       | 7.2           | –    | 7.0          | 6.6  | FFA.3E.770.CNS                                 | –                                                                               | FFA.3E.130.LC                               |
| C         | 75 |       | 8.2           | –    | 7.5          | 7.1  | FFA.3E.775.CNS                                 | –                                                                               | FFA.3E.130.LC                               |
| C         | 80 |       | 8.2           | –    | 8.0          | 7.6  | FFA.3E.780.CNS                                 | –                                                                               | FFA.3E.130.LC                               |
| C         | 85 |       | 9.2           | –    | 8.5          | 8.1  | FFA.3E.785.CNS                                 | –                                                                               | FFA.3E.130.LC                               |
| C         | 90 |       | 9.2           | –    | 9.0          | 8.6  | FFA.3E.790.CNS                                 | –                                                                               | FFA.3E.130.LC                               |
| C         | 95 |       | 10.2          | 10.2 | 9.5          | 9.1  | FFA.3E.795.CNS                                 | –                                                                               | FFA.3E.130.LC                               |
| C         | 10 |       | 10.2          | 10.2 | 10.0         | 9.6  | FFA.3E.710.CNS                                 | –                                                                               | FFA.3E.130.LC                               |
| C         | 11 |       | 11.2          | 11.2 | 11.0         | 10.1 | FFA.3E.711.CNS                                 | –                                                                               | FFA.3E.130.LC                               |
| K         | 11 |       | 12.3          | –    | 12.0         | 10.6 | FFA.4E.711.CNS                                 | FFA.3E.137.LCN                                                                  | FFA.4E.130.LC                               |
| K         | 12 |       | 13.8          | 13.8 | 12.8         | 12.1 | FFA.4E.712.CNS                                 | FFA.3E.137.LCN                                                                  | FFA.4E.130.LC                               |
| K         | 13 |       | 13.8          | 13.8 | 13.5         | 12.9 | FFA.4E.713.CNS                                 | FFA.3E.137.LCN                                                                  | FFA.4E.130.LC                               |
| K         | 14 |       | 15.3          | 15.3 | 14.0         | 13.6 | FFA.4E.714.CNS                                 | FFA.3E.137.LCN                                                                  | FFA.4E.130.LC                               |
| K         | 15 |       | 15.3          | 15.3 | 15.0         | 14.1 | FFA.4E.715.CNS                                 | FFA.3E.137.LCN                                                                  | FFA.4E.130.LC                               |
| C         | 50 | 4E    | 6.3           | –    | 5.0          | 4.6  | FFA.4E.750.CNS                                 | –                                                                               | FFA.4E.130.LC                               |
| C         | 55 |       | 6.3           | –    | 5.5          | 5.1  | FFA.4E.755.CNS                                 | –                                                                               | FFA.4E.130.LC                               |
| C         | 60 |       | 6.3           | –    | 6.0          | 5.6  | FFA.4E.760.CNS                                 | –                                                                               | FFA.4E.130.LC                               |
| C         | 65 |       | 7.3           | –    | 6.5          | 6.1  | FFA.4E.765.CNS                                 | –                                                                               | FFA.4E.130.LC                               |
| C         | 70 |       | 7.3           | –    | 7.0          | 6.6  | FFA.4E.770.CNS                                 | –                                                                               | FFA.4E.130.LC                               |
| C         | 75 |       | 8.3           | –    | 7.5          | 7.1  | FFA.4E.775.CNS                                 | –                                                                               | FFA.4E.130.LC                               |
| C         | 80 |       | 8.3           | –    | 8.0          | 7.6  | FFA.4E.780.CNS                                 | –                                                                               | FFA.4E.130.LC                               |
| C         | 85 |       | 9.3           | –    | 8.5          | 8.1  | FFA.4E.785.CNS                                 | –                                                                               | FFA.4E.130.LC                               |
| C         | 90 |       | 9.3           | –    | 9.0          | 8.6  | FFA.4E.790.CNS                                 | –                                                                               | FFA.4E.130.LC                               |
| C         | 95 |       | 10.8          | –    | 9.5          | 9.1  | FFA.4E.795.CNS                                 | –                                                                               | FFA.4E.130.LC                               |
| C         | 10 |       | 10.8          | –    | 10.5         | 9.6  | FFA.4E.710.CNS                                 | –                                                                               | FFA.4E.130.LC                               |
| C         | 11 |       | 12.3          | –    | 12.0         | 10.6 | FFA.4E.711.CNS                                 | –                                                                               | FFA.4E.130.LC                               |
| C         | 12 |       | 13.8          | 13.8 | 12.8         | 12.1 | FFA.4E.712.CNS                                 | –                                                                               | FFA.4E.130.LC                               |
| C         | 13 |       | 13.8          | 13.8 | 13.5         | 12.9 | FFA.4E.713.CNS                                 | –                                                                               | FFA.4E.130.LC                               |
| C         | 14 |       | 15.3          | 15.3 | 14.0         | 13.6 | FFA.4E.714.CNS                                 | –                                                                               | FFA.4E.130.LC                               |
| C         | 15 |       | 15.3          | 15.3 | 15.0         | 14.1 | FFA.4E.715.CNS                                 | –                                                                               | FFA.4E.130.LC                               |
| K         | 16 |       | 17.8          | –    | 16.5         | 15.6 | FFA.4K.716.CNS                                 | FFA.4E.137.LCN <sup>3)</sup>                                                    | FFA.4K.136.LC                               |
| K         | 17 |       | 17.8          | –    | 17.5         | 16.6 | FFA.4K.717.CNS                                 | FFA.4E.137.LCN                                                                  | FFA.4K.136.LC                               |
| K         | 18 |       | 19.8          | –    | 18.5         | 17.6 | FFA.4K.718.CNS                                 | FFA.4E.137.LCN                                                                  | FFA.4K.136.LC                               |
| K         | 19 |       | 19.8          | –    | 19.5         | 18.6 | FFA.4K.719.CNS                                 | FFA.4E.137.LCN                                                                  | FFA.4K.136.LC                               |
| K         | 20 |       | 21.8          | –    | 20.5         | 19.6 | FFA.4K.720.CNS                                 | FFA.4E.137.LCN                                                                  | FFA.4K.136.LC                               |
| K         | 21 |       | 21.8          | –    | 21.5         | 20.6 | FFA.4K.721.CNS                                 | FFA.4E.137.LCN                                                                  | FFA.4K.136.LC                               |
| K         | 22 |       | 23.8          | 23.8 | 22.5         | 21.6 | FFA.4K.722.CNS                                 | FFA.4E.137.LCN                                                                  | FFA.4K.136.LC                               |
| K         | 23 |       | 23.8          | 23.8 | 23.5         | 22.6 | FFA.4K.723.CNS                                 | FFA.4E.137.LCN                                                                  | FFA.4K.136.LC                               |

**Note:** <sup>1)</sup> for ordering the collet system separately.

<sup>2)</sup> for ordering a K type collet separately, the oversize collet and the corresponding collet nut should also be ordered (see page 79).

<sup>3)</sup> in 4E series, the centre-piece is made of one piece. All dimensions are in millimetres.



Part number example see page 3

# SPANNZANGEN | COLLETS SERIE E | SERIES E



## C type collets

| Reference |    | Serie | ø Collet (mm) |      | ø Cable (mm) |      | Part number of the collet system <sup>1)</sup> | Part number of the collet nut |
|-----------|----|-------|---------------|------|--------------|------|------------------------------------------------|-------------------------------|
| Type      | ø  |       | ø A           | ø B  | max.         | min. |                                                |                               |
| C         | 10 | 5E    | 11.8          | –    | 10.5         | 9.6  | FFA.5K.710.CNS                                 | FFA.5K.130.LC                 |
| C         | 11 |       | 11.8          | –    | 11.5         | 10.6 | FFA.5K.711.CNS                                 | FFA.5K.130.LC                 |
| C         | 12 |       | 13.8          | –    | 12.5         | 11.6 | FFA.5K.712.CNS                                 | FFA.5K.130.LC                 |
| C         | 13 |       | 13.8          | –    | 13.5         | 12.6 | FFA.5K.713.CNS                                 | FFA.5K.130.LC                 |
| C         | 14 |       | 15.8          | –    | 14.5         | 13.6 | FFA.5K.714.CNS                                 | FFA.5K.130.LC                 |
| C         | 15 |       | 15.8          | –    | 15.5         | 14.6 | FFA.5K.715.CNS                                 | FFA.5K.130.LC                 |
| C         | 16 |       | 17.8          | –    | 16.5         | 15.6 | FFA.5K.716.CNS                                 | FFA.5K.130.LC                 |
| C         | 17 |       | 17.8          | –    | 17.5         | 16.6 | FFA.5K.717.CNS                                 | FFA.5K.130.LC                 |
| C         | 18 |       | 19.8          | –    | 18.5         | 17.6 | FFA.5K.718.CNS                                 | FFA.5K.130.LC                 |
| C         | 19 |       | 19.8          | –    | 19.5         | 18.6 | FFA.5K.719.CNS                                 | FFA.5K.130.LC                 |
| C         | 20 |       | 21.8          | –    | 20.5         | 19.6 | FFA.5K.720.CNS                                 | FFA.5K.130.LC                 |
| C         | 21 |       | 21.8          | –    | 21.5         | 20.6 | FFA.5K.721.CNS                                 | FFA.5K.130.LC                 |
| C         | 22 |       | 23.8          | 23.8 | 22.5         | 21.6 | FFA.5K.722.CNS                                 | FFA.5K.130.LC                 |
| C         | 23 |       | 23.8          | 23.8 | 23.5         | 22.6 | FFA.5K.723.CNS                                 | FFA.5K.130.LC                 |

**Note:**

<sup>1)</sup> for ordering the collet system separately.

## Bend relief nut and bend relief

| Reference |          | Serie | Part number of the collet nut | Bend relief to be used <sup>1)</sup> |
|-----------|----------|-------|-------------------------------|--------------------------------------|
| Type      | ø        |       |                               |                                      |
| C         | 10 to 50 | 0E    | FFM.0E.130.LC                 | GMA.0B.***.●●                        |
| C         | 15 to 65 | 1E    | FFM.1E.130.LC                 | GMA.1B.***.●●                        |
| K         | 70 to 85 |       | FFM.2E.130.LC                 | GMA.2B.***.●●                        |
| C         | 15 to 85 | 2E    | FFM.2E.130.LC                 | GMA.2B.***.●●                        |
| K         | 90 to 11 |       | FFM.3E.130.LC                 | GMA.3B.***.●●                        |
| C         | 30 to 10 | 3E    | FFM.3E.130.LC                 | GMA.3B.***.●●                        |
| K         | 11 to 15 |       | FFM.4E.130.LC                 | GMA.4B.***.●●                        |
| C         | 50 to 15 | 4E    | FFM.4E.130.LC                 | GMA.4B.***.●●                        |

**Note:**

<sup>1)</sup> the bend relief is to be ordered separately (see page 80).

All dimensions are in millimetres.



## KATALOGÜBERSICHT CATALOG SUMMARY

Please request the appropriate catalog from our marketing department, or directly: [www.lemo.de](http://www.lemo.de)

### Connectors

- F-Series – Harsh Environment Connectors
- Special cable and fibre optic cable
- Thermo Series – for the highest measure range in temperature
- Multifunctional connector combinations for the CAMAC-technology
- Connectors, Audio-Video
- P-Series (REDEL)
- Unipole & Multipole Connectors

### Fibre optic connectors

Monomode and Multimode according to LEMO-Push-Pull-System

### Coaxial Connectors

(COELVER)

Bitte fordern Sie Ihren entsprechenden Katalog von unserer Marketing-Abteilung an, oder direkt unter: [www.lemo.de](http://www.lemo.de)

### Steckverbindungen



- F-Serie – Für harte Anwendungsgebiete
- Spezialkabel und LWL-Leitungen
- Serie Thermo für höchste Temperatur-Messbereiche
- Vielseitige Steckkombinationen in der CAMAC-Technik
- Connectors, Audio-Video
- P-Series (REDEL)
- Unipole & Multipole Connectors

### Glasfaser-Steckverbindungen

Monomode und Multimode nach dem LEMO-Push-Pull-System

### Koaxial Steckverbinder

(COELVER)

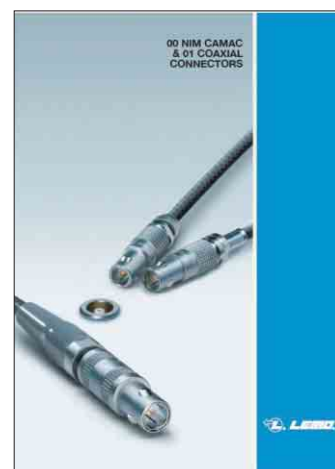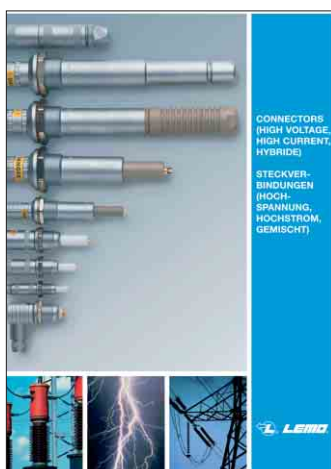

## LEMO HEADQUARTERS

### SWITZERLAND

#### LEMO SA

Chemin des Champs-Courbes 28 - P.O. Box 194 - CH-1024 Ecublens  
Tel. (+41 21) 695 16 00 - Fax (+41 21) 695 16 02 - e-mail: info@lemo.com

## LEMO SUBSIDIARIES

### AUSTRIA

#### LEMO Elektronik GesmbH

Ameisgasse 49-51 / DG1  
1140 Wien  
Tel: (+43 1) 914 23 20 0  
Fax: (+43 1) 911 70 90  
sales@lemo.at

### LEMO JAPAN Ltd

2-7-22, Mita,  
Minato-ku, Tokyo  
108-0073 JAPAN  
81-3-5446-5510  
81-3-5446-5511

### LEMO Trading (Shanghai) Co., Ltd.

5th Floor, Block 6, City of ELITE,  
1000 Jinhai Road  
Shanghai, China 201206  
(86 21) 5899 7721  
(86 21) 5899 7727

### LEMO Connectors Nederland BV

De Trompet 1060  
1967 DA Heemskerk  
(31) 251 25 78 20  
(31) 251 25 78 21

### DENMARK

#### LEMO Denmark A/S

Gammel Mosevej 46  
2820 Gentofte  
Tel: (+45) 45 20 44 00  
Fax: (+45) 45 20 44 01  
info-dk@lemo.com

### NORWAY / ICELAND

#### LEMO Norway A/S

Stanseveien 6B  
0975 Oslo  
Tel: (+47) 22 91 70 40  
Fax: (+47) 22 91 70 41  
info-no@lemo.com

### FRANCE

#### LEMO France Sàrl

165, avenue Jean Jaurès  
94700 Maisons Alfort  
Tel: (+33 1) 45 17 27 90  
Fax: (+33 1) 45 17 27 99  
info-fr@lemo.com

### SPAIN / PORTUGAL

#### IBERLEMO S.A.

Brasil, 45, 08402 Granollers  
Barcelona  
Tel: (+34 93) 860 44 20  
Fax: (+34 93) 879 10 77  
info-es@lemo.com

### GERMANY

#### LEMO Elektronik GmbH

Hanns-Schwindt-Str. 6  
81829 München  
Tel: (+49 89) 42 77 03  
Fax: (+49 89) 420 21 92  
info@lemo.de

### SWEDEN / FINLAND

#### LEMO Nordic AB

Mariehällsvägen 39A  
168 65 Bromma  
Tel: (+46 8) 635 60 60  
Fax: (+46 8) 635 60 61  
info-se@lemo.com

### HONG KONG

#### LEMO Hong Kong Ltd.

Room 33, 7th Floor  
HITEC, 1 Trademart Drive  
Kowloon Bay - Hong Kong  
Tel: (+852) 21 74 04 68  
Fax: (+852) 21 74 04 92  
hk.sales@lemo.com

### SWITZERLAND

#### LEMO Verkauf AG

Grundstrasse 22 B  
6343 Rotkreuz  
Tel: (+41 41) 790 49 40  
Fax: (+41 41) 790 49 43  
ch.sales@lemo.com

### HUNGARY

#### REDEL Elektronika Kft

Vágóhíd u. 26  
1201 Budapest XX.  
Tel: (+36 1) 421 47 10  
Fax: (+36 1) 421 47 57  
info-hu@lemo.com

### UNITED KINGDOM

#### LEMO UK Ltd

Unit 15 & 16  
Hazelwood Trading Estate  
Worthing  
West Sussex, BN14 8NP  
Tel: (+44 1903) 23 45 43  
Fax: (+44 1903) 20 62 31  
lemo-uk@lemo.com

### ITALY

#### LEMO Italia srl

Viale Lunigiana 25  
20125 Milano  
Tel: (+39 02) 66 71 10 46  
Fax: (+39 02) 66 71 10 66  
sales.it@lemo.com

### USA

#### LEMO USA Inc

P.O. Box 2408  
Rohnert Park  
CA 94927-2408  
Tel: (+1 707) 578 88 11  
(+1 800) 444 53 66  
Fax: (+1 707) 578 08 69  
info@lemousa.com

## LEMO DISTRIBUTORS

AUSTRALIA, BRAZIL, CANADA, CZECH REPUBLIC, GREECE, INDIA, ISRAEL,  
MALAYSIA, NEW ZEALAND, PHILIPPINES, POLAND, RUSSIA, SINGAPORE,  
SOUTH AFRICA, SOUTH KOREA, TAIWAN, THAILAND, TURKEY, UKRAINE





Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.