



50 to 600 Watts; 1 to 3 outputs

Features

- RoHS Compliant (VE versions)
- Inputs 24, 48, and 300 Vdc
- Any output: 1 to 95 Vdc
- Meets EN55022 Class A conducted emissions (See Notes)
- cULus, cTUVus (60950-1)
- CE marked (LVD)
- 80 – 90% efficiency
- Up to 10 W/cubic inch
- Master disable
- Overvoltage shutdown

Product Highlights

ComPAC delivers up to 600 W from one, two, or three outputs in a package just 0.99" (25,2 mm) in height with the field proven performance, high efficiency and high reliability inherent in Vicor's component level power converters. ComPAC meets conducted emissions of EN55022 Class A. ComPAC is offered with input voltage ranges optimized for industrial and telecommunication applications and provides extended input overvoltage capability, undervoltage lockout, and master disable.

Packaging Options

Conduction Cooled Models Available Add "-CC" to the end of the part number.

(Consult factory for details.)

Extended heat sink available add "-H1" to end of part number.

ComPAC Configuration Chart

Substitute VE- for VI- for RoHS compliant versions			
Configuration	Output Power	# of Modules	Dimensions
Single Output			
VI-LC 	50 – 200 W	1	8.6" x 2.5" x 0.99" (218,4 x 63,5 x 25,2 mm)
VI-MC 	100 – 400 W	2	8.6" x 4.9" x 0.99" (218,4 x 124,5 x 25,2 mm)
VI-NC 	300 – 600 W	3	8.6" x 7.3" x 0.99" (218,4 x 185,4 x 25,2 mm)
Dual Output			
VI-PC 	100 – 400 W	2	8.6" x 4.9" x 0.99" (218,4 x 124,5 x 25,2 mm)
VI-QC 	150 – 600 W	3	8.6" x 7.3" x 0.99" (218,4 x 185,4 x 25,2 mm)
Triple Output			
VI-RC 	150 – 600 W	3	8.6" x 7.3" x 0.99" (218,4 x 185,4 x 25,2 mm)

• Input Voltage

Nominal	Input Range Full Power	Maximum Power ^a	Low Line 75% Max. Power	Transient ^b
1 = 24 V	21 – 32 V	(1)	18	36
W = 24 V	18 – 36 V	(1)	n/a	n/a
3 = 48 V	42 – 60 V	(2)	41	72
N = 48 V	36 – 76 V	(2)	n/a	n/a
6 = 300 V	200 – 400 V	(2)	188	425
^a Max. Output Per Module				
(1)	5 V Outputs	>5 V Outputs	<5 V Outputs	
(2)	150 W	150 W	30 A	
	200 W	200 W	40 A	

^b Transient voltage for one second

•• Product Grade Temps. °C

Grade	Operating	Storage
E =	-10 to +85	-20 to +100
C =	-25 to +85	-40 to +100
I =	-40 to +85	-55 to +100
M =	-55 to +85	-65 to +100

Temperatures apply to product case.

••• Output Power/Current

V _{OUT} ≥ 5 V	V _{OUT} < 5 V
W = 100 W	W = 20 A
V = 150 W	V = 30 A
U = 200 W	U = 40 A
S = 300 W	S = 60 A
Q = 400 W	Q = 80 A

•• Output Voltage

Z = 2 V	2 = 15 V
Y = 3.3 V	N = 18.5 V
O = 5 V	3 = 24 V
X = 5.2 V	L = 28 V
W = 5.5 V	J = 36 V
V = 5.8 V	K = 40 V
T = 6.5 V	4 = 48 V
R = 7.5 V	H = 52 V
M = 10 V	F = 72 V
1 = 12 V	D = 85 V
P = 13.8 V	B = 95 V

••• Output Power/Current

V _{OUT} ≥ 5 V	V _{OUT} < 5 V
Y = 50 W	Y = 10 A
X = 75 W	X = 15 A
W = 100 W	W = 20 A
V = 150 W	V = 30 A
U = 200 W	U = 40 A

••• Output Power/Current

V _{OUT} ≥ 5 V	V _{OUT} < 5 V
S = 300 W	S = 60 A
P = 450 W	P = 90 A
M = 600 W	M = 120 A

COMPAC SPECIFICATIONS

(typical at $T_{BP} = 25^{\circ}\text{C}$, nominal line and 75% load, unless otherwise specified, V_{NOM} is factory set output voltage and I_{NOM} is maximum rated output current.)

■ INPUT SPECIFICATIONS

Parameter	E-Grade			C-, I-, M-Grade			Unit	Test Conditions
	Min	Typ	Max	Min	Typ	Max		
24 V	21	24	32	21	24	32	Vdc	See Fusing Information on Page 3
24 V Wide	18	24	36	18	24	36	Vdc	
48 V	42	48	60	42	48	60	Vdc	
48 V Wide	36	48	76	36	48	76	Vdc	
300 V	200	300	400	200	300	400	Vdc	
No load power dissipation ^a	1.35		2	1.35		2	Watts	
Master disable input current ^a (Absolute max., 20 mA)	4			4			mA	Sink or source to disable optocoupler (See Section 18 ComPAC Technical Description in VI-200/VI-J00 Applications Manual)
Quiescent Input current logic disable ^a		7	10		7	10	mA	Current drawn from source when disabled

^a For MC, PC series, multiply value by 2; for NC, QC, RC series, multiply value by 3.

■ OUTPUT SPECIFICATIONS (Applies to each output individually)

Parameter	E-Grade			C-, I-, M-Grade			Units	Test Conditions
	Min	Typ	Max	Min	Typ	Max		
Set point accuracy		1%	2%		0.5%	1%	V_{NOM}	
Load / line regulation			0.5%		0.05%	0.2%	V_{NOM}	LL to HL, 10% to full load
Load / line regulation			1%		0.2%	0.5%	V_{NOM}	LL to HL, no load to full load
Output temperature drift		0.02			0.01	0.02	$^{\circ}\text{C}$	Over rated temperature range
Long term drift		0.02			0.02		%/1 k hrs.	
Output ripple								
2 V, 3.3 V			150		60	100	mVp-p	20 MHz bandwidth
5 V			250		100	150	mVp-p	20 MHz bandwidth
10 – 48 V			3%		0.75%	1.5%	V_{NOM} -p	20 MHz bandwidth
Output voltage trimming ^a	50%		110%	50%		110%	V_{NOM}	
Total remote sense compensation ^a	0.5			0.5			Volts	0.25 V maximum allowable drop in –Out lead
OVP set point		125%		115%	125%	135%	V_{NOM}	Recycle power to restart
Current limit	105%		135%	105%		125%	I_{NOM}	Automatic restart
Short circuit current ^b	20%		140%	20%		130%	I_{NOM}	

^a 10 V, 12 V and 15 V outputs, trim range $\pm 10\%$. Consult factory for wider trim range.

^b Output voltages of 5 V or less incorporate foldback current limiting, outputs greater than 5 V incorporate straight line current limiting.

CONFIGURABLE SPECIFICATIONS (Cont.)**■ THERMAL CHARACTERISTICS**

Parameter	E-Grade			C-, I-, M-Grade			Units	Test Conditions
	Min	Typ	Max	Min	Typ	Max		
Efficiency		78 – 88%			80 – 90%			for 5 V outputs and higher
Shut down temp. — case ^a	90	95	105	90	95	105	°C	Cool and recycle power to restart
Operating temp. — case			85			85	°C	See Thermal Curves

^a Shut down temperature threshold is above maximum operating temperature. For over temperature protection, external means of disable should be employed below maximum operating temperature.

■ ISOLATION CHARACTERISTICS

Parameter	E-Grade			C-, I-, M-Grade			Unit	Test Conditions
	Min	Typ	Max	Min	Typ	Max		
Isolation								
Input to output	4,242			4,242			Vdc	
Output to case	707			707			Vdc	
Input to case	2,121			2,121			Vdc	

■ MECHANICAL SPECIFICATIONS

Parameter	E-Grade			C-, I-, M-Grade			Units	Test Conditions
	Min	Typ	Max	Min	Typ	Max		
Weight ^a	19.2			19.2			Ounces	
	544			544			Grams	

^a For MC, PC series, multiply value by 2; for NC, QC, RC series, multiply value by 3.

■ FUSING INFORMATION

Input Voltage	24 V	48 V	300 V
LC series (200 W)	10 A	7 A	2 A
MC, PC series (400 W)	20 A	15 A	4 A
NC, QC, RC series (600 W)	35 A	25 A	6 A

CONFIGURABLE SPECIFICATIONS (Cont.)**■ AGENCY APPROVALS**

Safety Standards	Markings	Notes
ANSI / ISA 12.12.01 - 2012, C22.2 No. 213-M1987 UL / CSA / EN / IEC 60950-1	cURus cURus, cTÜVus, CE Marked	Low Voltage Directive and RoHS Recast Directive as applicable.

■ EMI/EMC Characteristics (Performed on selected samples representative of the ComPac product family.)

Parameter	Notes
Conducted Emissions EN 55022, class A	3 Module configurations may require additional filter components under certain line and load conditions to comply with EN55022 class A.
ESD IEC 61000-4-2 level 4	Top, Bottom and Sides

THERMAL CURVES

■ FREE AIR □ 50 LFM ◆ 100 LFM ◇ 250 LFM ▲ 500 LFM △ 750 LFM ● 1000 LFM

2 V to 7.5 V Output, Standard heat sink



10 V to 95 V Output, Standard heat sink




2 V to 7.5 V Output, H1 heat sink



10 V to 95 V Output, H1 heat sink



INPUTS	
1	Ground
2	-Input
3	+Input
4	Disable-
5	Disable+
OUTPUTS	
A	+Output
B	+Sense
C	Trim
D	-Sense
E	-Output

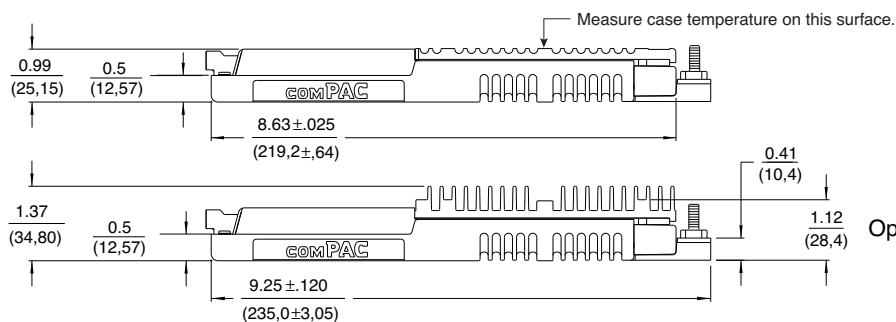

Optional heat sink (H1)

The drawing shows the 1000 Series 10-Pin D-Sub Connector with the following dimensions:

- Pin 1 to Pin 5:** 0.91 (23,1) inches (2.54 (64,5) mm total width, 0.20 (5,1) mm spacing).
- Pin 6 to Pin 10:** 2.156 (54,76) inches (0.19 (4,8) mm spacing).
- Overall Width:** 6.00 (152,4) inches.
- Overall Height:** 0.18 (4,6) inches.
- Mounting Hole Spacing:** 2.76 (70,1) inches.
- Mounting Hole Diameter:** $\phi 0.150 \pm .005$ THRU 4 PLACES (3.81 ± 0.13 mm).
- Pin Labels:** 1, 2, 3, 4, 5, 6, 7, 8, 9, 10.
- Output Labels:** A, B, C, D, E.
- Output 1 Label:** OUTPUT 1.
- Pin 10 Label:** 0.
- Pin 1 Label:** 1.
- Pin 2 Label:** 2.
- Pin 3 Label:** 3.
- Pin 4 Label:** 4.
- Pin 5 Label:** 5.
- Pin 6 Label:** 6.
- Pin 7 Label:** 7.
- Pin 8 Label:** 8.
- Pin 9 Label:** 9.
- Pin 10 Label:** 10.
- Pin 11 Label:** 11.
- Pin 12 Label:** 12.
- Pin 13 Label:** 13.
- Pin 14 Label:** 14.
- Pin 15 Label:** 15.
- Pin 16 Label:** 16.
- Pin 17 Label:** 17.
- Pin 18 Label:** 18.
- Pin 19 Label:** 19.
- Pin 20 Label:** 20.
- Pin 21 Label:** 21.
- Pin 22 Label:** 22.
- Pin 23 Label:** 23.
- Pin 24 Label:** 24.
- Pin 25 Label:** 25.
- Pin 26 Label:** 26.
- Pin 27 Label:** 27.
- Pin 28 Label:** 28.
- Pin 29 Label:** 29.
- Pin 30 Label:** 30.
- Pin 31 Label:** 31.
- Pin 32 Label:** 32.
- Pin 33 Label:** 33.
- Pin 34 Label:** 34.
- Pin 35 Label:** 35.
- Pin 36 Label:** 36.
- Pin 37 Label:** 37.
- Pin 38 Label:** 38.
- Pin 39 Label:** 39.
- Pin 40 Label:** 40.
- Pin 41 Label:** 41.
- Pin 42 Label:** 42.
- Pin 43 Label:** 43.
- Pin 44 Label:** 44.
- Pin 45 Label:** 45.
- Pin 46 Label:** 46.
- Pin 47 Label:** 47.
- Pin 48 Label:** 48.
- Pin 49 Label:** 49.
- Pin 50 Label:** 50.
- Pin 51 Label:** 51.
- Pin 52 Label:** 52.
- Pin 53 Label:** 53.
- Pin 54 Label:** 54.
- Pin 55 Label:** 55.
- Pin 56 Label:** 56.
- Pin 57 Label:** 57.
- Pin 58 Label:** 58.
- Pin 59 Label:** 59.
- Pin 60 Label:** 60.
- Pin 61 Label:** 61.
- Pin 62 Label:** 62.
- Pin 63 Label:** 63.
- Pin 64 Label:** 64.
- Pin 65 Label:** 65.
- Pin 66 Label:** 66.
- Pin 67 Label:** 67.
- Pin 68 Label:** 68.
- Pin 69 Label:** 69.
- Pin 70 Label:** 70.
- Pin 71 Label:** 71.
- Pin 72 Label:** 72.
- Pin 73 Label:** 73.
- Pin 74 Label:** 74.
- Pin 75 Label:** 75.
- Pin 76 Label:** 76.
- Pin 77 Label:** 77.
- Pin 78 Label:** 78.
- Pin 79 Label:** 79.
- Pin 80 Label:** 80.
- Pin 81 Label:** 81.
- Pin 82 Label:** 82.
- Pin 83 Label:** 83.
- Pin 84 Label:** 84.
- Pin 85 Label:** 85.
- Pin 86 Label:** 86.
- Pin 87 Label:** 87.
- Pin 88 Label:** 88.
- Pin 89 Label:** 89.
- Pin 90 Label:** 90.
- Pin 91 Label:** 91.
- Pin 92 Label:** 92.
- Pin 93 Label:** 93.
- Pin 94 Label:** 94.
- Pin 95 Label:** 95.
- Pin 96 Label:** 96.
- Pin 97 Label:** 97.
- Pin 98 Label:** 98.
- Pin 99 Label:** 99.
- Pin 100 Label:** 100.
- Pin 101 Label:** 101.
- Pin 102 Label:** 102.
- Pin 103 Label:** 103.
- Pin 104 Label:** 104.
- Pin 105 Label:** 105.
- Pin 106 Label:** 106.
- Pin 107 Label:** 107.
- Pin 108 Label:** 108.
- Pin 109 Label:** 109.
- Pin 110 Label:** 110.
- Pin 111 Label:** 111.
- Pin 112 Label:** 112.
- Pin 113 Label:** 113.
- Pin 114 Label:** 114.
- Pin 115 Label:** 115.
- Pin 116 Label:** 116.
- Pin 117 Label:** 117.
- Pin 118 Label:** 118.
- Pin 119 Label:** 119.
- Pin 120 Label:** 120.
- Pin 121 Label:** 121.
- Pin 122 Label:** 122.
- Pin 123 Label:** 123.
- Pin 124 Label:** 124.
- Pin 125 Label:** 125.
- Pin 126 Label:** 126.
- Pin 127 Label:** 127.
- Pin 128 Label:** 128.
- Pin 129 Label:** 129.
- Pin 130 Label:** 130.
- Pin 131 Label:** 131.
- Pin 132 Label:** 132.
- Pin 133 Label:** 133.
- Pin 134 Label:** 134.
- Pin 135 Label:** 135.
- Pin 136 Label:** 136.
- Pin 137 Label:** 137.
- Pin 138 Label:** 138.
- Pin 139 Label:** 139.
- Pin 140 Label:** 140.
- Pin 141 Label:** 141.
- Pin 142 Label:** 142.
- Pin 143 Label:** 143.
- Pin 144 Label:** 144.
- Pin 145 Label:** 145.
- Pin 146 Label:** 146.
- Pin 147 Label:** 147.
- Pin 148 Label:** 148.
- Pin 149 Label:** 149.
- Pin 150 Label:** 150.
- Pin 151 Label:** 151.
- Pin 152 Label:** 152.
- Pin 153 Label:** 153.
- Pin 154 Label:** 154.
- Pin 155 Label:** 155.
- Pin 156 Label:** 156.
- Pin 157 Label:** 157.
- Pin 158 Label:** 158.
- Pin 159 Label:** 159.
- Pin 160 Label:** 160.
- Pin 161 Label:** 161.
- Pin 162 Label:** 162.
- Pin 163 Label:** 163.
- Pin 164 Label:** 164.
- Pin 165 Label:** 165.
- Pin 166 Label:** 166.
- Pin 167 Label:** 167.
- Pin 168 Label:** 168.
- Pin 169 Label:** 169.
- Pin 170 Label:** 170.
- Pin 171 Label:** 171.
- Pin 172 Label:** 172.
- Pin 173 Label:** 173.
- Pin 174 Label:** 174.
- Pin 175 Label:** 175.
- Pin 176 Label:** 176.
- Pin 177 Label:** 177.
- Pin 178 Label:** 178.
- Pin 179 Label:** 179.
- Pin 180 Label:** 180.
- Pin 181 Label:** 181.
- Pin 182 Label:** 182.
- Pin 183 Label:** 183.
- Pin 184 Label:** 184.
- Pin 185 Label:** 185.
- Pin 186 Label:** 186.</

[illegible][illegible]

LONG TERM SAFE OPERATING AREA CURVES

(1% duty cycle max., $Z_s = .5$, for short duration transient capability refer to specifications)



I.S.W.: Input surge withstand, no degradation of performance. **R.E.:** Ratings Exceeded **S.D.:** Shutdown

Vicor's comprehensive line of power solutions includes high density AC-DC and DC-DC modules and accessory components, fully configurable AC-DC and DC-DC power supplies, and complete custom power systems.

Information furnished by Vicor is believed to be accurate and reliable. However, no responsibility is assumed by Vicor for its use. Vicor makes no representations or warranties with respect to the accuracy or completeness of the contents of this publication. Vicor reserves the right to make changes to any products, specifications, and product descriptions at any time without notice. Information published by Vicor has been checked and is believed to be accurate at the time it was printed; however, Vicor assumes no responsibility for inaccuracies. Testing and other quality controls are used to the extent Vicor deems necessary to support Vicor's product warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

Specifications are subject to change without notice.

Vicor's Standard Terms and Conditions

All sales are subject to Vicor's Standard Terms and Conditions of Sale, which are available on Vicor's webpage or upon request.

Product Warranty

In Vicor's standard terms and conditions of sale, Vicor warrants that its products are free from non-conformity to its Standard Specifications (the "Express Limited Warranty"). This warranty is extended only to the original Buyer for the period expiring two (2) years after the date of shipment and is not transferable.

UNLESS OTHERWISE EXPRESSLY STATED IN A WRITTEN SALES AGREEMENT SIGNED BY A DULY AUTHORIZED VICOR SIGNATORY, VICOR DISCLAIMS ALL REPRESENTATIONS, LIABILITIES, AND WARRANTIES OF ANY KIND (WHETHER ARISING BY IMPLICATION OR BY OPERATION OF LAW) WITH RESPECT TO THE PRODUCTS, INCLUDING, WITHOUT LIMITATION, ANY WARRANTIES OR REPRESENTATIONS AS TO MERCHANTABILITY, FITNESS FOR PARTICULAR PURPOSE, INFRINGEMENT OF ANY PATENT, COPYRIGHT, OR OTHER INTELLECTUAL PROPERTY RIGHT, OR ANY OTHER MATTER.

This warranty does not extend to products subjected to misuse, accident, or improper application, maintenance, or storage. Vicor shall not be liable for collateral or consequential damage. Vicor disclaims any and all liability arising out of the application or use of any product or circuit and assumes no liability for applications assistance or buyer product design. Buyers are responsible for their products and applications using Vicor products and components. Prior to using or distributing any products that include Vicor components, buyers should provide adequate design, testing and operating safeguards.

Vicor will repair or replace defective products in accordance with its own best judgment. For service under this warranty, the buyer must contact Vicor to obtain a Return Material Authorization (RMA) number and shipping instructions. Products returned without prior authorization will be returned to the buyer. The buyer will pay all charges incurred in returning the product to the factory. Vicor will pay all reshipment charges if the product was defective within the terms of this warranty.

Life Support Policy

VICOR'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS PRIOR WRITTEN APPROVAL OF THE CHIEF EXECUTIVE OFFICER AND GENERAL COUNSEL OF VICOR CORPORATION. As used herein, life support devices or systems are devices which (a) are intended for surgical implant into the body, or (b) support or sustain life and whose failure to perform when properly used in accordance with instructions for use provided in the labeling can be reasonably expected to result in a significant injury to the user. A critical component is any component in a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system or to affect its safety or effectiveness. Per Vicor Terms and Conditions of Sale, the user of Vicor products and components in life support applications assumes all risks of such use and indemnifies Vicor against all liability and damages.

Intellectual Property Notice

Vicor and its subsidiaries own Intellectual Property (including issued U.S. and Foreign Patents and pending patent applications) relating to the products described in this data sheet. No license, whether express, implied, or arising by estoppel or otherwise, to any intellectual property rights is granted by this document. Interested parties should contact Vicor's Intellectual Property Department.

Vicor Corporation

25 Frontage Road
Andover, MA, USA 01810
Tel: 800-735-6200
Fax: 978-475-6715

email

Customer Service: custserv@vicorpower.com

Technical Support: apps@vicorpower.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Vicor:](#)

[VI-NC13-IP](#)



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.