

**Figure 1**

Part Number: 2643167751  
 Frequency Range: Broadband Frequencies 25-300 MHz (43 material)  
 Description: 43 SPLIT FLAT CABLE CORE  
 Application: Suppression Components  
 Where Used: Cable Component  
 Part Type: Flat Cable EMI Suppression Cores

## Mechanical Specifications

Weight: 27.000 (g)

## Part Type Information

Flat cable suppression core can accommodate multi-conductors flat cables, in widths from 12.7 mm (0.500") up to 77 mm (3.0"). These flat cable cores are available in two ferrite material grades to reduce conducted EMI from 1 MHz to hundreds of MHz.

-Flat cable suppression cores, split or single cores, are controlled for impedances only. Minimum impedance values are specified for the + marked frequencies. The minimum impedance is typically the listed impedance less 20%.

-Centered, single turn impedance tests for the 31 and 43 material are made on the 4193A Vector Impedance Analyzer. All tests are made with the shortest practical wire length.

-Assembly clips are available for most of the split flat cable cores. See section 'Flat Cable Core Assembly clips' in our catalog.

-Our 'Expanded Cable & Suppressor Kit' (part number 0199000005) contains a selection of these flat cable cores and clips.

-Flat Cable Cores are available in selected sizes in the 'Flex Circuit & Ribbon Cable Core Kit' (part number 0199000038).

-Explanation of Part Numbers: Digits 1 & 2 = product class and 3 & 4 = material grade.



## Mechanical Specifications

| Dim | mm    | mm<br>tol | nominal<br>inch | inch<br>misc. |
|-----|-------|-----------|-----------------|---------------|
| A   | 76.20 | ±1.50     | 3.000           | -             |
| B   | 65.30 | ±1.30     | 2.570           | -             |
| C   | 12.70 | ±0.40     | 0.500           | -             |
| D   | 6.35  | ±0.25     | 0.250           | -             |
| E   | 0.85  | ±0.20     | 0.033           | -             |
| F   | -     | -         | -               | -             |
| G   | -     | -         | -               | -             |
| H   | -     | -         | -               | -             |
| J   | -     | -         | -               | -             |
| K   | -     | -         | -               | -             |

## Electrical Specifications

| Typical Impedance ( $\Omega$ ) |     |
|--------------------------------|-----|
| 10 MHz                         | 22  |
| 25 MHz+                        | 45  |
| 100 MHz+                       | 115 |
| 250 MHz                        | 240 |

| Electrical Properties |  |
|-----------------------|--|
|                       |  |

## Land Patterns

| V | W<br>ref | X | Y | Z |
|---|----------|---|---|---|
| - | -        | - | - | - |
| - | -        | - | - | - |

## Winding Information

| Turns<br>Tested | Wire<br>Size | 1st Wire<br>Length | 2nd Wire<br>Length |
|-----------------|--------------|--------------------|--------------------|
| -               | -            | -                  | -                  |

## Reel Information

| Tape Width<br>mm | Pitch<br>mm | Parts 7 "<br>Reel | Parts 13 "<br>Reel | Parts 14 "<br>Reel |
|------------------|-------------|-------------------|--------------------|--------------------|
| -                | -           | -                 | -                  | -                  |

## Package Size

| Pkg Size |
|----------|
| -<br>(-) |

## Connector Plate

| # Holes | # Rows |
|---------|--------|
| -       | -      |

### Legend

+ Test frequency

Preferred parts, the suggested choice for new designs, have shorter lead times and are more readily available.

The column H(Oe) gives for each bead the calculated dc bias field in oersted for 1 turn and 1 ampere direct current. The actual dc H field in the application is this value of H times the actual NI (ampere-turn) product. For the effect of the dc bias on the impedance of the bead material, see figures 18-23 in the application note How to choose Ferrite Components for EMI Suppression.

A ½ turn is defined as a single pass through a hole.

$\Sigma$ l/A - Core Constant

$A_e$  - Effective Cross-Sectional Area

$A_L$  - Inductance Factor ( $\frac{L}{N^2}$ )

N/AWG - Number of Turns/Wire Size for Test Coil

$l_e$  - Effective Path Length

$V_e$  - Effective Core Volume

NI - Value of dc Ampere-turns



## Ferrite Material Constants

|  |  |
|--|--|
| Specific Heat .....  | 0.25 cal/g/°C                          |
| Thermal Conductivity .....   | <b>3.5 - 4.5 mW/cm - °C</b>            |
| Coefficient of Linear Expansion .....  | 8 - 10x10 <sup>-6</sup> /°C            |
| Tensile Strength .....   | 4.9 kgf/mm <sup>2</sup>                |
| Compressive Strength .....   | 42 kgf/mm <sup>2</sup>                 |
| Young's Modulus .....  | 15x10 <sup>3</sup> kgf/mm <sup>2</sup> |
| Hardness (Knoop) .....   | 650                                    |
| Specific Gravity .....   | ≈ 4.7 g/cm <sup>3</sup>                |
| <i>The above quoted properties are typical for Fair-Rite MnZn and NiZn ferrites.</i> |  |

See next page for further material specifications.




**43 Material Characteristics:**

| Property   | Unit             | Symbol                | Value           |
|--|------------------|-----------------------|-----------------|
| Initial Permeability @ B < 10 gauss                        |                  | $\mu_i$               | 800             |
| Flux Density @ Field Strength                              | gauss<br>oersted | B<br>H                | 2900<br>10      |
| Residual Flux Density                                      | gauss            | $B_r$                 | 1300            |
| Coercive Force   | oersted          | $H_c$                 | 0.45            |
| Loss Factor @ Frequency                                    | $10^{-6}$<br>MHz | $\tan \delta / \mu_i$ | 250<br>1.0      |
| Temperature Coefficient of Initial Permeability (20 -70°C) | %/°C             |                       | 1.25            |
| Curie Temperature  | °C               | $T_c$                 | >130            |
| Resistivity  | $\Omega$ cm      | $\rho$                | $1 \times 10^5$ |

This NiZn is our most popular ferrite for suppression of conducted EMI from 20 MHz to 250 MHz. This material is also used for inductive applications such as high frequency common-mode chokes.


EMI suppression beads, beads on leads, SM beads, multi-aperture cores, round cable EMI suppression cores, round cable snap-its, flat cable EMI suppression cores, flat cable snap-its, miscellaneous suppression cores, bobbins, and toroids are all available in 43 material.

**Complex Permeability vs. Frequency**

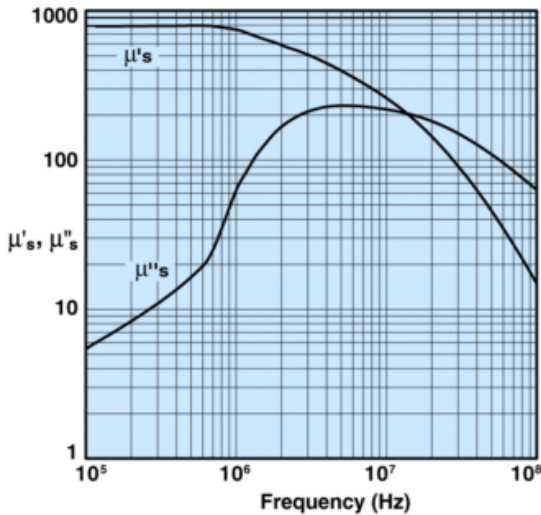


Measured on a 17/10/6mm toroid using the HP 4284A and the HP 4291A.

**Percent of Original Impedance vs. Temperature**

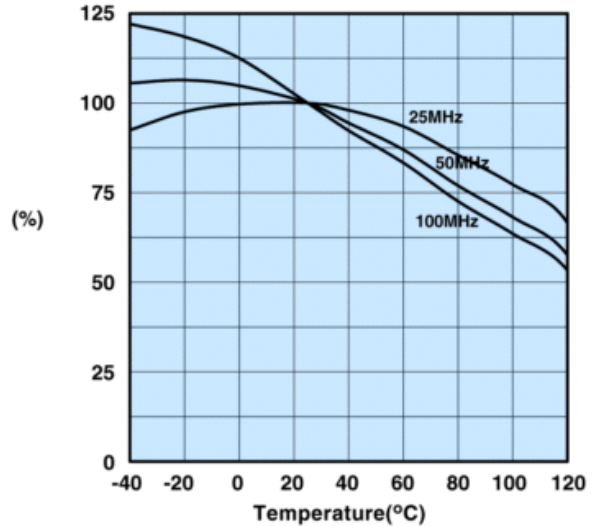


Measured on a 2643000301 using the HP4291A.

**Initial Permeability vs. Temperature**

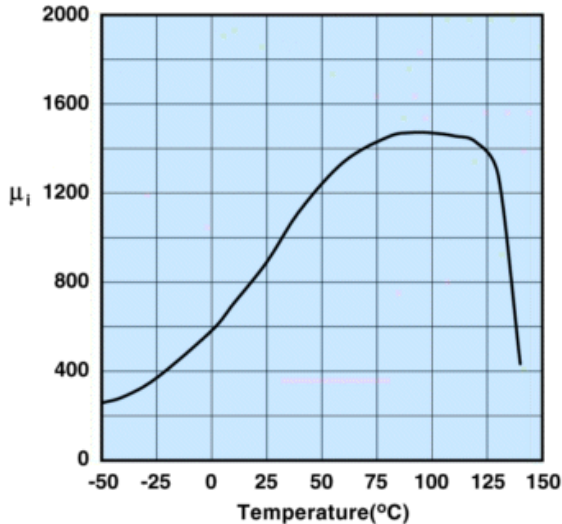

Measured on a 17/10/6mm toroid at 100kHz.

**Hysteresis Loop**

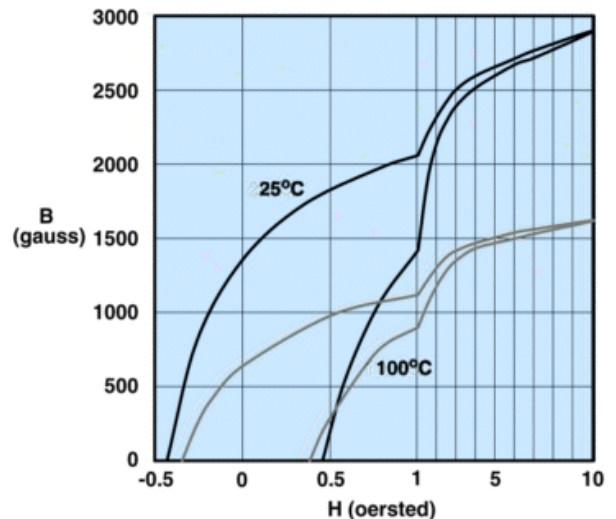

Measured on a 17/10/6mm toroid at 10kHz.



**Fair-Rite Products Corp.**  
**Your Signal Solution®**

Ferrite Components for the Electronics Industry


Fair-Rite Products Corp. PO Box J, One Commercial Row, Wallkill, NY 12589-0288  
Phone: (888) 324-7748 www.fair-rite.com

Fair-Rite Product's Catalog  
Part Data Sheet, 2643167751  
Printed: 2013-07-03



**RoHS**  
Material  
Declaration

### 2643167751

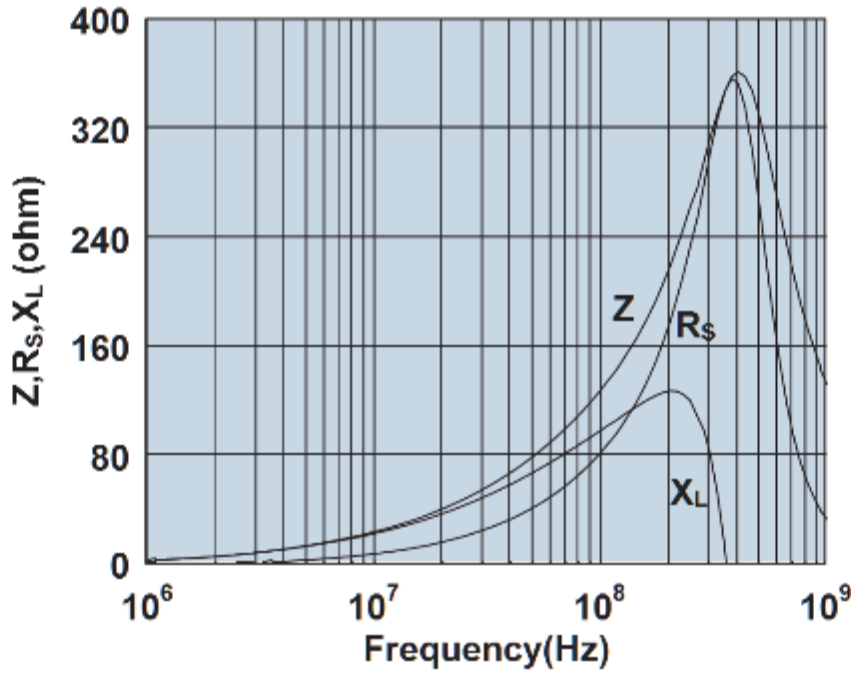

Impedance, reactance, and resistance vs. frequency.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.