

High Voltage $I_O=100\text{mA}$ Low Dropout Regulator

■ GENERAL DESCRIPTION

The NJW4183 is a high voltage and low current consumption low dropout regulator using BCD process.

It have lineup as A version(built-in ON/OFF function type) and B version.(without ON/OFF function type)


NJW4183 is mounted to SOT-89-3/5, TO-252-3/5 package and corresponded to Low ESR capacitor (MLCC).

It is suitable for a Car accessory, battery equipment and various applications.

■ PACKAGE OUTLINE




NJW4183U2



NJW4183DL3



NJW4183U3



NJW4183DL1

■ FEATURES

- Wide Operating Voltage Range 4.0V to 35V
- Low Current Consumption 18 μA (A version.)
15 μA (B version.)
- Correspond to Low ESR capacitor (MLCC)
- Output Current $I_O(\text{min.})=100\text{mA}$
- Output Voltage Range V_O : 2.0V to 5.0V
- High Precision Output $V_O \pm 1.0\%$
- ON / OFF Function (Apply only the A version.)
- Thermal Overload Protection
- Over Current Protection
- Reverse Current Protection
- Package Outline

A ver. : SOT-89-5 TO-252-5


B ver. : SOT-89-3 TO-252-3

■ PRODUCT CLASSIFICATION


Device Name	Version	ON/OFF Function	Package
NJM4183U2-xxA	A	Yes	SOT-89-5
NJM4183DL3-xxA	A	Yes	TO-252-5
NJM4183U3-xxB	B	-	SOT-89-3
NJW4183DL1-xxB	B	-	TO-252-3

xx=Output Voltage ex) 33=3.3V 05=5.0V


■ PIN CONFIGURATION




NJW4183U2-A



NJW4183DL3-A



NJW4183U3-B




NJW4183DL1-B


NJW4183

BLOCK DIAGRAM

• A version

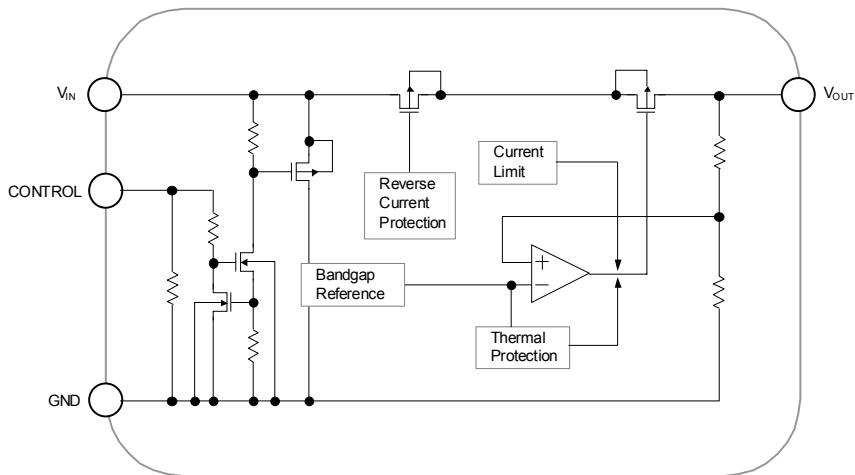

• B version

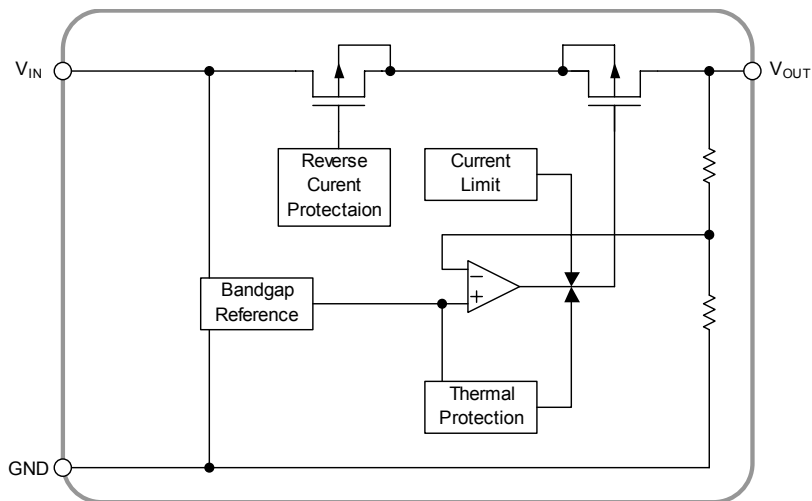

OUTPUT VOLTAGE RANK LIST

• A version

SOT-89-5

TO-252-5

Device Name	V _{OUT}	Device Name	V _{OUT}
NJW4183U2-33A	3.3V	NJW4183DL3-33A	3.3V
NJW4183U2-05A	5.0V	NJW4183DL3-05A	5.0V

• B version

SOT-89-3

TO-252-3

Device Name	V _{OUT}	Device Name	V _{OUT}
NJW4183U3-33B	3.3V	NJW4183DL1-33B	3.3V
NJW4183U3-05B	5.0V	NJW4183DL1-05B	5.0V

■ ABSOLUTE MAXIMUM RATINGS

(Ta=25°C)

PARAMETER	SYMBOL	RATINGS	UNIT
Input Voltage	V_{IN}	-0.3 to +40	V
Control Voltage(*1)	V_{CONT}	-0.3 to +40	V
Output Voltage	V_{OUT}	-0.3 to +7	V
Power Dissipation	P_D	SOT-89-3/5	625(*2) 2400(*3)
		TO-252-3/5	1190(*2) 3125(*3)
Junction Temperature	T_J	-40 to +150	°C
Operating Temperature	T_{opr}	-40 to +85	°C
Storage Temperature	T_{stg}	-40 to +150	°C

(*1): Apply only the A version.

(*2): Mounted on glass epoxy board. (76.2 × 114.3 × 1.6mm:based on EIA/JDEC standard size, 2Layers, Cu area 100mm²)

(*3): Mounted on glass epoxy board. (76.2 × 114.3 × 1.6mm:based on EIA/JDEC standard, 4Layers)

(For 4Layers: Applying 74.2 × 74.2mm inner Cu area and a thermal via hole to a board based on JEDEC standard JESD51-5)

■ ELECTRICAL CHARACTERISTICS

(Unless otherwise noted, V_O 3V: $V_{IN}=V_O + 1V$, $C_{IN}=1\mu F$, $C_O=2.2\mu F$, $T_a=25^\circ C$

$V_O < 3V$: $V_{IN}=4V$, $C_{IN}=1\mu F$, $C_O=2.2\mu F$ (V_O 2.5 : $C_O=4.7\mu F$), $T_a=25^\circ C$)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Output Voltage	V_O	$I_O = 30mA$	-1.0%	-	+1.0%	V
Quiescent Current	I_Q	A version $I_O = 0mA$, except I_{CONT}	-	18	30	μA
		B version $I_O = 0mA$	-	15	27	
Quiescent Current at Control OFF(*4)	I_O	$V_O \times 0.9$	100	-	-	mA
Output Current	$I_{Q(OFF)}$	$V_{CONT}=0V$	-	-	1	μA
Line Regulation	$\Delta V_O / \Delta V_{IN}$	$V_{IN}=V_O + 1V$ to 35V, $I_O = 30mA$ ($V_O \geq 3V$), $V_{IN}=4V$ to 35V, $I_O = 30mA$ ($V_O < 3V$)	-	-	0.05	%/V
Load Regulation	$\Delta V_O / \Delta I_O$	$I_O = 0mA$ to 100mA	-	-	0.018	%/mA
Ripple Rejection	RR	$V_{IN}=V_O + 2V$, $e_{in}=50mV_{rms}$ $f=1kHz$, $I_O = 10mA$	$V_O=3.3V$	-	45	dB
			$V_O=5.0V$	-	43	
Dropout Voltage(*5)	ΔV_{IO}	$I_O=60mA$	-	0.16	0.26	V
Control Current(*4)	I_{CONT}	$V_{CONT}=1.6V$	-	0.5	3	μA
Control Voltage for ON-state(*4)	$V_{CONT(ON)}$		1.6	-	-	V
Control Voltage for OFF-state(*4)	$V_{CONT(OFF)}$		-	-	0.6	V
Average Temperature Coefficient of Output Voltage	$\Delta V_O / \Delta T_a$	$T_a=0$ to $85^\circ C$, $I_O = 30mA$	-	± 50	-	ppm/°C



(*4): Apply only the A version.

(*5): The output voltage excludes under 3.8V.

The above specification is a common specification for all output voltages.


Therefore, it may be different from the individual specification for a specific output voltage.

POWER DISSIPATION vs. AMBIENT TEMPERATURE

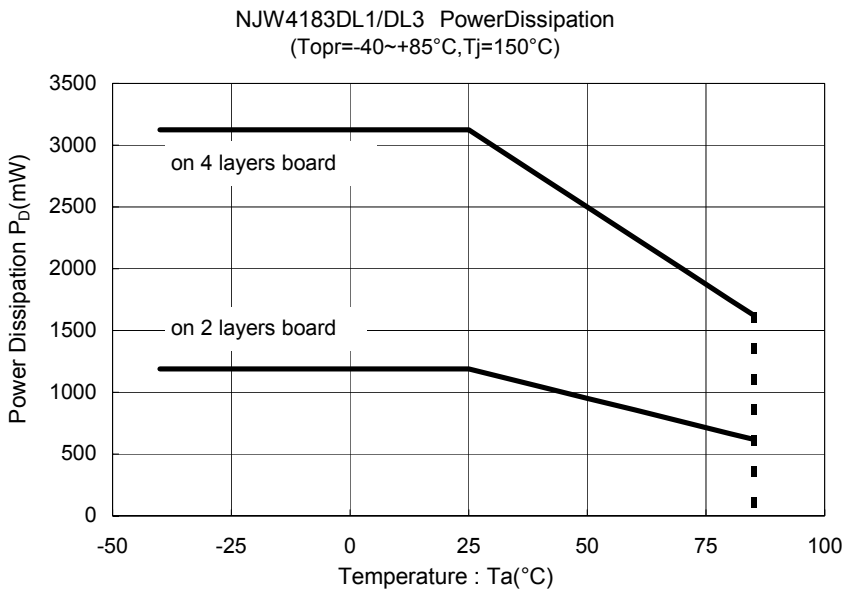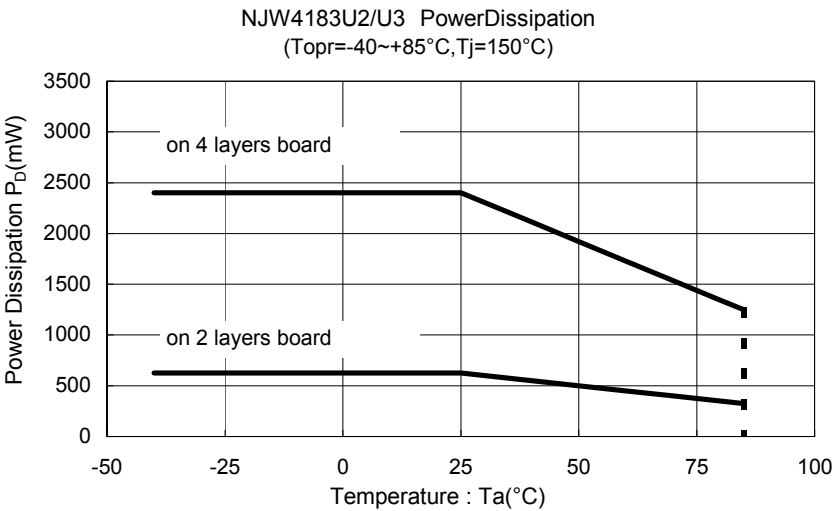


■ TEST CIRCUIT

• A version

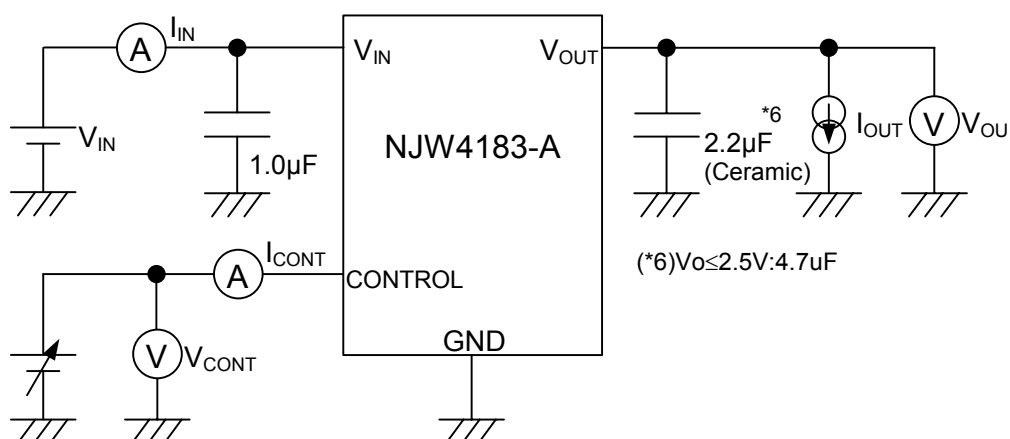


• B version

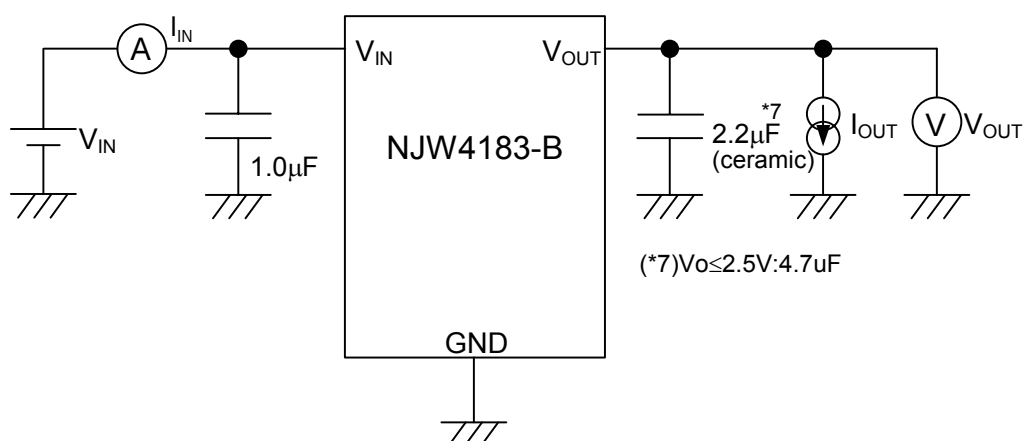

■ TYPICAL APPLICATION


• A version

① In the case where ON/OFF Control is not required

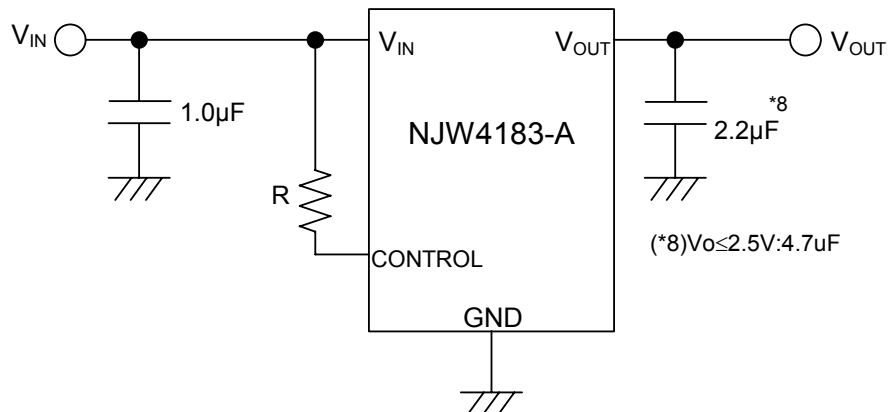

Connect control pin to V_{IN} pin


② In use of ON/OFF CONTROL

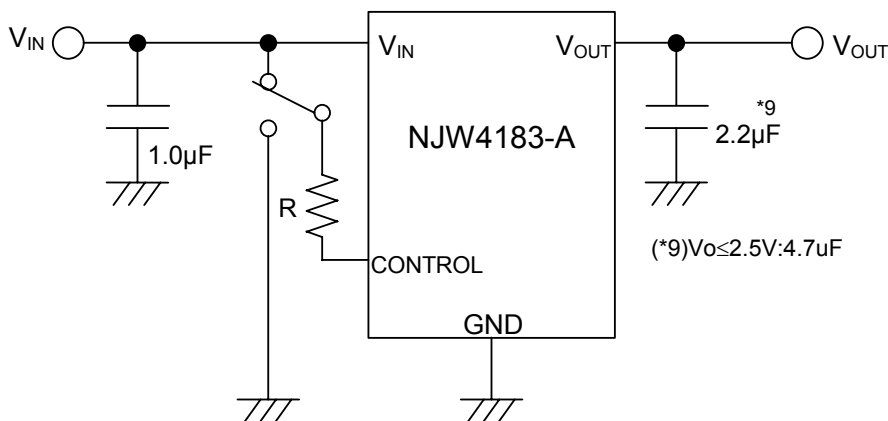

State of control pin:

- "H" → output is enabled.
- "L" or "open" → output is disabled.

• B version

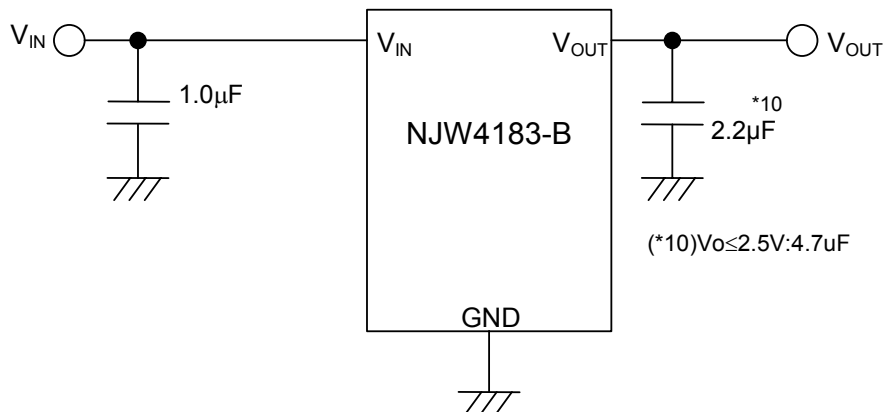

*In the case of using a resistance "R" between V_{IN} and control.

If this resistor is inserted, it can reduce the control current when the control voltage is high.

The applied voltage to control pin should set to consider voltage drop through the resistor "R" and the minimum control voltage for ON-state.

The $V_{CONT(ON)}$ and I_{CONT} have temperature dependence as shown in the "Control Current vs. Temperature" and "Control Voltage vs. Temperature" characteristics. Therefore, the resistance "R" should be selected to consider the temperature characteristics.

*Input Capacitor C_{IN}

Input Capacitor C_{IN} is required to prevent oscillation and reduce power supply ripple for applications when high power supply impedance or a long power supply line.

Therefore, use the recommended C_{IN} value (refer to conditions of ELECTRIC CHARACTERISTIC) or larger and should connect between GND and V_{IN} as shortest path as possible to avoid the problem.

*Output Capacitor C_O

Output capacitor (C_O) will be required for a phase compensation of the internal error amplifier.

The capacitance and the equivalent series resistance (ESR) influence to stable operation of the regulator.

Use of a smaller C_O may cause excess output noise or oscillation of the regulator due to lack of the phase compensation.

On the other hand, Use of a larger C_O reduces output noise and ripple output, and also improves output transient response when rapid load change.







Therefore, use the recommended C_O value (refer to conditions of ELECTRIC CHARACTERISTIC) or larger and should connect between GND and V_{OUT} as shortest path as possible for stable operation







The recommended capacitance depends on the output voltage rank. Especially, low voltage regulator requires larger C_O value.







In addition, you should consider varied characteristics of capacitor (a frequency characteristic, a temperature characteristic, a DC bias characteristic and so on) and unevenness peculiar to a capacitor supplier enough.







When selecting C_O , recommend that have withstand voltage margin against output voltage and superior temperature characteristic.







■ TYPICAL CHARACTERISTICS

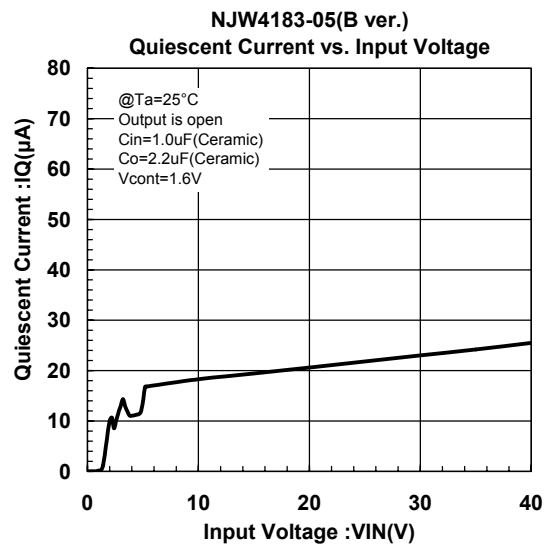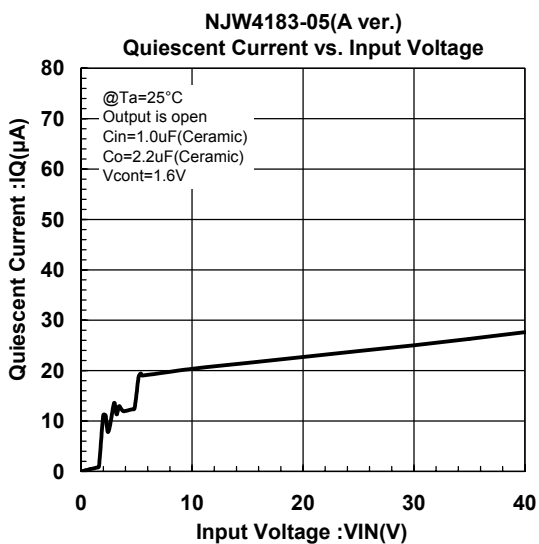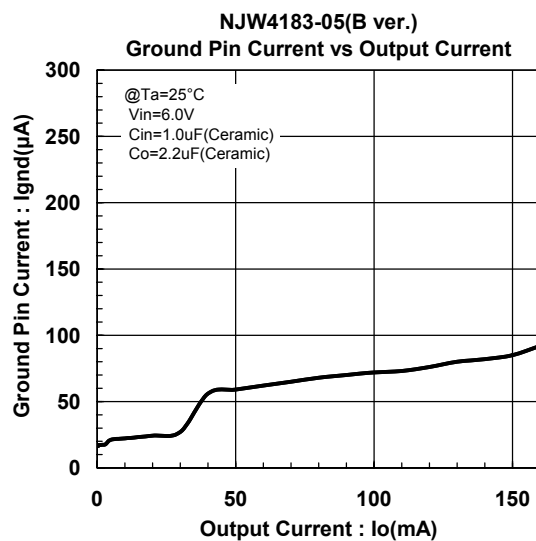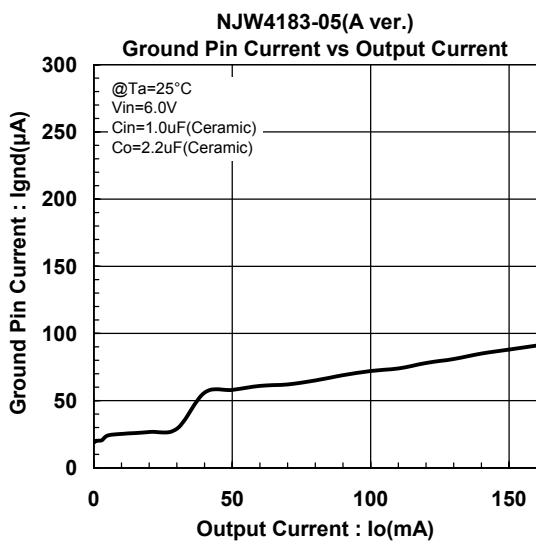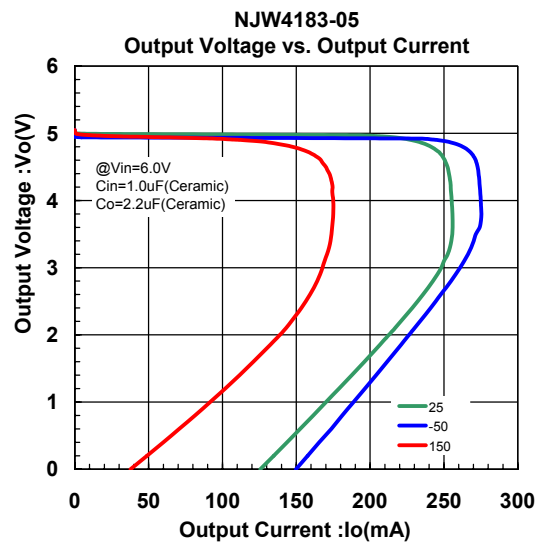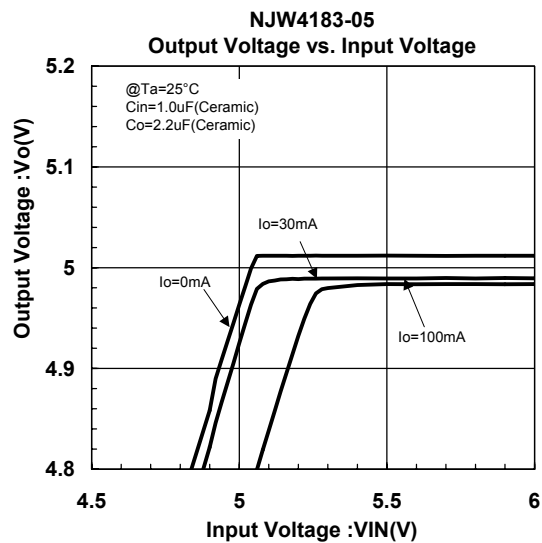

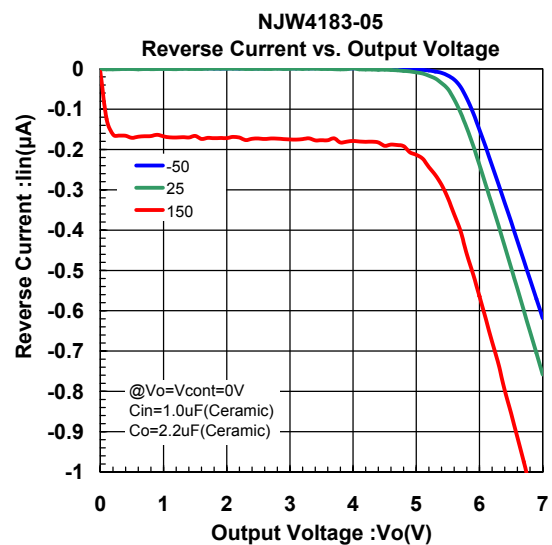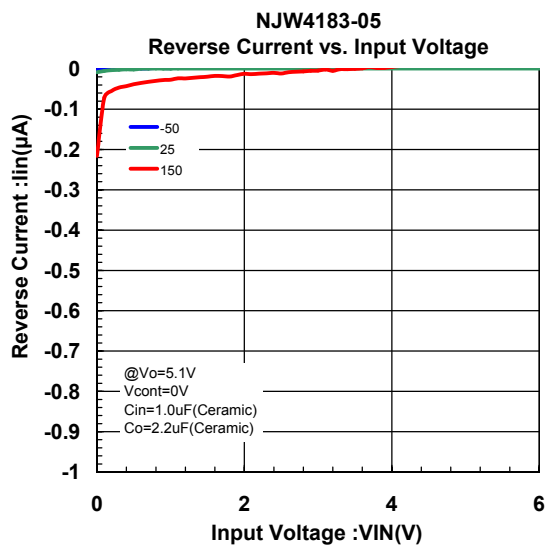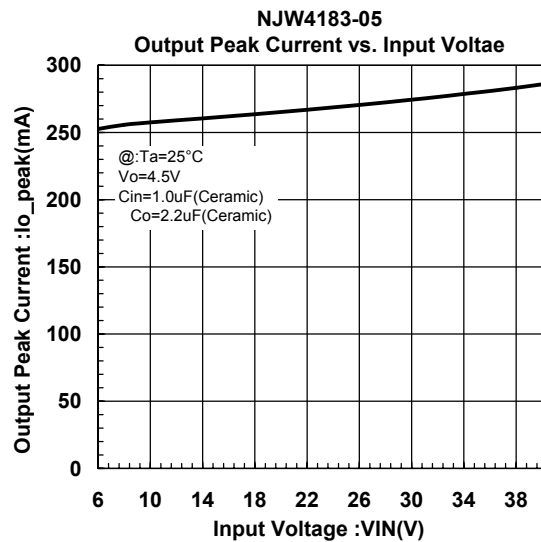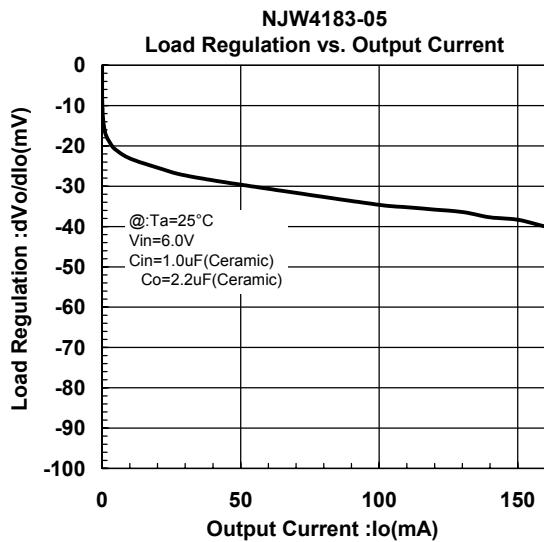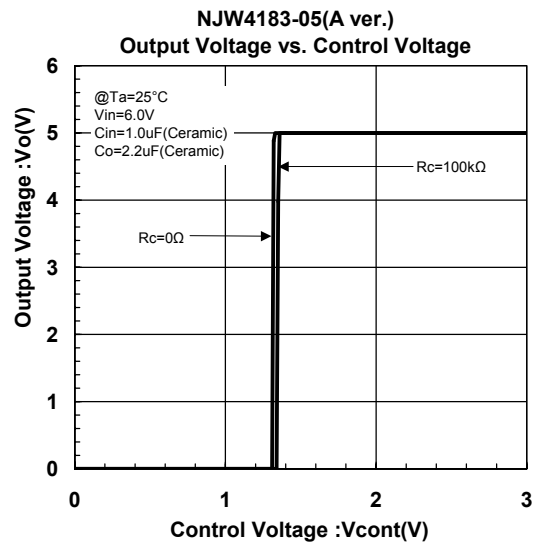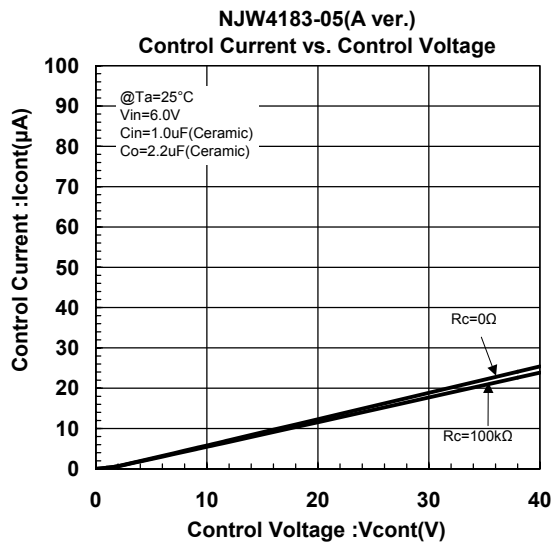

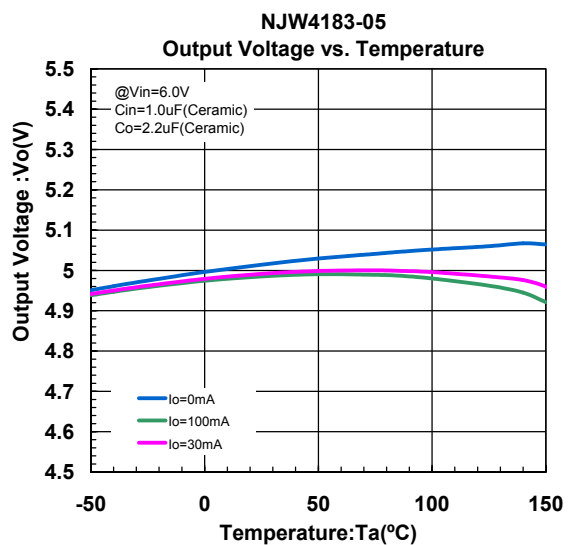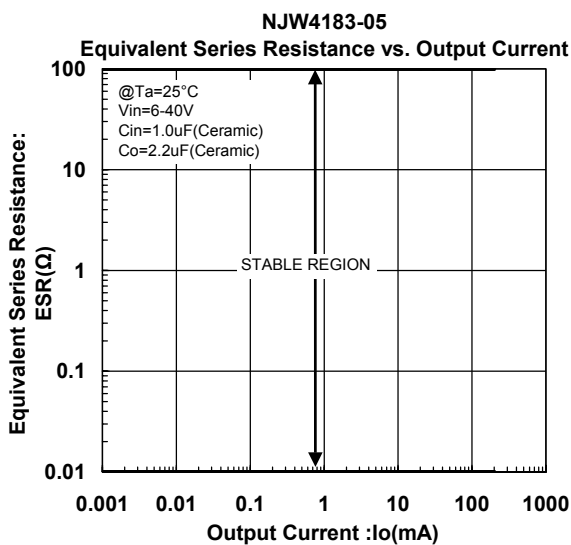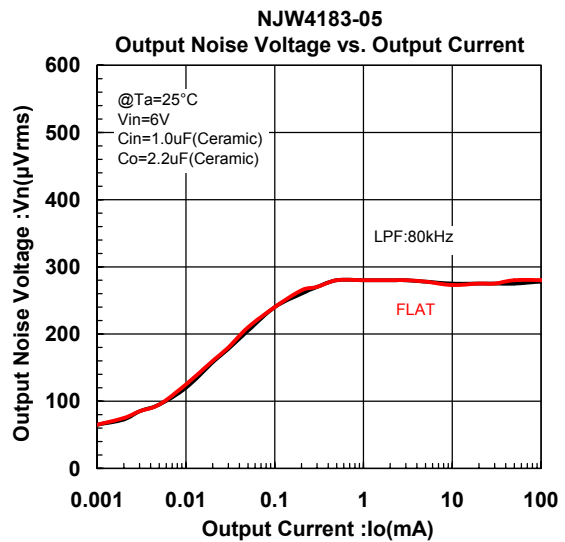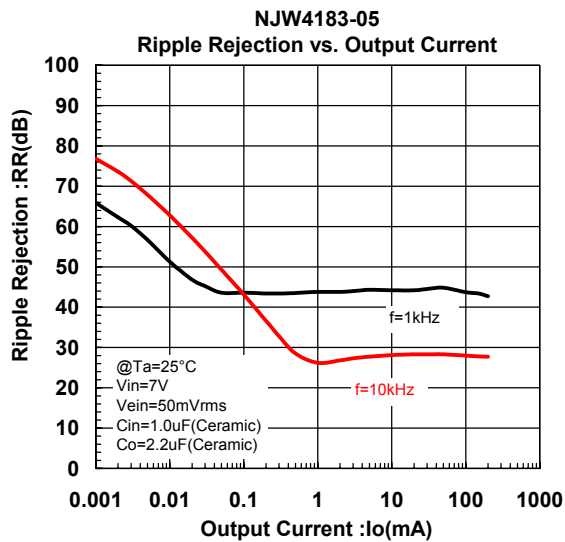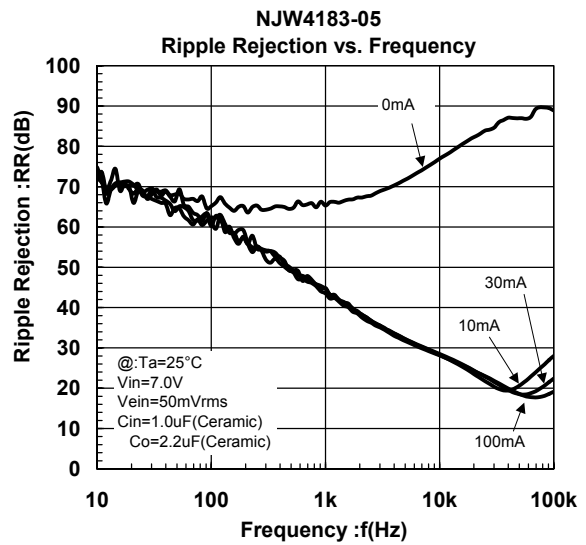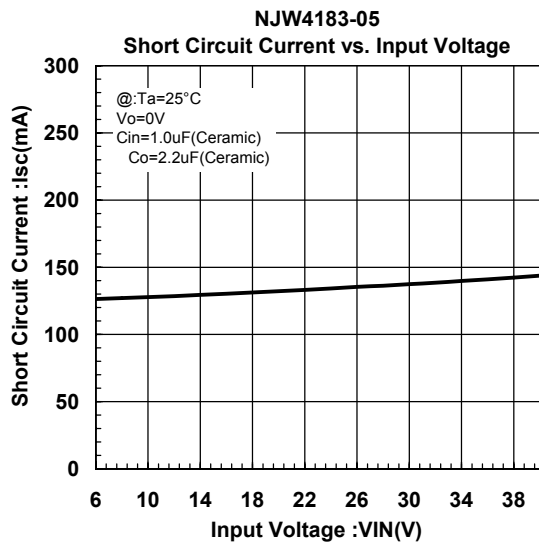

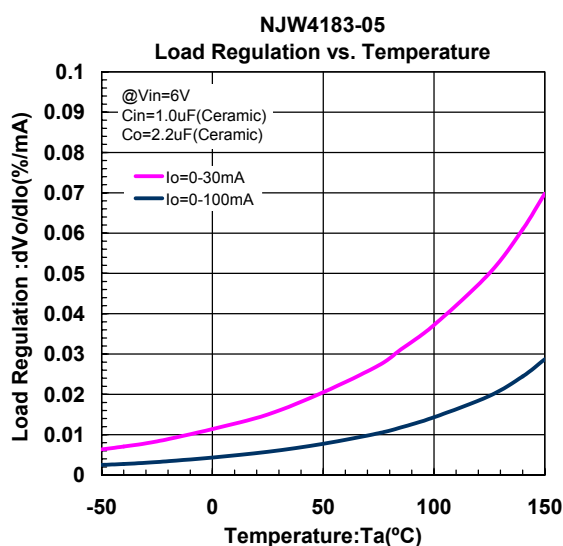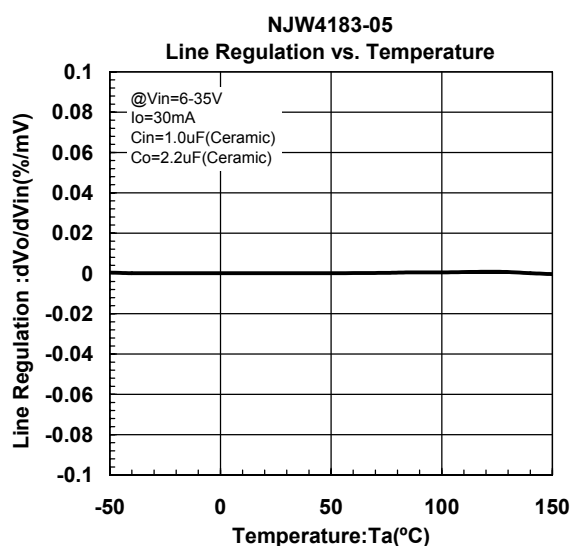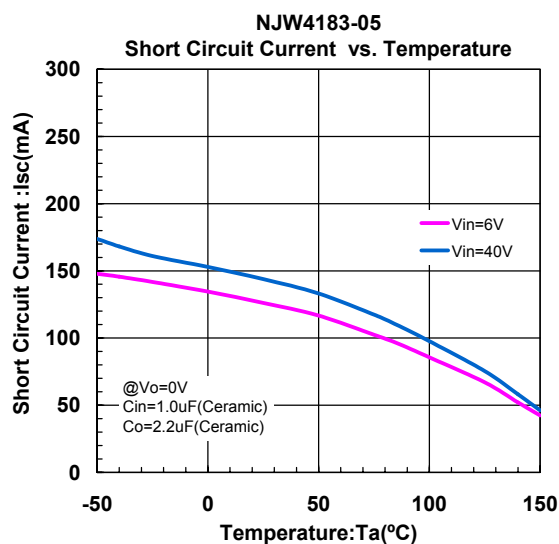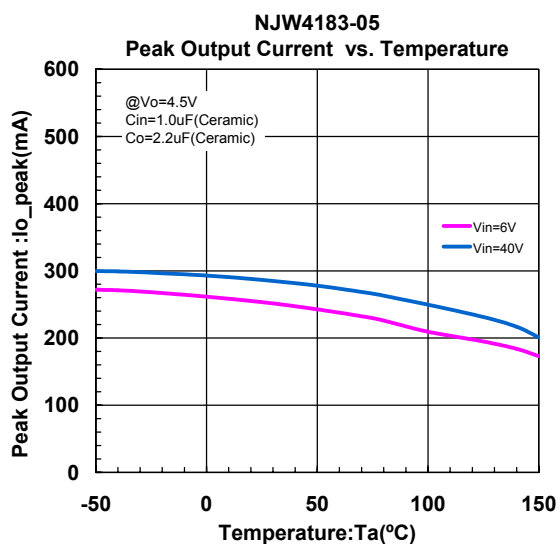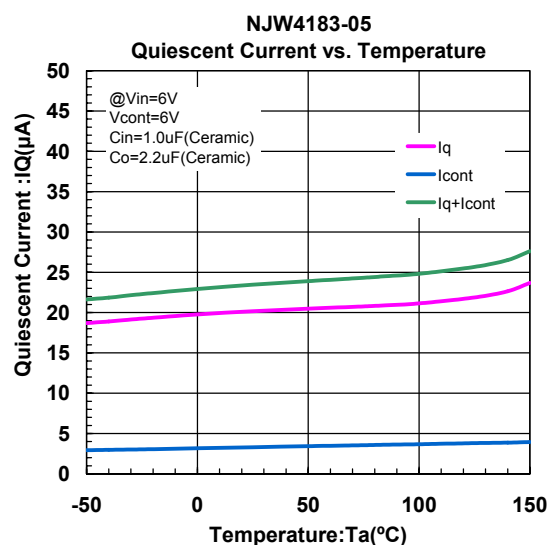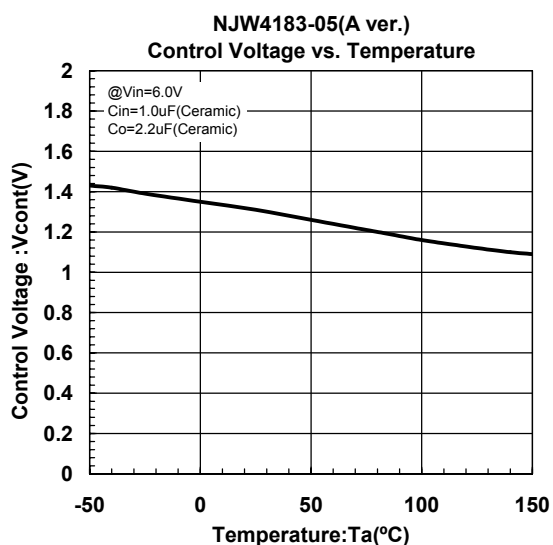

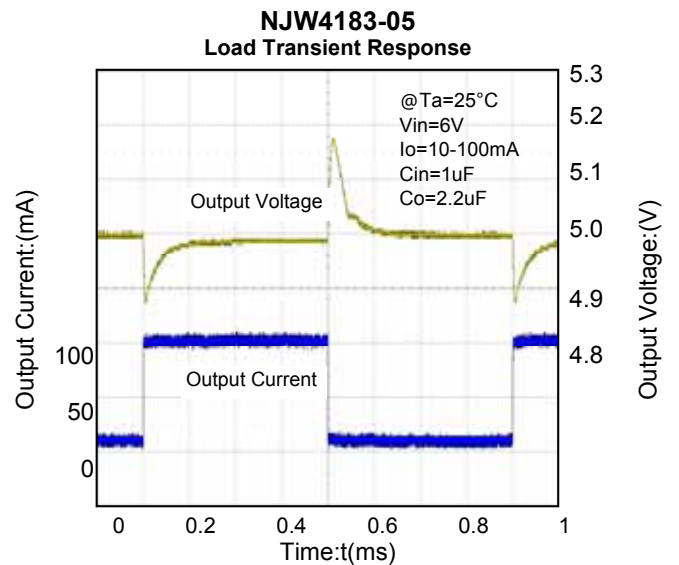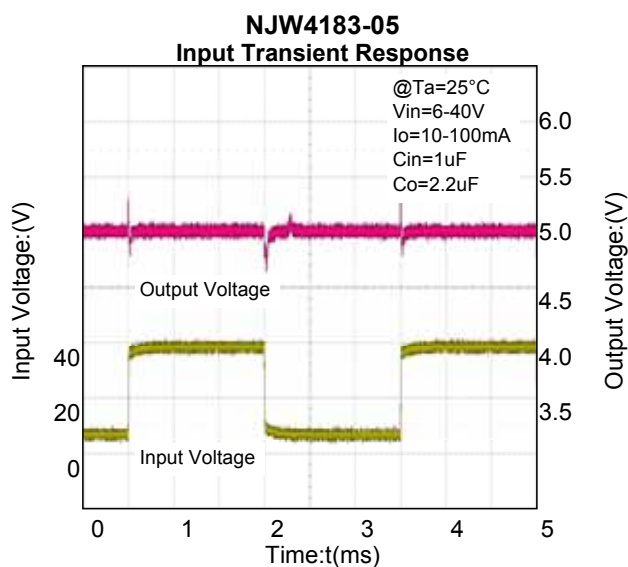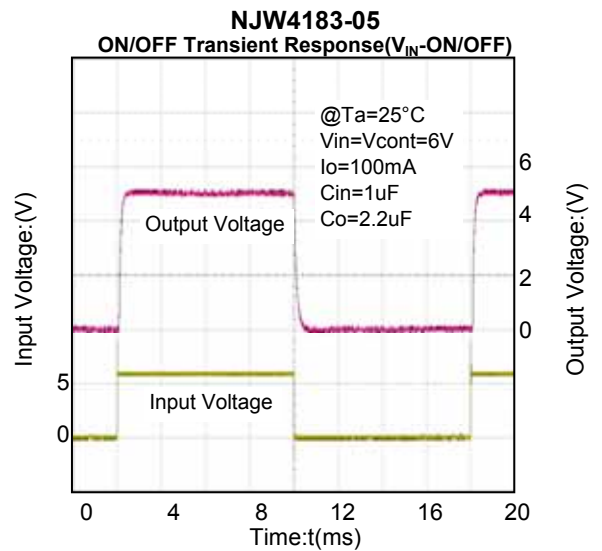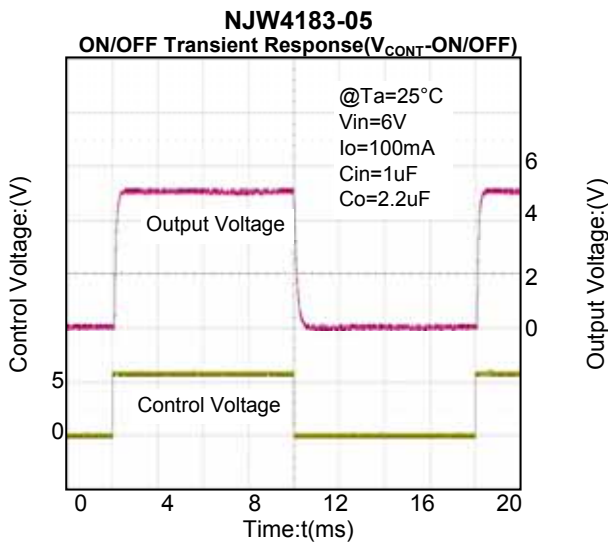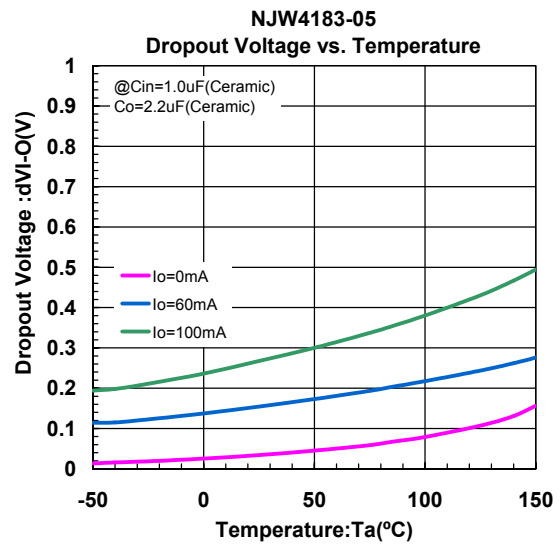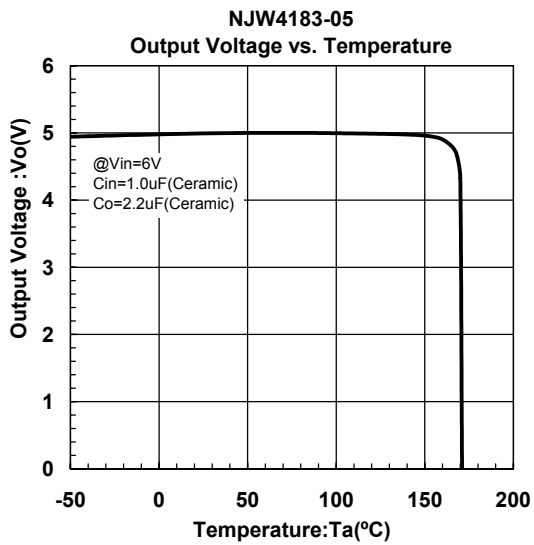

[CAUTION]
The specifications on this databook are only given for information , without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[NJR:](#)

[NJW4183U3](#)



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.