



A

Pushbutton

AP Series Industrial Pushbutton Switch

Features/Benefits

- **IP67 sealed**
- **1,000,000 life cycle**
- **Illumination / non-illumination**
- **Multiple colored caps**
- **Threaded or snap-in mounting**
- **Caps available separately**
- **RoHS compliant**

Typical Applications

- **Harsh environments**
- **Off-Road**
- **Industrial**
- **Medical**
- **Transportation**
- **Joystick control modules**
- **Gaming**
- **Military**



Specifications

FUNCTION: SPST Momentary, double break

CONTACT ARRANGEMENT: N.O.

MOUNTING TYPE:

Snap-in (no panel seal)

Threaded body (hex nut, lock washer, and panel seal gasket provided)

Torque spec for threaded body: Do not exceed 8-9 in-lbs (0.9-1.0 N.m)

Mechanical

OPERATING LIFE: 1,000,000 cycles

TOTAL TRAVEL: 2.1 ± 0.2 mm

OPERATING POINT 1.55 ± 0.25 mm

OVER TRAVEL: 0.6 min.

OPERATING FORCE: $4N \pm 1N$ standard configuration; other force
option $2N \pm 0.5N$

VIBRATION: 10-500 Hz 10g Max

SHOCK: 60g 11ms sawtooth wave

Electrical

CONTACT RATING:

200mA @ 24 V DC resistive (500,000 cycles)

100mA @ 50 V DC resistive (500,000 cycles)

400mA @ 32 V AC resistive (500,000 cycles)

125mA @ 125 V AC resistive (1,000,000 cycles)

DIELECTRIC STRENGTH: 1000 V AC min.

INSULATION RESISTANCE: $1 \text{ G } \Omega$ @ 500 VDC

INITIAL CONTACT RESISTANCE 50 m Ω max (without wire leads)

BOUNCE TIME: <5 ms

Materials

HOUSING: PBT

BASE: PBT

CAP: PBT

ACTUATOR:

Illuminated: Clear polycarbonate

Non-illuminated: PBT

INTERNAL SEAL: Silicone rubber

TERMINALS: Copper alloy, gold over silver plating

MOVABLE CONTACT: Copper alloy, gold over silver plating

TERMINAL SEAL: Epoxy

Operating Environment

OPERATING TEMPERATURE: -40°C to 85°C (+105°C non-illuminated)

ESD PROTECTION: 20 KV min.

Process Environment

SEALING: IP67

NOTE: Specifications and materials listed above are for switches with standard options.
For information on specific and custom switches, please contact Customer Service.

Build-A-Switch

To order, simply select desired option from each category and place in the appropriate box.

Designation	A	P									B	E
AP AP Series												
Operating Force												
2 2 Newtons												
4 4 Newtons												
Actuator Style												
D Dome / Convex												
C Concave												
E Extended Dome												
N None												
Actuator Color												
0 No Cap												
2 Black												
3 Red												
4 Orange												
5 Yellow												
6 Green												
7 Blue												
9 Gray												
Illumination												
00 No LED*												
01 Super White												
02 Bi-color; Red (Green)												
03 Red												
05 Amber												
06 Green												
07 Super Blue												
08 Bi-color; Amber (Green)												
Terminal Seal												
E Epoxy												
All models are epoxy sealed												
Contact Material												
B Gold												
Termination												
Z Solder Lug												
W 12" Wire Leads 22 AWG												
C** PC Terminals												
Bushing Style**												
S** Snap-in plastic												
T** Threaded plastic												
** No panel seal option												
Contact Customer Service for additional hardware options.												

* No LED available in short body only



Specifications and dimensions subject to change


AP Series Industrial Pushbutton Switch




A

Pushbutton

STANDARD VIEW

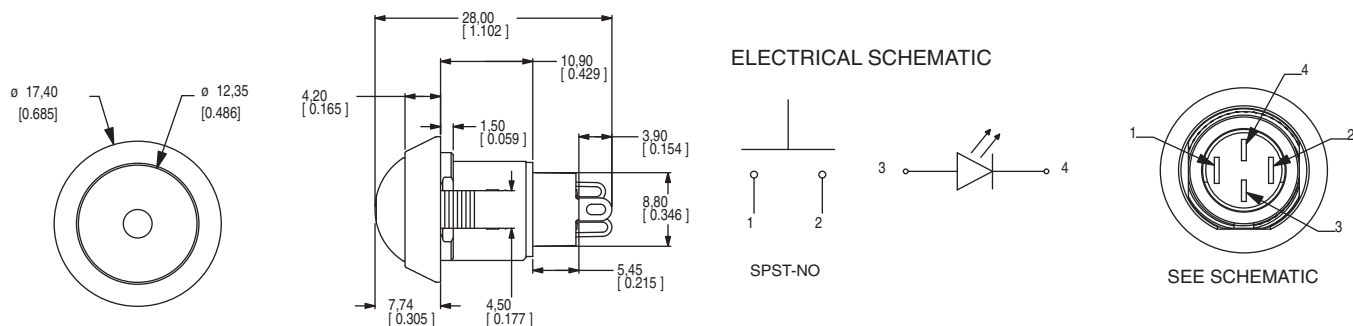


OPERATING FORCE





OPTION CODE	OPERATING FORCE
2	2 N, 200 g
4	4 N, 400 g



ACTUATOR STYLE





D DOME / CONVEX

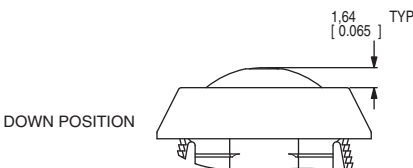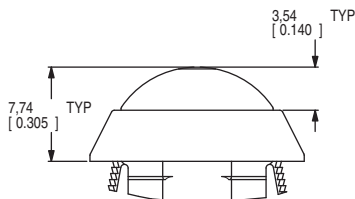

E EXTENDED DOME

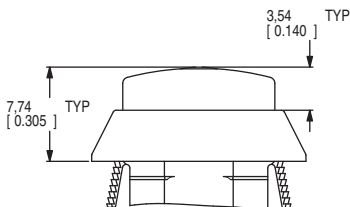

C CONCAVE

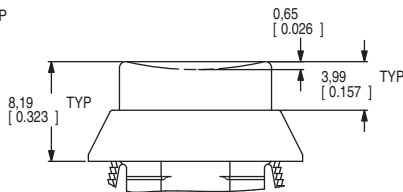


ACTUATOR COLOR



OPTION CODE	ACTUATOR COLOR
0	No Cap
2	Black
3	Red
4	Orange
5	Yellow
6	Green
7	Blue
9	Gray

For additional colors please contact Customer Service.



Third Angle
Projection



Dimensions are shown: mm (inches)
Specifications and dimensions subject to change

**A****Pushbutton**

AP Series Industrial Pushbutton Switch

ILLUMINATION



OPTION CODE	ILLUMINATION TYPE	TYPICAL INTENSITY*		PEAK WAVELENGTH	Vf Forward Voltage
		MIN	MAX		
		(mcd)		(nm)	
00	Model without illumination	N/A		N/A	
01	LED Super White	4,000	5,000	N/A	3.5
02	LED Bi-Color – Red (Green)	10	20	635/565	2.0
03	LED Red	4	8	700	2.0
05	LED Amber	35	50	610	2.0
06	LED Green	35	50	565	2.0
07	LED Super Blue	800	1,500	470	3.8
08	LED Bi-Color – Amber (Green)	10	10	585/565	2.0

*LED FORWARD CURRENT: 20 mA


LED FORWARD VOLTAGE: see chart above

LED REVERSE VOLTAGE: 5.0 V MAX

* For information on specific and custom LED, please contact Customer Service.

NOTE:



For bi-color LED's the polarity must be reversed to alternate the color





BUSHING STYLE




S SNAP-IN

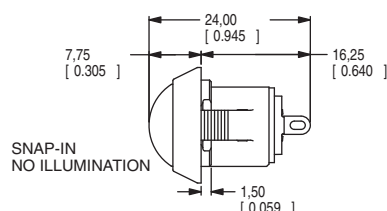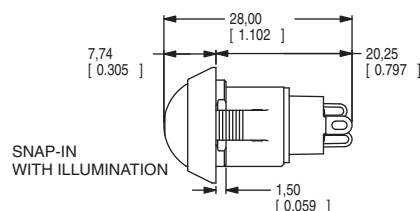


T THREADED PLASTIC

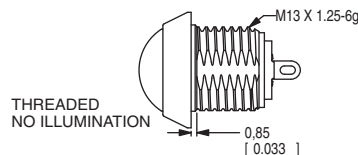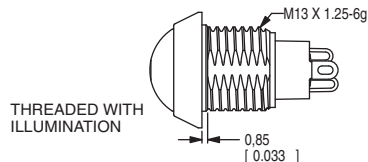

PANEL CUTOUT



PANEL THICKNESS	DIM A (± 0.05 mm)	DIM B (± 0.05 mm)
1 mm [0.039 in]	13.70 mm [0.539 in]	13.00 mm [0.512 in]
2 mm [0.079 in]	13.80 mm [0.539 in]	13.00 mm [0.512 in]
3 mm [0.118 in]	13.90 mm [0.547 in]	13.10 mm [0.516 in]
THREADED BODY MIN PANEL THICKNESS 1 mm	13.70 mm [0.539 in]	13.00 mm [0.512 in]



Third Angle
Projection



A 0.1mm min. chamfer on the leading edge of the mounting hole is recommended for snap-in version.

Dimensions are shown: mm (inches)
Specifications and dimensions subject to change

www.ck-components.com


AP Series Industrial Pushbutton Switch




A

Pushbutton

TERMINATION




Z SOLDER LUG


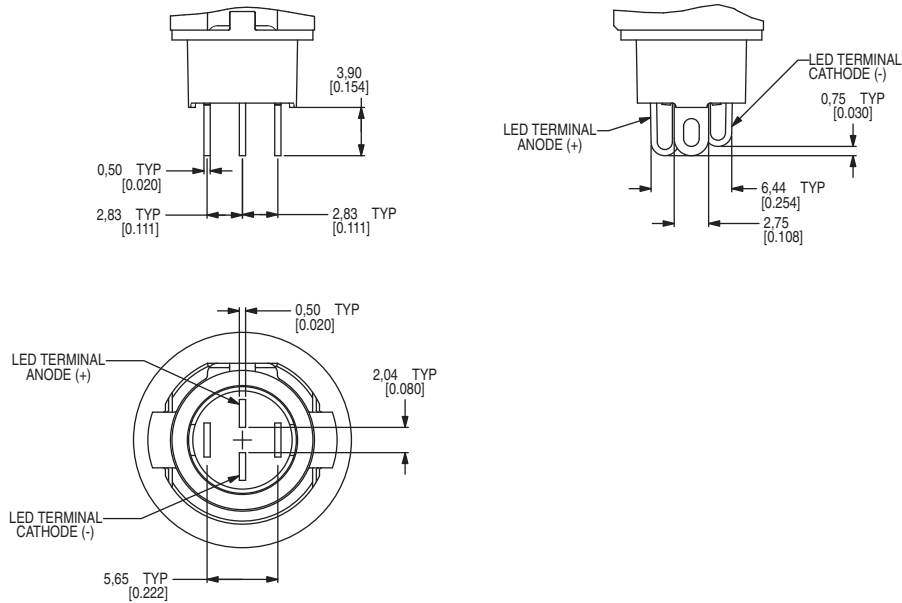


C PC TERMINALS

**** Illumination not available with PC Terminals

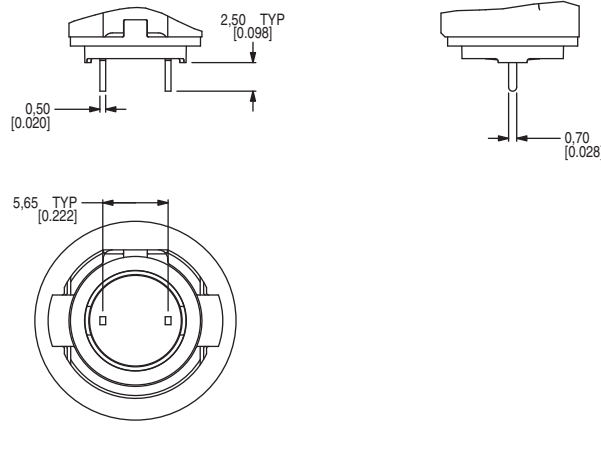

W 12" WIRE LEADS 22 AWG

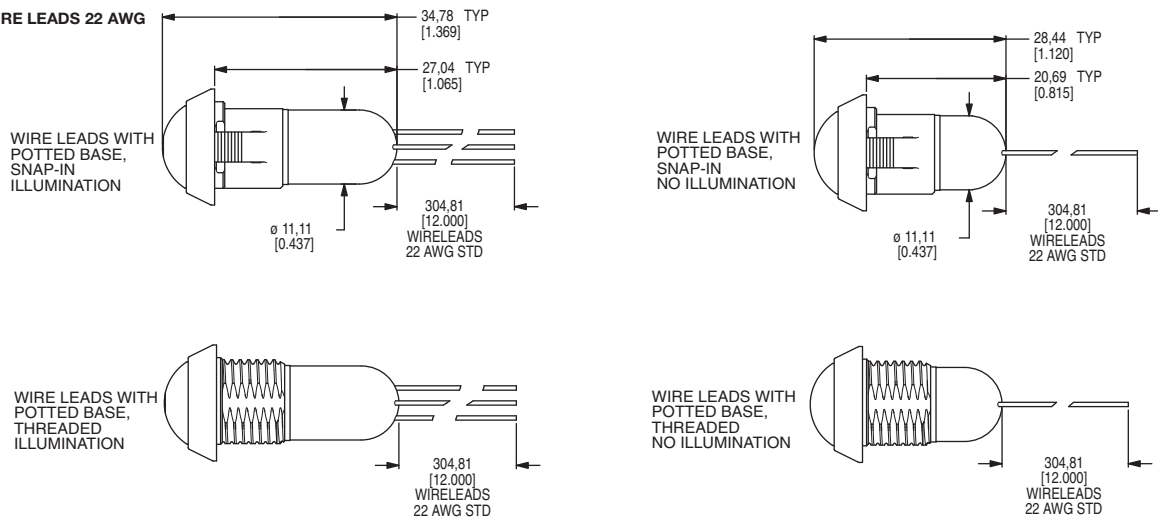

Dimensions are shown: mm (inches)
Specifications and dimensions subject to change



AP Series Industrial Pushbutton Switch

A

Pushbutton

CONTACT MATERIAL



B GOLD

OPTION CODE	CONTACT MATERIAL
B	Gold

TERMINAL SEAL




E EPOXY

All models are epoxy sealed

HARDWARE


LOCK WASHER

Part Number 647D00000




HEX NUT

Part number 515D00000

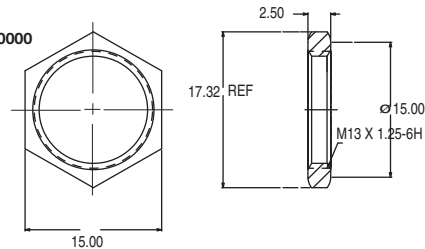

PANEL SEAL

Part Number 655D00000

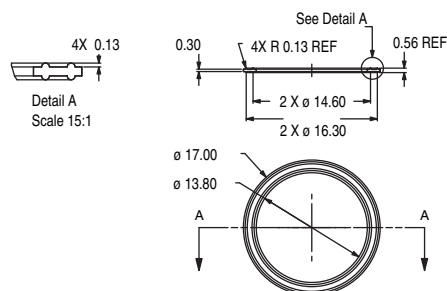

Caps available on next page



Third Angle
Projection



Dimensions are shown: mm (inches)
Specifications and dimensions subject to change



AVAILABLE CAPS



481D XX XXX

Cap Color



Style

OPTION	CAP COLOR
01	WHITE
02	BLACK
03	RED
04	ORANGE
05	YELLOW
06	GREEN
07	BLUE
08	BROWN
09	GRAY

PART NUMBER	HOLE	STYLE
481DXX000	NO	DOME
481DXX001	YES	DOME
481DXX002	NO	EXTENDED DOME
481DXX003	YES	EXTENDED DOME
481DXX004	NO	CONCAVE
481DXX005	YES	CONCAVE



DOME

481DXX000 = HOLE
481DXX001 = NO HOLE





EXTENDED DOME

481DXX002 = HOLE
481DXX003 = NO HOLE



CONCAVE

481DXX004 = HOLE
481DXX005 = NO HOLE





Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.