

## Sensor/Actuator cable - SAC-4P-10,0-542/ FS SH SCO BK - 1406187

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



Sensor/Actuator cable, 4-position, PVC, Yellow RAL 1021, shielded, Free cable end, on Socket straight M12-SPEEDCON, Cable length: 10 m



### Key commercial data

|                      |                                                                                                         |
|----------------------|---------------------------------------------------------------------------------------------------------|
| Packing unit         | 1 PCE                                                                                                   |
| GTIN                 | <br>4 046356 798631 |
| Custom tariff number | 85444290                                                                                                |
| Country of origin    | UNITED STATES                                                                                           |

### Technical data

#### Dimensions

|                 |      |
|-----------------|------|
| Length of cable | 10 m |
|-----------------|------|

#### Ambient conditions

|                                 |                                  |
|---------------------------------|----------------------------------|
| Ambient temperature (operation) | -25 °C ... 90 °C (Plug / socket) |
| Degree of protection            | IP65                             |
|                                 | IP67                             |
|                                 | IP68                             |

#### General

|                       |                                      |
|-----------------------|--------------------------------------|
| Rated current at 40°C | 4 A                                  |
| Rated voltage         | 30 V                                 |
| Number of positions   | 4                                    |
| Contact resistance    | ≤ 5 mΩ                               |
| Insulation resistance | ≥ 100 MΩ                             |
| Standards/regulations | M8 plug-in connector IEC 61076-2-104 |

## Sensor/Actuator cable - SAC-4P-10,0-542/ FS SH SCO BK - 1406187

### Technical data

#### General

|                             |                                             |
|-----------------------------|---------------------------------------------|
| Coding                      | A - standard                                |
| Surge voltage category      | II                                          |
| Pollution degree            | 3                                           |
| Insertion/withdrawal cycles | ≥ 100                                       |
| Torque                      | 0.2 Nm (M8 plug-in connectors)              |
| Contact material            | CuSn                                        |
| Contact surface material    | Ni/Au                                       |
| Contact carrier material    | TPU GF                                      |
| Material of grip body       | TPU, hardly inflammable, self-extinguishing |
| Material, knurls            | Zinc die-cast, nickel-plated                |
| Sealing material            | NBR                                         |
| Status display              | No                                          |

#### Line characteristics

|                                               |                                               |
|-----------------------------------------------|-----------------------------------------------|
| Cable type                                    | PVC yellow 105 °C                             |
| Cable type (abbreviation)                     | 542                                           |
| UL AWM style                                  | 2517 (105°C/300 V)                            |
| AWG signal line                               | 22                                            |
| Core diameter including insulation            | 1.27 mm ±0.03 mm                              |
| Wire colors                                   | brown, blue, black, white                     |
| Overall twist                                 | 4 wires, twisted                              |
| Shielding                                     | Tinned copper braided shield                  |
| Optical shield covering                       | 85 %                                          |
| External sheath, color                        | yellow                                        |
| External cable diameter D                     | 5.5 mm ± 0.2 mm                               |
| Minimum bending radius, flexible installation | 12 x D                                        |
| Cable weight                                  | 48 kg/km                                      |
| Outer sheath, material                        | PVC                                           |
| Material conductor insulation                 | PVC                                           |
| Conductor material                            | Tin-plated Cu litz wires                      |
| Nominal voltage, cabel                        | 300 V                                         |
| Special properties                            | UL standards PLTC and ITC                     |
| Other resistance                              | UV resistant                                  |
| Ambient temperature (operation)               | -30 °C ... 105 °C (cable, fixed installation) |

## Sensor/Actuator cable - SAC-4P-10,0-542/ FS SH SCO BK - 1406187

### Classifications

#### ETIM

|          |          |
|----------|----------|
| ETIM 3.0 | EC001855 |
| ETIM 4.0 | EC001855 |
| ETIM 5.0 | EC001855 |

#### UNSPSC

|               |          |
|---------------|----------|
| UNSPSC 11     | 31251501 |
| UNSPSC 12.01  | 31251501 |
| UNSPSC 13.2   | 31251501 |
| UNSPSC 6.01   | 31251501 |
| UNSPSC 7.0901 | 31251501 |

#### eCl@ss

|            |          |
|------------|----------|
| eCl@ss 4.0 | 27060306 |
| eCl@ss 4.1 | 27060306 |
| eCl@ss 5.0 | 27061801 |
| eCl@ss 5.1 | 27061801 |
| eCl@ss 6.0 | 27279218 |
| eCl@ss 7.0 | 27279218 |

### Approvals

#### Approvals

---

#### Approvals

UL Listed / cUL Listed / cULus Listed

---

#### Ex Approvals

---

#### Approvals submitted

---

#### Approval details

## Sensor/Actuator cable - SAC-4P-10,0-542/ FS SH SCO BK - 1406187

### Approvals

|                                                                                             |       |
|---------------------------------------------------------------------------------------------|-------|
| UL Listed  |       |
| Nominal current I <sub>N</sub>                                                              | 4 A   |
| Nominal voltage U <sub>N</sub>                                                              | 300 V |

|                                                                                              |       |
|----------------------------------------------------------------------------------------------|-------|
| cUL Listed  |       |
| Nominal current I <sub>N</sub>                                                               | 4 A   |
| Nominal voltage U <sub>N</sub>                                                               | 300 V |

|                                                                                                 |  |
|-------------------------------------------------------------------------------------------------|--|
| cULus Listed  |  |
|-------------------------------------------------------------------------------------------------|--|

### Accessories

#### Accessories

##### Protection and sealing elements

Screw plug - PROT-M 8 MS-PA-CHAIN - 1430860

M8 sealing cap made of plastic with fixing band for sensor cables, for M8 sockets



#### Tools

Torque screwdriver - TSD 02 SAC - 1208487



Torque screwdriver, with preset torque of 0.2 Nm and 4 mm hexagonal drive for M8 connectors

## Sensor/Actuator cable - SAC-4P-10,0-542/ FS SH SCO BK - 1406187

### Accessories


Tool - SAC BIT M8-D10 - 1208461



Nut for assembling sensor/actuator cables with M8 connector and for M8 connectors with QUICKON fast connection technology, for 4 mm hexagonal drive


### Drawings

Schematic diagram




Pin assignment M8 socket, 4-pos., view female side

Dimensioned drawing



Socket M8 x 1, straight

Circuit diagram

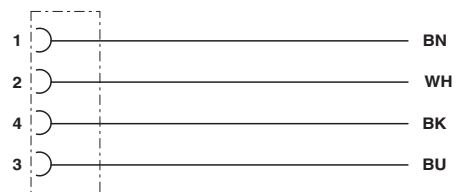

Contact assignment of M8/M12 plugs/sockets



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.