


Product Specification

SFP Evaluation Board

FDB-1018

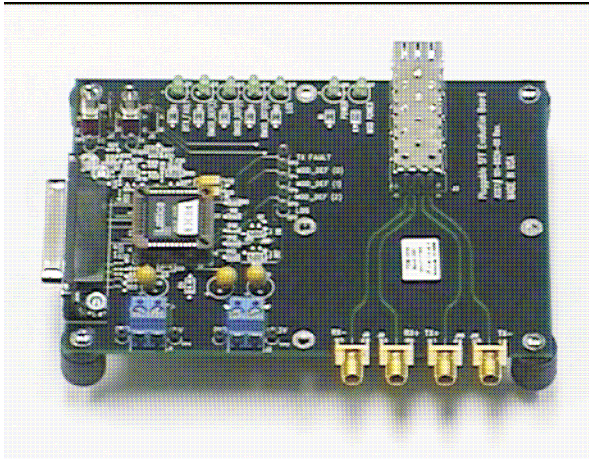

Finisar's FDB-1018 Evaluation Board is the perfect vehicle for testing and evaluating the new Small Form Factor Pluggable (SFP) optical transceivers.

The board consists of a single SFP edge connector and cage, four 50-ohm SMA coaxial connectors (J8-J11) for the high-speed differential transmitter input and receiver output signals, and test points and LEDs for monitoring all other SFP pins. It is compatible with short wavelength and long wavelength SFP transceiver types for use at data rates of 125 Mb/s to 4.25 Gb/s.

The FDB-1018 SFP Evaluation Board is supplied with software and a DB-25 cable for communication with a PC parallel port. This cable allows direct communication between the PC and the module via the I²C 2-wire serial bus on pins MOD_DEF(1) and MOD_DEF(2), as well as for reading the status lines and setting the TX disable and Rate Select inputs.

The software included with the board provides a simple windows-based GUI for monitoring the Serial ID information available in Finisar's SFP transceivers.


A switch is provided to assert and test the transmit disable function (S3). Another switch (S1) is provided to select the operating bit rate in those dual rate SFP transceivers that require it (not required for Finisar's SFP transceivers). TX disable can be controlled either by the switch or the parallel port. Change the position of the jumper to change controls. Similarly, a jumper governs the Rate Select control.


SPECIFICATIONS

The FDB-1018 SFP Evaluation Board requires two supply voltages. A module supply voltage of 3.1 to 3.6V should be supplied at connector J2. A 5V $\pm$ 10% supply, used for the parallel port communication, should be connected to J1.

Input signals to the TX+ and TX- connectors should yield a differential swing ranging from 400 mV to 2400 mV, or each have a single-ended swing ranging from 200 mV to 1200 mV. Output signals on the RX+ and RX- connectors may range between 185 to 1000 mV, single-ended. SFP transceivers have internal AC coupling on all data lines.

The board layout and schematics are shown below.

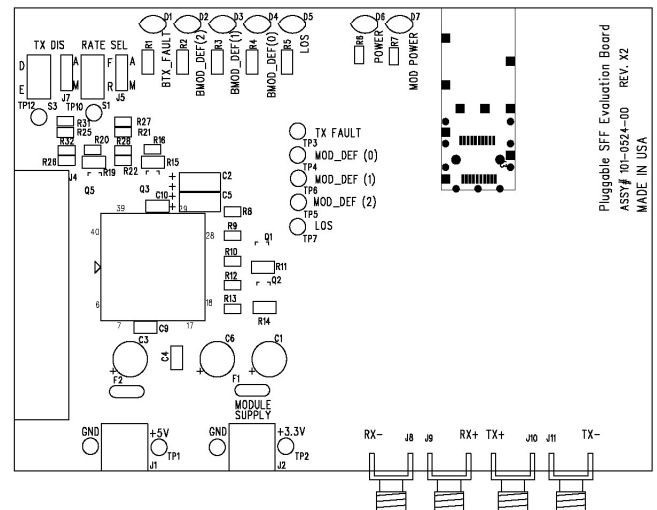

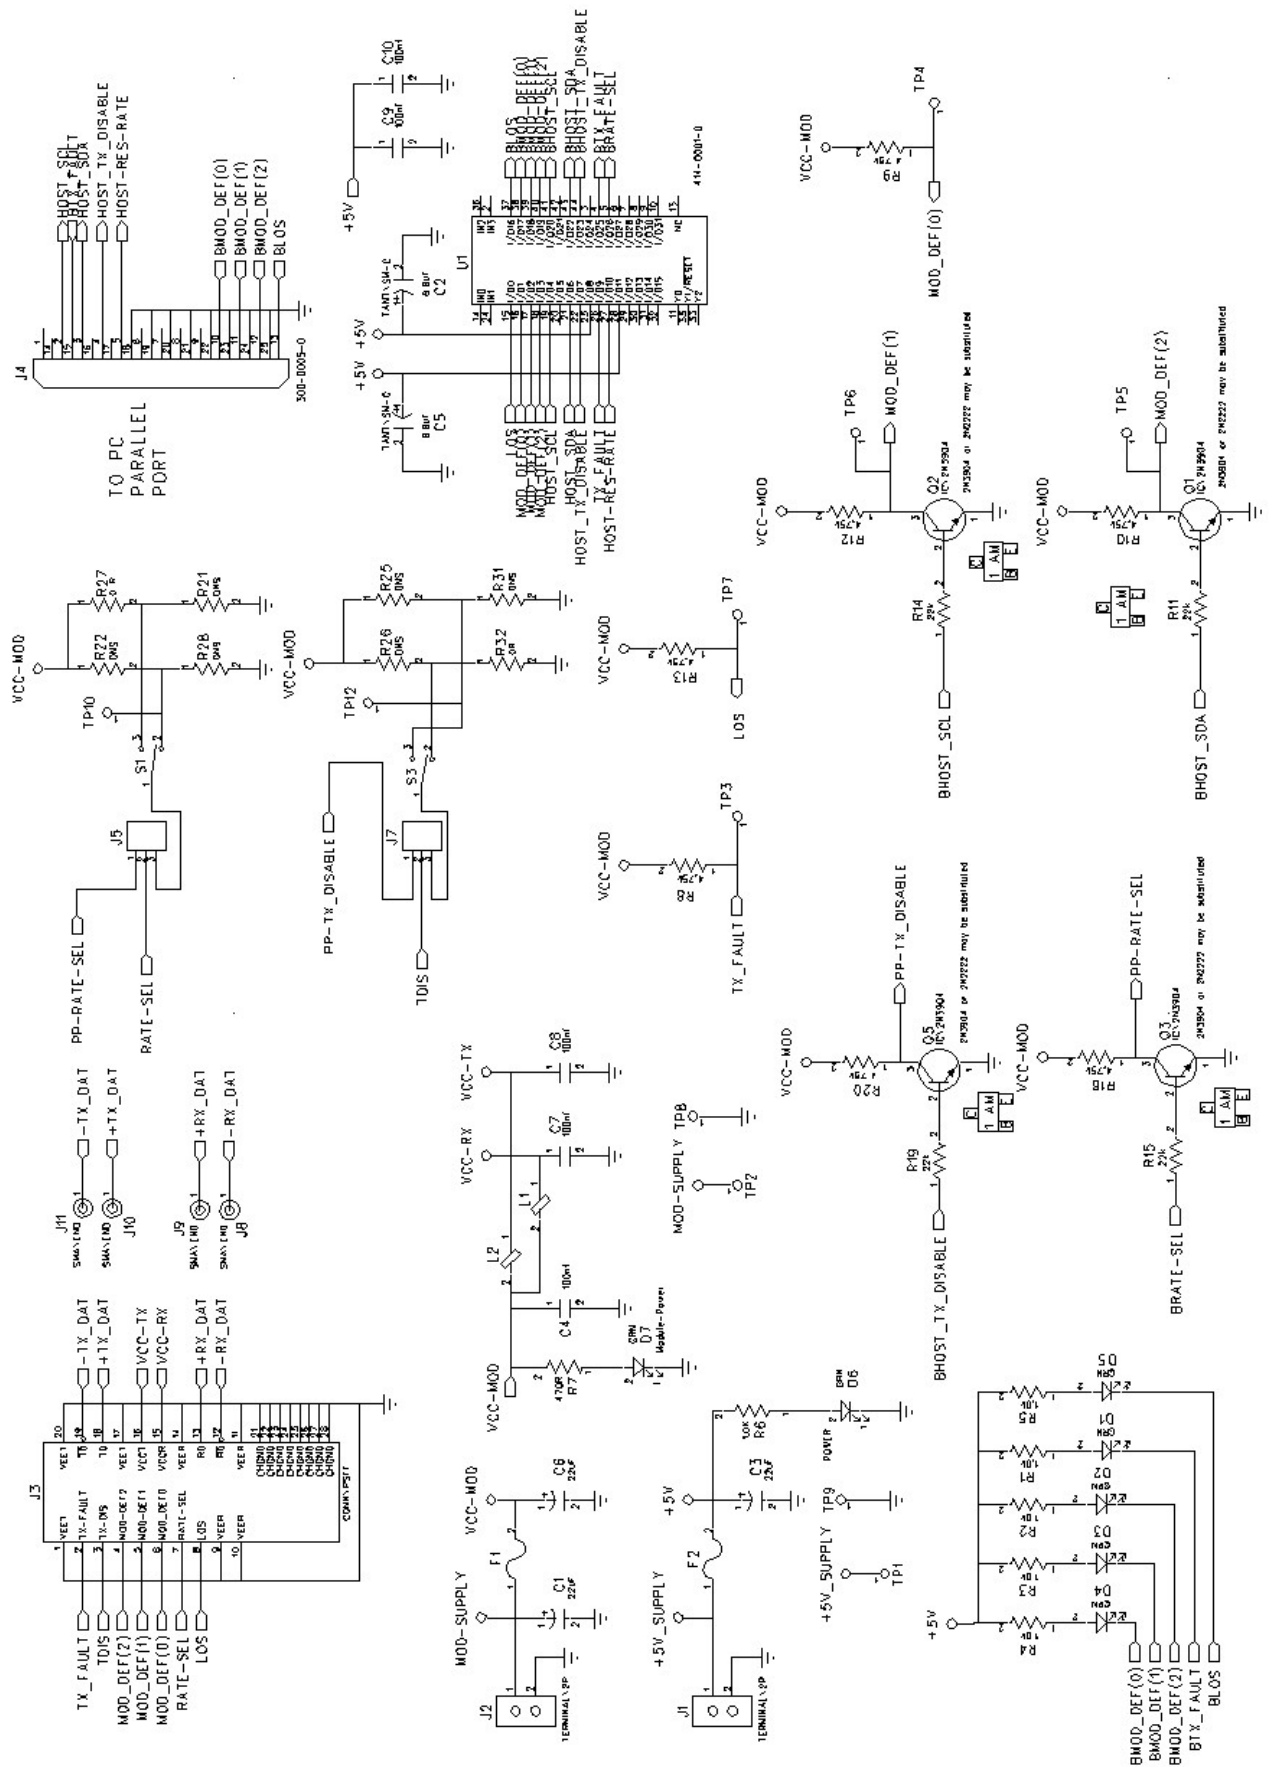

Finisar Corporation
1389 Moffett Park Drive
Sunnyvale, CA 94089-1133
Tel. 1-408-548-1000
Fax 1-408-541-6138
sales@finisar.com
www.finisar.com



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.