

# MM3ZxxxST1G Series, SZMM3ZxxxST1G Series

## Zener Voltage Regulators

### 300 mW SOD-323 Surface Mount Tight Tolerance Portfolio

This series of Zener diodes is packaged in a SOD-323 surface mount package that has a power dissipation of 300 mW. They are designed to provide voltage regulation protection and are especially attractive in situations where space is at a premium. They are well suited for applications such as cellular phones, hand-held portables, and high density PC boards.

#### Specification Features

- Standard Zener Breakdown Voltage Range – 3.3 V to 36 V
- Steady State Power Rating of 300 mW
- Small Body Outline Dimensions:  
– 0.067" x 0.049" (1.7 mm x 1.25 mm)
- Low Body Height: 0.035" (0.9 mm)
- Package Weight: 4.507 mg/unit
- ESD Rating of Class 3 (> 16 kV) per Human Body Model
- Tight Tolerance  $V_Z$
- SZ Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q101 Qualified and PPAP Capable
- These Devices are Pb-Free, Halogen Free/BFR Free and are RoHS Compliant\*

#### Mechanical Characteristics:

**CASE:** Void-free, transfer-molded plastic

**FINISH:** All external surfaces are corrosion resistant

**MAXIMUM CASE TEMPERATURE FOR SOLDERING PURPOSES:**

260°C for 10 Seconds

**LEADS:** Plated with Pb-Sn or Sn only (Pb-Free)

**POLARITY:** Cathode indicated by polarity band

**FLAMMABILITY RATING:** UL 94 V-0

**MOUNTING POSITION:** Any




ON Semiconductor®

<http://onsemi.com>



SOD-323  
CASE 477  
STYLE 1



#### MARKING DIAGRAM



XX = Specific Device Code  
M = Date Code\*  
▪ = Pb-Free Package

(Note: Microdot may be in either location)

\*Date Code orientation may vary depending upon manufacturing location.

#### ORDERING INFORMATION

Device	Package	Shipping†
MM3ZxxxST1G	SOD-323 (Pb-Free)	3,000 / Tape & Reel
SZMM3ZxxxST1G	SOD-323 (Pb-Free)	3,000 / Tape & Reel
MM3ZxxxST3G	SOD-323 (Pb-Free)	10,000 / Tape & Reel

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

#### DEVICE MARKING INFORMATION

See specific marking information in the device marking column of the Electrical Characteristics table on page 3 of this data sheet.

\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

## MM3ZxxxST1G Series, SZMM3ZxxxST1G Series

### MAXIMUM RATINGS

Rating	Symbol	Max	Unit
Total Device Dissipation FR-4 Board, (Note 1) @ $T_A = 25^\circ\text{C}$ Derate above $25^\circ\text{C}$	$P_D$	300 2.4	mW mW/ $^\circ\text{C}$
Thermal Resistance from Junction-to-Ambient	$R_{\theta JA}$	416	$^\circ\text{C}/\text{W}$
Junction and Storage Temperature Range	$T_J, T_{stg}$	-65 to +150	$^\circ\text{C}$

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.


- FR-4 printed circuit board, single-sided copper, mounting pad  $1\text{ cm}^2$ .

### ELECTRICAL CHARACTERISTICS

( $T_A = 25^\circ\text{C}$  unless otherwise noted,

$V_F = 0.9\text{ V}$  Max. @  $I_F = 10\text{ mA}$  for all types)

Symbol	Parameter
$V_Z$	Reverse Zener Voltage @ $I_{ZT}$
$I_{ZT}$	Reverse Current
$Z_{ZT}$	Maximum Zener Impedance @ $I_{ZT}$
$I_{ZK}$	Reverse Current
$Z_{ZK}$	Maximum Zener Impedance @ $I_{ZK}$
$I_R$	Reverse Leakage Current @ $V_R$
$V_R$	Reverse Voltage
$I_F$	Forward Current
$V_F$	Forward Voltage @ $I_F$
$\Theta V_Z$	Maximum Temperature Coefficient of $V_Z$
C	Max. Capacitance @ $V_R = 0$ and $f = 1\text{ MHz}$

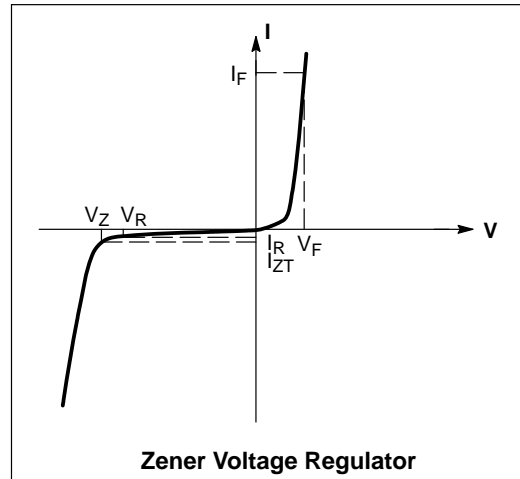

## MM3ZxxxST1G Series, SZMM3ZxxxST1G Series

**ELECTRICAL CHARACTERISTICS** ( $V_F = 0.9 \text{ Max}$  @  $I_F = 10 \text{ mA}$  for all types)

Device*	Device Marking	Test Current $I_{zt}$ mA	Zener Voltage VZ		$Z_{ZK} I_Z = 0.5 \text{ mA } \Omega \text{ Max}$	$Z_{ZT} I_Z = I_{ZT} @ 10\% \text{ Mod } \Omega \text{ Max}$	Max IR @ VR		$dV_Z/dt$ (mV/k) @ $I_{ZT1} = 5 \text{ mA}$		C pF Max @ $V_R = 0$ $f = 1 \text{ MHz}$
			Min	Max			$\mu\text{A}$	V	Min	Max	
MM3Z2V4ST1G	T2	5.0	2.29	2.51	1000	100	50	1.0	-3.5	0	450
MM3Z2V7ST1G	T3	5.0	2.59	2.81	1000	100	20	1.0	-3.5	0	450
MM3Z3V0ST1G	T4	5.0	2.90	3.11	1000	100	10	1.0	-3.5	0	450
MM3Z3V3ST1G	T5	5.0	3.32	3.53	1000	95	5.0	1.0	-3.5	0	450
MM3Z3V6ST1G	T6	5.0	3.49	3.71	1000	90	5.0	1.0	-3.5	0	450
MM3Z3V9ST1G	T7	5.0	3.89	4.16	1000	90	3.0	1.0	-3.5	-2.5	450
MM3Z4V3ST1G	T8	5.0	4.17	4.43	1000	90	3.0	1.0	-3.5	0	450
MM3Z4V7ST1G	T9	5.0	4.55	4.75	800	80	3.0	2.0	-3.5	0.2	260
MM3Z5V1ST1G	TA	5.0	4.98	5.2	500	60	2.0	2.0	-2.7	1.2	225
MM3Z5V6ST1G	TC	5.0	5.49	5.73	200	40	1.0	2.0	-2.0	2.5	200
MM3Z6V2ST1G	TE	5.0	6.06	6.33	100	10	3.0	4.0	0.4	3.7	185
MM3Z6V8ST1G	TF	5.0	6.65	6.93	160	15	2.0	4.0	1.2	4.5	155
MM3Z7V5ST1G	TG	5.0	7.28	7.6	160	15	1.0	5.0	2.5	5.3	140
MM3Z8V2ST1G	TH	5.0	8.02	8.36	160	15	0.7	5.0	3.2	6.2	135
MM3Z9V1ST1G	TK	5.0	8.85	9.23	160	15	0.5	6.0	3.8	7.0	130
MM3Z10VST1G	WB	5.0	9.80	10.20	160	15	0.5	6.0	4.5	8.0	130
MM3Z11VST1G	WC	5.0	10.78	11.22	160	20	0.1	8.0	5.4	9.0	130
MM3Z12VST1G	TN	5.0	11.74	12.24	80	25	0.1	8.0	6.0	10	130
MM3Z13VST1G	TQ	5.0	12.91	13.49	160	30	0.1	8.0	7.0	11	120
MM3Z15VST1G	TP	5.0	14.34	14.98	80	40	0.1	11	8.8	12.7	130
MM3Z16VST1G	TU	5.0	15.85	16.51	80	40	0.05	11.2	10.4	14	105
MM3Z18VST1G	TW	5.0	17.56	18.35	80	45	0.05	12.6	12.4	16	100
MM3Z20VST1G	U8	5.0	19.60	20.40	100	55	0.05	14.0	14.4	18	85
MM3Z22VST1G	WP	5.0	21.54	22.47	100	55	0.05	15.4	16.4	20	85
MM3Z24VST1G	WT	5.0	23.72	24.78	120	70	0.05	16.8	18.4	22	80
MM3Z27VST1G	WQ	5.0	26.19	27.53	300	80	0.05	18.9	21.4	25.3	70
MM3Z30VST1G	WV	5.0	29.19	30.69	300	80	0.05	21.0	24.4	29.4	70
MM3Z33VST1G	WR	5.0	32.15	33.79	300	80	0.05	23.2	27.4	33.4	70
MM3Z36VST1G	WU	5.0	35.07	36.87	500	90	0.05	25.2	30.4	37.4	70
MM3Z39VST1G	WN	2.0	38.22	39.78	500	130	0.05	27.3	33.4	41.2	45

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

\*Include SZ-prefix devices where applicable.

# MM3ZxxxST1G Series, SZMM3ZxxxST1G Series

## TYPICAL CHARACTERISTICS

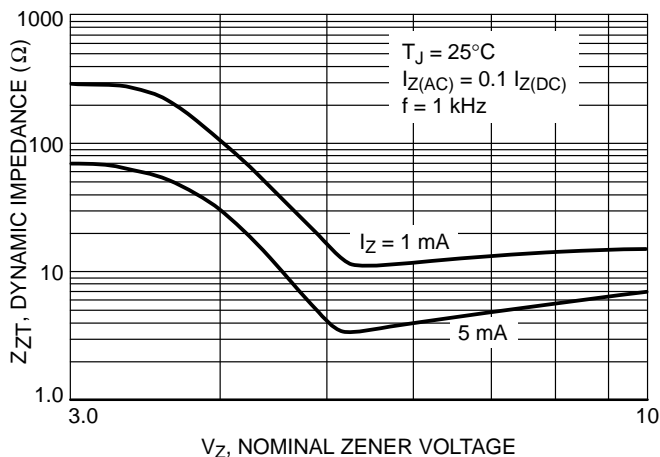


Figure 1. Effect of Zener Voltage on Zener Impedance

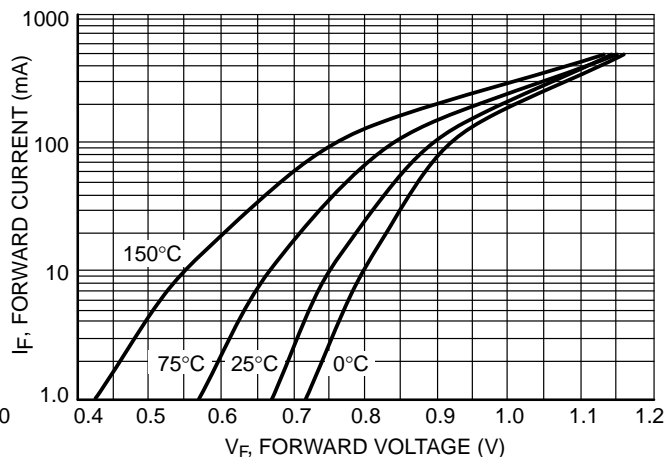


Figure 2. Typical Forward Voltage

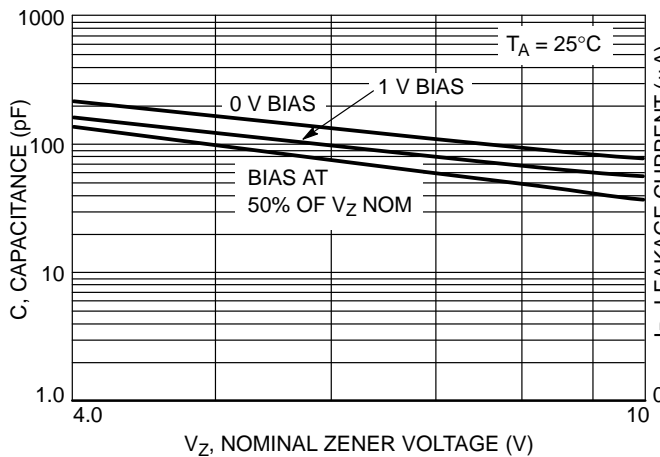


Figure 3. Typical Capacitance

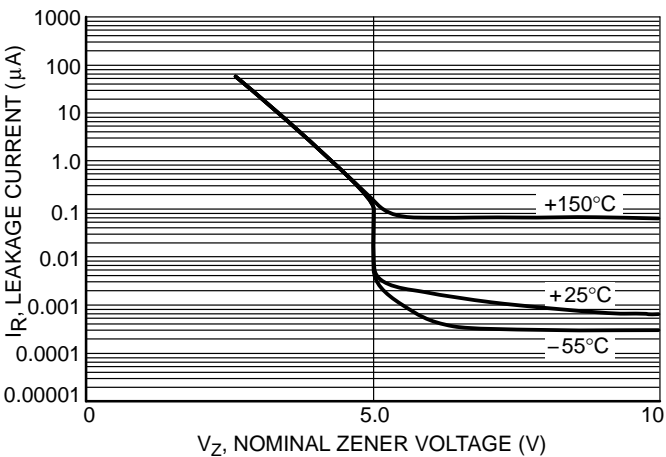


Figure 4. Typical Leakage Current

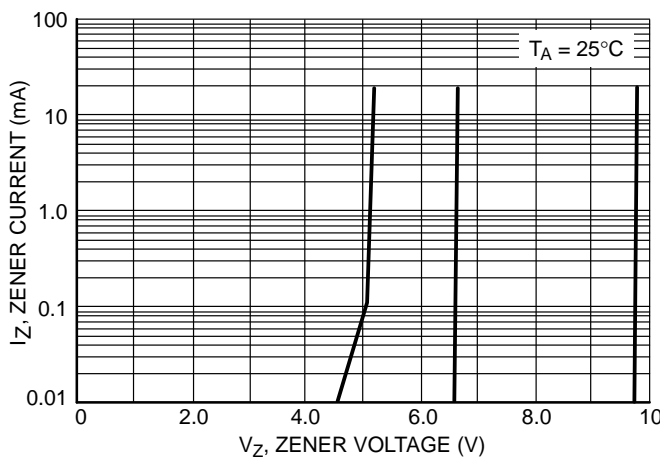


Figure 5. Zener Voltage versus Zener Current ( $V_Z$  Up to 9 V)



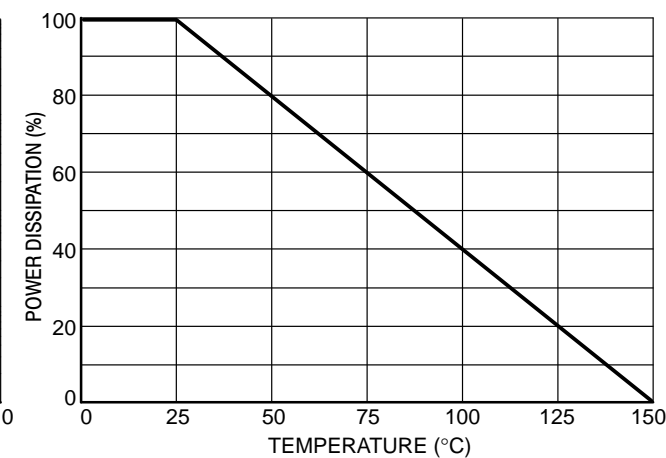


Figure 6. Steady State Power Derating

# MM3ZxxxST1G Series, SZMM3ZxxxST1G Series

## PACKAGE DIMENSIONS

SOD-323  
CASE 477-02  
ISSUE H

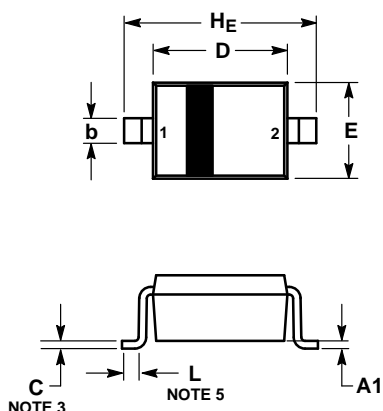


### NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETERS.
3. LEAD THICKNESS SPECIFIED PER L/F DRAWING WITH SOLDER PLATING.
4. DIMENSIONS A AND B DO NOT INCLUDE MOLD FLASH, PROTRUSIONS OR GATE BURRS.
5. DIMENSION L IS MEASURED FROM END OF RADIUS.

DIM	MILLIMETERS			INCHES		
	MIN	NOM	MAX	MIN	NOM	MAX
A	0.80	0.90	1.00	0.031	0.035	0.040
A1	0.00	0.05	0.10	0.000	0.002	0.004
A3	0.15 REF			0.006 REF		
b	0.25	0.32	0.4	0.010	0.012	0.016
C	0.089	0.12	0.177	0.003	0.005	0.007
D	1.60	1.70	1.80	0.062	0.066	0.070
E	1.15	1.25	1.35	0.045	0.049	0.053
L	0.08			0.003		
HE	2.30	2.50	2.70	0.090	0.098	0.105

STYLE 1:  
PIN 1. CATHODE  
2. ANODE

### SOLDERING FOOTPRINT\*

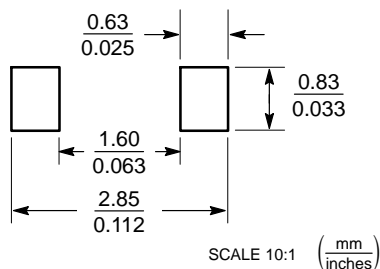

\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

ON Semiconductor and are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

### PUBLICATION ORDERING INFORMATION

**LITERATURE FULFILLMENT:**  
Literature Distribution Center for ON Semiconductor  
P.O. Box 5163, Denver, Colorado 80217 USA  
**Phone:** 303-675-2175 or 800-344-3860 Toll Free USA/Canada  
**Fax:** 303-675-2176 or 800-344-3867 Toll Free USA/Canada  
**Email:** orderlit@onsemi.com

**N. American Technical Support:** 800-282-9855 Toll Free  
USA/Canada  
**Europe, Middle East and Africa Technical Support:**  
Phone: 421 33 790 2910  
**Japan Customer Focus Center**  
Phone: 81-3-5817-1050

**ON Semiconductor Website:** [www.onsemi.com](http://www.onsemi.com)  
**Order Literature:** <http://www.onsemi.com/orderlit>

For additional information, please contact your local Sales Representative



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.