

# 74LVC1G99

Ultra-configurable multiple function gate; 3-state

Rev. 11 — 25 July 2019

Product data sheet

## 1. General description

The 74LVC1G99 provides a low voltage, ultra-configurable, multiple function gate with 3-state output. The device can be configured as one of several logic functions including, AND, OR, NAND, NOR, XOR, XNOR, inverter, buffer and MUX. No external components are required to configure the device as all inputs can be connected directly to  $V_{CC}$  or GND. The 3-state output is controlled by the output enable input ( $\overline{OE}$ ). A HIGH level at  $\overline{OE}$  causes the output (Y) to assume a high-impedance OFF-state. When  $\overline{OE}$  is LOW, the output state is determined by the signals applied to the Schmitt trigger inputs (A, B, C and D).

Due to the use of Schmitt trigger inputs the device is tolerant of slowly changing input signals, transforming them into sharply defined, jitter free output signals. By eliminating leakage current paths to  $V_{CC}$  and GND, the inputs and disabled output are also over-voltage tolerant, making the device suitable for mixed-voltage applications.

This device is fully specified for partial power-down applications using  $I_{OFF}$ . The  $I_{OFF}$  circuitry disables the output, preventing the damaging backflow current through the device when it is powered down.

The 74LVC1G99 is fully specified over the supply range from 1.65 V to 5.5 V.

## 2. Features and benefits

- Wide supply voltage range from 1.65 V to 5.5 V
- 5 V tolerant inputs for interfacing with 5 V logic
- High noise immunity
- Complies with JEDEC standard:
  - JESD8-7 (1.65 V to 1.95 V)
  - JESD8-5 (2.3 V to 2.7 V)
  - JESD8-B/JESD36 (2.7 V to 3.6 V)
- ESD protection:
  - HBM JESD22-A114F exceeds 2000 V
  - MM JESD22-A115-A exceeds 200 V
- $\pm 24$  mA output drive ( $V_{CC} = 3.0$  V)
- CMOS low power consumption
- Latch-up performance exceeds 250 mA
- Direct interface with TTL levels
- Inputs accept voltages up to 5 V
- Multiple package options
- Specified from  $-40$  °C to  $+85$  °C and  $-40$  °C to  $+125$  °C.

3. Ordering information

Table 1. Ordering information

| Type number | Package           |        |                                                                                             |          |
|-------------|-------------------|--------|---------------------------------------------------------------------------------------------|----------|
|             | Temperature range | Name   | Description                                                                                 | Version  |
| 74LVC1G99DP | -40 °C to +125 °C | TSSOP8 | plastic thin shrink small outline package; 8 leads; body width 3 mm; lead length 0.5 mm     | SOT505-2 |
| 74LVC1G99GT | -40 °C to +125 °C | XSON8  | plastic extremely thin small outline package; no leads; 8 terminals; body 1 × 1.95 × 0.5 mm | SOT833-1 |
| 74LVC1G99GF | -40 °C to +125 °C | XSON8  | extremely thin small outline package; no leads; 8 terminals; body 1.35 × 1 × 0.5 mm         | SOT1089  |
| 74LVC1G99GN | -40 °C to +125 °C | XSON8  | extremely thin small outline package; no leads; 8 terminals; body 1.2 × 1.0 × 0.35 mm       | SOT1116  |
| 74LVC1G99GS | -40 °C to +125 °C | XSON8  | extremely thin small outline package; no leads; 8 terminals; body 1.35 × 1.0 × 0.35 mm      | SOT1203  |


4. Marking

Table 2. Marking codes

| Type number | Marking code [1] |
|-------------|------------------|
| 74LVC1G99DP | V99              |
| 74LVC1G99GT | V99              |
| 74LVC1G99GF | YF               |
| 74LVC1G99GN | YF               |
| 74LVC1G99GS | YF               |

[1] The pin 1 indicator is located on the lower left corner of the device, below the marking code.

5. Functional diagram

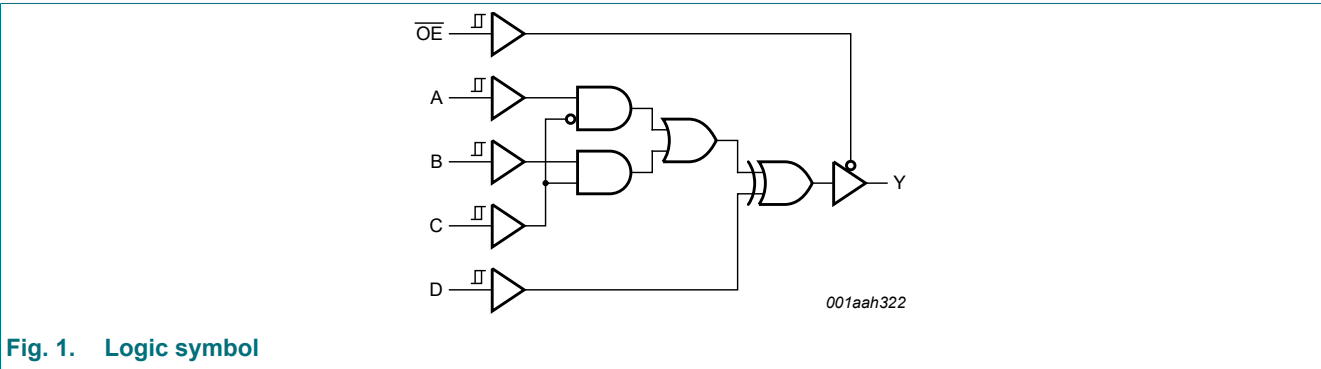

6. Pinning information

6.1. Pinning

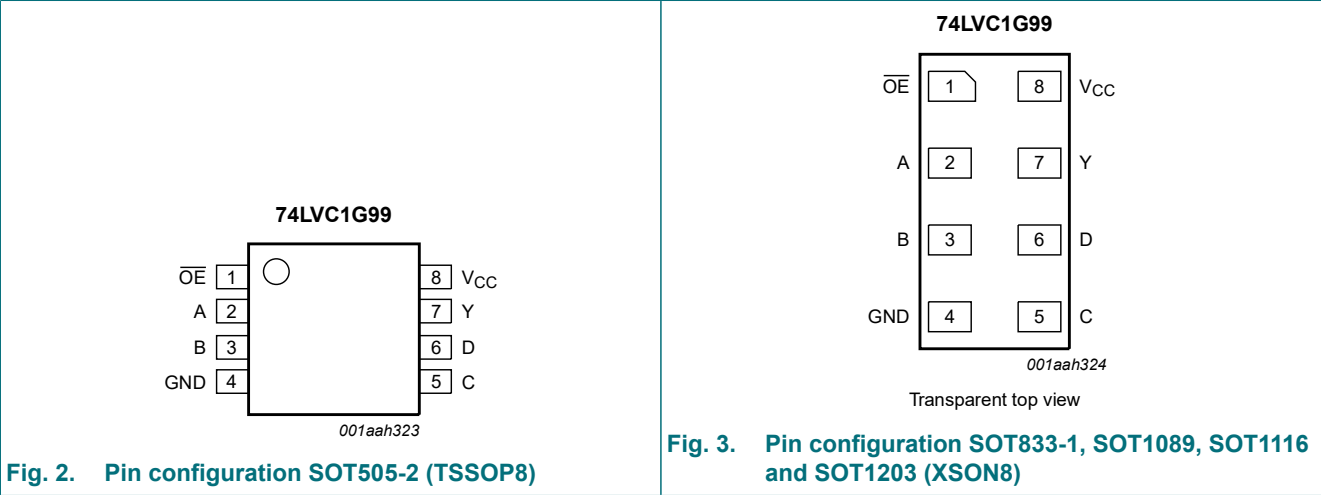


Fig. 2. Pin configuration SOT505-2 (TSSOP8)

Fig. 3. Pin configuration SOT833-1, SOT1089, SOT1116 and SOT1203 (XSON8)

6.2. Pin description

Table 3. Pin description

| Symbol          | Pin | Description                                      |
|-----------------|-----|--------------------------------------------------|
| OE              | 1   | output enable input $\overline{OE}$ (active LOW) |
| A               | 2   | data input                                       |
| B               | 3   | data input                                       |
| GND             | 4   | ground (0 V)                                     |
| C               | 5   | data input                                       |
| D               | 6   | data input                                       |
| Y               | 7   | data output                                      |
| V <sub>CC</sub> | 8   | supply voltage                                   |

## 7. Functional description

**Table 4. Function table**

*H = HIGH voltage level; L = LOW voltage level; X = don't care; Z = high-impedance OFF-state.*

| Input |   |   |   |   | Output |
|-------|---|---|---|---|--------|
| OE    | D | C | B | A | Y      |
| L     | L | L | L | L | L      |
| L     | L | L | L | H | H      |
| L     | L | L | H | L | L      |
| L     | L | L | H | H | H      |
| L     | L | H | L | L | L      |
| L     | L | H | L | H | L      |
| L     | L | H | H | L | H      |
| L     | L | H | H | H | H      |
| L     | H | L | L | L | H      |
| L     | H | L | L | H | L      |
| L     | H | L | H | L | H      |
| L     | H | L | H | H | L      |
| L     | H | H | L | L | H      |
| L     | H | H | L | H | H      |
| L     | H | H | H | L | L      |
| L     | H | H | H | H | L      |
| H     | X | X | X | X | Z      |

### 7.1. Logic configurations

**Table 5. Function selection table**

| Primary function                                  | Complementary function                        |
|---------------------------------------------------|-----------------------------------------------|
| 3-state buffer                                    |                                               |
| 3-state inverter                                  |                                               |
| 3-state 2-input multiplexer                       |                                               |
| 3-state 2-input multiplexer with inverting output |                                               |
| 3-state 2-input AND                               | 3-state 2-input NOR with two inverting inputs |
| 3-state 2-input AND with one inverting input      | 3-state 2-input NOR with one inverting input  |
| 3-state 2-input AND with two inverting inputs     | 3-state 2-input NOR                           |
| 3-state 2-input NAND                              | 3-state 2-input OR with two inverting inputs  |
| 3-state 2-input NAND with one inverting input     | 3-state 2-input OR with one inverting input   |
| 3-state 2-input NAND with two inverting inputs    | 3-state 2-input OR                            |
| 3-state 2-input XOR                               |                                               |
| 3-state 2-input XNOR                              | 3-state 2-input XOR with one inverting input  |

7.2. 3-state buffer functions available

Table 6. Function table

H = HIGH voltage level; L = LOW voltage level; See Fig. 4.

| Function       | Input |        |        |        |       |
|----------------|-------|--------|--------|--------|-------|
|                | OE    | A      | B      | C      | D     |
| 3-state buffer | L     | input  | H or L | L      | L     |
|                | L     | H or L | input  | H      | L     |
|                | L     | L      | H      | input  | L     |
|                | L     | H      | L      | input  | H     |
|                | L     | H      | H or L | L      | input |
|                | L     | H or L | L      | H      | input |
|                | L     | L      | L      | H or L | input |




Fig. 4. 3-state buffer function

7.3. 3-state inverter functions available

Table 7. Function table

H = HIGH voltage level; L = LOW voltage level; X = don't care. See Fig. 5.

| Function         | Input |        |        |        |       |
|------------------|-------|--------|--------|--------|-------|
|                  | OE    | A      | B      | C      | D     |
| 3-state inverter | L     | input  | H or L | L      | H     |
|                  | L     | X      | input  | H      | H     |
|                  | L     | L      | H      | input  | H     |
|                  | L     | H      | L      | input  | L     |
|                  | L     | H      | H or L | L      | input |
|                  | L     | H or L | H      | H      | input |
|                  | L     | H      | H      | H or L | input |





Fig. 5. 3-state inverter function

7.4. 3-state multiplexer functions available

Table 8. Function table

H = HIGH voltage level; L = LOW voltage level. See Fig. 6.

| Function                    | Input |         |         |                    |   |
|-----------------------------|-------|---------|---------|--------------------|---|
|                             | OE    | A       | B       | C                  | D |
| 3-state 2-input multiplexer | L     | input 1 | input 2 | input 1 or input 2 | L |
|                             | L     | input 2 | input 1 | input 2 or input 1 | L |
|                             | L     | input 1 | input 2 | input 1 or input 2 | H |
|                             | L     | input 2 | input 1 | input 2 or input 1 | H |

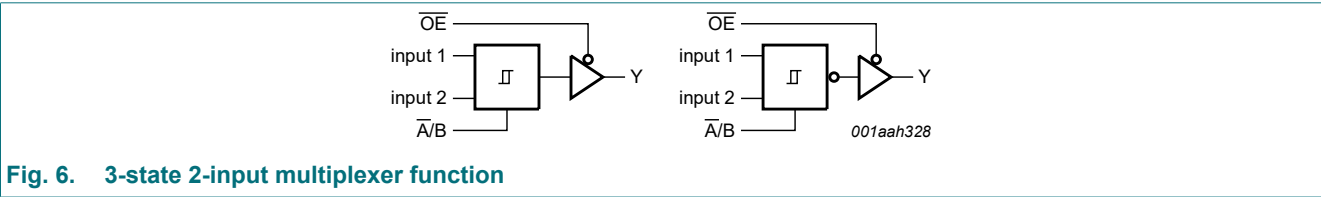

7.5. 3-state AND/NOR functions available

Table 9. Function table

H = HIGH voltage level; L = LOW voltage level. See Fig. 7.

| Number of inputs | Function    |             | Input |   |         |         |   |
|------------------|-------------|-------------|-------|---|---------|---------|---|
|                  | AND/NAND    | OR/NOR      | OE    | A | B       | C       | D |
| 2                | 3-state AND | 3-state NOR | L     | L | input 1 | input 2 | L |
| 2                | 3-state AND | 3-state NOR | L     | L | input 2 | input 1 | L |

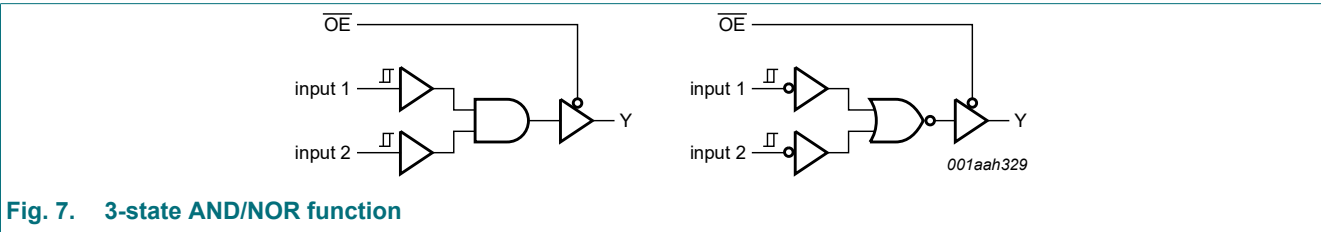


Table 10. Function table

H = HIGH voltage level; L = LOW voltage level. See Fig. 8.

| Number of inputs | Function    |             | Input |         |         |         |   |
|------------------|-------------|-------------|-------|---------|---------|---------|---|
|                  | AND/NAND    | OR/NOR      | OE    | A       | B       | C       | D |
| 2                | 3-state AND | 3-state NOR | L     | input 2 | L       | input 1 | L |
| 2                | 3-state AND | 3-state NOR | L     | H       | input 1 | input 2 | H |

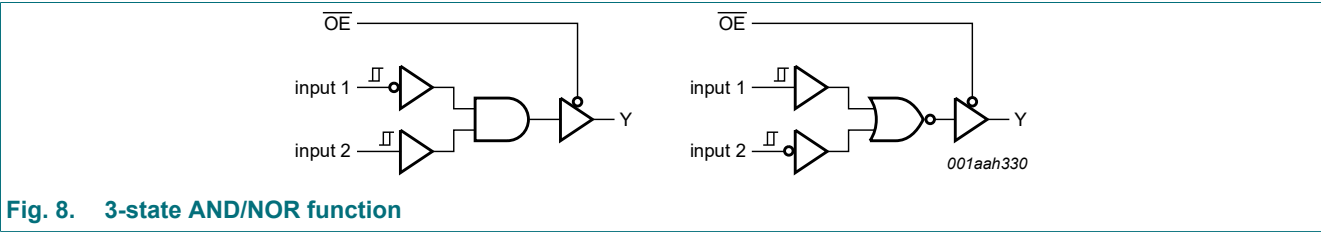


Table 11. Function table

H = HIGH voltage level; L = LOW voltage level. See Fig. 9.

| Number of inputs | Function    |             | Input |         |         |         |   |
|------------------|-------------|-------------|-------|---------|---------|---------|---|
|                  | AND/NAND    | OR/NOR      | OE    | A       | B       | C       | D |
| 2                | 3-state AND | 3-state NOR | L     | input 1 | L       | input 2 | L |
| 2                | 3-state AND | 3-state NOR | L     | H       | input 2 | input 1 | H |


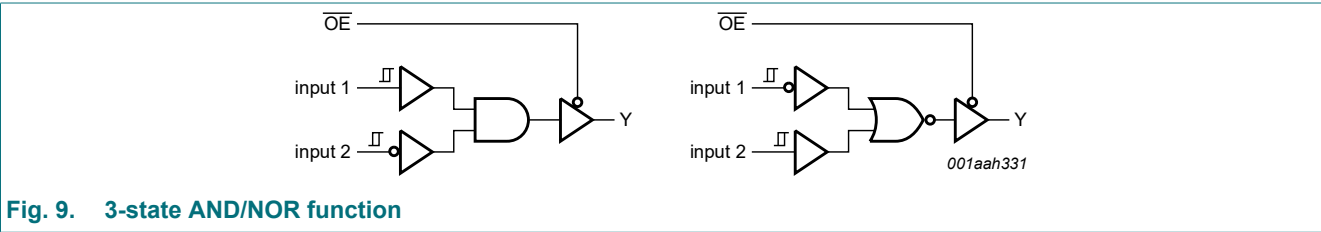


Table 12. Function table

H = HIGH voltage level; L = LOW voltage level. See Fig. 10.

| Number of inputs | Function    |             | Input |         |   |         |   |
|------------------|-------------|-------------|-------|---------|---|---------|---|
|                  | AND/NAND    | OR/NOR      | OE    | A       | B | C       | D |
| 2                | 3-state AND | 3-state NOR | L     | input 1 | H | input 2 | H |
| 2                | 3-state AND | 3-state NOR | L     | input 2 | H | input 1 | H |

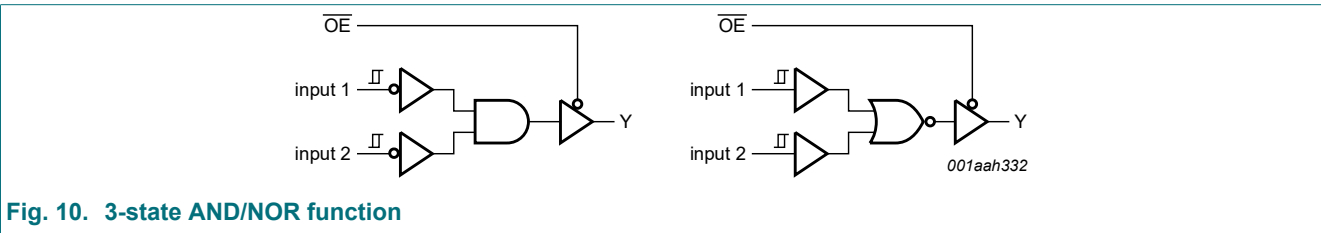

7.6. 3-state NAND/OR functions available

Table 13. Function table

H = HIGH voltage level; L = LOW voltage level. See Fig. 11.

| Number of inputs | Function     |            | Input |   |         |         |   |
|------------------|--------------|------------|-------|---|---------|---------|---|
|                  | AND/NAND     | OR/NOR     | OE    | A | B       | C       | D |
| 2                | 3-state NAND | 3-state OR | L     | L | input 1 | input 2 | H |
| 2                | 3-state NAND | 3-state OR | L     | L | input 2 | input 1 | H |

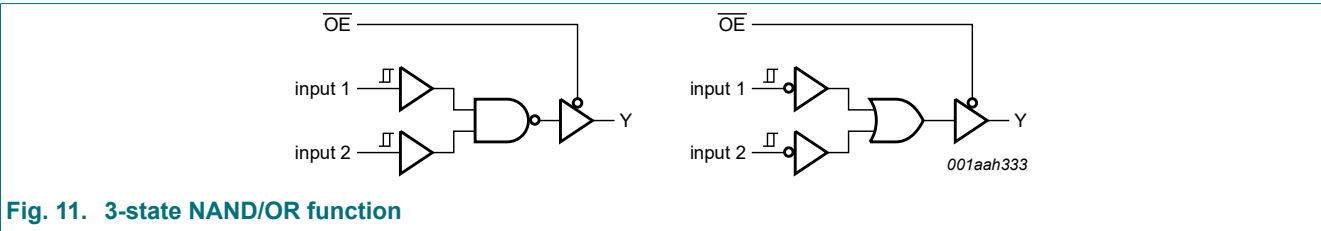


Table 14. Function table

H = HIGH voltage level; L = LOW voltage level. See Fig. 12.

| Number of inputs | Function     |            | Input |         |         |         |   |
|------------------|--------------|------------|-------|---------|---------|---------|---|
|                  | AND/NAND     | OR/NOR     | OE    | A       | B       | C       | D |
| 2                | 3-state NAND | 3-state OR | L     | input 2 | L       | input 1 | H |
| 2                | 3-state NAND | 3-state OR | L     | H       | input 1 | input 2 | L |

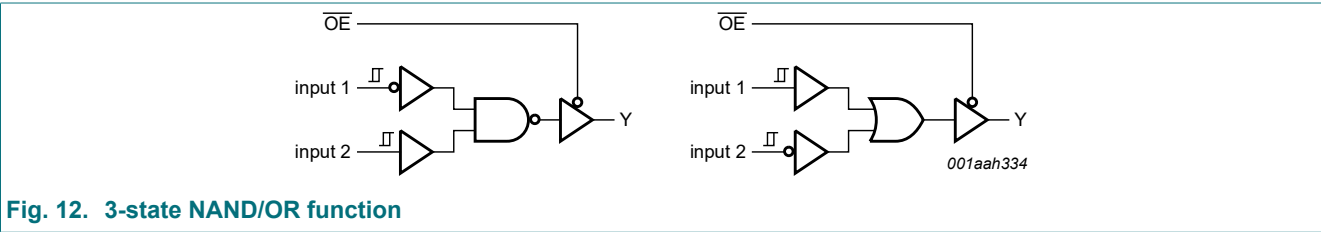


Table 15. Function table

H = HIGH voltage level; L = LOW voltage level. See Fig. 13.

| Number of inputs | Function     |            | Input |         |         |         |   |
|------------------|--------------|------------|-------|---------|---------|---------|---|
|                  | AND/NAND     | OR/NOR     | OE    | A       | B       | C       | D |
| 2                | 3-state NAND | 3-state OR | L     | input 1 | L       | input 2 | H |
| 2                | 3-state NAND | 3-state OR | L     | H       | input 2 | input 1 | L |


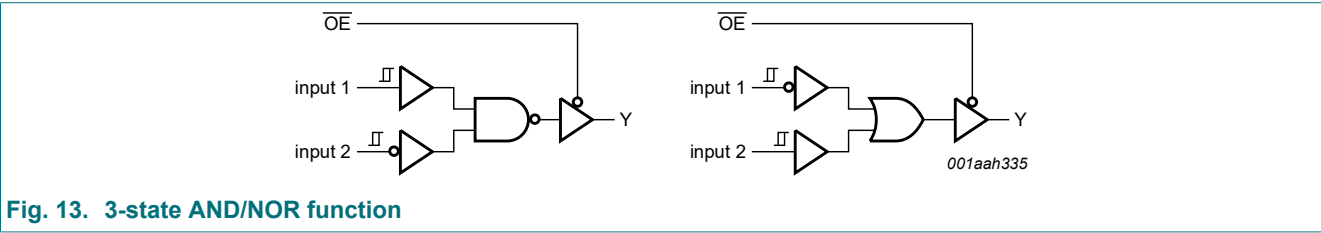


Table 16. Function table

H = HIGH voltage level; L = LOW voltage level. See Fig. 14.

| Number of inputs | Function     |            | Input |         |   |         |   |
|------------------|--------------|------------|-------|---------|---|---------|---|
|                  | AND/NAND     | OR/NOR     | OE    | A       | B | C       | D |
| 2                | 3-state NAND | 3-state OR | L     | input 1 | H | input 2 | L |
| 2                | 3-state NAND | 3-state OR | L     | input 2 | H | input 1 | L |

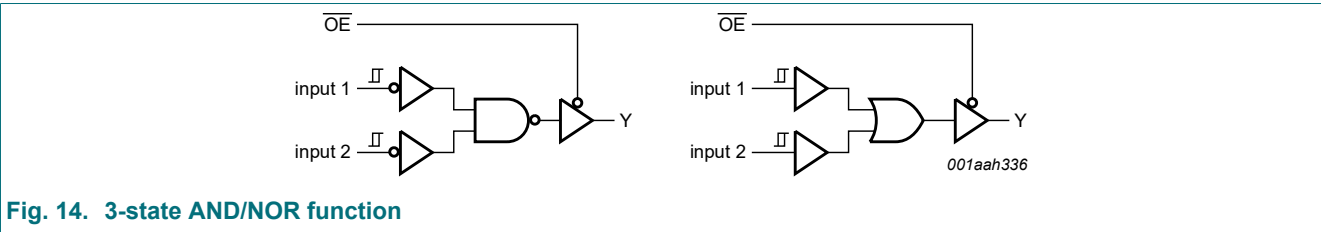

7.7. 3-state XOR/XNOR functions available

Table 17. Function table

H = HIGH voltage level; L = LOW voltage level. See Fig. 15.

| Function    | Input |         |         |         |         |
|-------------|-------|---------|---------|---------|---------|
|             | OE    | A       | B       | C       | D       |
| 3-state XOR | L     | input 1 | H or L  | L       | input 2 |
|             | L     | input 2 | H or L  | L       | input 1 |
|             | L     | H or L  | input 1 | H       | input 2 |
|             | L     | H or L  | input 2 | H       | input 1 |
|             | L     | L       | H       | input 1 | input 2 |
|             | L     | L       | H       | input 2 | input 1 |

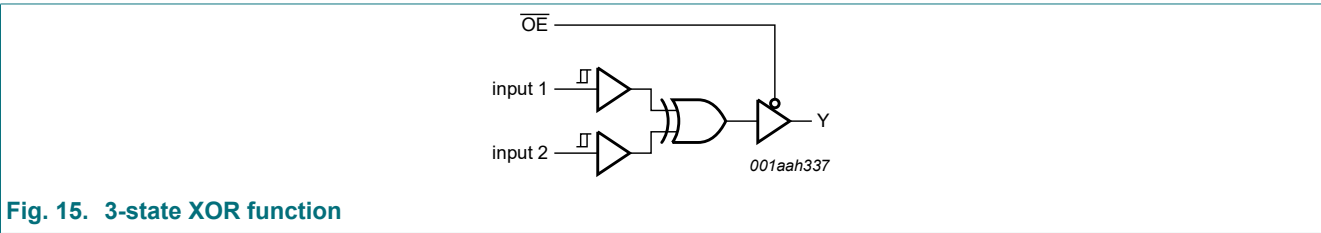


Table 18. Function table

H = HIGH voltage level; L = LOW voltage level. See Fig. 16.

| Function    | Input |   |   |         |         |
|-------------|-------|---|---|---------|---------|
|             | OE    | A | B | C       | D       |
| 3-state XOR | L     | H | L | input 1 | input 2 |

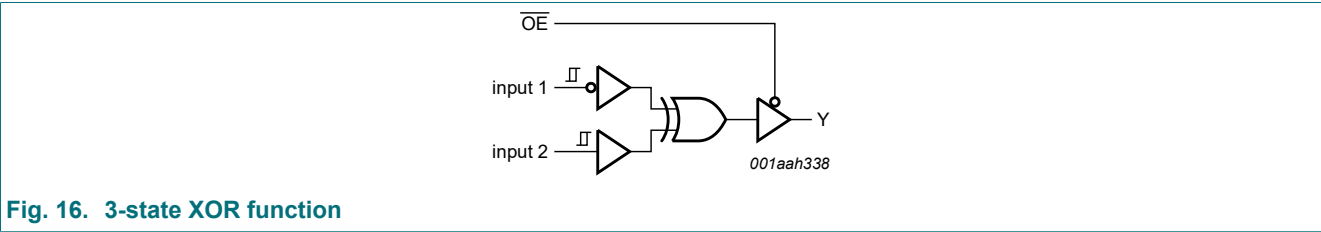


Table 19. Function table

H = HIGH voltage level; L = LOW voltage level. See Fig. 17.

| Function    | Input |   |   |         |         |
|-------------|-------|---|---|---------|---------|
|             | OE    | A | B | C       | D       |
| 3-state XOR | L     | H | L | input 1 | input 2 |

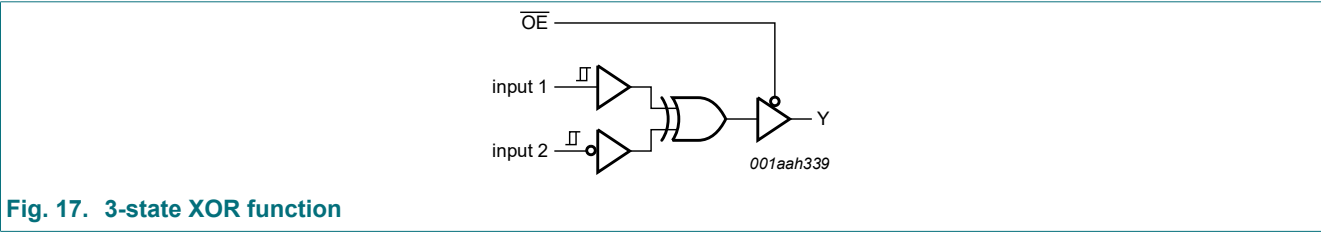


Table 20. Function table

H = HIGH voltage level; L = LOW voltage level. See Fig. 18.

| Function     | Input |   |   |         |         |
|--------------|-------|---|---|---------|---------|
|              | OE    | A | B | C       | D       |
| 3-state XNOR | L     | H | L | input 1 | input 2 |
|              | L     | H | L | input 2 | input 1 |




Fig. 18. 3-state XNOR function

## 8. Limiting values

Table 21. Limiting values

In accordance with the Absolute Maximum Rating System (IEC 60134). Voltages are referenced to GND (ground = 0 V).

| Symbol    | Parameter               | Conditions                      | Min  | Max            | Unit |
|-----------|-------------------------|---------------------------------|------|----------------|------|
| $V_{CC}$  | supply voltage          |                                 | -0.5 | +6.5           | V    |
| $I_{IK}$  | input clamping current  | $V_I < 0$ V                     | -50  | -              | mA   |
| $V_I$     | input voltage           |                                 | -0.5 | +6.5           | V    |
| $I_{OK}$  | output clamping current | $V_O > V_{CC}$ or $V_O < 0$ V   | -    | $\pm 50$       | mA   |
| $V_O$     | output voltage          | Active mode                     | -0.5 | $V_{CC} + 0.5$ | V    |
|           |                         | Power-down mode; $V_{CC} = 0$ V | -0.5 | +6.5           | V    |
| $I_O$     | output current          | $V_O = 0$ V to $V_{CC}$         | -    | $\pm 50$       | mA   |
| $I_{CC}$  | supply current          |                                 | -    | 100            | mA   |
| $I_{GND}$ | ground current          |                                 | -100 | -              | mA   |
| $P_{tot}$ | total power dissipation | $T_{amb} = -40$ °C to $+125$ °C | -    | 250            | mW   |
| $T_{stg}$ | storage temperature     |                                 | -65  | +150           | °C   |

[1] The input and output voltage ratings may be exceeded if the input and output current ratings are observed.

[2] For SOT505-2 (TSSOP8) packages:  $P_{tot}$  derates linearly with 4.6 mW/K above 96 °C.

For SOT833-1 (XSON8) packages:  $P_{tot}$  derates linearly with 3.1 mW/K above 68 °C.

For SOT1089 (XSON8) packages:  $P_{tot}$  derates linearly with 4.0 mW/K above 88 °C.

For SOT1116 (XSON8) packages:  $P_{tot}$  derates linearly with 4.2 mW/K above 90 °C.

For SOT1203 (XSON8) packages:  $P_{tot}$  derates linearly with 3.6 mW/K above 81 °C.

## 9. Recommended operating conditions

Table 22. Operating conditions

| Symbol              | Parameter                           | Conditions                      | Min  | Max      | Unit |
|---------------------|-------------------------------------|---------------------------------|------|----------|------|
| $V_{CC}$            | supply voltage                      |                                 | 1.65 | 5.5      | V    |
| $V_I$               | input voltage                       |                                 | 0    | 5.5      | V    |
| $V_O$               | output voltage                      | Active mode                     | 0    | $V_{CC}$ | V    |
|                     |                                     | Power-down mode; $V_{CC} = 0$ V | 0    | 5.5      | V    |
| $T_{amb}$           | ambient temperature                 |                                 | -40  | +125     | °C   |
| $\Delta t/\Delta V$ | input transition rise and fall rate | $V_{CC} = 1.65$ V to 2.7 V      | -    | 20       | ns/V |
|                     |                                     | $V_{CC} = 2.7$ V to 4.5 V       | -    | 10       | ns/V |
|                     |                                     | $V_{CC} = 4.5$ V to 5.5 V       | -    | 5        | ns/V |

## 10. Static characteristics

Table 23. Static characteristics

At recommended operating conditions. Voltages are referenced to GND (ground = 0 V).

| Symbol    | Parameter                 | Conditions                                                             | -40 °C to +85 °C |           |         | -40 °C to +125 °C |         | Unit    |
|-----------|---------------------------|------------------------------------------------------------------------|------------------|-----------|---------|-------------------|---------|---------|
|           |                           |                                                                        | Min              | Typ [1]   | Max     | Min               | Max     |         |
| $V_{OH}$  | HIGH-level output voltage | $V_I = V_{T+}$ or $V_{T-}$                                             |                  |           |         |                   |         |         |
|           |                           | $I_O = -100$ $\mu$ A;<br>$V_{CC} = 1.65$ V to 5.5 V                    | $V_{CC} - 0.1$   | -         | -       | $V_{CC} - 0.1$    | -       | V       |
|           |                           | $I_O = -4$ mA; $V_{CC} = 1.65$ V                                       | 1.2              | -         | -       | 0.95              | -       | V       |
|           |                           | $I_O = -8$ mA; $V_{CC} = 2.3$ V                                        | 1.9              | -         | -       | 1.7               | -       | V       |
|           |                           | $I_O = -12$ mA; $V_{CC} = 2.7$ V                                       | 2.2              | -         | -       | 1.9               | -       | V       |
|           |                           | $I_O = -24$ mA; $V_{CC} = 3.0$ V                                       | 2.3              | -         | -       | 2.0               | -       | V       |
|           |                           | $I_O = -32$ mA; $V_{CC} = 4.5$ V                                       | 3.8              | -         | -       | 3.4               | -       | V       |
| $V_{OL}$  | LOW-level output voltage  | $V_I = V_{T+}$ or $V_{T-}$                                             |                  |           |         |                   |         |         |
|           |                           | $I_O = 100$ $\mu$ A;<br>$V_{CC} = 1.65$ V to 5.5 V                     | -                | -         | 0.1     | -                 | 0.1     | V       |
|           |                           | $I_O = 4$ mA; $V_{CC} = 1.65$ V                                        | -                | -         | 0.45    | -                 | 0.70    | V       |
|           |                           | $I_O = 8$ mA; $V_{CC} = 2.3$ V                                         | -                | -         | 0.3     | -                 | 0.45    | V       |
|           |                           | $I_O = 12$ mA; $V_{CC} = 2.7$ V                                        | -                | -         | 0.4     | -                 | 0.60    | V       |
|           |                           | $I_O = 24$ mA; $V_{CC} = 3.0$ V                                        | -                | -         | 0.55    | -                 | 0.80    | V       |
|           |                           | $I_O = 32$ mA; $V_{CC} = 4.5$ V                                        | -                | -         | 0.55    | -                 | 0.80    | V       |
| $I_I$     | input leakage current     | $V_{CC} = 0$ V to 5.5 V;<br>$V_I = 5.5$ V or GND                       | -                | $\pm 0.1$ | $\pm 1$ | -                 | $\pm 1$ | $\mu$ A |
| $I_{OZ}$  | OFF-state output current  | $V_{CC} = 3.6$ V; $V_I = V_{IH}$ or $V_{IL}$ ;<br>$V_O = 5.5$ V or GND | -                | $\pm 0.1$ | $\pm 2$ | -                 | $\pm 2$ | $\mu$ A |
| $I_{OFF}$ | power-off leakage current | $V_{CC} = 0$ V; $V_I$ or $V_O = 5.5$ V                                 | -                | $\pm 0.1$ | $\pm 2$ | -                 | $\pm 2$ | $\mu$ A |

| Symbol          | Parameter                 | Conditions                                                                                                | -40 °C to +85 °C |         |     | -40 °C to +125 °C |     | Unit          |
|-----------------|---------------------------|-----------------------------------------------------------------------------------------------------------|------------------|---------|-----|-------------------|-----|---------------|
|                 |                           |                                                                                                           | Min              | Typ [1] | Max | Min               | Max |               |
| $I_{CC}$        | supply current            | $V_{CC} = 1.65 \text{ V to } 5.5 \text{ V};$<br>$V_I = 5.5 \text{ V or GND}; I_O = 0 \text{ A}$           | -                | 0.1     | 4   | -                 | 4   | $\mu\text{A}$ |
| $\Delta I_{CC}$ | additional supply current | per pin; $V_{CC} = 2.3 \text{ V to } 5.5 \text{ V};$<br>$V_I = V_{CC} - 0.6 \text{ V}; I_O = 0 \text{ A}$ | -                | 5       | 500 | -                 | 500 | $\mu\text{A}$ |
| $C_I$           | input capacitance         | $V_{CC} = 3.3 \text{ V}; V_I = \text{GND to } V_{CC}$                                                     | -                | 2.5     | -   | -                 | -   | pF            |

[1] All typical values are measured at  $V_{CC} = 3.3 \text{ V}$  and  $T_{amb} = 25 \text{ °C}$ .

## 10.1. Transfer characteristics




**Table 24. Transfer characteristics**

Voltages are referenced to GND (ground = 0 V; for test circuit see [Fig. 26](#))

| Symbol   | Parameter                        | Conditions                                                                                                                                                     | -40 °C to +85 °C |         |      | -40 °C to +125 °C |      | Unit |
|----------|----------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------|---------|------|-------------------|------|------|
|          |                                  |                                                                                                                                                                | Min              | Typ [1] | Max  | Min               | Max  |      |
| $V_{T+}$ | positive-going threshold voltage | see <a href="#">Fig. 19</a> , <a href="#">Fig. 20</a> , <a href="#">Fig. 21</a> ,<br><a href="#">Fig. 22</a> and <a href="#">Fig. 23</a>                       |                  |         |      |                   |      |      |
|          |                                  | $V_{CC} = 1.8 \text{ V}$                                                                                                                                       | 0.70             | 1.02    | 1.20 | 0.67              | 1.20 | V    |
|          |                                  | $V_{CC} = 2.3 \text{ V}$                                                                                                                                       | 1.11             | 1.42    | 1.60 | 1.08              | 1.60 | V    |
|          |                                  | $V_{CC} = 3.0 \text{ V}$                                                                                                                                       | 1.50             | 1.79    | 2.00 | 1.47              | 2.00 | V    |
|          |                                  | $V_{CC} = 4.5 \text{ V}$                                                                                                                                       | 2.16             | 2.52    | 2.74 | 2.13              | 2.74 | V    |
|          |                                  | $V_{CC} = 5.5 \text{ V}$                                                                                                                                       | 2.61             | 2.99    | 3.33 | 2.58              | 3.33 | V    |
| $V_{T-}$ | negative-going threshold voltage | see <a href="#">Fig. 19</a> , <a href="#">Fig. 20</a> , <a href="#">Fig. 21</a> ,<br><a href="#">Fig. 22</a> and <a href="#">Fig. 23</a>                       |                  |         |      |                   |      |      |
|          |                                  | $V_{CC} = 1.8 \text{ V}$                                                                                                                                       | 0.30             | 0.53    | 0.72 | 0.30              | 0.75 | V    |
|          |                                  | $V_{CC} = 2.3 \text{ V}$                                                                                                                                       | 0.58             | 0.77    | 1.00 | 0.58              | 1.03 | V    |
|          |                                  | $V_{CC} = 3.0 \text{ V}$                                                                                                                                       | 0.80             | 1.04    | 1.30 | 0.80              | 1.33 | V    |
|          |                                  | $V_{CC} = 4.5 \text{ V}$                                                                                                                                       | 1.21             | 1.55    | 1.90 | 1.21              | 1.93 | V    |
|          |                                  | $V_{CC} = 5.5 \text{ V}$                                                                                                                                       | 1.45             | 1.86    | 2.29 | 1.45              | 2.32 | V    |
| $V_H$    | hysteresis voltage               | $(V_{T+} - V_{T-})$ ; see <a href="#">Fig. 19</a> , <a href="#">Fig. 20</a> ,<br><a href="#">Fig. 21</a> , <a href="#">Fig. 22</a> and <a href="#">Fig. 23</a> |                  |         |      |                   |      |      |
|          |                                  | $V_{CC} = 1.8 \text{ V}$                                                                                                                                       | 0.30             | 0.48    | 0.62 | 0.23              | 0.62 | V    |
|          |                                  | $V_{CC} = 2.3 \text{ V}$                                                                                                                                       | 0.40             | 0.64    | 0.80 | 0.34              | 0.80 | V    |
|          |                                  | $V_{CC} = 3.0 \text{ V}$                                                                                                                                       | 0.50             | 0.75    | 1.00 | 0.44              | 1.00 | V    |
|          |                                  | $V_{CC} = 4.5 \text{ V}$                                                                                                                                       | 0.71             | 0.97    | 1.20 | 0.65              | 1.20 | V    |
|          |                                  | $V_{CC} = 5.5 \text{ V}$                                                                                                                                       | 0.71             | 1.13    | 1.40 | 0.65              | 1.40 | V    |

[1] All typical values are measured at  $T_{amb} = 25 \text{ °C}$

10.2. Waveforms transfer characteristics

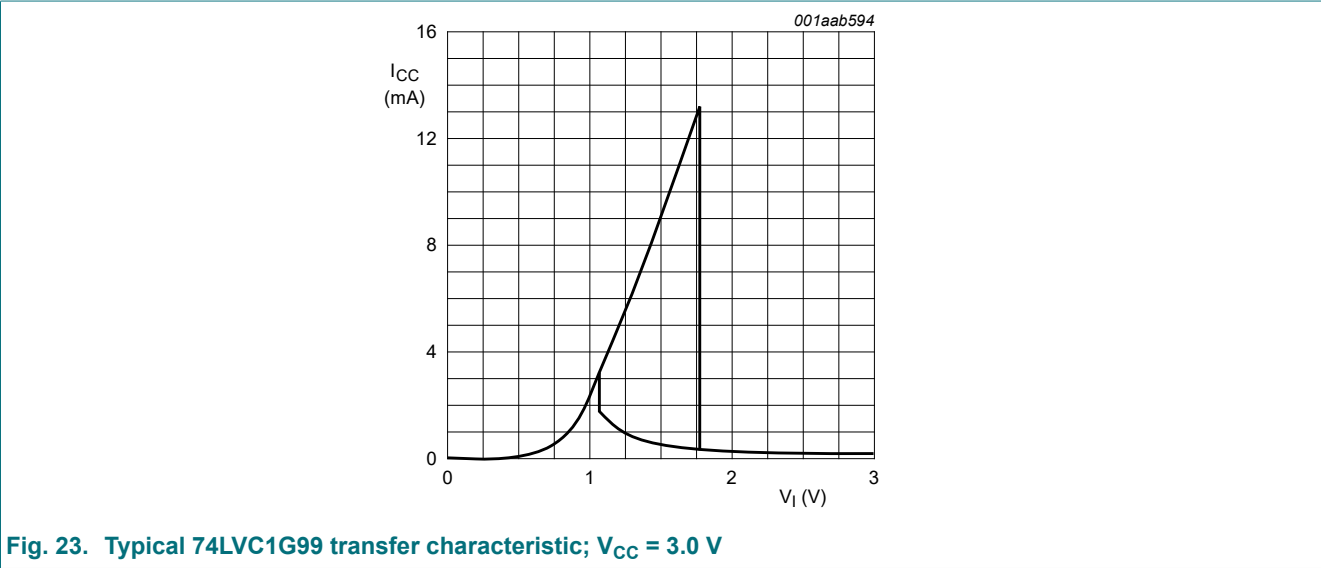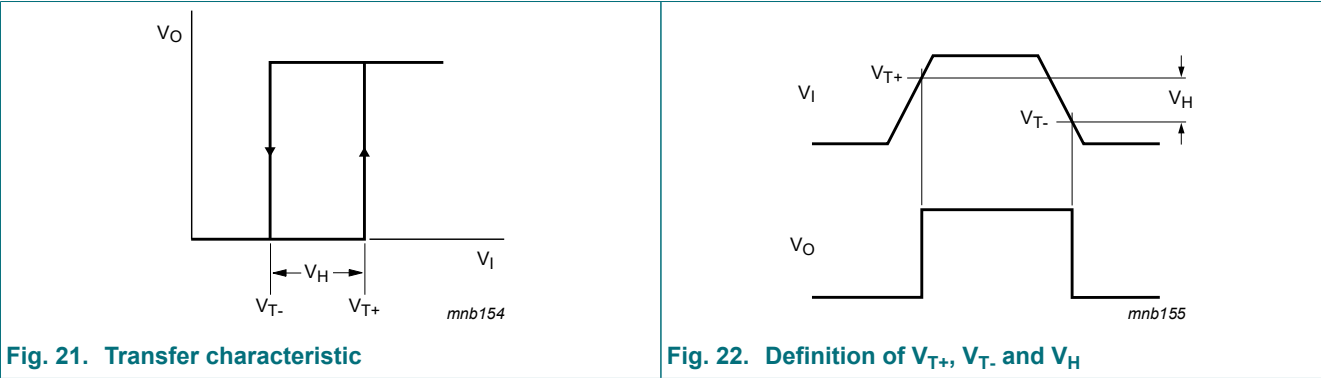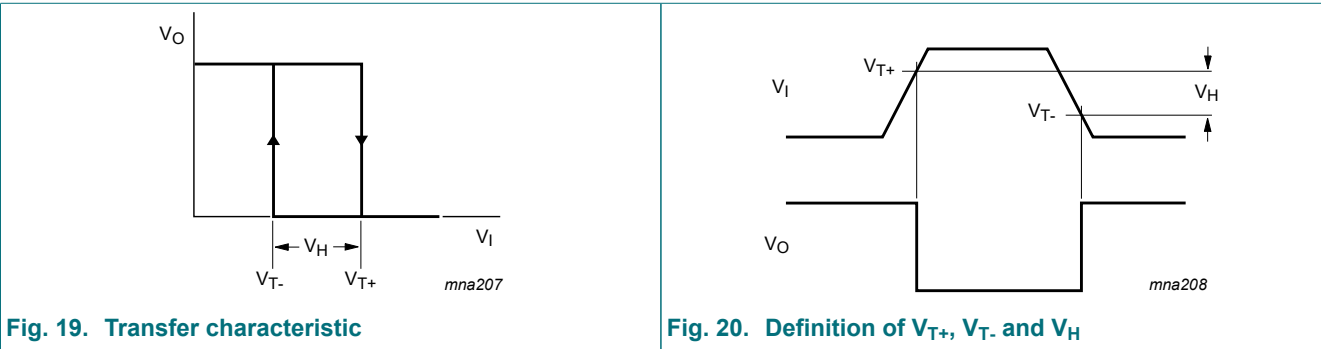

## 11. Dynamic characteristics

**Table 25. Dynamic characteristics**

Voltages are referenced to GND (ground = 0 V; for test circuit see [Fig. 26](#)).

| Symbol   | Parameter         | Conditions                                   | -40 °C to +85 °C |         |      | -40 °C to +125 °C |      | Unit |
|----------|-------------------|----------------------------------------------|------------------|---------|------|-------------------|------|------|
|          |                   |                                              | Min              | Typ [1] | Max  | Min               | Max  |      |
| $t_{pd}$ | propagation delay | A to Y; see <a href="#">Fig. 24</a> [2]      |                  |         |      |                   |      |      |
|          |                   | $V_{CC} = 1.65 \text{ V to } 1.95 \text{ V}$ | 2.8              | 7.5     | 30.8 | 2.8               | 38.5 | ns   |
|          |                   | $V_{CC} = 2.3 \text{ V to } 2.7 \text{ V}$   | 2.0              | 5.0     | 11.7 | 2.0               | 14.6 | ns   |
|          |                   | $V_{CC} = 2.7 \text{ V}$                     | 2.0              | 5.4     | 9.0  | 2.0               | 11.3 | ns   |
|          |                   | $V_{CC} = 3.0 \text{ V to } 3.6 \text{ V}$   | 1.8              | 4.5     | 8.4  | 1.8               | 10.5 | ns   |
|          |                   | $V_{CC} = 4.5 \text{ V to } 5.5 \text{ V}$   | 1.8              | 3.8     | 5.5  | 1.8               | 6.9  | ns   |
|          |                   | B to Y; see <a href="#">Fig. 24</a> [2]      |                  |         |      |                   |      |      |
|          |                   | $V_{CC} = 1.65 \text{ V to } 1.95 \text{ V}$ | 2.8              | 7.5     | 28.9 | 2.8               | 36.2 | ns   |
|          |                   | $V_{CC} = 2.3 \text{ V to } 2.7 \text{ V}$   | 2.0              | 5.0     | 11.3 | 2.0               | 14.2 | ns   |
|          |                   | $V_{CC} = 2.7 \text{ V}$                     | 2.0              | 5.4     | 9.0  | 2.0               | 11.3 | ns   |
|          |                   | $V_{CC} = 3.0 \text{ V to } 3.6 \text{ V}$   | 1.8              | 4.5     | 8.2  | 1.8               | 10.3 | ns   |
|          |                   | $V_{CC} = 4.5 \text{ V to } 5.5 \text{ V}$   | 1.8              | 3.8     | 5.4  | 1.8               | 6.8  | ns   |
|          |                   | C to Y; see <a href="#">Fig. 24</a> [2]      |                  |         |      |                   |      |      |
|          |                   | $V_{CC} = 1.65 \text{ V to } 1.95 \text{ V}$ | 3.2              | 7.8     | 29.8 | 3.2               | 37.3 | ns   |
|          |                   | $V_{CC} = 2.3 \text{ V to } 2.7 \text{ V}$   | 2.3              | 5.2     | 12.3 | 2.3               | 15.4 | ns   |
|          |                   | $V_{CC} = 2.7 \text{ V}$                     | 2.3              | 5.3     | 9.6  | 2.3               | 12.0 | ns   |
|          |                   | $V_{CC} = 3.0 \text{ V to } 3.6 \text{ V}$   | 2.3              | 4.6     | 8.6  | 2.3               | 10.8 | ns   |
|          |                   | $V_{CC} = 4.5 \text{ V to } 5.5 \text{ V}$   | 1.8              | 3.8     | 5.7  | 1.8               | 7.2  | ns   |
|          |                   | D to Y; see <a href="#">Fig. 24</a> [2]      |                  |         |      |                   |      |      |
|          |                   | $V_{CC} = 1.65 \text{ V to } 1.95 \text{ V}$ | 2.8              | 7.0     | 25.7 | 2.8               | 32.2 | ns   |
|          |                   | $V_{CC} = 2.3 \text{ V to } 2.7 \text{ V}$   | 2.0              | 4.6     | 10.7 | 2.0               | 13.4 | ns   |
|          |                   | $V_{CC} = 2.7 \text{ V}$                     | 2.0              | 4.8     | 9.2  | 2.0               | 11.5 | ns   |
|          |                   | $V_{CC} = 3.0 \text{ V to } 3.6 \text{ V}$   | 1.8              | 4.1     | 7.6  | 1.8               | 9.5  | ns   |
|          |                   | $V_{CC} = 4.5 \text{ V to } 5.5 \text{ V}$   | 1.6              | 3.4     | 5.2  | 1.6               | 6.5  | ns   |

| Symbol           | Parameter                     | Conditions                                                                                                                      | -40 °C to +85 °C |         |      | -40 °C to +125 °C |      | Unit |
|------------------|-------------------------------|---------------------------------------------------------------------------------------------------------------------------------|------------------|---------|------|-------------------|------|------|
|                  |                               |                                                                                                                                 | Min              | Typ [1] | Max  | Min               | Max  |      |
| t <sub>en</sub>  | enable time                   | OE to Y; see Fig. 25 [3]                                                                                                        |                  |         |      |                   |      |      |
|                  |                               | V <sub>CC</sub> = 1.65 V to 1.95 V                                                                                              | 2.0              | 5.7     | 25.2 | 2.0               | 32.0 | ns   |
|                  |                               | V <sub>CC</sub> = 2.3 V to 2.7 V                                                                                                | 1.4              | 3.8     | 11.3 | 1.4               | 14.0 | ns   |
|                  |                               | V <sub>CC</sub> = 2.7 V                                                                                                         | 1.4              | 4.2     | 8.6  | 1.4               | 11.0 | ns   |
|                  |                               | V <sub>CC</sub> = 3.0 V to 3.6 V                                                                                                | 1.4              | 3.5     | 7.0  | 1.4               | 9.0  | ns   |
|                  |                               | V <sub>CC</sub> = 4.5 V to 5.5 V                                                                                                | 1.4              | 2.7     | 4.7  | 1.4               | 6.0  | ns   |
| t <sub>dis</sub> | disable time                  | OE to Y; see Fig. 25 [4]                                                                                                        |                  |         |      |                   |      |      |
|                  |                               | V <sub>CC</sub> = 1.65 V to 1.95 V                                                                                              | 3.0              | 5.7     | 15.0 | 3.0               | 19.0 | ns   |
|                  |                               | V <sub>CC</sub> = 2.3 V to 2.7 V                                                                                                | 2.0              | 3.6     | 5.8  | 2.0               | 7.3  | ns   |
|                  |                               | V <sub>CC</sub> = 2.7 V                                                                                                         | 2.0              | 4.5     | 6.6  | 2.0               | 8.2  | ns   |
|                  |                               | V <sub>CC</sub> = 3.0 V to 3.6 V                                                                                                | 2.1              | 4.5     | 5.9  | 2.1               | 7.4  | ns   |
|                  |                               | V <sub>CC</sub> = 4.5 V to 5.5 V                                                                                                | 1.0              | 3.4     | 4.5  | 1.0               | 5.6  | ns   |
| C <sub>PD</sub>  | power dissipation capacitance | per buffer (output enabled);<br>f <sub>i</sub> = 10 MHz; C <sub>L</sub> = 50 pF;<br>V <sub>I</sub> = GND to V <sub>CC</sub> [5] |                  |         |      |                   |      |      |
|                  |                               | V <sub>CC</sub> = 1.65 V to 1.95 V                                                                                              | -                | 14      | -    | -                 | -    | pF   |
|                  |                               | V <sub>CC</sub> = 2.3 V to 2.7 V                                                                                                | -                | 16      | -    | -                 | -    | pF   |
|                  |                               | V <sub>CC</sub> = 2.7 V                                                                                                         | -                | 18      | -    | -                 | -    | pF   |
|                  |                               | V <sub>CC</sub> = 3.0 V to 3.6 V                                                                                                | -                | 25      | -    | -                 | -    | pF   |
|                  |                               | V <sub>CC</sub> = 4.5 V to 5.5 V                                                                                                | -                | 30      | -    | -                 | -    | pF   |

[1] All typical values are measured at nominal V<sub>CC</sub> and T<sub>amb</sub> = 25 °C.

[2] t<sub>pd</sub> is the same as t<sub>PLH</sub> and t<sub>PHL</sub>.

[3] t<sub>en</sub> is the same as t<sub>PZH</sub> and t<sub>PZL</sub>.

[4] t<sub>dis</sub> is the same as t<sub>PHZ</sub> and t<sub>PLZ</sub>.

[5] C<sub>PD</sub> is used to determine the dynamic power dissipation (P<sub>D</sub> in μW).

$$P_D = C_{PD} \times V_{CC}^2 \times f_i \times N + \Sigma(C_L \times V_{CC}^2 \times f_o) \text{ where:}$$

f<sub>i</sub> = input frequency in MHz;

f<sub>o</sub> = output frequency in MHz;

C<sub>L</sub> = output load capacitance in pF;

V<sub>CC</sub> = supply voltage in V;

N = number of inputs switching;

Σ(C<sub>L</sub> × V<sub>CC</sub><sup>2</sup> × f<sub>o</sub>) = sum of the outputs.

11.1. Waveforms and test circuit



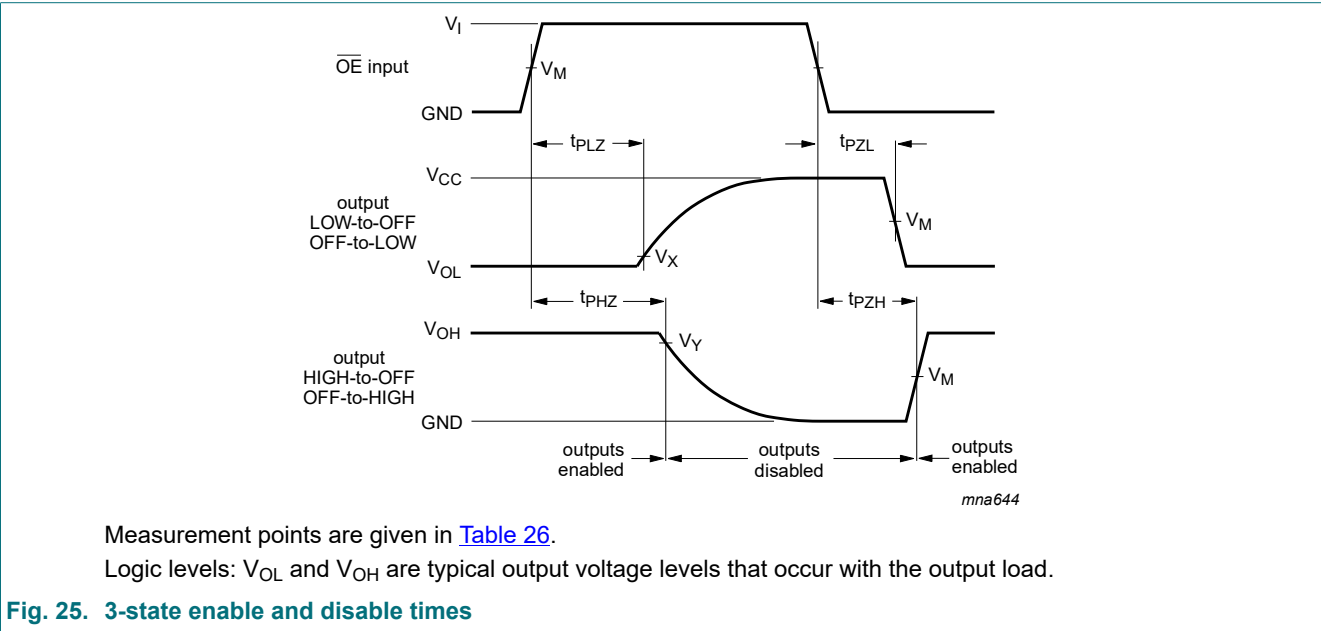


Table 26. Measurement points

| Supply voltage   | Input       | Output      |                          |                          |
|------------------|-------------|-------------|--------------------------|--------------------------|
| $V_{CC}$         | $V_M$       | $V_M$       | $V_X$                    | $V_Y$                    |
| 1.65 V to 1.95 V | $0.5V_{CC}$ | $0.5V_{CC}$ | $V_{OL} + 0.15\text{ V}$ | $V_{OH} - 0.15\text{ V}$ |
| 2.3 V to 2.7 V   | $0.5V_{CC}$ | $0.5V_{CC}$ | $V_{OL} + 0.15\text{ V}$ | $V_{OH} - 0.15\text{ V}$ |
| 2.7 V            | 1.5 V       | 1.5 V       | $V_{OL} + 0.3\text{ V}$  | $V_{OH} - 0.3\text{ V}$  |
| 3.0 V to 3.6 V   | 1.5 V       | 1.5 V       | $V_{OL} + 0.3\text{ V}$  | $V_{OH} - 0.3\text{ V}$  |
| 4.5 V to 5.5 V   | $0.5V_{CC}$ | $0.5V_{CC}$ | $V_{OL} + 0.3\text{ V}$  | $V_{OH} - 0.3\text{ V}$  |

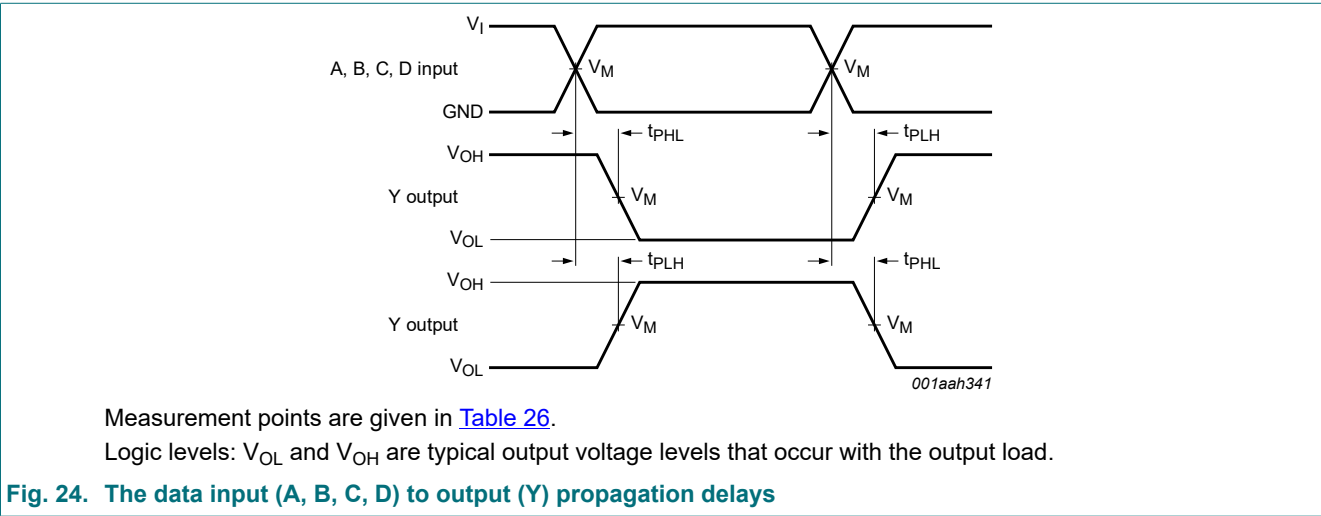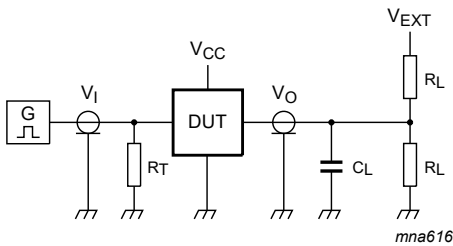

Test data is given in [Table 27](#).  
Definitions for test circuit:  
 $R_L$  = Load resistance.  
 $C_L$  = Load capacitance including jig and probe capacitance.  
 $R_T$  = Termination resistance should be equal to the output impedance  $Z_o$  of the pulse generator.  
 $V_{EXT}$  = External voltage for measuring switching times.

Fig. 26. Test circuit for measuring switching times

Table 27. Test data

| Supply voltage   | Input    |               | Load  |              | $V_{EXT}$          |                    |                    |
|------------------|----------|---------------|-------|--------------|--------------------|--------------------|--------------------|
|                  | $V_I$    | $t_r = t_f$   | $C_L$ | $R_L$        | $t_{PLH}, t_{PHL}$ | $t_{PZH}, t_{PHZ}$ | $t_{PZL}, t_{PLZ}$ |
| 1.65 V to 1.95 V | $V_{CC}$ | $\leq 2.0$ ns | 30 pF | 1 k $\Omega$ | open               | GND                | $2V_{CC}$          |
| 2.3 V to 2.7 V   | $V_{CC}$ | $\leq 2.0$ ns | 30 pF | 500 $\Omega$ | open               | GND                | $2V_{CC}$          |
| 2.7 V            | 2.7 V    | $\leq 2.5$ ns | 50 pF | 500 $\Omega$ | open               | GND                | 6 V                |
| 3.0 V to 3.6 V   | 2.7 V    | $\leq 2.5$ ns | 50 pF | 500 $\Omega$ | open               | GND                | 6 V                |
| 4.5 V to 5.5 V   | $V_{CC}$ | $\leq 2.5$ ns | 50 pF | 500 $\Omega$ | open               | GND                | $2V_{CC}$          |

12. Package outline

TSSOP8: plastic thin shrink small outline package; 8 leads; body width 3 mm; lead length 0.5 mm    SOT505-2

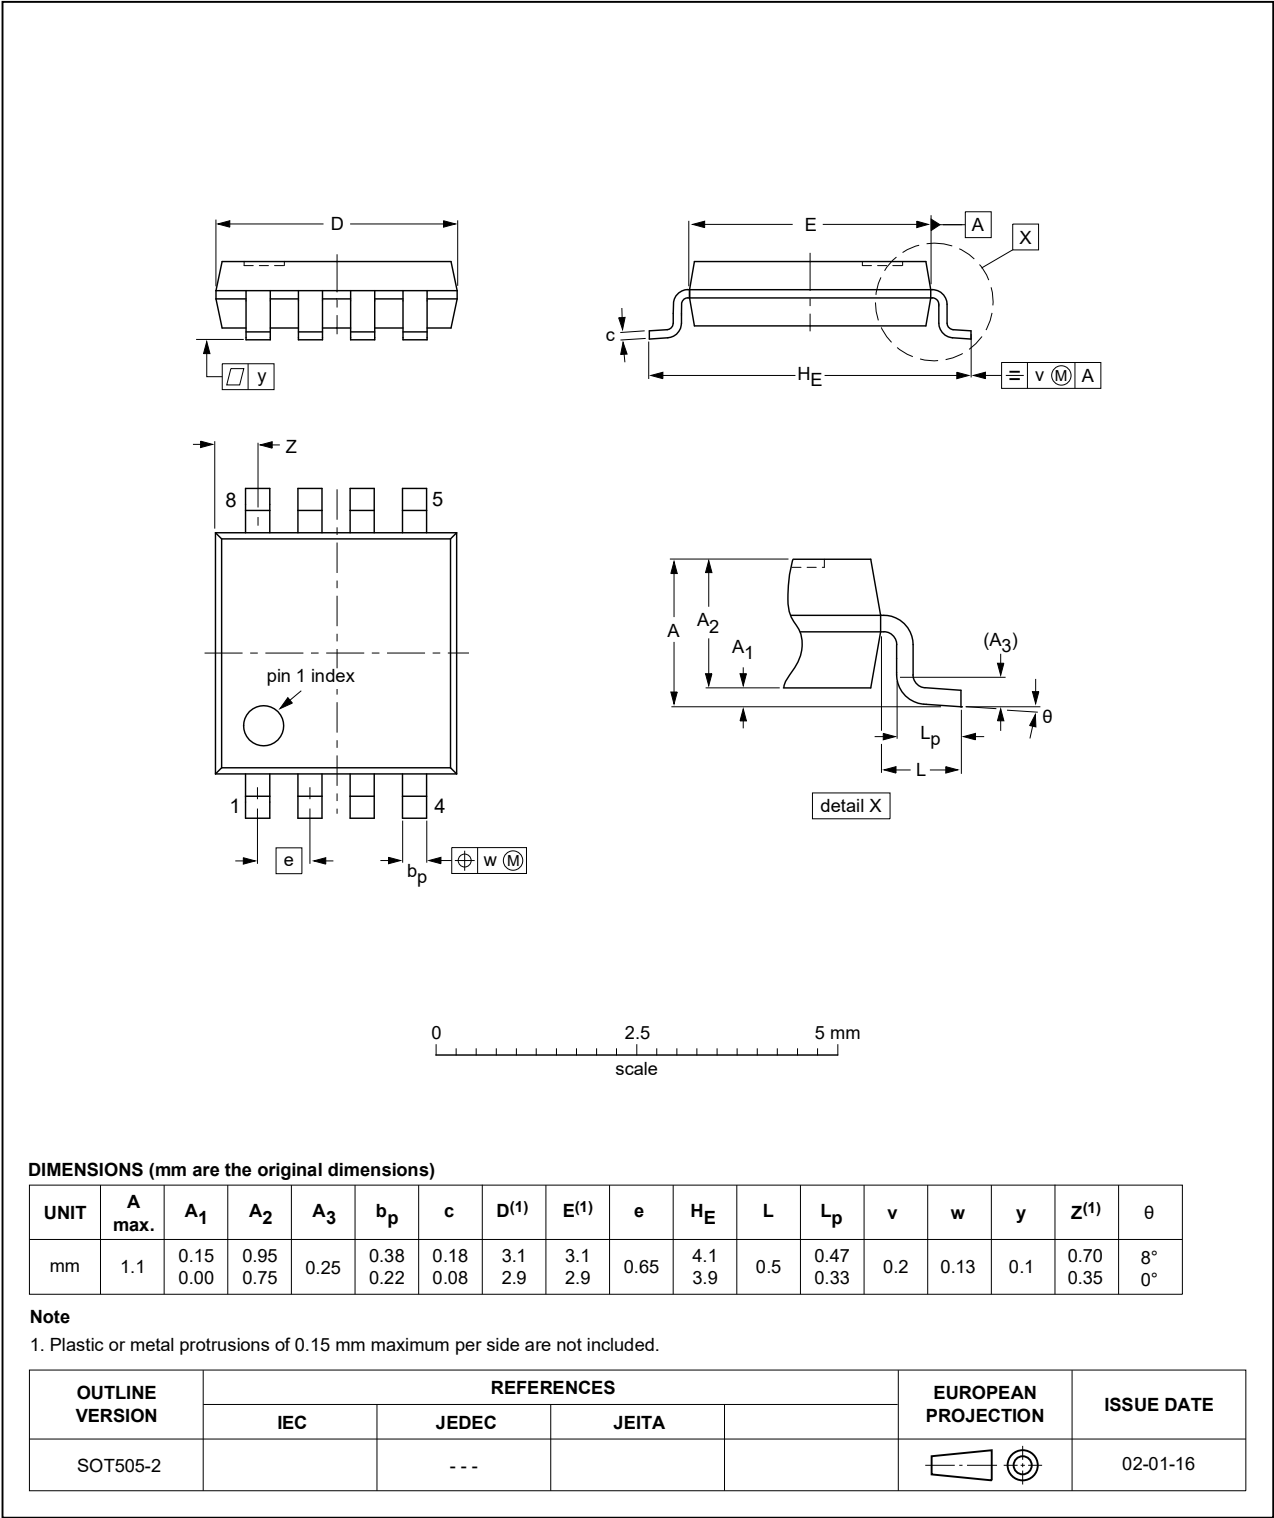


Fig. 27. Package outline SOT505-2 (TSSOP8)

XSON8: plastic extremely thin small outline package; no leads; 8 terminals; body 1 x 1.95 x 0.5 mm SOT833-1

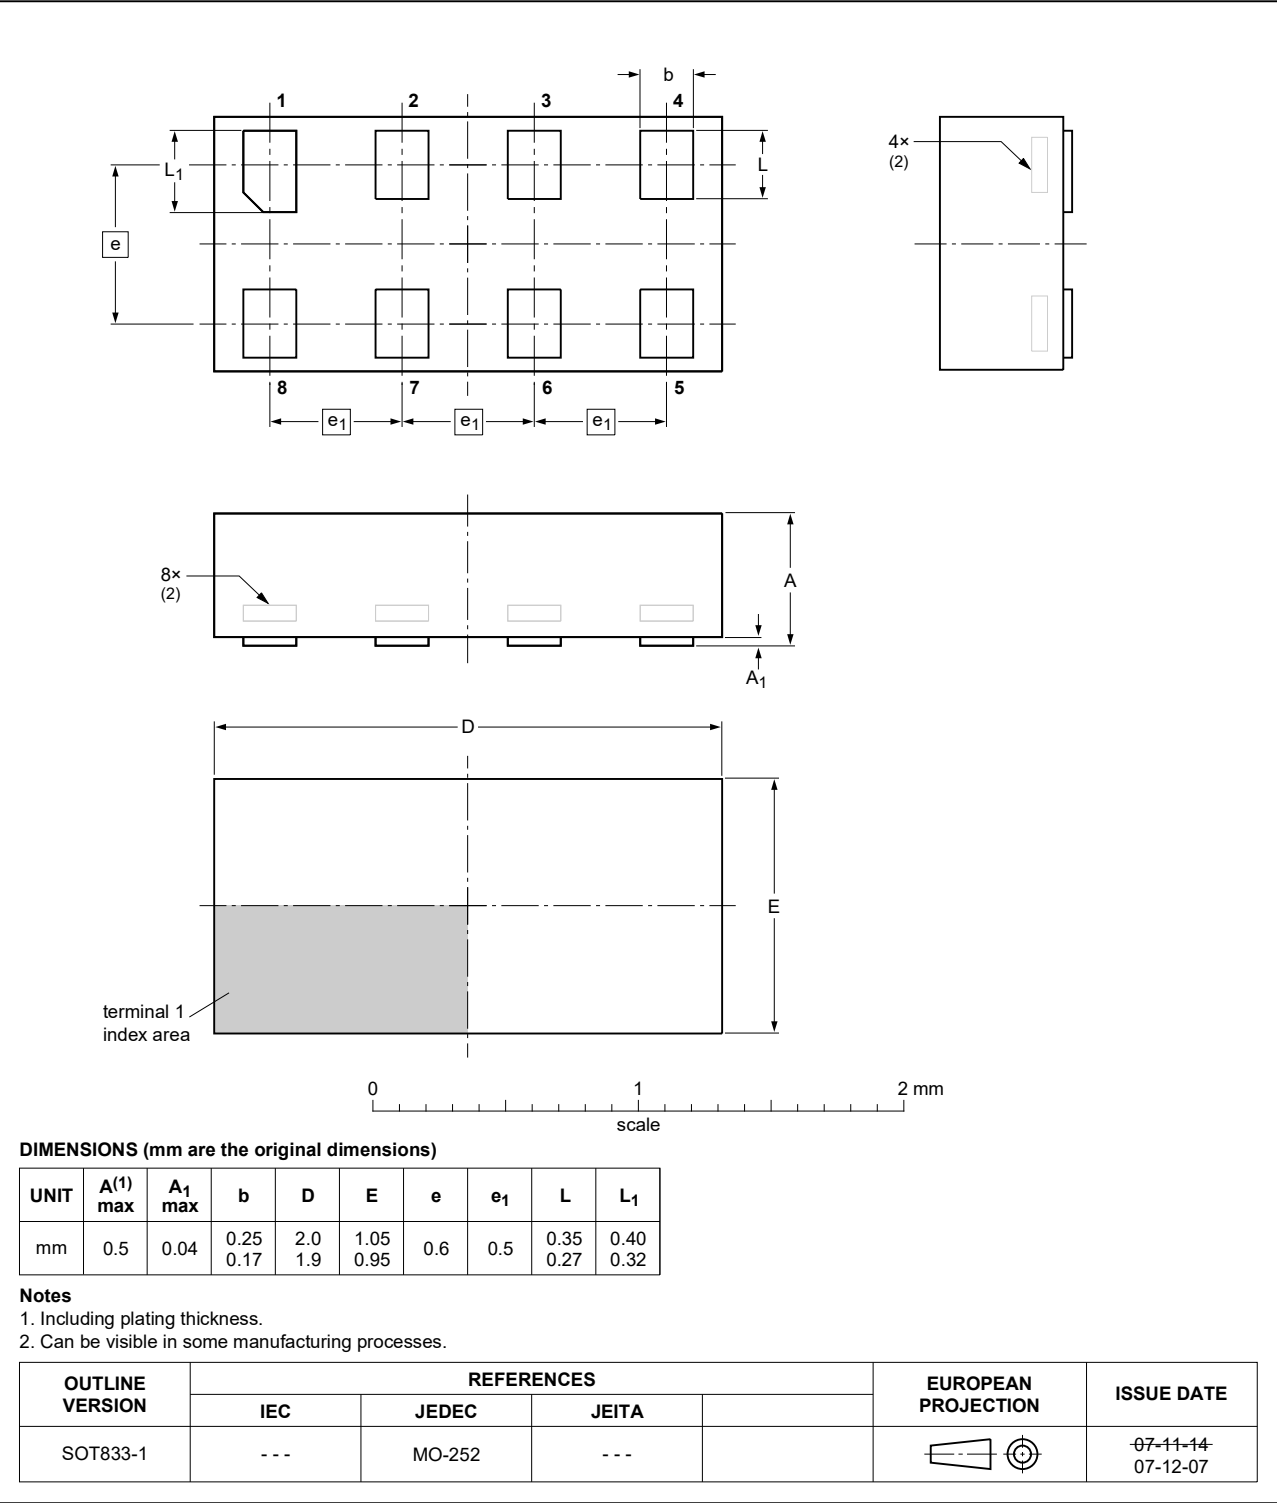


Fig. 28. Package outline SOT833-1 (XSON8)

XSON8: extremely thin small outline package; no leads;  
8 terminals; body 1.35 x 1 x 0.5 mm

SOT1089

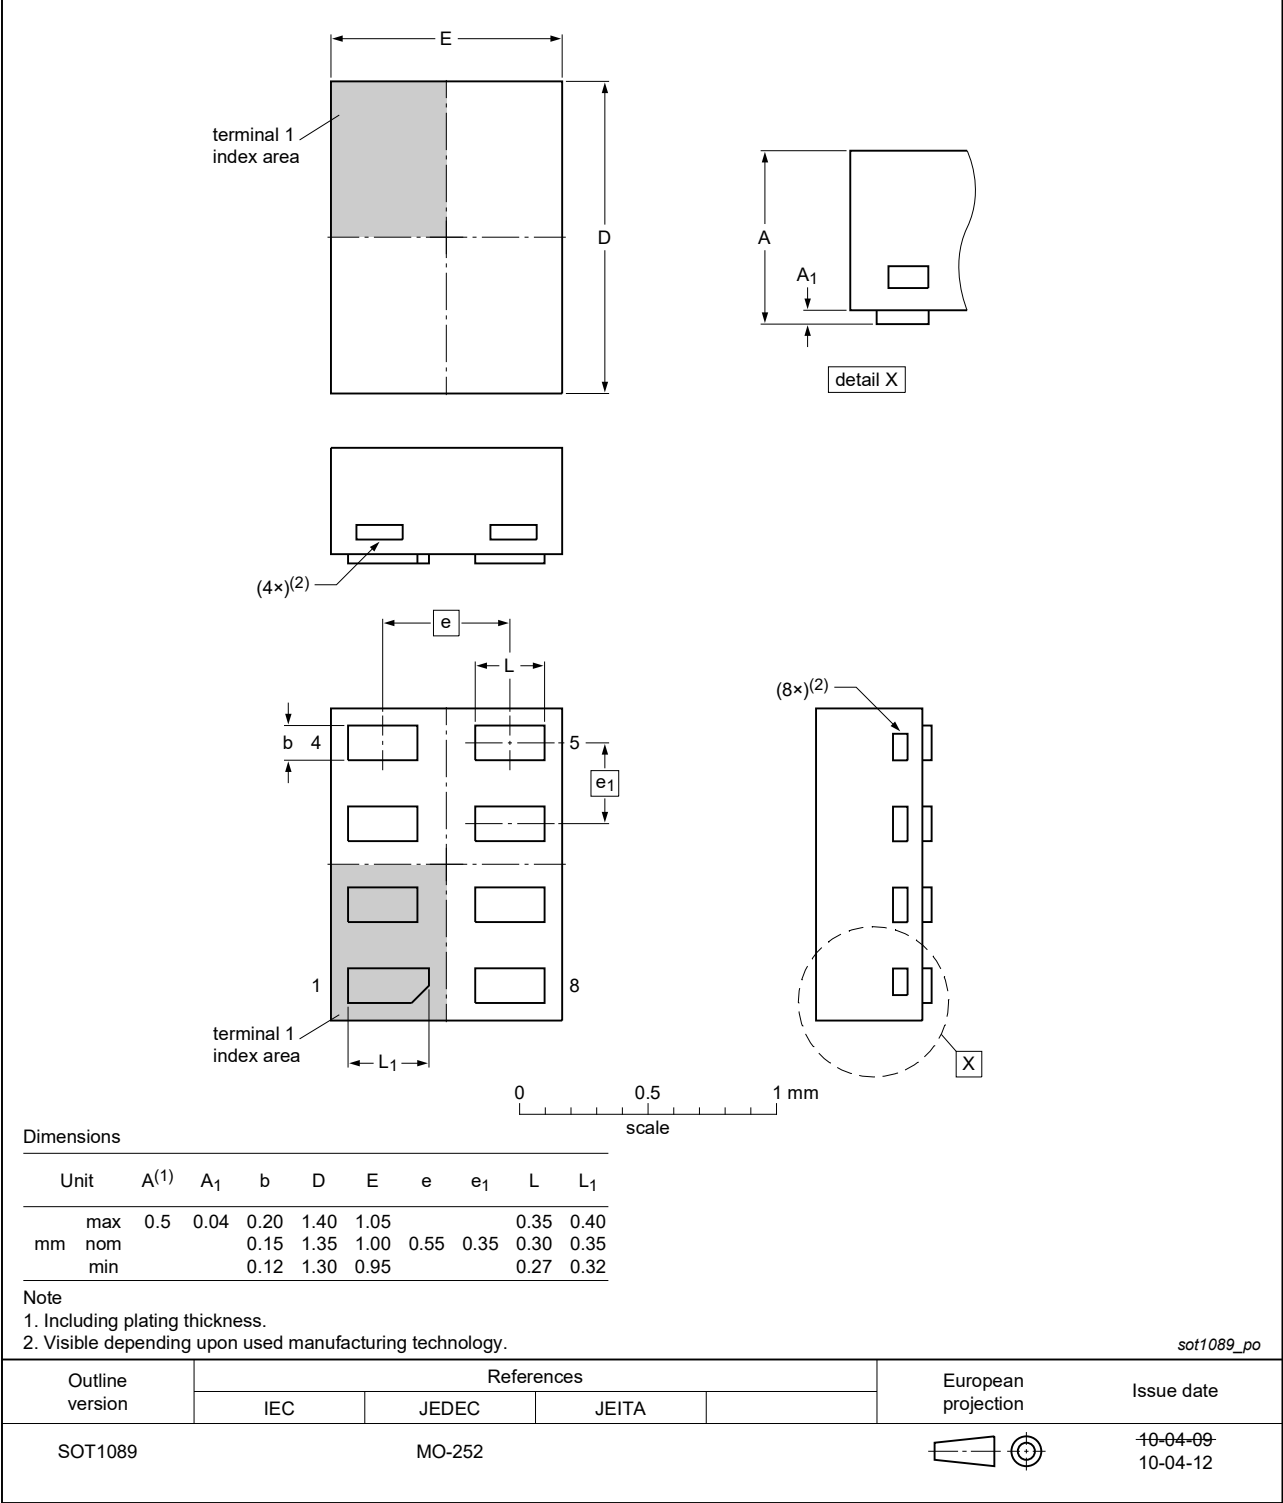


Fig. 29. Package outline SOT1089 (XSON8)

XSON8: extremely thin small outline package; no leads;  
8 terminals; body 1.2 x 1.0 x 0.35 mm

SOT1116

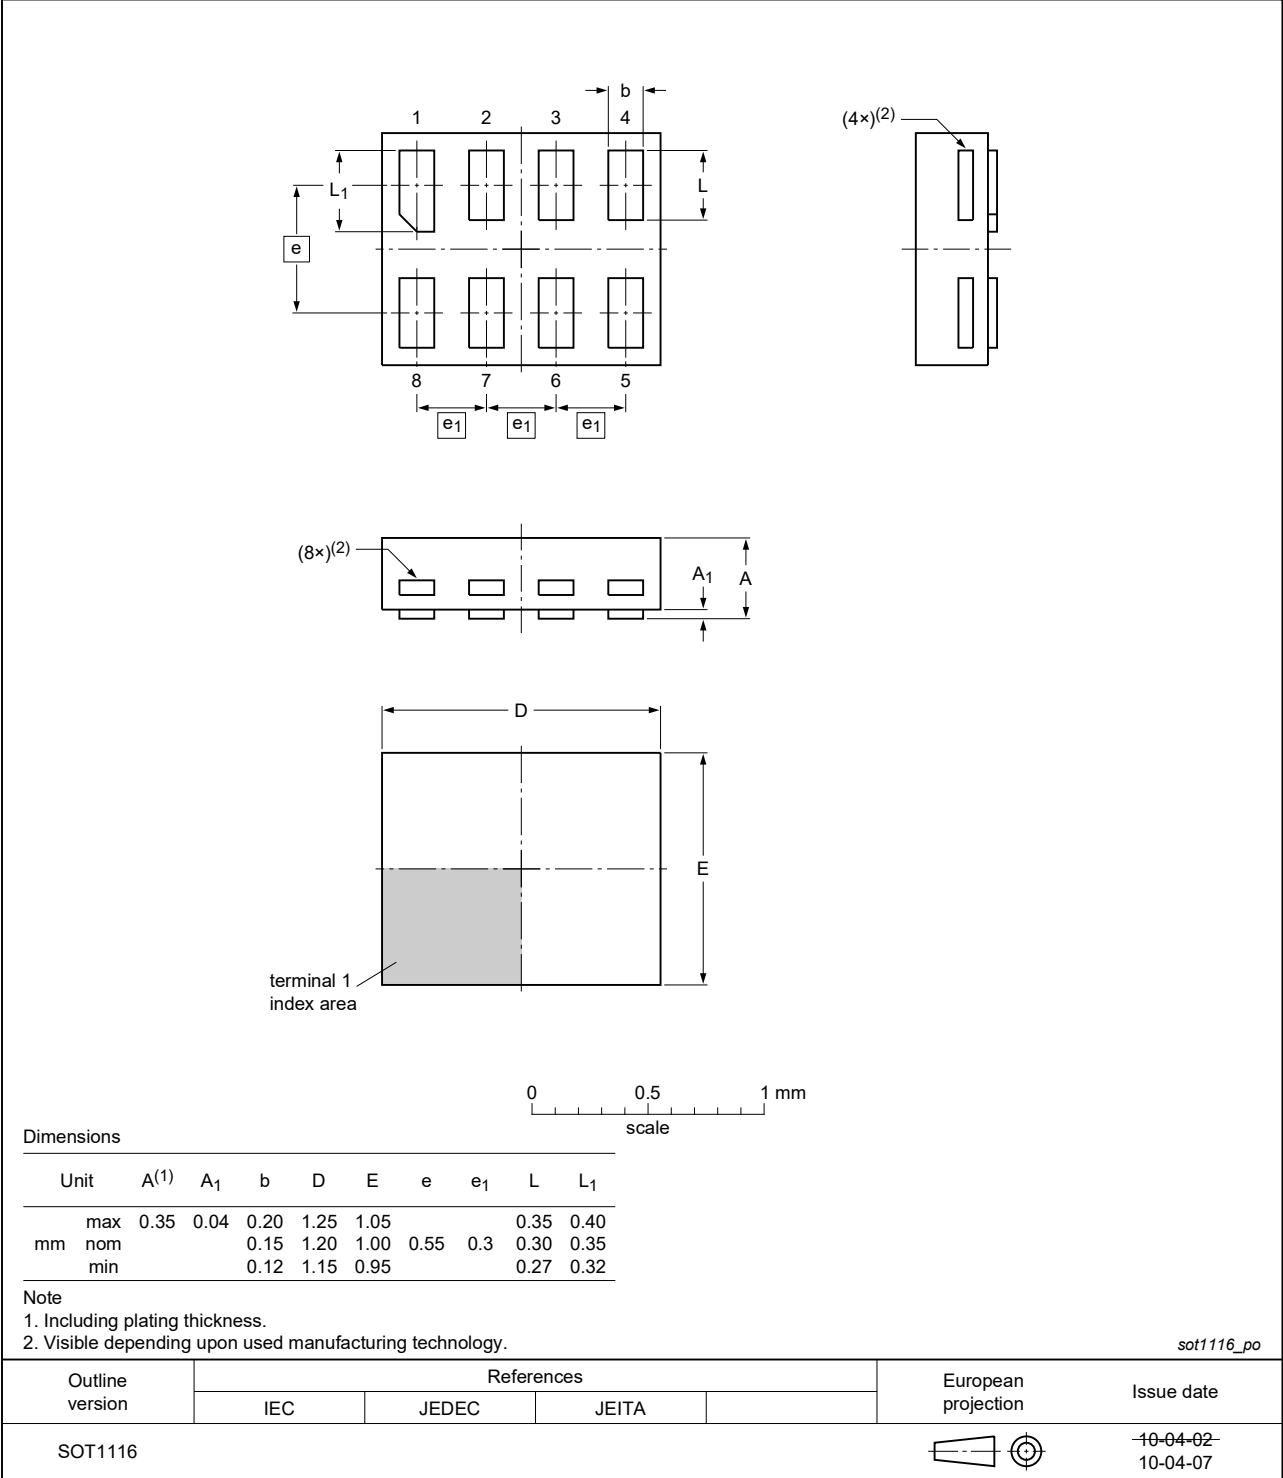


Fig. 30. Package outline SOT1116 (XSON8)

XSON8: extremely thin small outline package; no leads;  
8 terminals; body 1.35 x 1.0 x 0.35 mm

SOT1203

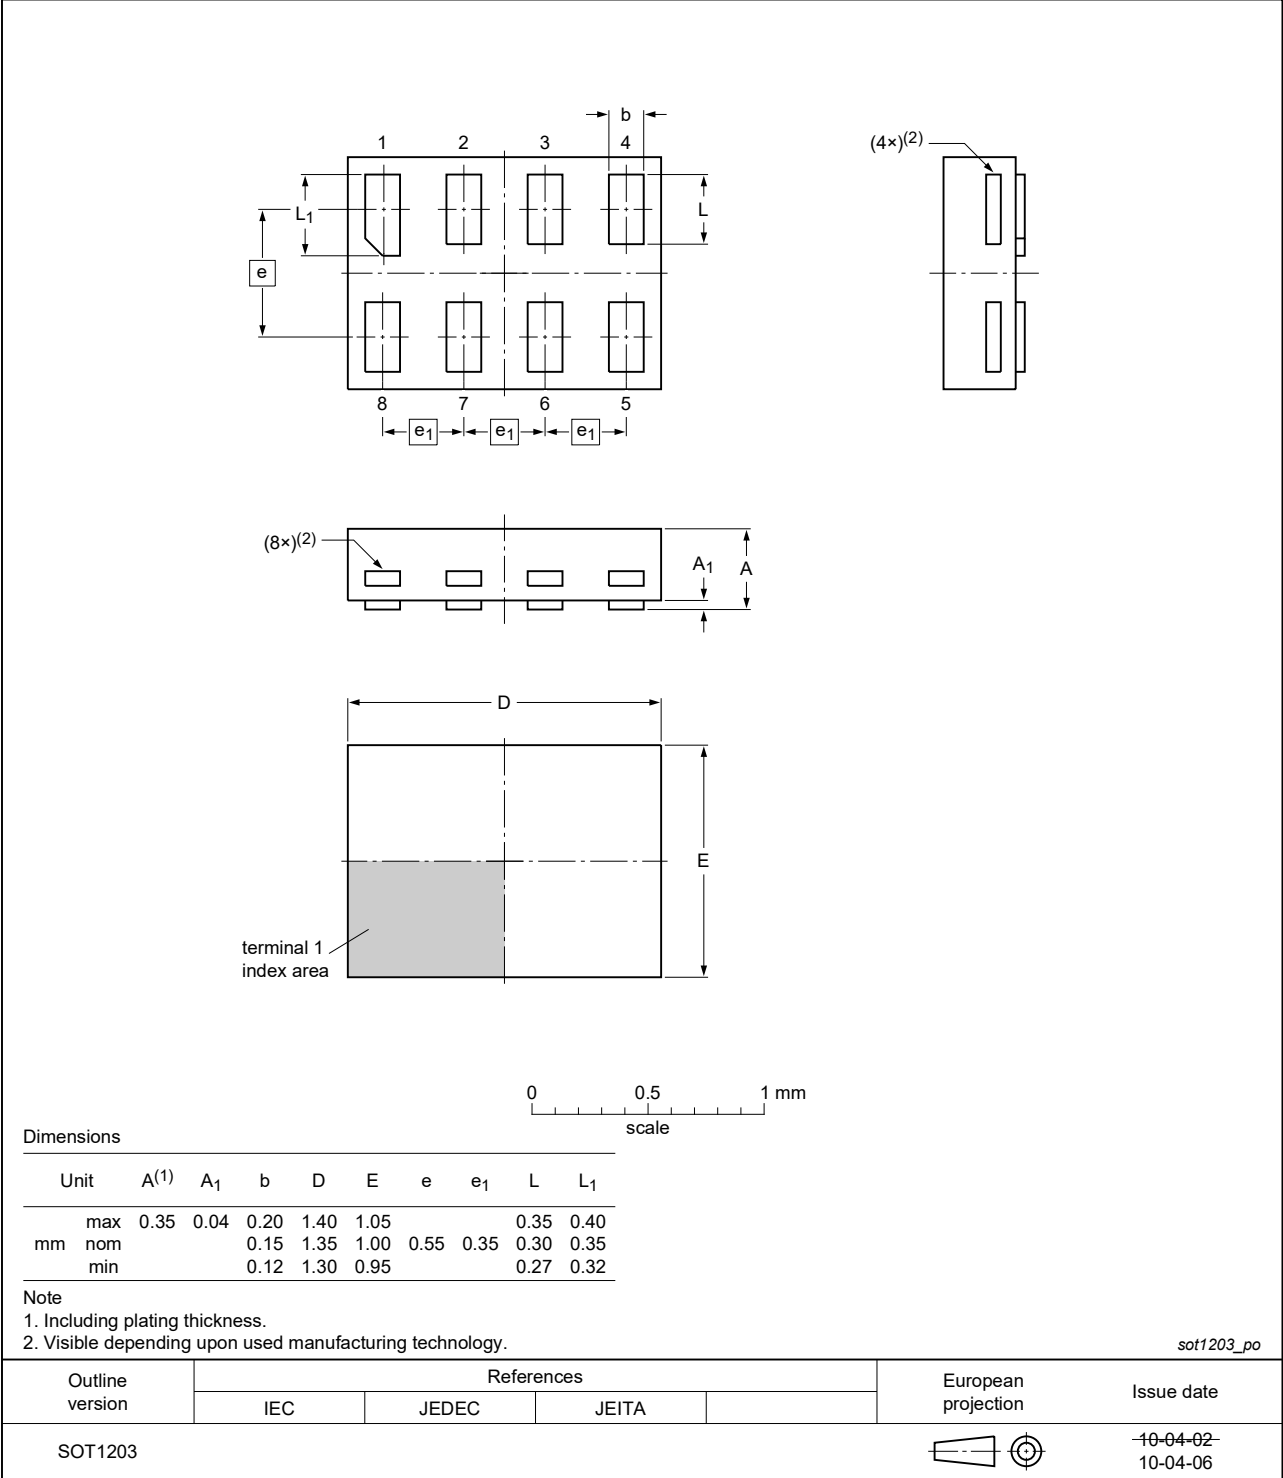


Fig. 31. Package outline SOT1203 (XSON8)

## 13. Abbreviations

Table 28. Abbreviations

| Acronym | Description                             |
|---------|-----------------------------------------|
| CMOS    | Complementary Metal-Oxide Semiconductor |
| DUT     | Device Under Test                       |
| ESD     | ElectroStatic Discharge                 |
| HBM     | Human Body Model                        |
| MM      | Machine Model                           |
| TTL     | Transistor-Transistor Logic             |

## 14. Revision history

Table 29. Revision history

| Document ID      | Release date                                                                                                                                                                                                                                                                                   | Data sheet status  | Change notice | Supersedes       |
|------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|---------------|------------------|
| 74LVC1G99 v.11   | 20190725                                                                                                                                                                                                                                                                                       | Product data sheet | -             | 74LVC1G99 v.10.1 |
| Modifications:   | <ul style="list-style-type: none"> <li>Type number 74LVC1G99GM (SOT902-2) removed.</li> <li><a href="#">Table 21</a>: Derating values for <math>P_{tot}</math> total power dissipation updated.</li> </ul>                                                                                     |                    |               |                  |
| 74LVC1G99 v.10.1 | 20181022                                                                                                                                                                                                                                                                                       | Product data sheet | -             | 74LVC1G99 v.10   |
| Modifications:   | <ul style="list-style-type: none"> <li><a href="#">Table 12</a>: input D logic level changed to HIGH.</li> </ul>                                                                                                                                                                               |                    |               |                  |
| 74LVC1G99 v.10   | 20180927                                                                                                                                                                                                                                                                                       | Product data sheet | -             | 74LVC1G99 v.9    |
| Modifications:   | <ul style="list-style-type: none"> <li>The format of this data sheet has been redesigned to comply with the identity guidelines of Nexperia.</li> <li>Legal texts have been adapted to the new company name where appropriate.</li> <li>Type number 74LVC1G99GD (SOT996-2) removed.</li> </ul> |                    |               |                  |
| 74LVC1G99 v.9    | 20161212                                                                                                                                                                                                                                                                                       | Product data sheet | -             | 74LVC1G99 v.8    |
| Modifications:   | <ul style="list-style-type: none"> <li><a href="#">Table 23</a>: The maximum limits for leakage current and supply current have changed.</li> </ul>                                                                                                                                            |                    |               |                  |
| 74LVC1G99 v.8    | 20130405                                                                                                                                                                                                                                                                                       | Product data sheet | -             | 74LVC1G99 v.7    |
| Modifications:   | <ul style="list-style-type: none"> <li>For type number 74LVC1G99GD XSON8U has changed to XSON8.</li> </ul>                                                                                                                                                                                     |                    |               |                  |
| 74LVC1G99 v.7    | 20120622                                                                                                                                                                                                                                                                                       | Product data sheet | -             | 74LVC1G99 v.6    |
| Modifications:   | <ul style="list-style-type: none"> <li>For type number 74LVC1G99GM the SOT code has changed to SOT902-2.</li> </ul>                                                                                                                                                                            |                    |               |                  |
| 74LVC1G99 v.6    | 20111201                                                                                                                                                                                                                                                                                       | Product data sheet | -             | 74LVC1G99 v.5    |
| Modifications:   | <ul style="list-style-type: none"> <li>Legal pages updated.</li> </ul>                                                                                                                                                                                                                         |                    |               |                  |
| 74LVC1G99 v.5    | 20101021                                                                                                                                                                                                                                                                                       | Product data sheet | -             | 74LVC1G99 v.4    |
| 74LVC1G99 v.4    | 20100416                                                                                                                                                                                                                                                                                       | Product data sheet | -             | 74LVC1G99 v.3    |
| 74LVC1G99 v.3    | 20091203                                                                                                                                                                                                                                                                                       | Product data sheet | -             | 74LVC1G99 v.2    |
| 74LVC1G99 v.2    | 20080208                                                                                                                                                                                                                                                                                       | Product data sheet | -             | 74LVC1G99 v.1    |
| 74LVC1G99 v.1    | 20080103                                                                                                                                                                                                                                                                                       | Product data sheet | -             | -                |

## 15. Legal information

### Data sheet status

| Document status<br>[1][2]      | Product status [3] | Definition                                                                            |
|--------------------------------|--------------------|---------------------------------------------------------------------------------------|
| Objective [short] data sheet   | Development        | This document contains data from the objective specification for product development. |
| Preliminary [short] data sheet | Qualification      | This document contains data from the preliminary specification.                       |
| Product [short] data sheet     | Production         | This document contains the product specification.                                     |

- [1] Please consult the most recently issued document before initiating or completing a design.
- [2] The term 'short data sheet' is explained in section "Definitions".
- [3] The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the internet at <https://www.nexperia.com>.

### Definitions

**Draft** — The document is a draft version only. The content is still under internal review and subject to formal approval, which may result in modifications or additions. Nexperia does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

**Short data sheet** — A short data sheet is an extract from a full data sheet with the same product type number(s) and title. A short data sheet is intended for quick reference only and should not be relied upon to contain detailed and full information. For detailed and full information see the relevant full data sheet, which is available on request via the local Nexperia sales office. In case of any inconsistency or conflict with the short data sheet, the full data sheet shall prevail.

**Product specification** — The information and data provided in a Product data sheet shall define the specification of the product as agreed between Nexperia and its customer, unless Nexperia and customer have explicitly agreed otherwise in writing. In no event however, shall an agreement be valid in which the Nexperia product is deemed to offer functions and qualities beyond those described in the Product data sheet.

### Disclaimers

**Limited warranty and liability** — Information in this document is believed to be accurate and reliable. However, Nexperia does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information. Nexperia takes no responsibility for the content in this document if provided by an information source outside of Nexperia.

In no event shall Nexperia be liable for any indirect, incidental, punitive, special or consequential damages (including - without limitation - lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory.

Notwithstanding any damages that customer might incur for any reason whatsoever, Nexperia's aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the Terms and conditions of commercial sale of Nexperia.

**Right to make changes** — Nexperia reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

**Suitability for use** — Nexperia products are not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or malfunction of an Nexperia product can reasonably be expected to result in personal

injury, death or severe property or environmental damage. Nexperia and its suppliers accept no liability for inclusion and/or use of Nexperia products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

**Quick reference data** — The Quick reference data is an extract of the product data given in the Limiting values and Characteristics sections of this document, and as such is not complete, exhaustive or legally binding.

**Applications** — Applications that are described herein for any of these products are for illustrative purposes only. Nexperia makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Customers are responsible for the design and operation of their applications and products using Nexperia products, and Nexperia accepts no liability for any assistance with applications or customer product design. It is customer's sole responsibility to determine whether the Nexperia product is suitable and fit for the customer's applications and products planned, as well as for the planned application and use of customer's third party customer(s). Customers should provide appropriate design and operating safeguards to minimize the risks associated with their applications and products.

Nexperia does not accept any liability related to any default, damage, costs or problem which is based on any weakness or default in the customer's applications or products, or the application or use by customer's third party customer(s). Customer is responsible for doing all necessary testing for the customer's applications and products using Nexperia products in order to avoid a default of the applications and the products or of the application or use by customer's third party customer(s). Nexperia does not accept any liability in this respect.

**Limiting values** — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) will cause permanent damage to the device. Limiting values are stress ratings only and (proper) operation of the device at these or any other conditions above those given in the Recommended operating conditions section (if present) or the Characteristics sections of this document is not warranted. Constant or repeated exposure to limiting values will permanently and irreversibly affect the quality and reliability of the device.

**Terms and conditions of commercial sale** — Nexperia products are sold subject to the general terms and conditions of commercial sale, as published at <http://www.nexperia.com/profile/terms>, unless otherwise agreed in a valid written individual agreement. In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. Nexperia hereby expressly objects to applying the customer's general terms and conditions with regard to the purchase of Nexperia products by customer.

**No offer to sell or license** — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

**Export control** — This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from competent authorities.

**Non-automotive qualified products** — Unless this data sheet expressly states that this specific Nexperia product is automotive qualified, the product is not suitable for automotive use. It is neither qualified nor tested in accordance with automotive testing or application requirements. Nexperia accepts no liability for inclusion and/or use of non-automotive qualified products in automotive equipment or applications.

In the event that customer uses the product for design-in and use in automotive applications to automotive specifications and standards, customer (a) shall use the product without Nexperia's warranty of the product for such automotive applications, use and specifications, and (b) whenever customer uses the product for automotive applications beyond Nexperia's specifications such use shall be solely at customer's own risk, and (c) customer fully indemnifies Nexperia for any liability, damages or failed product claims resulting from customer design and use of the product for automotive applications beyond Nexperia's standard warranty and Nexperia's product specifications.

**Translations** — A non-English (translated) version of a document is for reference only. The English version shall prevail in case of any discrepancy between the translated and English versions.

### Trademarks

Notice: All referenced brands, product names, service names and trademarks are the property of their respective owners.

## Contents

|                                              |           |
|----------------------------------------------|-----------|
| <b>1. General description</b>                | <b>1</b>  |
| <b>2. Features and benefits</b>              | <b>1</b>  |
| <b>3. Ordering information</b>               | <b>2</b>  |
| <b>4. Marking</b>                            | <b>2</b>  |
| <b>5. Functional diagram</b>                 | <b>2</b>  |
| <b>6. Pinning information</b>                | <b>3</b>  |
| 6.1. Pinning                                 | 3         |
| 6.2. Pin description                         | 3         |
| <b>7. Functional description</b>             | <b>4</b>  |
| 7.1. Logic configurations                    | 4         |
| 7.2. 3-state buffer functions available      | 5         |
| 7.3. 3-state inverter functions available    | 5         |
| 7.4. 3-state multiplexer functions available | 6         |
| 7.5. 3-state AND/NOR functions available     | 6         |
| 7.6. 3-state NAND/OR functions available     | 7         |
| 7.7. 3-state XOR/XNOR functions available    | 9         |
| <b>8. Limiting values</b>                    | <b>10</b> |
| <b>9. Recommended operating conditions</b>   | <b>11</b> |
| <b>10. Static characteristics</b>            | <b>11</b> |
| 10.1. Transfer characteristics               | 12        |
| 10.2. Waveforms transfer characteristics     | 13        |
| <b>11. Dynamic characteristics</b>           | <b>14</b> |
| 11.1. Waveforms and test circuit             | 16        |
| <b>12. Package outline</b>                   | <b>18</b> |
| <b>13. Abbreviations</b>                     | <b>23</b> |
| <b>14. Revision history</b>                  | <b>23</b> |
| <b>15. Legal information</b>                 | <b>24</b> |

© Nexperia B.V. 2019. All rights reserved

For more information, please visit: <http://www.nexperia.com>

For sales office addresses, please send an email to: [salesaddresses@nexperia.com](mailto:salesaddresses@nexperia.com)

Date of release: 25 July 2019



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.