


### RoHS **MLA Automotive Varistor Series**

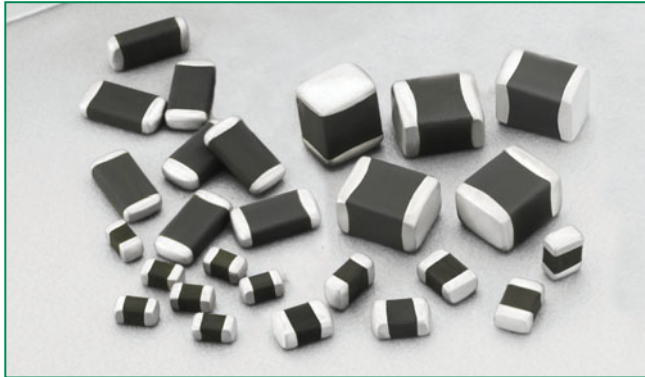

#### Size Table

| Metric | EIA  |
|--------|------|
| 1608   | 0603 |
| 2012   | 0805 |
| 3216   | 1206 |
| 3225   | 1210 |

#### Applications

- Suppression of inductive switching or other transient events such as EFT and surge voltage at the circuit board level
- ESD protection for IEC 61000-4-2, MIL-STD-883c method 3015.7, and other industry specifications
- Provides on-board transient voltage protection for ICS and transistors
- Used to help achieve electromagnetic compliance of end products
- Replace larger surface mount TVS Zeners in many applications

#### Description

The MLA Automotive Series of transient voltage surge suppression devices is based on the Littelfuse Multilayer fabrication technology. These components are designed to suppress a variety of transient events, including those specified in IEC 61000-4-2 or other standards used for Electromagnetic Compliance (EMC). The MLA Automotive Series is typically applied to protect integrated circuits and other components at the circuit board level.

The wide operating voltage and energy range make the MLA Automotive Series suitable for numerous applications on power supply, control and signal lines.

The MLA Automotive Series is manufactured from semiconducting ceramics, and is supplied in a leadless, surface mount package. The MLA Automotive Series is compatible with modern reflow and wave soldering procedures.

It can operate over a wider temperature range than Zener diodes, and has a much smaller footprint than plastic-housed components.

#### Features

- AEC - Q200 compliant
- RoHS compliant
- Leadless 0603, 0805, 1206 and 1210 chip sizes
- Multilayer ceramic construction technology
- -55°C to +125°C operating temp. range
- Operating voltage range  $V_{M(DC)} = 3.5V$  to 48V
- Rated for surge current (8 x 20µs)
- Rated for energy (10 x 1000µs)
- Inherent bi-directional clamping
- No plastic or epoxy packaging assures better than UL94V-0 flammability rating
- Standard low capacitance types available

#### Absolute Maximum Ratings

For ratings of individual members of a series, see device ratings and specifications table.

| Continuous   | MLA Auto Series | Units |
|--|-----------------|-------|
| Steady State Applied Voltage:  |                 |       |
| DC Voltage Range ( $V_{M(DC)}$ )   | 3.5 to 48       | V     |
| AC Voltage Range ( $V_{M(AC)(RMS)}$ )  | 2.5 to 40       | V     |
| Transient:   |                 |       |
| Non-Repetitive Surge Current, 8/20µs Waveform, ( $I_{TM}$ )                                    | up to 500       | A     |
| Non-Repetitive Surge Energy, 10/1000µs Waveform, ( $W_{TM}$ )                                  | 0.1 to 2.5      | J     |
| Operating Ambient Temperature Range ( $T_A$ )  | -55 to +125     | °C    |
| Storage Temperature Range ( $T_{STG}$ )  | -55 to +150     | °C    |
| Temperature Coefficient ( $\alpha V$ ) of Clamping Voltage ( $V_C$ ) at Specified Test Current | <0.01           | %/°C  |

### Device Ratings and Specifications

| Part Number        | Maximum Ratings (125° C)           |                    |   |   |   | Specifications (25°C)                  |                        |                                 |
|--------------------|------------------------------------|--------------------|---|---|---|--|------------------------|---------------------------------|
|                    | Maximum Continuous Working Voltage |                    | Maximum Non-repetitive Surge Current (8/20 $\mu$ s) | Maximum Non-repetitive Surge Energy (10/1000 $\mu$ s) | Maximum Clamping Voltage at 1A (or as Noted) (8/20 $\mu$ s) | Nominal Voltage at 1mA DC Test Current |                        | Typical Capacitance at f = 1MHz |
|                    | V <sub>M(DC)</sub>                 | V <sub>M(AC)</sub> | I <sub>TM</sub>                                     | W <sub>TM</sub>                                       | V <sub>C</sub>  | V <sub>N(DC) Min</sub>                 | V <sub>N(DC) Max</sub> | C                               |
|                    | (V)                                | (V)                | (A)   | (J)   | (V)   | (V)                                    | (V)                    | (pF)                            |
| V3.5MLA0603NHAUTO  | 3.5                                | 2.5                | 30  | 0.100   | 13.0  | 3.7                                    | 7.0                    | 1270                            |
| V3.5MLA0805NHAUTO  | 3.5                                | 2.5                | 120   | 0.300   | 13.0  | 3.7                                    | 7.0                    | 2530                            |
| V3.5MLA0805LNHAUTO | 3.5                                | 2.5                | 40  | 0.100   | 13.0  | 3.7                                    | 7.0                    | 1380                            |
| V3.5MLA1206NHAUTO  | 3.5                                | 2.5                | 100   | 0.300   | 13.0  | 3.7                                    | 7.0                    | 6000                            |
| V5.5MLA0603NHAUTO  | 5.5                                | 4.0                | 30  | 0.100   | 17.5  | 7.1                                    | 9.3                    | 500                             |
| V5.5MLA0805NHAUTO  | 5.5                                | 4.0                | 120   | 0.300   | 17.5  | 7.1                                    | 9.3                    | 1840                            |
| V5.5MLA0805LNHAUTO | 5.5                                | 4.0                | 40  | 0.100   | 17.5  | 7.1                                    | 9.3                    | 400                             |
| V5.5MLA1206NHAUTO  | 5.5                                | 4.0                | 150   | 0.400   | 17.5  | 7.1                                    | 9.3                    | 3500                            |
| V9MLA0603NHAUTO    | 9.0                                | 6.5                | 30  | 0.100   | 25.5  | 11.0                                   | 16.0                   | 490                             |
| V9MLA0805LNHAUTO   | 9.0                                | 6.5                | 40  | 0.100   | 25.5  | 11.0                                   | 16.0                   | 520                             |
| V12MLA0805LNHAUTO  | 12.0                               | 9.0                | 40  | 0.100   | 29.0  | 14.0                                   | 18.5                   | 410                             |
| V14MLA0603NHAUTO   | 14.0                               | 10.0               | 30  | 0.100   | 34.5  | 15.9                                   | 21.5                   | 180                             |
| V14MLA0805NHAUTO   | 14.0                               | 10.0               | 120   | 0.300   | 32.0  | 15.9                                   | 20.3                   | 560                             |
| V14MLA0805LNHAUTO  | 14.0                               | 10.0               | 40  | 0.100   | 32.0  | 15.9                                   | 20.3                   | 320                             |
| V14MLA1206NHAUTO   | 14.0                               | 10.0               | 150   | 0.400   | 32.0  | 15.9                                   | 20.3                   | 1400                            |
| V18MLA0603NHAUTO   | 18.0                               | 14.0               | 30  | 0.100   | 50.0  | 22.0                                   | 28.0                   | 120                             |
| V18MLA0805NHAUTO   | 18.0                               | 14.0               | 120   | 0.300   | 44.0  | 22.0                                   | 28.0                   | 520                             |
| V18MLA0805LNHAUTO  | 18.0                               | 14.0               | 40  | 0.100   | 44.0  | 22.0                                   | 28.0                   | 290                             |
| V18MLA1206NHAUTO   | 18.0                               | 14.0               | 150   | 0.400   | 44.0  | 22.0                                   | 28.0                   | 1270                            |
| V18MLA1210NHAUTO   | 18.0                               | 14.0               | 500   | 2.500   | 44.0 at 2.5   | 22.0                                   | 28.0                   | 1440                            |
| V26MLA0603NHAUTO   | 26.0                               | 20.0               | 30  | 0.100   | 60.0  | 31.0                                   | 38.0                   | 110                             |
| V26MLA0805NHAUTO   | 26.0                               | 20.0               | 100   | 0.300   | 60.0  | 29.5                                   | 38.5                   | 220                             |
| V26MLA0805LNHAUTO  | 26.0                               | 20.0               | 40  | 0.100   | 60.0  | 29.5                                   | 38.5                   | 140                             |
| V26MLA1206NHAUTO   | 26.0                               | 20.0               | 150   | 0.600   | 60.0  | 29.5                                   | 38.5                   | 600                             |
| V26MLA1210NHAUTO   | 26.0                               | 20.0               | 300   | 1.200   | 60.0 at 2.5   | 29.5                                   | 38.5                   | 1040                            |
| V30MLA0603NHAUTO   | 30.0                               | 25.0               | 30  | 0.100   | 74.0  | 37.0                                   | 46.0                   | 90                              |
| V30MLA0805LNHAUTO  | 30.0                               | 25.0               | 30  | 0.100   | 72.0  | 37.0                                   | 46.0                   | 90                              |
| V30MLA1210NHAUTO   | 30.0                               | 25.0               | 280   | 1.200   | 68.0 at 2.5   | 35.0                                   | 43.0                   | 1820                            |
| V30MLA1210LNHAUTO  | 30.0                               | 25.0               | 220   | 0.900   | 68.0 at 2.5   | 35.0                                   | 43.0                   | 1760                            |
| V33MLA1206NHAUTO   | 33.0                               | 26.0               | 180   | 0.800   | 75.0  | 38.0                                   | 49.0                   | 500                             |
| V42MLA1206NHAUTO   | 42.0                               | 30.0               | 180   | 0.800   | 92.0  | 46.0                                   | 60.0                   | 425                             |
| V48MLA1210NHAUTO   | 48.0                               | 40.0               | 250   | 1.200   | 105.0 at 2.5  | 54.5                                   | 66.5                   | 520                             |
| V48MLA1210LNHAUTO  | 48.0                               | 40.0               | 220   | 0.900   | 105.0 at 2.5  | 54.5                                   | 66.5                   | 500                             |

NOTES:

- 'L' suffix is a low capacitance and energy version; Contact your Littelfuse sales representative for custom capacitance requirements
- Typical leakage at 25°C < 25 $\mu$ A, maximum leakage 100 $\mu$ A at V<sub>M(DC)</sub>
- Average power dissipation of transients for 0603, 0805, 1206 and 1210 sizes not to exceed 0.05W, 0.1W, 0.1W and 0.15W respectively

**Peak Current and Energy Derating Curve**

When transients occur in rapid succession, the average power dissipation is the energy (watt-seconds) per pulse times the number of pulses per second. The power so developed must be within the specifications shown on the Device Ratings and Specifications Table for the specific device. For applications exceeding 125°C ambient temperature, the peak surge current and energy ratings must be derated as shown below.

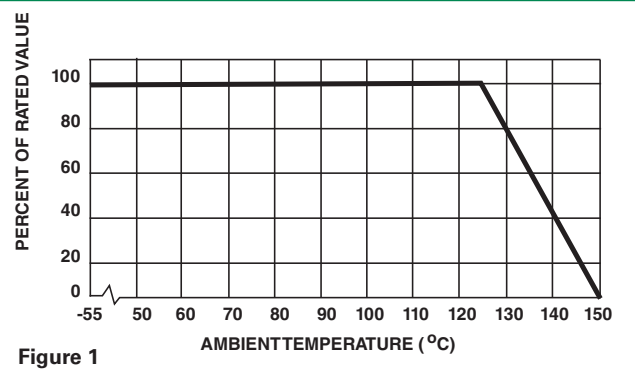


Figure 1

**Peak Pulse Current Test Waveform for Clamping Voltage**



Figure 2

- $O_1$  = Virtual Origin of Wave
- $T$  = Time from 10% to 90% of Peak
- $T_1$  = Rise Time =  $1.25 \times T$
- $T_2$  = Decay Time

**Example** - For an  $8/20 \mu s$  Current Waveform:

- $8 \mu s = T_1$  = Rise Time
- $20 \mu s = T_2$  = Decay Time

Limit V-I Characteristic for V3.5MLA0603 to V30MLA0603

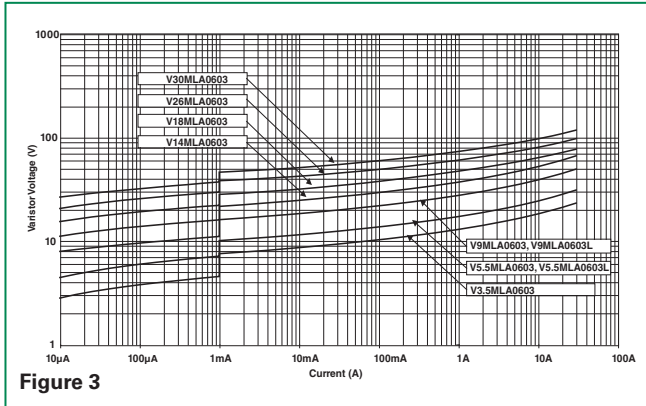


Figure 3

Limit V-I Characteristic for V3.5MLA0805L to V30MLA0805L

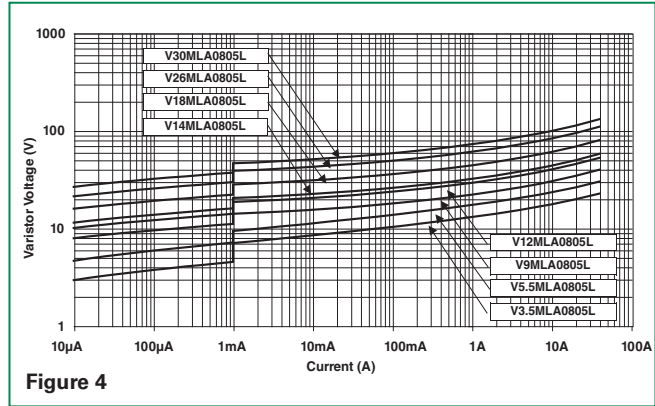


Figure 4

Limit V-I Characteristic for V3.5MLA0805 to V26MLA0805

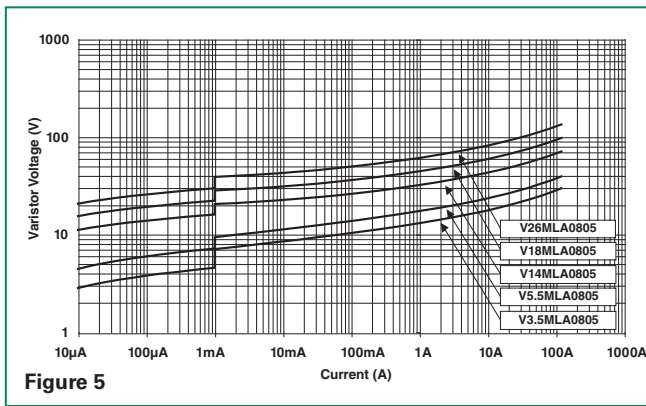


Figure 5

Limit V-I Characteristic for V3.5MLA1206 to V42MLA1206

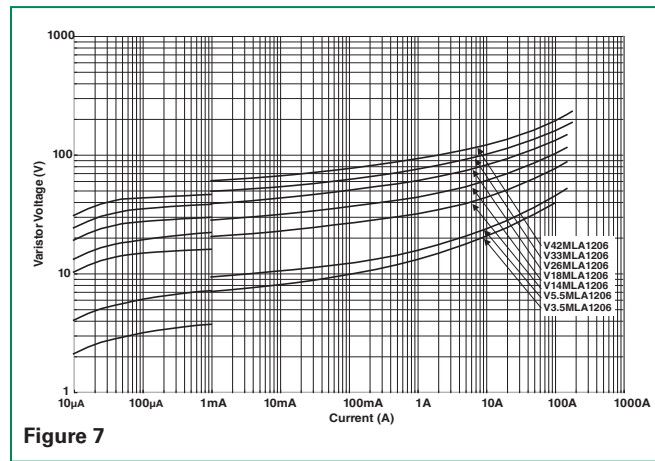


Figure 7

Limit V-I Characteristic for V18MLA1210 to V48MLA1210

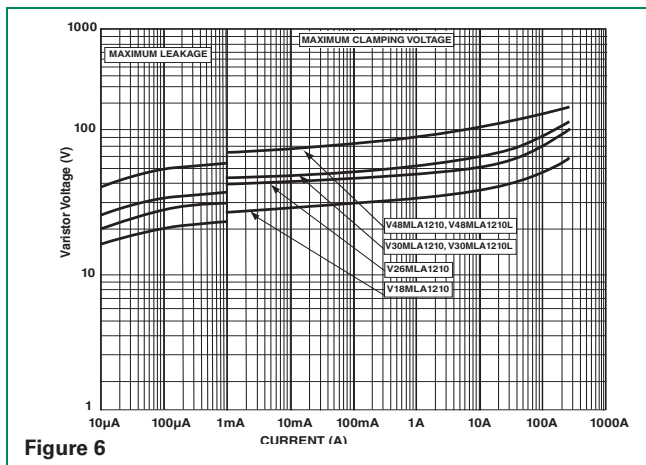


Figure 6

**Device Characteristics**

At low current levels, the V-I curve of the multilayer transient voltage suppressor approaches a linear (ohmic) relationship and shows a temperature dependent effect. At or below the maximum working voltage, the suppressor is in a high resistance modex (approaching  $10^6\Omega$  at its maximum rated working voltage). Leakage currents at maximum rated voltage are below  $100\mu A$ , typically  $25\mu A$ .

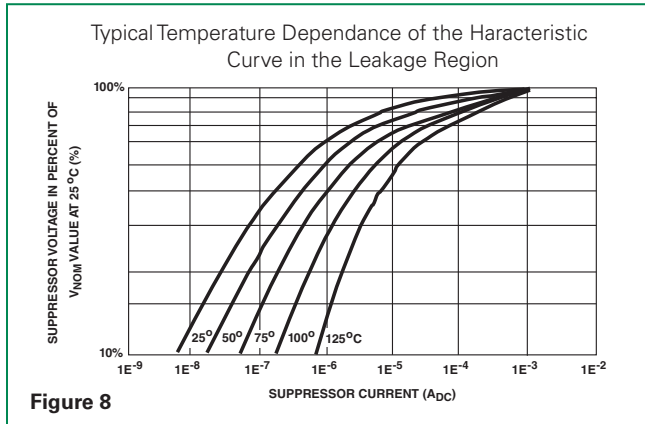


Figure 8

**Speed of Response**

The Multilayer Suppressor is a leadless device. Its response time is not limited by the parasitic lead inductances found in other surface mount packages. The response time of the  $Z_{N}O$  dielectric material is less than 1ns and the MLA Automotive Series can clamp very fast dV/dT events such as ESD. Additionally, in "real world" applications, the associated circuit wiring is often the greatest factor effecting speed of response. Therefore, transient suppressor placement within a circuit can be considered important in certain instances.

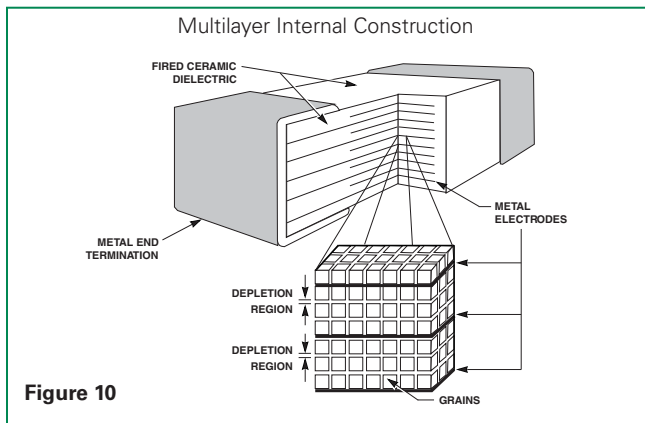


Figure 10

**Clamping Voltage Over Temperature ( $V_c$  at 10A)**

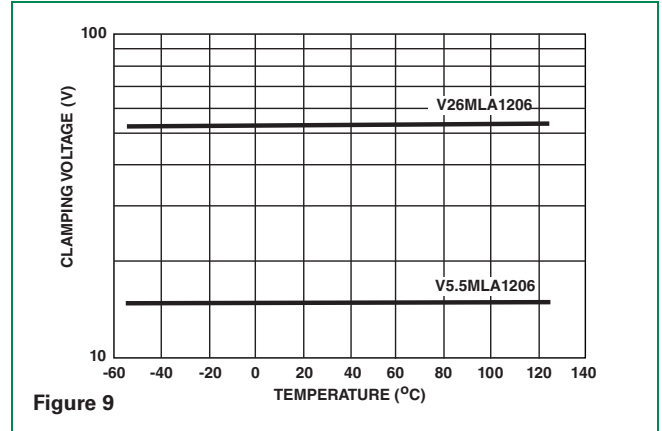


Figure 9

**Energy Absorption/Peak Current Capability**

Energy dissipated within the MLA Automotive Series is calculated by multiplying the clamping voltage, transient current and transient duration. An important advantage of the multilayer is its interdigitated electrode construction within the mass of dielectric material. This results in excellent current distribution and the peak temperature per energy absorbed is very low. The matrix of semiconducting grains combine to absorb and distribute transient energy (heat) (see Speed of Response). This dramatically reduces peak temperature; thermal stresses and enhances device reliability.

As a measure of the device capability in energy and peak current handling, the V26MLA1206 part was tested with multiple pulses at its peak current rating ( $150A$ ,  $8/20\mu s$ ). At the end of the test, 10,000 pulses later, the device voltage characteristics are still well within specification.

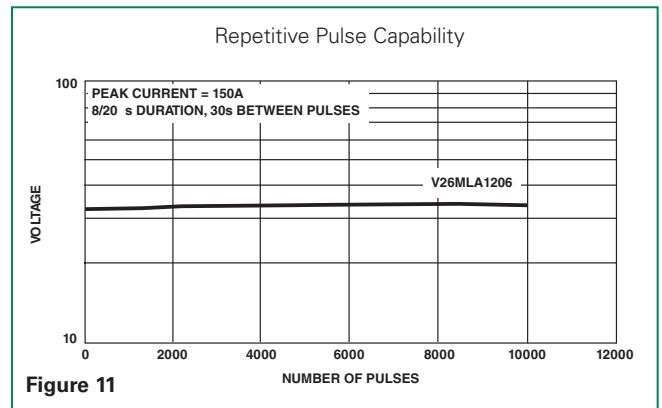


Figure 11

### Lead (Pb) Soldering Recommendations

The principal techniques used for the soldering of components in surface mount technology are IR Re-flow and Wave soldering. Typical profiles are shown on the right.


The recommended solder for the MLA Automotive Series suppressor is a 62/36/2 (Sn/Pb/Ag), 60/40 (Sn/Pb) or 63/37 (Sn/Pb). Littelfuse also recommends an RMA solder flux.

Wave soldering is the most strenuous of the processes. To avoid the possibility of generating stresses due to thermal shock, a preheat stage in the soldering process is recommended, and the peak temperature of the solder process should be rigidly controlled.


When using a reflow process, care should be taken to ensure that the MLA Automotive Series chip is not subjected to a thermal gradient steeper than 4 degrees per second; the ideal gradient being 2 degrees per second. During the soldering process, preheating to within 100 degrees of the solder's peak temperature is essential to minimize thermal shock.

Once the soldering process has been completed, it is still necessary to ensure that any further thermal shocks are avoided. One possible cause of thermal shock is hot printed circuit boards being removed from the solder process and subjected to cleaning solvents at room temperature. The boards must be allowed to cool gradually to less than 50° C before cleaning.

### Reflow Solder Profile

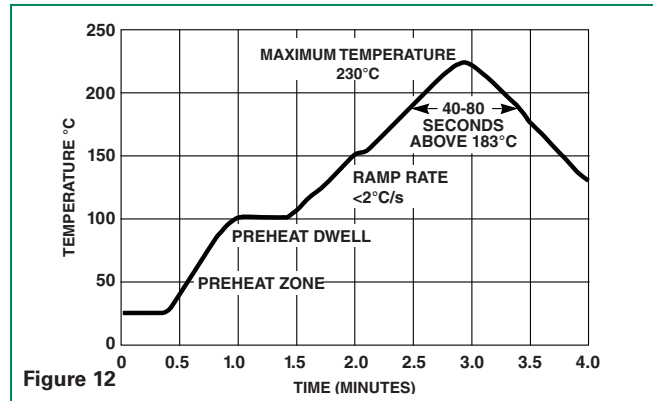

### Wave Solder Profile

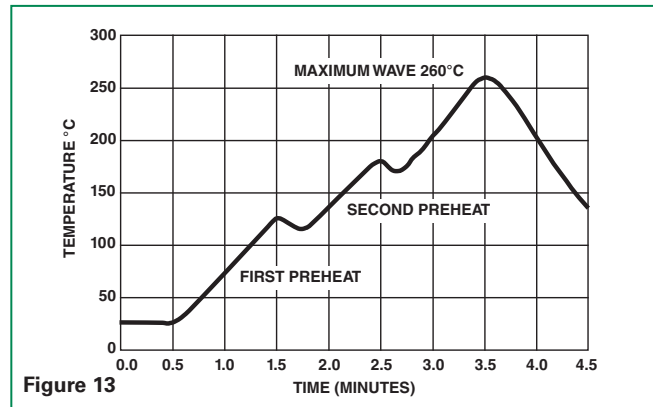

### Lead-free (Pb-free) Soldering Recommendations


Littelfuse offers the Nickel Barrier Termination option (see "N" suffix in Part Numbering System for ordering) for the optimum Lead-free solder performance, consisting of a Matte Tin outer surface plated on Nickel underlayer, plated on Silver base metal.

The preferred solder is 96.5/3.0/0.5 (SnAgCu) with an RMA flux, but there is a wide selection of pastes and fluxes available with which the Nickel Barrier parts should be compatible.

The reflow profile must be constrained by the maximums in the Lead-free Reflow Profile. For Lead-free wave soldering, the Wave Solder Profile still applies.


Note: the Lead-free paste, flux and profile were used for evaluation purposes by Littelfuse, based upon industry standards and practices. There are multiple choices of all three available, it is advised that the customer explores the optimum combination for their process as processes vary considerably from site to site.

### Lead-free Re-flow Solder Profile

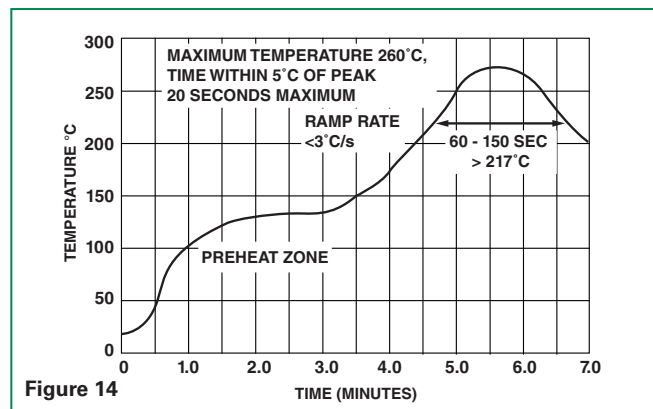


### Product Dimensions (mm)

PAD LAYOUT DIMENSIONS

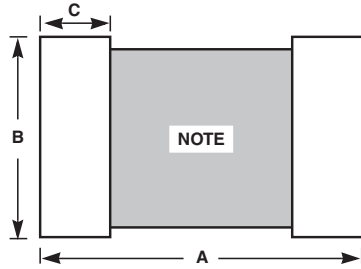

CHIP LAYOUT DIMENSIONS




NOTE : Avoid metal runs in this area, parts not recommended for use in applications using Silver (Ag) epoxy paste.

| Dimension       | 1210 Size         |                 | 1206 Size         |                 | 0805 Size          |                  | 0603 Size         |                |
|-----------------|-------------------|-----------------|-------------------|-----------------|--------------------|------------------|-------------------|----------------|
|                 | IN                | MM              | IN                | MM              | IN                 | MM               | IN                | MM             |
| <b>A</b>        | 0.160             | 4.06            | 0.160             | 4.06            | 0.120              | 3.05             | 0.100             | 2.54           |
| <b>B</b>        | 0.100             | 2.54            | 0.065             | 1.65            | 0.050              | 1.27             | 0.030             | 0.76           |
| <b>C</b>        | 0.040             | 1.02            | 0.040             | 1.02            | 0.040              | 1.02             | 0.035             | 0.89           |
| <b>D (max.)</b> | 0.113             | 2.87            | 0.071             | 1.80            | 0.043              | 1.10             | 0.040             | 1.00           |
| <b>E</b>        | 0.020<br>-/+0.010 | 0.50<br>-/+0.25 | 0.020<br>-/+0.010 | 0.50<br>-/+0.25 | 0.020 +/-<br>0.010 | 0.50 +/-<br>0.25 | 0.015<br>-/+0.008 | 0.4<br>-/+0.20 |
| <b>L</b>        | 0.125<br>-/+0.012 | 3.20<br>-/+0.30 | 0.125<br>-/+0.012 | 3.20<br>-/+0.30 | 0.079<br>-/+0.008  | 2.01<br>-/+0.20  | 0.063<br>-/+0.006 | 1.6<br>-/+0.15 |
| <b>W</b>        | 0.100<br>-/+0.012 | 2.54<br>-/+0.30 | 0.060<br>-/+0.011 | 1.60<br>-/+0.28 | 0.049<br>-/+0.008  | 1.25<br>-/+0.20  | 0.032<br>-/+0.060 | 0.8<br>-/+0.15 |

MLA Auto Series

### Part Numbering System

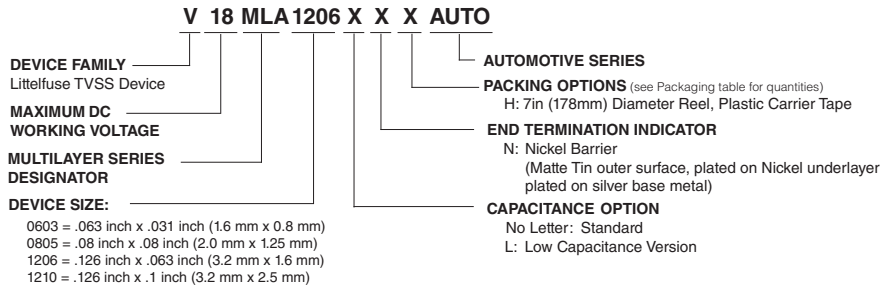

### Packaging\*


| Device Size | Quantity                  |
|-------------|---------------------------|
|             | 7" Inch Reel ("H" Option) |
| 1210        | 2,000                     |
| 1206        | 2,500                     |
| 0805        | 2,500                     |
| 0603        | 2,500                     |

\*(Packaging) It is recommended that parts be kept in the sealed bag provided and that parts be used as soon as possible when removed from bags.

**Tape and Reel Specifications**



For T and H Pack Options: PLASTIC CARRIER TAPE  
For R Pack Options: EMBOSSED PAPER CARRIER TAPE

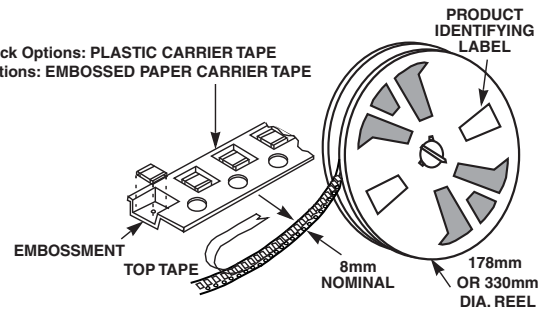

| Symbol | Description  | Dimensions in Millimeters                    |
|--------|--|--|
|        |  | 0603, 0805, 1206 & 1210 Sizes                |
| $A_0$  | Width of Cavity  | Dependent on Chip Size to Minimize Rotation. |
| $B_0$  | Length of Cavity   | Dependent on Chip Size to Minimize Rotation. |
| $K_0$  | Depth of Cavity  | Dependent on Chip Size to Minimize Rotation. |
| $W$    | Width of Tape  | 8 $\pm$ 0.3                                  |
| $F$    | Distance Between Drive Hole Centers and Cavity Centers           | 3.5 $\pm$ 0.05                               |
| $E$    | Distance Between Drive Hole Centers and Tape Edge                | 1.75 $\pm$ 0.1                               |
| $P_1$  | Distance Between Cavity Centers                                  | 4 $\pm$ 0.1                                  |
| $P_2$  | Axial Drive Distance Between Drive Hole Centers & Cavity Centers | 2 $\pm$ 0.1                                  |
| $P_0$  | Axial Drive Distance Between Drive Hole Centers                  | 4 $\pm$ 0.1                                  |
| $D_0$  | Drive Hole Diameter  | 1.55 $\pm$ 0.05                              |
| $D_1$  | Diameter of Cavity Piercing                                      | 1.05 $\pm$ 0.05                              |
| $T_1$  | Top Tape Thickness   | 0.1 Max                                      |

NOTES:

- Conforms to EIA-481-1, Revision A
- Can be supplied to IEC publication 286-3





Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.