

July 1994

Quad Operational Amplifier

Features

- This Circuit is Processed in Accordance to MIL-STD-883 and is Fully Conformant Under the Provisions of Paragraph 1.2.1.
- Slew Rate 0.9V/ μ s (Min)
- Bandwidth 2.5MHz (Min)
- Input Offset Voltage..... 3mV (Max)
- Input Bias Current 200nA (Max)
- Input Voltage Noise 9nV/ $\sqrt{\text{Hz}}$ (Typ)
- No Crossover Distortion
- Standard Quad Pinout

Applications

- Universal Active Filters
- D3 Communications Filters
- Audio Amplifiers
- Battery-Powered Equipment

Description

The Intersil HA-4741/883, which contains four amplifiers on a monolithic chip, provides a new measure of performance for general purpose operational amplifiers. Each amplifier in the HA-4741/883 has operating specifications that equal or exceed those of the 741-type amplifier in all categories of performance.



The HA-4741/883 is well suited to applications requiring accurate signal processing by virtue of its low values of input offset voltage (3mV max), input bias current (200nA max) and input voltage noise (9nV/ $\sqrt{\text{Hz}}$ typ at 1kHz). The 2.5MHz bandwidth, coupled with high open loop gain, allow the HA-4741/883 to be used in designs requiring amplifiers of wideband signals, such as audio amplifiers. Audio application is further enhanced by the HA-4741/883's negligible output crossover distortion. These excellent dynamic characteristics also make the HA-4741/883 ideal for a wide range of active filter designs. Performance integrity of multi-channel designs is assured by a high level of amplifier-to-amplifier isolation (66dB at 10kHz).

A wide range of supply voltages ($\pm 2\text{V}$ to $\pm 20\text{V}$) can be used to power the HA-4741/883, making it compatible with almost any system including battery-powered equipment.

Ordering Information

PART NUMBER	TEMPERATURE RANGE	PACKAGE
HA1-4741/883	-55°C to +125°C	14 Lead CerDIP
HA4-4741/883	-55°C to +125°C	20 Lead Ceramic LCC

Pinouts

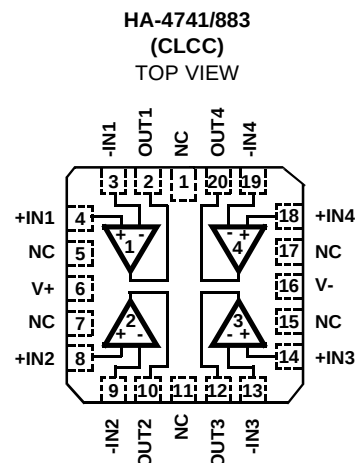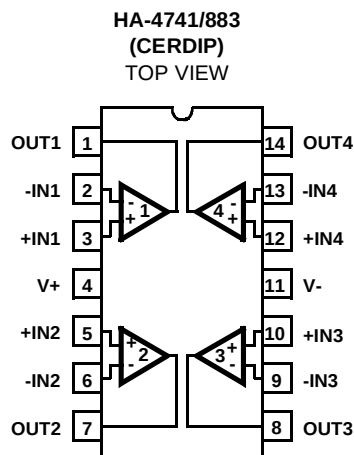

Specifications HA-4741/883

Absolute Maximum Ratings

Voltage Between V+ and V- Terminals 40V
 Differential Input Voltage 15V
 Voltage at Either Input Terminal V+ to V-
 Output Current Indefinite (One Amplifier Shorted to GND)
 Junction Temperature (T_J) +175°C
 Storage Temperature Range -65°C to +150°C
 ESD Rating <2000V
 Lead Temperature (Soldering 10s) +300°C

Thermal Information

Thermal Resistance θ_{JA} θ_{JC}
 CerDIP Package 75°C/W 20°C/W
 Ceramic LCC Package 65°C/W 15°C/W
 Package Power Dissipation Limit at +75°C for T_J ≤ +175°C
 CerDIP Package 1.33W
 Ceramic LCC Package 1.54W
 Package Power Dissipation Derating Factor Above +75°C
 CerDIP Package 13.3mW/°C
 Ceramic LCC Package 15.4mW/°C

CAUTION: Stresses above those listed in "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress only rating and operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied.

Operating Conditions

Operating Temperature Range -55°C to +125°C $V_{INCM} \leq 1/2 (V+ - V-)$
 Operating Supply Voltage ±5V to ±15V $R_L \geq 2k\Omega$

TABLE 1. DC ELECTRICAL PERFORMANCE CHARACTERISTICS

Device Tested at: V_{SUPPLY} = ±15V, R_{SOURCE} = 100Ω, R_{LOAD} = 500kΩ, V_{OUT} = 0V, Unless Otherwise Specified.

PARAMETERS	SYMBOL	CONDITIONS	GROUP A SUBGROUPS	TEMPERATURE	LIMITS		UNITS
					MIN	MAX	
Input Offset Voltage	V _{IO}	V _{CM} = 0V	1	+25°C	-3	3	mV
			2, 3	+125°C, -55°C	-5	5	mV
Input Bias Current	+I _B	V _{CM} = 0V, +R _S = 10kΩ, -R _S = 100Ω	1	+25°C	-200	200	nA
			2, 3	+125°C, -55°C	-325	325	nA
	-I _B	V _{CM} = 0V, +R _S = 100Ω, -R _S = 10kΩ	1	+25°C	-200	200	nA
			2, 3	+125°C, -55°C	-325	325	nA
Input Offset Current	I _{IO}	V _{CM} = 0V, +R _S = 10kΩ, -R _S = 10kΩ	1	+25°C	-30	30	nA
			2, 3	+125°C, -55°C	-75	75	nA
Common Mode Range	+CMR	V+ = 3V, V- = -27V	1	+25°C	12	-	V
			2, 3	+125°C, -55°C	12	-	V
	-CMR	V+ = 27V, V- = -3V	1	+25°C	-	-12	V
			2, 3	+125°C, -55°C	-	-12	V
Large Signal Voltage Gain	+A _{VOL}	V _{OUT} = 0V and +10V, R _L = 2kΩ	4	+25°C	50	-	kV/V
			5, 6	+125°C, -55°C	25	-	kV/V
	-A _{VOL}	V _{OUT} = 0V and -10V, R _L = 2kΩ	4	+25°C	50	-	kV/V
			5, 6	+125°C, -55°C	25	-	kV/V
Common Mode Rejection Ratio	+CMRR	ΔV _{CM} = -10V, V+ = +5V, V- = -25V, V _{OUT} = -10V	1	+25°C	80	-	dB
			2, 3	+125°C, -55°C	74	-	dB
	-CMRR	ΔV _{CM} = +10V, V+ = +25V, V- = -5V, V _{OUT} = +10V	1	+25°C	80	-	dB
			2, 3	+125°C, -55°C	74	-	dB

Specifications HA-4741/883

TABLE 1. DC ELECTRICAL PERFORMANCE CHARACTERISTICS (Continued)

Device Tested at: $V_{SUPPLY} = \pm 15V$, $R_{SOURCE} = 100\Omega$, $R_{LOAD} = 500k\Omega$, $V_{OUT} = 0V$, Unless Otherwise Specified.

PARAMETERS	SYMBOL	CONDITIONS	GROUP A SUBGROUPS	TEMPERATURE	LIMITS		UNITS
					MIN	MAX	
Output Voltage Swing	+V _{OUT1}	R _L = 10k Ω	4	+25°C	12	-	V
			5, 6	+125°C, -55°C	12	-	V
	-V _{OUT1}	R _L = 10k Ω	4	+25°C	-	-12	V
			5, 6	+125°C, -55°C	-	-12	V
	+V _{OUT2}	R _L = 2k Ω	4	+25°C	10	-	V
			5, 6	+125°C, -55°C	10	-	V
	-V _{OUT2}	R _L = 2k Ω	4	+25°C	-	-10	V
			5, 6	+125°C, -55°C	-	-10	V
Output Current	+I _{OUT}	V _{OUT} = -10V	4	+25°C	5	-	mA
			5, 6	+125°C, -55°C	5	-	mA
	-I _{OUT}	V _{OUT} = +10V	4	+25°C	-	-5	mA
			5, 6	+125°C, -55°C	-	-5	mA
Quiescent Power Supply Current	+I _{CC}	V _{OUT} = 0V, I _{OUT} = 0mA	1	+25°C	-	5	mA
			2, 3	+125°C, -55°C	-	7	mA
	-I _{CC}	V _{OUT} = 0V, I _{OUT} = 0mA	1	+25°C	-5	-	mA
			2, 3	+125°C, -55°C	-7	-	mA
Power Supply Rejection Ratio	+PSRR	$\Delta V_{SUP} = +5V$, V+ = +10V, V- = -15V, V+ = +20V, V- = -15V	1	+25°C	80	-	dB
			2, 3	+125°C, -55°C	80	-	dB
	-PSRR	$\Delta V_{SUP} = -5V$, V+ = +15V, V- = -10V, V+ = +15V, V- = -20V	1	+25°C	80	-	dB
			2, 3	+125°C, -55°C	80	-	dB

TABLE 2. AC ELECTRICAL PERFORMANCE CHARACTERISTICS

Device Tested at: $V_{SUPPLY} = \pm 15V$, $R_{SOURCE} = 50\Omega$, $R_{LOAD} = 2k\Omega$, $C_{LOAD} = 50pF$, $A_{VCL} = +1V/V$, Unless Otherwise Specified.

PARAMETERS	SYMBOL	CONDITIONS	GROUP A SUBGROUPS	TEMPERATURE	LIMITS		UNITS
					MIN	MAX	
Slew Rate	+SR	V _{OUT} = -5V to +5V	7	+25°C	0.9	-	V/ μ s
	-SR	V _{OUT} = +5V to -5V	7	+25°C	0.9	-	V/ μ s
Rise and Fall Time	T _R	V _{OUT} = 0 to +200mV 10% $\leq$ T _R $\leq$ 90%	7	+25°C	-	140	ns
	T _F	V _{OUT} = 0 to -200mV 10% $\leq$ T _F $\leq$ 90%	7	+25°C	-	140	ns
Overshoot	+OS	V _{OUT} = 0 to +200mV	7	+25°C	-	40	%
	-OS	V _{OUT} = 0 to -200mV	7	+25°C	-	40	%
Gain Bandwidth Product (Small Signal)	GBWP	V _{OUT} = 50mV	7	+25°C	2.5	-	MHz

Specifications HA-4741/883

TABLE 3. ELECTRICAL PERFORMANCE CHARACTERISTICS

Device Characterized at: $V_{SUPPLY} = \pm 15V$, $R_{LOAD} = 5k\Omega$, $C_{LOAD} = 50pF$, Unless Otherwise Specified.

PARAMETERS	SYMBOL	CONDITIONS	NOTES	TEMPERATURE	LIMITS		UNITS
					MIN	MAX	
Differential Input Resistance	R_{IN}	$V_{CM} = 0V$	1	+25°C	260	-	k Ω
Full Power Bandwidth	FPBW	$V_{PEAK} = 10V$	1, 2	+25°C	14	-	kHz
Minimum Closed Loop Stable Gain	CLSG	$R_L = 2k\Omega$, $C_L = 50pF$	1	-55°C to +125°C	1	-	V/V
Output Resistance	R_{OUT}	Open Loop	1	+25°C	-	350	Ω
Quiescent Power Consumption	PC	$V_{OUT} = 0V$, $I_{OUT} = 0mA$	1, 3	-55°C to +125°C	-	180	mW
Channel Separation	CS	$f = 10kHz$, $R_S = 1k\Omega$ Referred to Input $A_V = 100V/V$, $V_{IN} = 100mV_{PEAK}$	1	+25°C	-66	-	dB

NOTES:

- Parameters listed in Table 3 are controlled via design or process parameters and are not directly tested at final production. These parameters are lab characterized upon initial design release, or upon design changes. These parameters are guaranteed by characterization based upon data from multiple production runs which reflect lot to lot and within lot variation.
- Full Power Bandwidth guarantee based on Slew Rate measurement using $FPBW = \text{Slew Rate} / (2\pi V_{PEAK})$.
- Quiescent Power Consumption based upon Quiescent Supply Current test maximum. (No load on outputs.)

TABLE 4. ELECTRICAL TEST REQUIREMENTS

MIL-STD-883 TEST REQUIREMENTS	SUBGROUPS (SEE TABLES 1 AND 2)
Interim Electrical Parameters (Pre Burn-In)	1
Final Electrical Test Parameters	1 (Note 1), 2, 3, 4, 5, 6, 7
Group A Test Requirements	1, 2, 3, 4, 5, 6, 7
Groups C and D Endpoints	1

NOTE:

- PDA applies to Subgroup 1 only.

Die Characteristics

DIE DIMENSIONS:

87 x 75 x 19 mils $\pm$ 1 mils

2210 x 1910 x 483 μ m $\pm$ 25.4 μ m

METALLIZATION:

Type: Al, 1% Cu

Thickness: 16kÅ $\pm$ 2kÅ

GLASSIVATION:

Type: Nitride

Thickness: 7kÅ $\pm$ 0.7kÅ

WORST CASE CURRENT DENSITY:


1.68 x 10⁵ A/cm²

SUBSTRATE POTENTIAL (Powered Up): V-

TRANSISTOR COUNT: 72

PROCESS: Junction Isolated Bipolar/JFET

Metallization Mask Layout

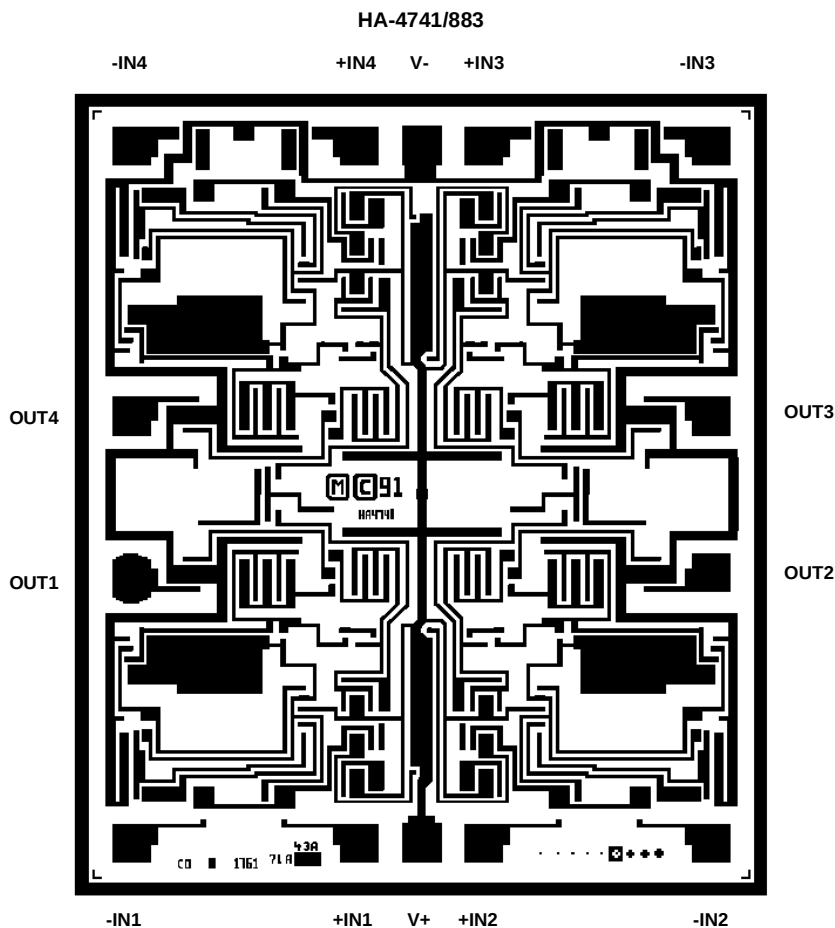

All Intersil U.S. products are manufactured, assembled and tested utilizing ISO9000 quality systems.

Intersil Corporation's quality certifications can be viewed at www.intersil.com/design/quality

Intersil products are sold by description only. Intersil Corporation reserves the right to make changes in circuit design, software and/or specifications at any time without notice. Accordingly, the reader is cautioned to verify that data sheets are current before placing orders. Information furnished by Intersil is believed to be accurate and reliable. However, no responsibility is assumed by Intersil or its subsidiaries for its use; nor for any infringements of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Intersil or its subsidiaries.

For information regarding Intersil Corporation and its products, see www.intersil.com



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.