

## Interactive Catalog Replaces Catalog Pages

Honeywell Sensing and Control has replaced the PDF product catalog with the new **Interactive Catalog**. The **Interactive Catalog** is a power search tool that makes it easier to find product information. It includes more installation, application, and technical information than ever before.



**Click this icon to try the new  
Interactive Catalog.**

---


### **Sensing and Control**

Honeywell Inc.

11 West Spring Street

Freeport, Illinois 61032

## CSN Series Hall Effect Current Sensors

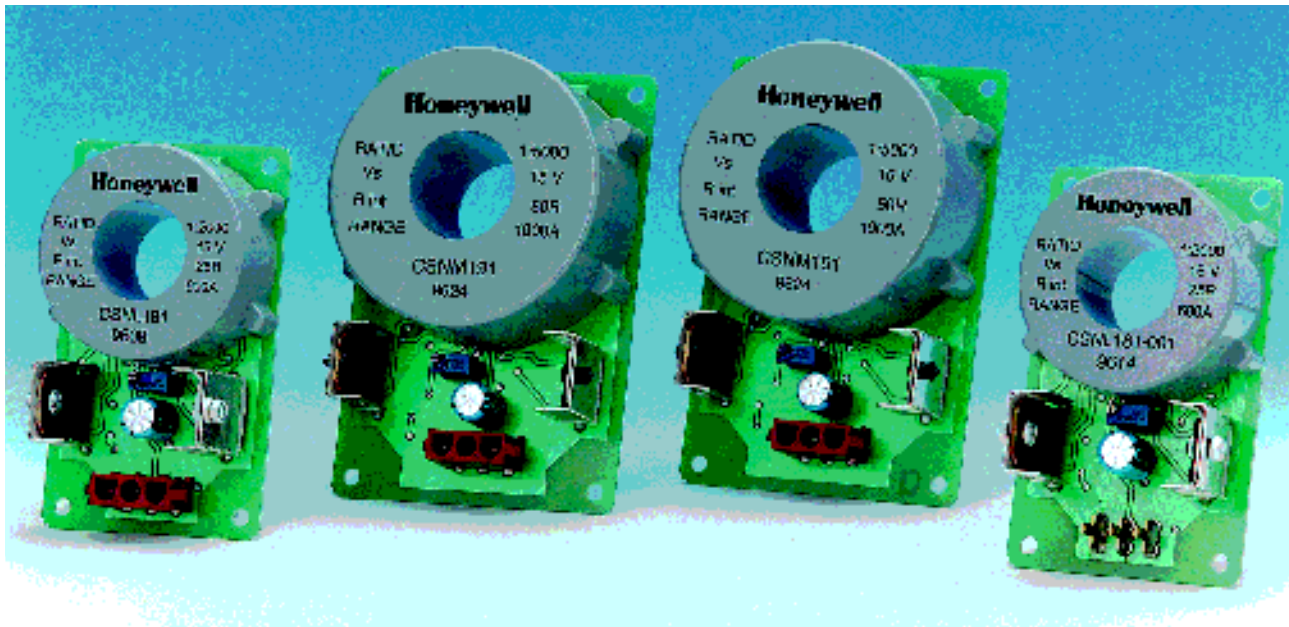

### FEATURES

- Current sensing up to 1000A
- Measures DC, AC and impulse currents
- Very fast response
- High overload capability
- Extended temperature range -40°C to +85°C
- Different termination styles
- Optional conformal coating

### BENEFITS

- Increased measuring range in compact package
- No restriction on input current waveform
- Output signal accurately tracks changes in input signal
- Sensor integrity unaffected
- Improved reliability
- Flexibility of connection style
- Provides additional protection to the sensors

### DESCRIPTION

These new industrial current sensors extend Honeywell's closed loop current sensing capability. They offer increased current measuring capability up to 1000A over an extended temperature range of -40°C to +85°C and are available with different terminal options.

The sensors are closed loop devices based on the principle of the hall effect and null balance method. The output from the current sensor is the balancing current which is a perfect image of the primary current reduced by the number of secondary turns at any time. This current can be expressed as a voltage by passing it through a resistor.

### TYPICAL APPLICATIONS

- Variable speed drives
- Overcurrent protection
- Power supplies
- Feedback control systems
- Robotics
- Welding equipment

# PERFORMANCE DATA

## Definition

A current transducer based on the principle of magnetic compensation. It provides electronic measurement of DC, AC, pulsed currents and their combinations with galvanic isolation between the primary (high current) and secondary circuits.

## Electrical Data

	CSNL181 - XXX	CSNM191 - XXX
Nominal current (In)	: 300 Arms	: 500 Arms
Measuring range	: 0 to ±600 A	: 0 to ±1000 A
Measuring Resistance (Rm)	: Rm min Rm max	: Rm min Rm max
with ±15V	at ±300 A.t max : 0 ohm 50 ohm	at ±500 A.t max : 0 ohm 50 ohm
	at ±600 A.t max : 0 ohm 10 ohm	at ±1000 A.t max : 0 ohm 5 ohm
Nominal analogue output current	: 150 mA	: 100 mA
Turns Ratio	: 1/2000	: 1/5000
Overall accuracy at +25°C	: ±0.5% on In	: ±0.5% of In
Supply Voltage	: ±12V to 18V (±5%)	: ±12V to ±18V (±5%)
Isolation between primary and secondary	: 7.5 kV rms/50 Hz/1 min	: 6.0 kV rms/50 Hz/1 min

## Accuracy - Dynamic Performance

Zero offset current at +25°C	: Max ±0.3 mA	: Max ±0.2 mA
Thermal drift of offset current, between 0°C to +70°C	: Typ ±0.3 mA; Max ±0.5 mA	: Typ ±0.2 mA; Max ±0.3 mA
Linearity	: better than ±0.1%	: better than ±0.1%
Response time	: better than 500nS	: better than 1µs
di/dt accurately followed	: better than 50 A/µs	: better than 50 A/µs
Bandwidth	: DC to 150 KHz	: DC to 100 KHz

## General data

Operating temperature	: -40°C to +85°C (-40°F to +185°F)	: -40°C to +85°C (-40°F to +185°F)
Storage temperature	: -40°C to +90°C (-40°F to +194°F)	: -40°C to +90°C (-40°F to +194°F)
Current consumption	: Typ 14mA(±18V) + output current	: Typ 14mA(±18V) + output current
Secondary internal resistance	: 25 ohm (at 70°C)	: 50 ohm (at 70°C)
Sensor Housing	: Insulated plastic case (Bayblend FR1468)	: Insulated plastic case (Bayblend FR1468)
Signal sense	: a positive output current is obtained on terminal O/P when the primary current flows in the direction of the arrow	: a positive output current is obtained on terminal O/P when the primary current flows in the direction of the arrow
EMC	: EN50081-2, EN 50082-2	: EN50081-2, EN 50082-2


### WARNING

#### PERSONAL INJURY

- DO NOT USE these products as safety or emergency stop devices, or in any other application where failure of the product could result in personal injury.

**Failure to comply with these instructions could result in death or serious injury.**

## Electrical Connection

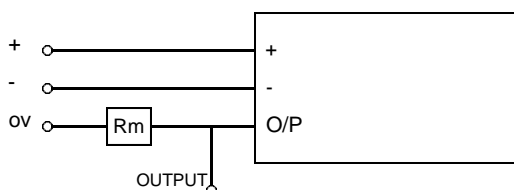


## Termination

- 300A: Supply Voltage ±12V to ±18V
- 500A: Supply Voltage ±12V to ±18V
- O/P Measured output signal

CHARACTERISTICS		
Catalogue Listing	Secondary Connection	Conformal Coating
CSNL181	Amp 3-Way Pin Mate-N-Lok Connector	No
CSNL181-001	Amp Tab, 2.79(.110) Series Faston Terminal	No
CSNL181-002	Amp 3-Way Pin Mate-N-Lok Connector	Humiseal 1R32
CSNL181-003	Amp Tab, 2.79(.110) Series Faston Terminal	Humiseal 1R32
CSNM191	Amp 3-Way Pin Mate-N-Lok Connector	No
CSNM191-001	Amp Tab, 2.79(.110) Series Faston Terminal	No
CSNM191-002	Amp 3-Way Pin Mate-N-Lok Connector	Humiseal 1R32
CSNM191-003	Amp Tab, 2.79(.110) Series Faston Terminal	Humiseal 1R32

## MOUNTING DIMENSIONS IN MM AND (INCHES)

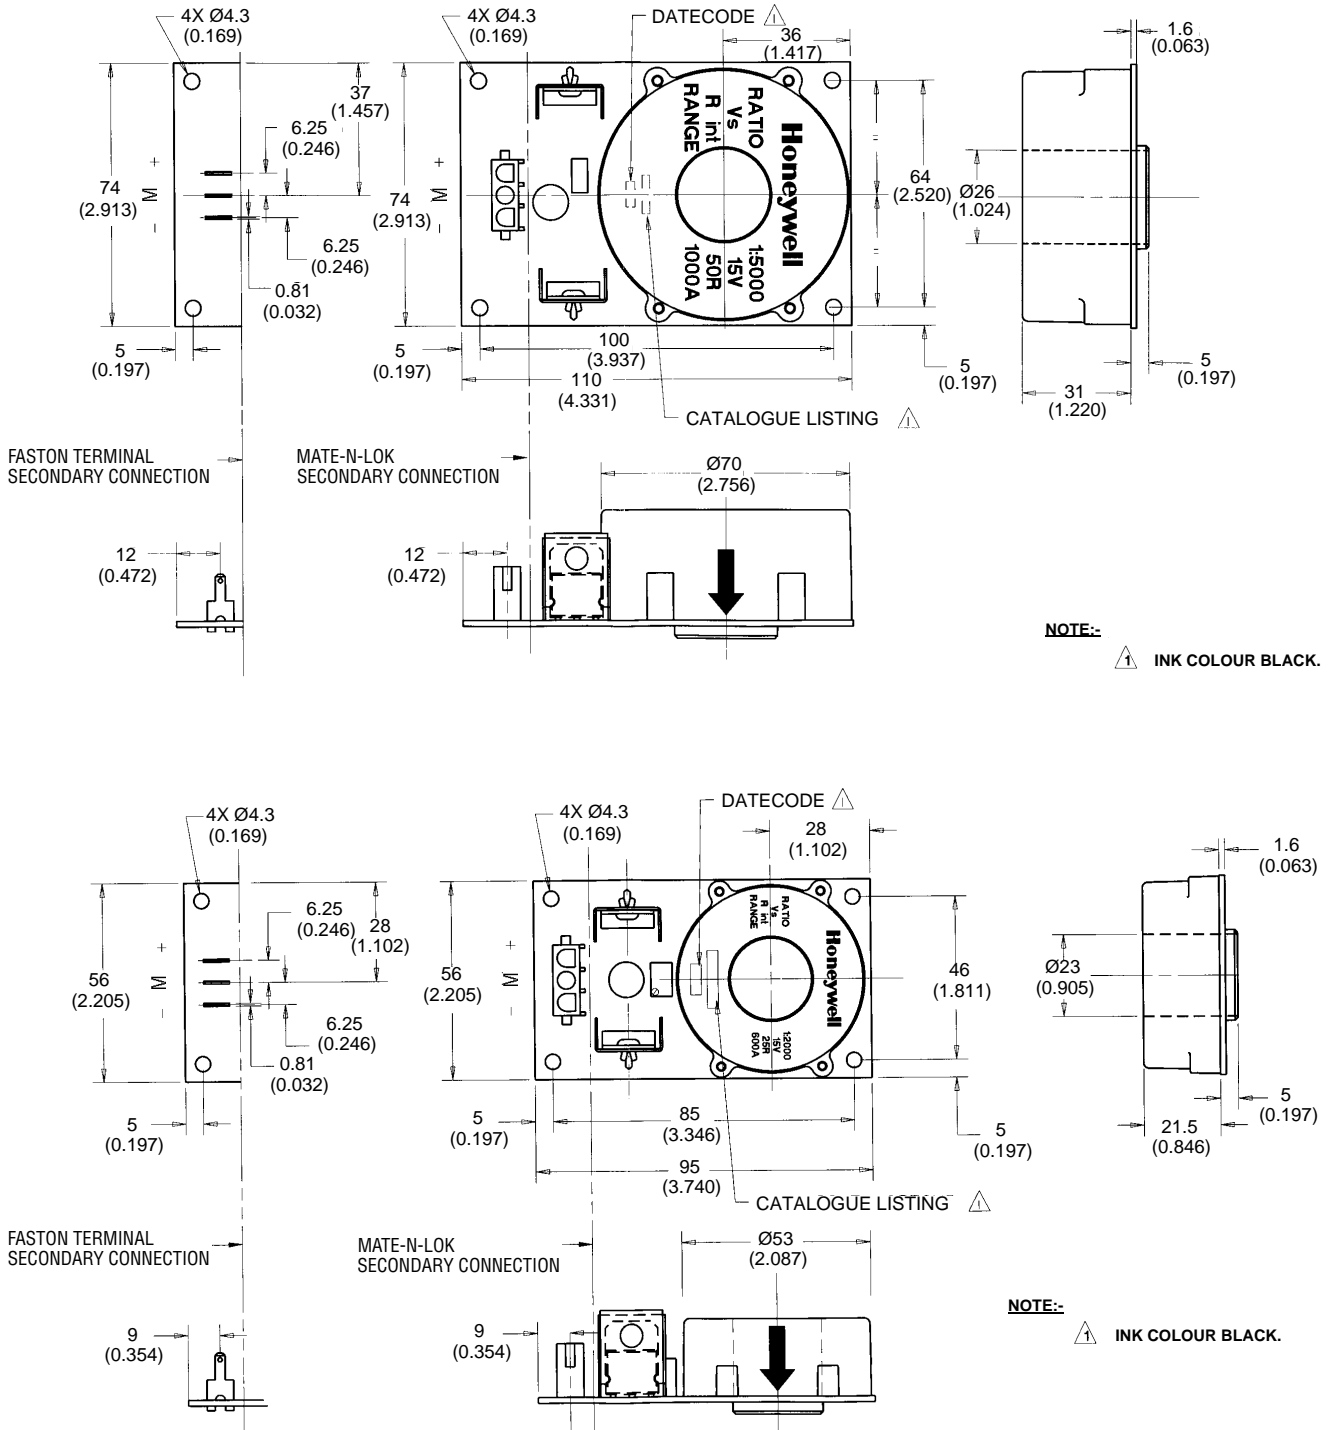

**WARNING****MISUSE OF DOCUMENTATION**

- The information presented in this product sheet (or catalog) is for reference only. DO NOT USE this document as product installation information.
  - Complete installation, operation and maintenance information is to be referenced for each product.
- Failure to comply with these instructions could result in death or serious injury.**

## Sales and Service

For more information:

WWW <http://www.honeywell.com/sensing/>E-mail [info@micro.honeywell.com](mailto:info@micro.honeywell.com)

or contact your local sales office

**EUROPE****Austria**Honeywell Austria GmbH  
Phone: (43) 1-727-80-0  
FAX: (43) 1-727-80-337**Belgium**Honeywell SA/NV  
Phone: 32-2-728 2403  
FAX: 32-2-728 2502**Bulgaria**Honeywell EOOD  
Phone: (359) 2-79-40-27  
Fax: (359) 2-79-40-90**Czech Republic**Honeywell spol. s r.o.  
Phone: (420-2) 6112-3469/3424  
Fax: (420-2) 6112 2691**Denmark**Honeywell A/S  
Phone: 45 39-55-55-55  
FAX: 45 39-55-55-58**Finland**Honeywell OY  
Phone: (358) 9-3480101  
FAX: (358) 9-34801375**France**Honeywell SA  
Phone: (33) -1-60 19 82 68  
FAX: (33) -1-60 19 81 73**Germany**Honeywell AG  
Phone: 49-69-8064-444  
FAX: 49-69-8064-442**Hungary**Honeywell Kft.  
Phone: (36) 1-252-6363  
FAX: (36) 1-252-1541**Italy**Honeywell S.p.A.  
Phone: 39 (2) 92146 1  
FAX: 39 (2) 92146 888**The Netherlands**Honeywell B.V.  
Phone: (31) 20 565 6911  
FAX: (31) 20 565 6600**Norway**Honeywell A/S  
Phone: (47) 66 76 20 00  
FAX: (47) 66 76 20 90**Poland**Honeywell Sp. zo.o  
Phone: (48) 22 606 0900  
FAX: (48) 22 640 0901**Portugal**Honeywell Portugal Lda  
Phone: (351) 1 4172602  
FAX: (351) 1 4172600**Romania**Honeywell Bucharest  
Phone: (40) 1 2110076  
FAX: (40) 1 2103375**Commonwealth of Independent States (CIS)**Honeywell-Sterch  
Phone: (7-095) 141 5403  
Fax: (7-095) 415 2976**Slovak Republic**Honeywell sro.  
Phone: (421) 7 5247 403  
(421) 7 5247 461/  
445  
FAX: (421) 7 5247 415**South Africa (Republic of)****Honeywell Southern**  
Honeywell S.A. Pty. Ltd  
Phone: (27) 11 805-1201  
Fax: (27) 11 315-2179**Spain**Honeywell S.A.  
Phone: (34) 1-313 6100  
FAX: (34) 1-313 6129**Sweden**Honeywell AB  
Phone: (46) 8 775 55 00  
FAX: (46) 8 775 56 00**Switzerland**Honeywell AG  
Phone: (41) 1 839 25 25  
FAX: (41) 1 831 03 14**Turkey**Honeywell AS  
Emirhan Cad No 145  
Barbaros Plaza C Blok Kat 18  
80700 Dikilitas Istanbul  
Tel: 90-212 227 4196  
FAX: 90-212 259 0465**United Kingdom**Honeywell Control Systems Ltd  
Phone: (44) 1344 656000  
FAX: (44) 1344 656015**Mediterranean & African Distributors**Honeywell SpA  
Phone: (39) 2 921 46 232  
Fax: (39) 2 921 46 233**Middle East Headquarters**Honeywell Middle East Ltd.  
Phone: (9712) 322530  
Fax: (9712) 327718**ASIAPACIFIC****Australia**Honeywell Limited  
Phone: (61) 2-9353-7400  
FAX: (61) 2-9353-7406  
Toll Free 1300-36-39-36  
Toll Free Fax: 1300-36-04-30**China - PRC**Honeywell China Ltd.  
Phone: (86-10) 6595-6898  
FAX: (86-10) 6591-3002**China - Hong Kong**Honeywell China Ltd.  
Phone: (852) 2331-9133  
FAX: (852) 2953-6767**India**Honeywell Inc.  
Phone: (91) 22-204-5827  
FAX: (91) 22-640-9513**Indonesia**Honeywell Indonesia  
Phone: (622)1-521-3330  
FAX: (622)1-384-8949**Japan**Yamatake-Honeywell Co., Ltd  
Phone: (81) 466-20-2187  
FAX: (81) 466-20-2309**South Korea**LG - Honeywell Co. Ltd  
Phone: (822) 799-6011  
FAX: (822) 792-9013**Malaysia**Honeywell Engineering Sdn Bhd  
Phone: (603) 758-4988  
FAX: (603) 758-8922**New Zealand**Honeywell Limited  
Phone: (64-9) 623-5050  
FAX: (64-9) 623-5060**Philippines**Yamatake-Honeywell  
Phone: (63-2) 817-6452  
FAX: (63-2) 817-6471**Singapore/SE Asia Regional Office**Honeywell Southeast Asia Pte. Ltd.  
Phone: (65) 249-0341  
FAX: (65) 445-3033**Taiwan**Honeywell Taiwan Ltd.  
Phone: (886-2) 245-1000  
FAX: (886-2) 245-3242**Thailand**Honeywell Systems Ltd.  
Phone: (662) 693-3099  
FAX: (662) 693-3085**NORTH AMERICA****Canada**Honeywell Ltd  
Phone: 1-800-737-3360  
FAX: 1-800-565-4130**USA**MICRO SWITCH  
Honeywell Inc  
Phone: 1-800-537-6945  
1-815-235-6847  
FAX: 1-815-235-6545**LATIN AMERICA****Argentina**Honeywell S.A.I.C.  
Phone: (54-1) 383-9282  
FAX: (54-1) 325-6470**Brazil**Honeywell do Brasil & Cia  
Phone: (55-11) 865-2055  
FAX: (55-11) 865-3894**Chile**Honeywell Chile, S.A.  
Phone: (56-2) 233-0688  
FAX: (56-2) 231-6679**Columbia**Honeywell Columbia, S.A.  
Phone: (57-1) 623-3239/3051  
FAX: (57-1) 623-3395**Ecuador**Honeywell S.A.  
Phone: (593-2) 981-560/1  
FAX: (593-2) 981-562**Mexico**Honeywell S.A. de C.V.  
Phone: (52-5) 259-1966  
FAX: (52-5) 570-2985**Puerto Rico**Honeywell Inc.  
Phone: (809)792-7075  
FAX: (809) 792-0053**Venezuela**Honeywell CA  
Phone: (58-2) 238-0211  
FAX: (58-2) 238-3391

This publication does not constitute a contract between Honeywell and its customers. The contents may be changed at any time without notice. It is the customer's responsibility to ensure safe operation and installation of the products. Detailed mounting drawings of all products illustrated are available on request.

© Honeywell 1997

# Honeywell

*Helping You Control Your World*Honeywell Control Systems Ltd.  
Newhouse Industrial Estate  
Motherwell ML1 5SB  
Scotland, UK  
Tel: (44) 1698 481400  
Fax: (44) 1698 481014

100418-1-EN GLO 12/97

Printed in the United Kingdom



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.