

ECP-E2...

Electronic circuit breaker

CLIPLINE

Data sheet
102899_en_03

© PHOENIX CONTACT 2010-12-17



1 Description

The **ECP-E2...** electronic circuit breaker can be used in applications that cover all aspects of the switched-mode power supply unit.

In the event of an overload, switched-mode power supply units reduce their output voltage, which means that all the connected loads are no longer sufficiently supplied, e.g., in the event of a short circuit at the load.

The solution here is the ECP-E2... electronic circuit breaker, which selectively protects all 24 V DC load circuits. The ECP-E2... constantly limits the residual current to 1.8 times (or 1.5/1.3 times) the protected nominal current. Capacitive loads can thus be switched on and loads are only switched off in the event of an overload or short circuit.

In addition, the ECP-E2... can be controlled remotely by means of the control input (12), for example, via a PLC, i.e., the ECP-E2... is electronically connected by means of an external +24 V DC permanent signal (at connection 12), enabling current to flow in the load circuit. Defined shutdown, independent of the load, is carried out by applying the ground signal at the same control input (12).

The floating auxiliary contacts of the ECP-E2... can be used to implement a group query from connection 13 to 14. If a circuit breaker trips or is disabled, the signal to connection 14 is interrupted.

A multi-color LED and the signal contact indicate the operating or error state.

1.1 Properties

- Selective load protection, electronic shutdown characteristic curve
- Active current limitation when switching on capacitive loads up to 20,000 μF and in the event of overload/short circuit
- Nominal current can be selected in fixed current strengths from 1 A ... 12 A
- Safe overload shutdown from $1.1 \times I_N$, even for long load cables or low cable cross-sections
- Manual on/off switch (S1)
- Control input IN+ for remote ON/OFF signal
- Indication by means of LED or signal contact F
- Integrated failsafe element
- Design width of just 12.5 mm per channel
- Can be plugged into a modular base



NOTE: Make sure that the cable cross-section of the relevant load circuit is adapted to the nominal current of the ECP-E2... used.

In the system or machine, take special precautionary measures to prevent system parts from restarting (according to Machinery Directive 2006/42/EC and EN 60204-1). In the event of an error (short circuit/overload), the load circuit is electronically shut down by the ECP-E2....



NOTE: Make sure that the cable cross-section of the relevant load circuit is adapted to the nominal current of the ECP-E2... used.



Make sure you always use the latest documentation.
It can be downloaded at www.phoenixcontact.net/catalog.



This data sheet is valid for all products listed on the following page:

2 Ordering data

Electronic circuit breaker

| Description | Type | Order No. | Pcs./Pkt. |
|---|------------|-----------|-----------|
| Electronic circuit breaker, version with control input and group query, can be plugged into a TMCP base, indication by means of 3-color LED | | | |
| 1 A nominal current | ECP-E2 1A | 0900139 | 5 |
| 2 A nominal current | ECP-E2 2A | 0900236 | 5 |
| 3 A nominal current | ECP-E2 3A | 0900333 | 5 |
| 4 A nominal current | ECP-E2 4A | 0900430 | 5 |
| 6 A nominal current | ECP-E2 6A | 0900634 | 5 |
| 8 A nominal current | ECP-E2 8A | 0900838 | 5 |
| 10 A nominal current | ECP-E2 10A | 0900100 | 5 |
| 12 A nominal current | ECP-E2 12A | 0900207 | 5 |

Accessories

| Description | Type | Order No. | Pcs./Pkt. |
|--|-----------------|----------------------|-----------|
| Modular base , 2-pos., designed to accommodate two 1-pos. circuit breakers, width of 12.5 mm per position | TMCP SOCKET M | 0916589 | 10 |
| Base termination elements , can be plugged into both the left and right-hand side, contain the connections for the reset inputs/group query | TMCP CONNECT LR | 0916592 | 3 |
| Spring lock , for mechanical locking if mounted overhead, 1-pos. | ECP-LOCK | 0912021 | 10 |
| Zack marker strip , 10-section, for labeling the center of the terminal block | ZB 6 | See CLIPLINE catalog | |
| Fixed bridge , plug-in, not insulated, 500 mm long, can be cut to length, for distribution of the supply potential in the base, $I_{\max} = 50 \text{ A}$ | FBST 500 TMCP | 0916615 | 20 |
| Continuous plug-in bridge , 500 m long, can be cut to length, for potential distribution, $I_{\max} = 32 \text{ A}$, red | FBST 500-PLC RD | 2966786 | 20 |
| Continuous plug-in bridge , 500 m long, can be cut to length, for potential distribution, $I_{\max} = 32 \text{ A}$, blue | FBST 500-PLC BU | 2966692 | 20 |
| Signal bridge , plug-in, for bridging group indication when there is a free slot on the TMCP SOCKET M base, $I_{\max} = 1 \text{ A}$ | TCMP SB | 0916602 | 6 |

3 Technical data

Operating data

| | |
|---|--|
| Nominal voltage | 24 V DC |
| DC supply voltage | 18 V DC ... 32 V DC |
| Nominal current I_N | Depending on the selected item version: 1 A, 2 A, 3 A, 4 A, 6 A, 8 A, 10 A, 12 A |
| Closed circuit current I_0 | In the ON state: 20 mA ... 30 mA, typical (depending on the signal output) |
| Tripping current (bimetal) | 0.3 A, typical (only in the event of an error, until electrically shut down) |
| Indication of the operating state | <ul style="list-style-type: none"> Multi-color LED Floating signal contact F On/off position of switch S1 |
| Multi-color LED | <p>Green = Device switched on (S1 = ON) or load circuit/Power MOSFET controlled</p> <p>Orange = Overload or short circuit until electronically shut down</p> <p>Red = Device electronically shut down, load circuit/Power MOSFET switched off, undervoltage ($U_B < 8\text{ V}$) or after switch-on until the end of the switch-on delay time</p> <p>OFF: Manually switched off (S1 = OFF) or device power supply disconnected</p> |
| Protection against polarity reversal of U_B | Internal bimetal (failsafe element) triggered, pushbutton moves to OFF position |
| Auxiliary contacts | Pin 11 (GND) Pin 12 (individual indication) Pin 13/14 (group query) |
| Switching capacity I_{CN} | Active current limitation of 180% |

Load circuit

| | |
|--|--|
| Load output | Power MOSFET output (positive switching) |
| Overload shutdown | $1.1 \times I_N$ (1.05 ... $1.35 \times I_N$), typical |
| Short circuit current I_K | Active current limitation; $1.8 \times I_N$, maximum (see "Time-current characteristic" on page 6) |
| Shutdown time | 3 s at $I_L > 1.1 \times I_N$, typical 100 ms ... 3 s at $I_L > 1.8 \times I_N$ (or $1.5 \times I_N / 1.3 \times I_N$), typical See "Voltage drop, current limitation, maximum load current" on page 4 |
| R_i when plugged in | $\approx 50\text{ m}\Omega$ |
| Temperature shutdown | Internal temperature monitoring with electronic shutdown |
| Undervoltage monitoring of load output | With hysteresis, no reset required: OFF at $U_B < 8\text{ V}$ |
| Switch-on delay t_{Start} | 0.5 s, typical after each switch-on and after applying U_B |
| Load circuit shutdown | Electronic shutdown after overload/short circuit |
| Free running circuit | External free-wheeling diode recommended on inductive load |
| Parallel connection of multiple load outputs | Not permitted |

Alarm output F, signal contact

| | |
|-----------------------------------|--|
| Electrical data | Floating signal contact 30 V DC/0.5 A, maximum; 10 V/10 mA, minimum |
| Normal state, LED lights up green | U_B present and switch S1 set to ON and no overload, no short circuit |
| OFF state, LED OFF | <ul style="list-style-type: none"> Device switched off (switch S1 set to OFF) Operating voltage U_B not present |
| Error state, LED lights up orange | Overload condition $> 1.1 \times I_N$ until electronically shut down |
| Error state, LED lights up red | <ul style="list-style-type: none"> Electronic shutdown after overload or short circuit Device switched off with control signal (switch S1 set to ON) Group signal, N/O contact, contact SC-SO open |
| Error pattern | Alarm output F (signal contact) is in the error state if: <ul style="list-style-type: none"> Operating voltage U_B is not present ON/OFF switch S1 is set to OFF The LED lights up red (electronic shutdown) |


Control input IN+

| | |
|---------------------------------------|--|
| Electrical data | Maximum voltage +32 V DC High > 8 V DC ≤ 32 V DC Low ≤ 3 V DC > 0 V DC Current consumption 2.6 mA, typical (+24 V DC) Minimum pulse length 10 ms |
| Control input IN+ (terminal block 12) | +24 V level (HIGH): Device is switched on by a remote ON/OFF signal. 0 V level (LOW): Device is switched off by a remote ON/OFF signal. |
| Switch S1 ON/OFF | Device can only be switched on with S1 if a HIGH level is present at IN+. |

General data

| | |
|---|--|
| Width x length x height | 12.5 mm x 60 mm x 70 mm |
| Weight | 40 g |
| Service life at 1 x I _N | 10,000 |
| Ambient temperature | 0°C ... +50°C (no condensation, see EN 60204-1) |
| Storage temperature | -20°C ... +70°C |
| Insulation material | PA-F |
| Inflammability class according to UL 94 | V0 |
| Backup fuse | Not required, since a redundant failsafe element is integrated. If the failsafe element has been triggered, the pushbutton is in the OFF position. |
| Housing fixing | Can be plugged into TMCP SOCKET M modular base |
| Slip-on connections | 6.3 mm according to DIN 46244-A6.3-0.8 |
| Humid heat | 96 h/95% relative humidity/40°C according to IEC 60068-2-78, Test Cab climatic class 3K3 according to EN 60721 |
| Degree of protection | Housing: IP30, DIN 40050 Terminal blocks: IP00, DIN 40050 |

Tests/approvals

| | |
|--|---|
| Conformance with EMC Directive 2004/108/EC | Noise emission: EN 61000-6-3 Noise immunity: EN 61000-6-2 |
| Isolation coordination (IEC 60934) | 0.5 kV/pollution degree 2, increased isolation in the actuation area |
| Dielectric strength | 32 V DC, maximum (load circuit) |
| Insulation resistance (OFF state) | None, electronic shutdown only |
| Vibration resistance | 3g, test according to IEC 60068-2-6 Test Fc |
| Approvals |  UL 2367, File E317172 Solid State Overcurrent Protectors CE |

Voltage drop, current limitation, maximum load current

| Nominal current I _N | Typical voltage drop U _{ON} at I _N | Active current limitation (typical) | Maximum load current at 100% operating factor, T _A = 40°C | Maximum load current at 100% operating factor, T _A = 50°C |
|--------------------------------|---|--|--|--|
| 1 A | 80 mV | 1.8 x I _N | 1 A | 1 A |
| 2 A | 130 mV | 1.8 x I _N | 2 A | 2 A |
| 3 A | 80 mV | 1.8 x I _N | 3 A | 3 A |
| 4 A | 100 mV | 1.8 x I _N | 4 A | 4 A |
| 6 A | 130 mV | 1.8 x I _N | 6 A | 5 A |
| 8 A | 120 mV | 1.5 x I _N | 8 A | 7 A |
| 10 A | 150 mV | 1.5 x I _N | 10 A | 9 A |
| 12 A | 180 mV | 1.3 x I _N | 12 A | 10.8 A |




When mounted in rows without convection cooling, due to the thermal effect during continuous operation (100% operating factor) the nominal device current must only be led to a maximum of 80%.

3.1 Connection diagram



The signal contacts are shown in the OFF or error state.

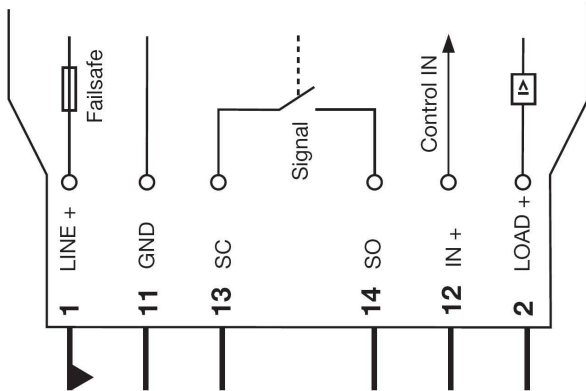

With control input IN+ (+24 V DC)
 With alarm output F (group signal, N/O contact)
 Normal state: SC-SO closed
 Error state: SC-SO open

3.3 Dimensions

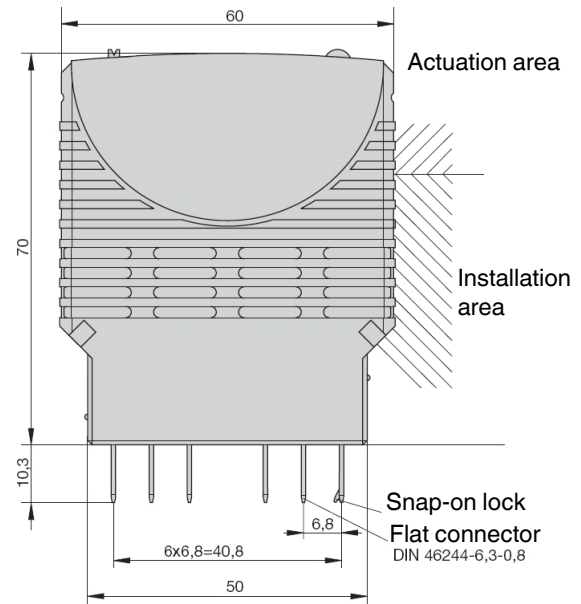


Figure 2 Dimensions (in mm)

3.2 Block diagram (example ECP-E ...)

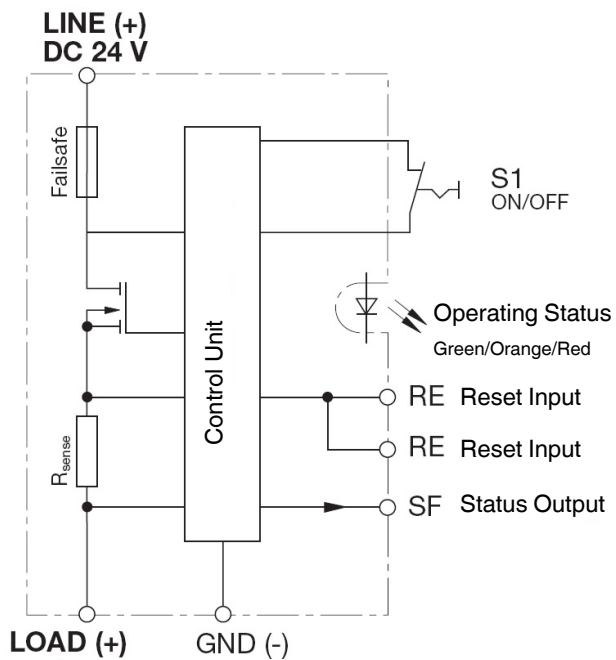


Figure 1 Block diagram (example ECP-E ...)

3.4 Time-current characteristic ($T_A = 25^\circ\text{C}$)

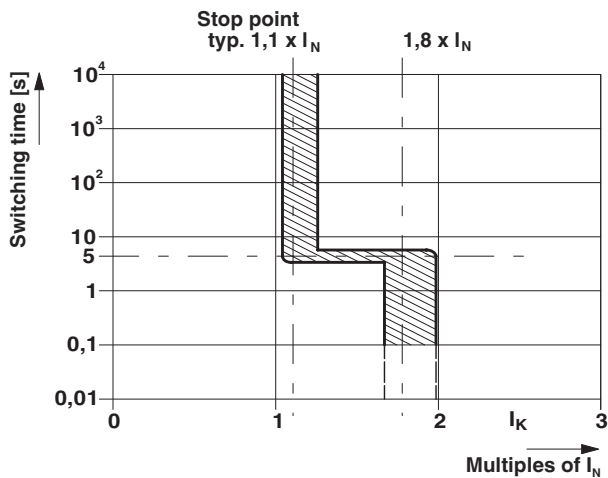


Figure 3 Time-current characteristic

- In the $1.1 \dots 1.8 \times I_N^*$ range, the typical shutdown time is 3 s.
 - The electronic current limitation is typically activated from $1.8 \times I_N^*$.
This means that under all overload conditions (regardless of the current supply and load circuit resistance), 1.8 times the nominal current* typically flows until shutdown. The shutdown time ranges from 100 ms to 3 s depending on the multiple of the nominal current or in the event of short circuit (I_K).
 - Without the current limitation typically activated at $1.8 \times I_N^*$, a significantly higher overcurrent would flow in the event of an overload or short circuit.
- * Typical current limitation $1.8 \times I_N$ at $I_N = 1 \text{ A} \dots 6 \text{ A}$
 Typical current limitation $1.5 \times I_N$ at $I_N = 8 \text{ A}$ or 10 A
 Typical current limitation $1.3 \times I_N$ at $I_N = 12 \text{ A}$

3.5 Safe shutdown

| Safe shutdown of the ECP-E2... for various supply line lengths and cable cross-sections | | | | | | | | |
|--|--|---|--|--|--|--------------------|-----------------|-------------------|
| Specific electrical resistance of electrolytic copper $\rho_0 = 0.0178 \text{ } (\Omega \times \text{mm}^2)/\text{m}$ | | | | | | | | |
| $U_B = 19.2 \text{ V DC}$ (80% of 24 V DC) | | | The voltage drop at the ECP-E2... and the tolerance of the shutdown point (typically $1.1 \times I_N = 1.05 \dots 1.35 \times I_N$) have already been taken into consideration. | | | | | |
| ECP-E2... nominal current setting I_N (in A) \rightarrow | | | 3 A | 6 A | \rightarrow ECP-E2... shuts down after typically 3 s ... 5 s | | | |
| E.g., Shutdown current $I_{\text{off}} = 1.25 \text{ A} \times I_N$ (in A) \rightarrow | | | 3.75 A | 7.5 A | | | | |
| R_{max} in Ohm = $(U_B/I_{\text{off}}) - 0.050 \text{ } \Omega^1 \rightarrow$ | | | 5.07 Ω | 2.51 Ω | | | | |
| ECP-E2... safely trips from 0 Ω up to maximum circuit resistance R_{max} | | | | | | | | |
| | Cable cross-section A in $\text{mm}^2 \rightarrow$ | 0.14 mm^2 | 0.25 mm^2 | 0.34 mm^2 | 0.5 mm^2 | 0.75 mm^2 | 1 mm^2 | 1.5 mm^2 |
| | Distance L in meters (= single length) \downarrow | Total cable resistance in Ohm = $(R_0 \times 2 \times L)/A$ | | | | | | |
| | | \downarrow | \downarrow | \downarrow | \downarrow | \downarrow | \downarrow | \downarrow |
| | 5 m | 1.27 Ω | 0.71 Ω | 0.52 Ω | 0.36 Ω | 0.24 Ω | 0.18 Ω | 0.12 Ω |
| | 10 m | 2.54 Ω | 1.42 Ω | 1.05 Ω | 0.71 Ω | 0.47 Ω | 0.36 Ω | 0.24 Ω |
| | 15 m | 3.81 Ω | 2.14 Ω | 1.57 Ω | 1.07 Ω | 0.71 Ω | 0.53 Ω | 0.36 Ω |
| | 20 m | 5.09 Ω | 2.85 Ω | 2.09 Ω | 1.42 Ω | 0.95 Ω | 0.71 Ω | 0.47 Ω |
| | 25 m | 6.36 Ω | 3.56 Ω | 2.62 Ω | 1.78 Ω | 1.19 Ω | 0.89 Ω | 0.59 Ω |
| | 30 m | 7.63 Ω | 4.27 Ω | 3.14 Ω | 2.14 Ω | 1.42 Ω | 1.07 Ω | 0.71 Ω |
| | 35 m | 8.90 Ω | 4.98 Ω | 3.66 Ω | 2.49 Ω | 1.66 Ω | 1.25 Ω | 0.83 Ω |
| | 40 m | 10.17 Ω | 5.70 Ω | 4.19 Ω | 2.85 Ω | 1.90 Ω | 1.42 Ω | 0.95 Ω |
| | 45 m | 11.44 Ω | 6.41 Ω | 4.71 Ω | 3.20 Ω | 2.14 Ω | 1.60 Ω | 1.07 Ω |
| | 50 m | 12.71 Ω | 7.12 Ω | 5.24 Ω | 3.56 Ω | 2.37 Ω | 1.78 Ω | 1.19 Ω |
| | 75 m | 19.07 Ω | 10.68 Ω | 7.85 Ω | 5.34 Ω | 3.56 Ω | 2.67 Ω | 1.78 Ω |
| | 100 m | 25.34 Ω | 14.24 Ω | 10.47 Ω | 7.12 Ω | 4.75 Ω | 3.56 Ω | 2.37 Ω |
| | 125 m | 31.79 Ω | 17.80 Ω | 13.09 Ω | 8.90 Ω | 5.93 Ω | 4.45 Ω | 2.97 Ω |
| | 150 m | 38.14 Ω | 21.36 Ω | 15.71 Ω | 10.68 Ω | 7.12 Ω | 5.34 Ω | 3.56 Ω |
| | 175 m | 44.50 Ω | 24.92 Ω | 18.32 Ω | 12.46 Ω | 8.31 Ω | 6.23 Ω | 4.15 Ω |
| | 200 m | 50.86 Ω | 28.48 Ω | 20.94 Ω | 14.24 Ω | 9.49 Ω | 7.12 Ω | 4.75 Ω |
| | 225 m | 57.21 Ω | 32.04 Ω | 23.56 Ω | 16.02 Ω | 10.68 Ω | 8.01 Ω | 5.34 Ω |
| | 250 m | 63.57 Ω | 35.60 Ω | 26.18 Ω | 17.80 Ω | 11.87 Ω | 8.90 Ω | 5.93 Ω |
| Example 1: Maximum permissible distance for 1.5 mm^2 and 3 A \rightarrow Approximately 200 m² | | | | | | | | |
| Example 2: Maximum permissible distance for 1.5 mm^2 and 6 A \rightarrow Approximately 100 m | | | | | | | | |
| Example 3: Mixed wiring: (Control cabinet --- sensor/actuator level) | | | | R1 = 40 m in 1.5 mm^2 and R2 = 5 m in 0.25 mm^2 R1 = 0.95 Ohm, R2 = 0.71 Ohm Total (R1 + R2) = 1.66 Ohm | | | | |

¹ Internal resistance of miniature circuit breakers

² Shutdown current $I_{\text{off}} = 3 \text{ A} \times 1.25 \text{ A} = 3.75 \text{ A}$
 Maximum circuit resistance $R_{\text{max}} = U_B/I_{\text{off}} - 0.050 \text{ } \Omega$ (internal resistance of miniature circuit breakers)
 $R_{\text{max}} = (19.2 \text{ V}/3.75 \text{ A}) - 0.050 \text{ } \Omega = 5.07 \text{ } \Omega$
 In the table, the calculated value of 5.07 Ω lies between 200 m and 225 m (4.75 Ω and 5.34 Ω).
 Therefore a distance of around 200 m can be covered.

4 Mounting on a modular base

The TMCP SOCKET M base is snapped onto a DIN rail and can accommodate two ECP-E2... devices.

The two-channel bases are modular, which means that larger distribution systems can be created. A connection element is inserted at both the start and end of the system.

Current distribution on the individual channels with a common supply (positive pole) is achieved by inserting a power rail in the slot provided on the connection side of the modules.

All electrical connections are established using spring-cage terminal blocks. The reference potential for the ECP-E2... (GND pin 11) is also looped through and led to the side connection elements.

By connecting together the individual bases, all the internal wiring is established for the ground potential and group error message.

The ECP-E2... has an integrated signal contact (PDT). The SC-S0 contact is used for the group error message. The contacts for this indication are already connected in series in the bases and are connected to the side connection elements via two connections (13, 14).

In each base, the series circuit can be contacted using a test socket and any interruptions can thus be determined.

4.1 Technical data

TMCP SOCKET M

| | |
|--|--|
| Test contact for testing group indication on a cable interrupt | $\varnothing = 2 \text{ mm}$ |
| Nominal voltage (without ECP-E2...) | 433 V AC; 65 V DC |
| Nominal current (without ECP-E2...) | |
| LINE supply (1) | 50 A |
| LOAD output (2) | 25 A |
| Reference potential GND (11) | 10 A |
| Group indication (13-14) | 1.0 A (with ECP-E2...: 0.5 A) |
| Internal resistance (without ECP-E2...) | |
| LINE-LOAD (1-2) | 5 m Ω |
| Indication (13-14) for each module | 8 m Ω /each position plus each additional aligned module: +5 m Ω |
| Supply rail for current distribution | Uninsulated power rail I_{max} 50 A (the uninsulated power rail is inserted fully and is therefore safe to touch) |
| Dielectric strength of base (without ECP-E2...) | |
| Between main circuits (without power rail) | 1500 V |
| Main circuit to signal circuit | 1500 V |
| Signal circuit to signal circuit | 1500 V |
| Weight | |
| Central part | 85 g, approximately |
| Connection elements (pair) | 30 g, approximately |
| Approval | Meets standard UL 60950 |

4.2 Dimensions with base

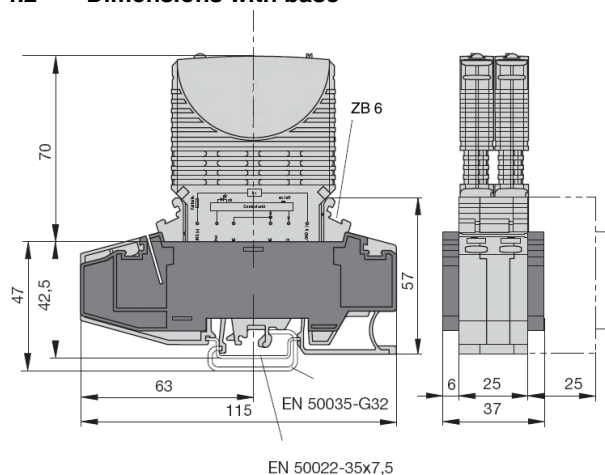


Figure 4 Dimensions in mm

4.3 Assembly

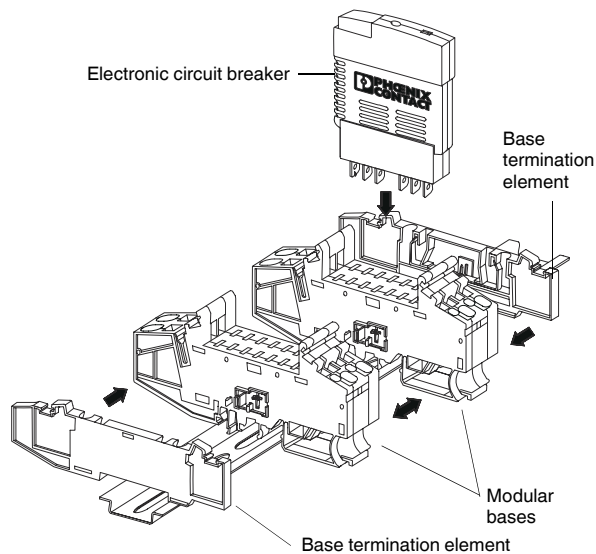


Figure 5 Assembly

To assemble, proceed as follows:

- Snap TMCP SOCKET M base onto an NS 35 DIN rail according to EN 60751.
- Push bases together.
- Snap on TMCP CONNECT LR base termination elements to the left and right-hand side.
- Cut FBST 500... power rail to length as required and insert in bases.
- Insert connecting cables in the spring-cage terminal blocks (see "Connecting spring-cage terminal blocks" on page 9 and "Pin assignment on base" on page 9).
- Insert ECP-E2....
- If necessary, secure the ECP-E2... and base using a clamp (see "Locking the base and ECP-E2..." on page 10).

4.4 Connecting spring-cage terminal blocks

Spring-cage terminal blocks for solid wires and stranded cables with and without ferrules.

Use the specified screwdriver size (SD) to release the spring cage.

| Connection | Spring-cage terminal blocks for | Screwdriver size (SD) |
|--|---------------------------------|-----------------------|
| LINE supply (1) | 1.5 ... 10 mm ² | SD 2 (0.8 x 4.0 mm) |
| LOAD output (2) | 0.25 ... 4 mm ² | SD 1 (0.6 x 3.5 mm) |
| Reference potential GND or group indication connections (11 or 13, 14) | 0.25 ... 2.5 mm ² | SD 1 (0.6 x 3.5 mm) |
| Individual indication connection (12) | 0.25 ... 1.5 mm ² | SD 0 (0.4 x 2.5 mm) |

4.5 Pin assignment on base

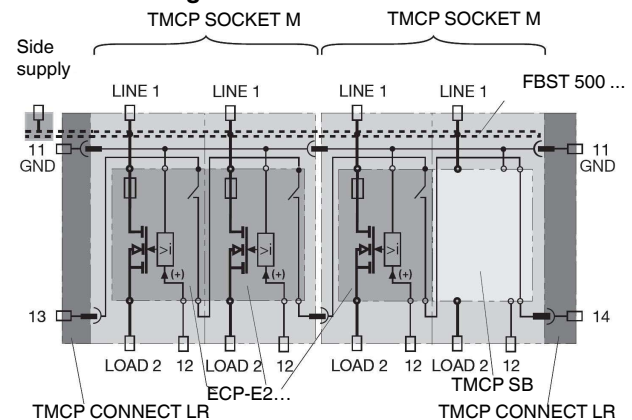


Figure 6 Connection diagram

| PIN | Assignment |
|--------|---|
| 11 | GND |
| 12 | Control signal ON connection (+24 V DC) |
| 13, 14 | Group indication connection (N/O contact) |

| [2(k)] | LINE (+) | TMCP SOCKET M |
|--------|--------------------------------|---------------|
| [12] | GND | [2(k)] |
| [24] | Group SF, N/O contact | [12] |
| [2(i)] | Not used | [24] |
| [23] | Group SF, N/O contact | [2(i)] |
| [11] | Control signal IN+, +24 V = ON | [23] |
| [1] | LOAD (+) | [11] |
| | | [1] |

Figure 7 Pin assignment

4.6 Locking the base and ECP-E2...

If mounted overhead, the ECP-E2... must be connected to the base using the ECP-LOCK clamp.

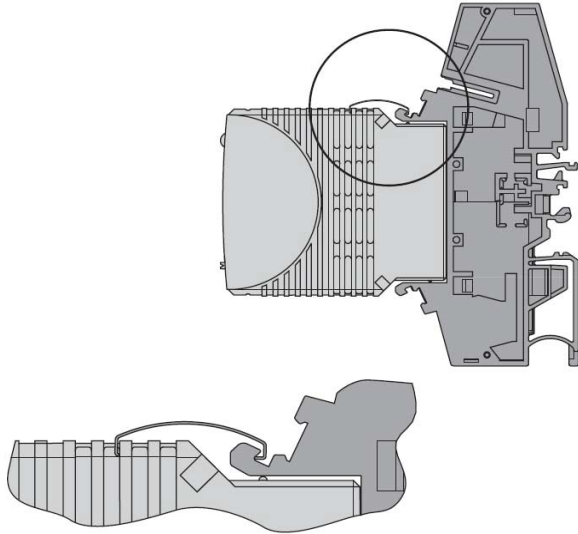


Figure 8 Mounting the ECP-LOCK

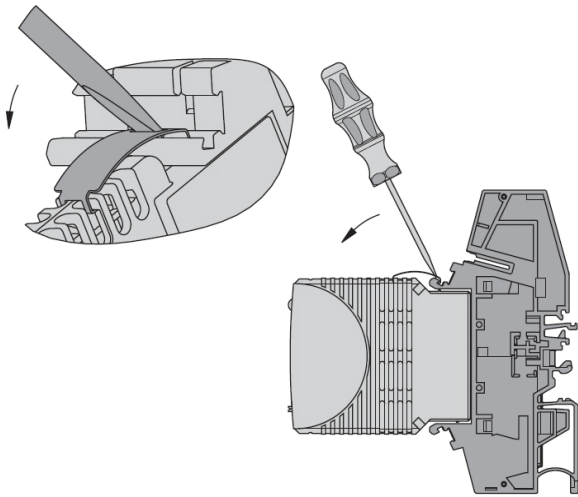


Figure 9 Removing the ECP-LOCK



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.