



Small Signal Zener Diodes



FEATURES

- Silicon planar power Zener diodes
- Standard Zener voltage tolerance is $\pm 5\%$ with a "B" suffix in the ordering code (e.g.: 1N5221B), suffix "C" is $\pm 2\%$ tolerance
- These diodes are also available in MiniMELF case with the type designation TZM5221 to TZM5267, SOT-23 case with the type designations MMBZ5225 to MMBZ5267 and SOD-123 case with the types designations MMSZ5225 to MMSZ5267
- AEC-Q101 qualified
- Material categorization: for definitions of compliance please see www.vishay.com/doc?99912



RoHS COMPLIANT HALOGEN FREE

| PRIMARY CHARACTERISTICS | | |
|------------------------------|---------------------|------|
| PARAMETER | VALUE | UNIT |
| V _Z range nom. | 2.4 to 75 | V |
| Test current I _{ZT} | 1.7 to 20 | mA |
| V _Z specification | Thermal equilibrium | |
| Int. construction | Single | |

APPLICATIONS

- Voltage stabilization

| ORDERING INFORMATION | | | |
|----------------------|-------------------------------|---------------------------------|------------------------|
| DEVICE NAME | ORDERING CODE | TAPED UNITS PER REEL | MINIMUM ORDER QUANTITY |
| 1N5221B to 1N5267B | 1N5221B to 1N5267B-series-TR | 10 000 per 13" reel | 30 000/box |
| 1N5221C to 1N5267C | 1N5221C to 1N5267C-series-TR | | |
| 1N5221B to 1N5267B | 1N5221B to 1N5267B-series-TAP | 10 000 per ammpack (52 mm tape) | |
| 1N5221C to 1N5267C | 1N5221C to 1N5267C-series-TAP | | |

| PACKAGE | | | | |
|--------------|--------|--------------------------------------|-----------------------------------|--------------------------|
| PACKAGE NAME | WEIGHT | MOLDING COMPOUND FLAMMABILITY RATING | MOISTURE SENSITIVITY LEVEL | SOLDERING CONDITIONS |
| DO-35 | 125 mg | UL 94 V-0 | MSL level 1 (according J-STD-020) | 260 °C/10 s at terminals |

| ABSOLUTE MAXIMUM RATINGS (T _{amb} = 25 °C, unless otherwise specified) | | | | |
|---|-------------------------------------|-------------------|----------------------------------|------|
| PARAMETER | TEST CONDITION | SYMBOL | VALUE | UNIT |
| Power dissipation | T _L ≤ 25 °C | P _{tot} | 500 | mW |
| Zener current | | I _Z | P _{tot} /V _Z | mA |
| Thermal resistance junction to ambient air | l = 4 mm, T _L = constant | R _{thJA} | 300 | K/W |
| Junction temperature | | T _j | 175 | °C |
| Storage temperature range | | T _{stg} | -65 to +175 | °C |
| Forward voltage (max.) | I _F = 200 mA | V _F | 1.1 | V |



| ELECTRICAL CHARACTERISTICS (T _{amb} = 25 °C, unless otherwise specified) | | | | | | | | |
|---|------------------------------------|------------------|------------------|----------------------------------|-----|---|-------------------------------------|-------------------------|
| PART NUMBER | ZENER VOLTAGE RANGE ⁽¹⁾ | TEST CURRENT | | REVERSE LEAKAGE CURRENT | | DYNAMIC RESISTANCE f = 1 kHz | | TEMPERATURE COEFFICIENT |
| | V _Z at I _{ZT1} | I _{ZT1} | I _{ZT2} | I _R at V _R | | Z _Z at I _{ZT1} ⁽¹⁾ | Z _{ZK} at I _{ZT2} | α _{VZ} |
| | V | mA | | μA | V | Ω | | %/K |
| | NOM. | | | MAX. | | MAX. | MAX. | TYP. |
| 1N5221 | 2.4 | 20 | 0.25 | 100 | 1 | 30 | 1200 | - 0.085 |
| 1N5222 | 2.5 | 20 | 0.25 | 100 | 1 | 30 | 1250 | - 0.085 |
| 1N5223 | 2.7 | 20 | 0.25 | 75 | 1 | 30 | 1300 | - 0.08 |
| 1N5224 | 2.8 | 20 | 0.25 | 75 | 1 | 30 | 1400 | - 0.08 |
| 1N5225 | 3 | 20 | 0.25 | 50 | 1 | 29 | 1600 | - 0.075 |
| 1N5226 | 3.3 | 20 | 0.25 | 25 | 1 | 28 | 1600 | - 0.07 |
| 1N5227 | 3.6 | 20 | 0.25 | 15 | 1 | 24 | 1700 | - 0.065 |
| 1N5228 | 3.9 | 20 | 0.25 | 10 | 1 | 23 | 1900 | - 0.06 |
| 1N5229 | 4.3 | 20 | 0.25 | 5 | 1 | 22 | 2000 | 0.055 |
| 1N5230 | 4.7 | 20 | 0.25 | 5 | 2 | 19 | 1900 | 0.03 |
| 1N5231 | 5.1 | 20 | 0.25 | 5 | 2 | 17 | 1600 | 0.03 |
| 1N5232 | 5.6 | 20 | 0.25 | 5 | 3 | 11 | 1600 | 0.038 |
| 1N5233 | 6 | 20 | 0.25 | 5 | 3.5 | 7 | 1600 | 0.038 |
| 1N5234 | 6.2 | 20 | 0.25 | 5 | 4 | 7 | 1000 | 0.045 |
| 1N5235 | 6.8 | 20 | 0.25 | 3 | 5 | 5 | 750 | 0.05 |
| 1N5236 | 7.5 | 20 | 0.25 | 3 | 6 | 6 | 500 | 0.058 |
| 1N5237 | 8.2 | 20 | 0.25 | 3 | 6.5 | 8 | 500 | 0.062 |
| 1N5238 | 8.7 | 20 | 0.25 | 3 | 6.5 | 8 | 600 | 0.065 |
| 1N5239 | 9.1 | 20 | 0.25 | 3 | 7 | 10 | 600 | 0.068 |
| 1N5240 | 10 | 20 | 0.25 | 3 | 8 | 17 | 600 | 0.075 |
| 1N5241 | 11 | 20 | 0.25 | 2 | 8.4 | 22 | 600 | 0.076 |
| 1N5242 | 12 | 20 | 0.25 | 1 | 9.1 | 30 | 600 | 0.077 |
| 1N5243 | 13 | 9.5 | 0.25 | 0.5 | 9.9 | 13 | 600 | 0.079 |
| 1N5244 | 14 | 9 | 0.25 | 0.1 | 10 | 15 | 600 | 0.082 |
| 1N5245 | 15 | 8.5 | 0.25 | 0.1 | 11 | 16 | 600 | 0.082 |
| 1N5246 | 16 | 7.8 | 0.25 | 0.1 | 12 | 17 | 600 | 0.083 |
| 1N5247 | 17 | 7.4 | 0.25 | 0.1 | 13 | 19 | 600 | 0.084 |
| 1N5248 | 18 | 7 | 0.25 | 0.1 | 14 | 21 | 600 | 0.085 |
| 1N5249 | 19 | 6.6 | 0.25 | 0.1 | 14 | 23 | 600 | 0.086 |
| 1N5250 | 20 | 6.2 | 0.25 | 0.1 | 15 | 25 | 600 | 0.086 |
| 1N5251 | 22 | 5.6 | 0.25 | 0.1 | 17 | 29 | 600 | 0.087 |
| 1N5252 | 24 | 5.2 | 0.25 | 0.1 | 18 | 33 | 600 | 0.088 |
| 1N5253 | 25 | 5 | 0.25 | 0.1 | 19 | 35 | 600 | 0.089 |
| 1N5254 | 27 | 4.6 | 0.25 | 0.1 | 21 | 41 | 600 | 0.09 |
| 1N5255 | 28 | 4.5 | 0.25 | 0.1 | 21 | 44 | 600 | 0.091 |
| 1N5256 | 30 | 4.2 | 0.25 | 0.1 | 23 | 49 | 600 | 0.091 |
| 1N5257 | 33 | 3.8 | 0.25 | 0.1 | 25 | 58 | 700 | 0.092 |
| 1N5258 | 36 | 3.4 | 0.25 | 0.1 | 27 | 70 | 700 | 0.093 |
| 1N5259 | 39 | 3.2 | 0.25 | 0.1 | 30 | 80 | 800 | 0.094 |
| 1N5260 | 43 | 3 | 0.25 | 0.1 | 33 | 93 | 900 | 0.095 |
| 1N5261 | 47 | 2.7 | 0.25 | 0.1 | 36 | 105 | 1000 | 0.095 |
| 1N5262 | 51 | 2.5 | 0.25 | 0.1 | 39 | 125 | 1100 | 0.096 |
| 1N5263 | 56 | 2.2 | 0.25 | 0.1 | 43 | 150 | 1300 | 0.096 |
| 1N5264 | 60 | 2.1 | 0.25 | 0.1 | 46 | 170 | 1400 | 0.097 |
| 1N5265 | 62 | 2 | 0.25 | 0.1 | 47 | 185 | 1400 | 0.097 |
| 1N5266 | 68 | 1.8 | 0.25 | 0.1 | 52 | 230 | 1600 | 0.097 |
| 1N5267 | 75 | 1.7 | 0.25 | 0.1 | 56 | 270 | 1700 | 0.098 |

Note

(1) Based on DC measurement at thermal equilibrium; lead length = 9.5 (3/8"); thermal resistance of heat sink = 30 K/W

BASIC CHARACTERISTICS ($T_{amb} = 25\text{ }^{\circ}\text{C}$, unless otherwise specified)

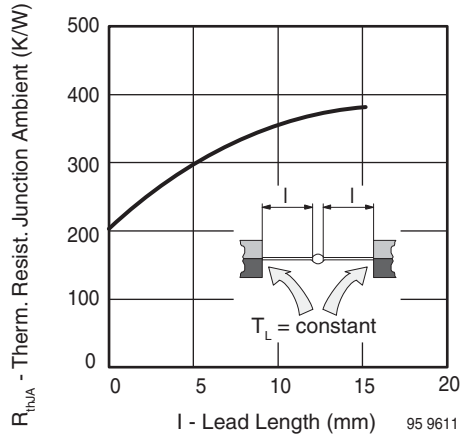


Fig. 1 - Thermal Resistance vs. Lead Length

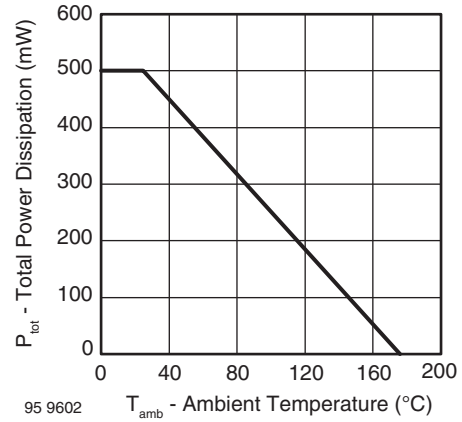


Fig. 4 - Total Power Dissipation vs. Ambient Temperature

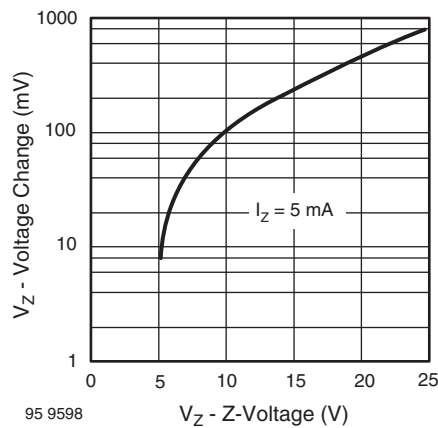


Fig. 2 - Typical Change of Working Voltage under Operating Conditions at $T_{amb} = 25\text{ }^{\circ}\text{C}$

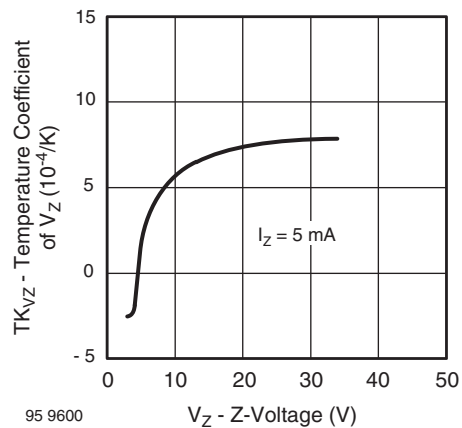


Fig. 5 - Temperature Coefficient of V_Z vs. Z-Voltage

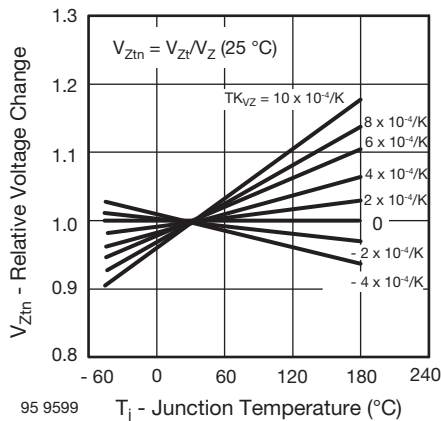


Fig. 3 - Typical Change of Working Voltage vs. Junction Temperature

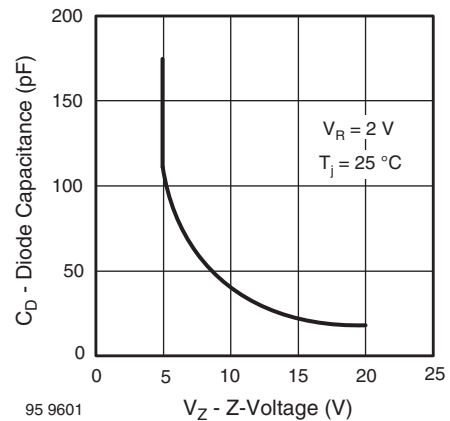


Fig. 6 - Diode Capacitance vs. Z-Voltage

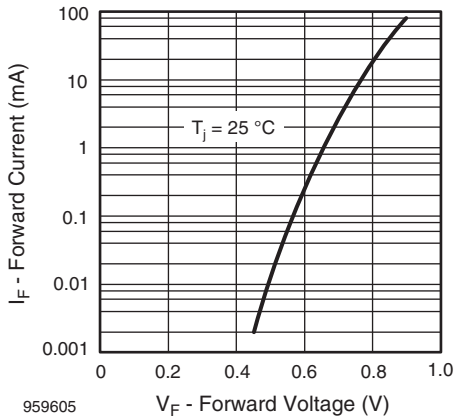


Fig. 7 - Forward Current vs. Forward Voltage

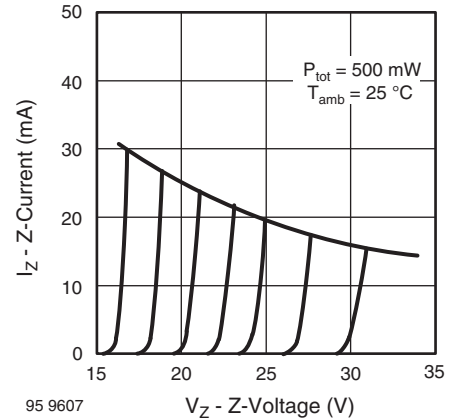


Fig. 9 - Z-Current vs. Z-Voltage

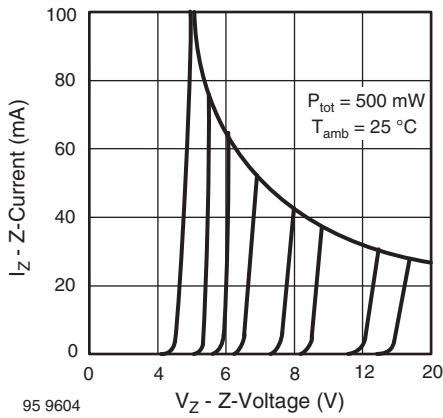


Fig. 8 - Z-Current vs. Z-Voltage

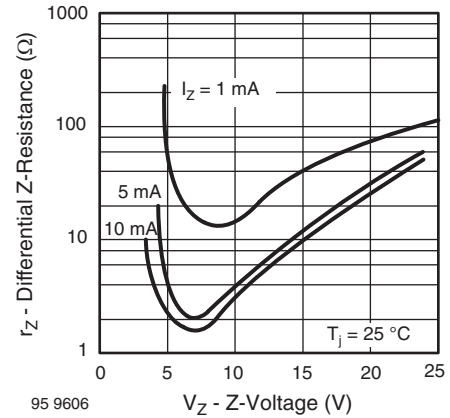


Fig. 10 - Differential Z-Resistance vs. Z-Voltage


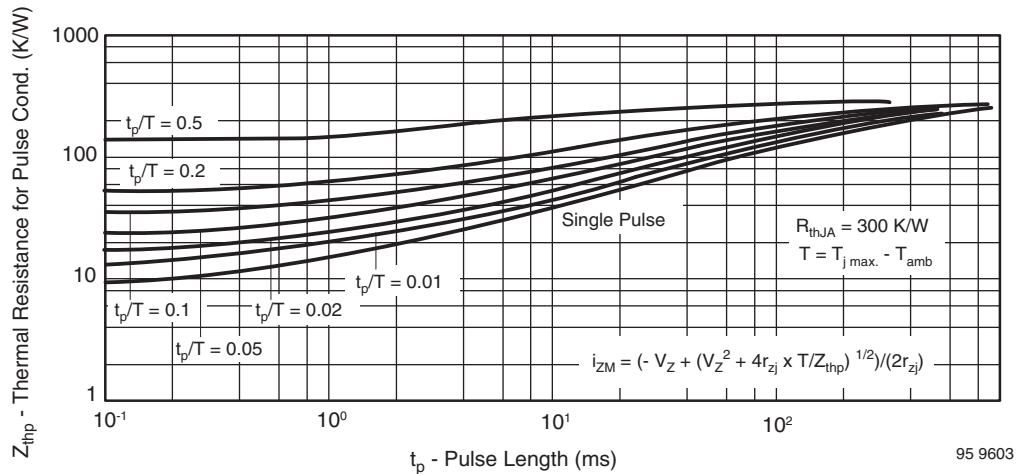


Fig. 11 - Thermal Response



PACKAGE DIMENSIONS in millimeters (inches): **DO-35_1N52xx**

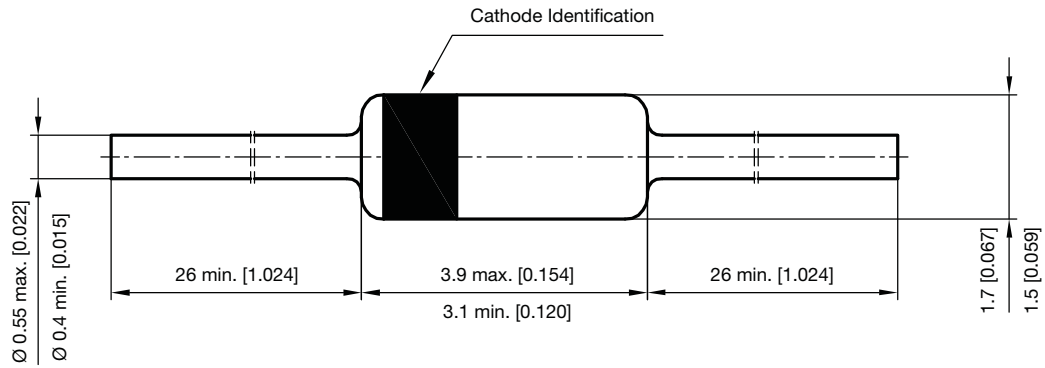

Rev. 1 - Date: 19. December 2011
Document no.: S8-V-3906.04-031(4)
94 12648



Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

Material Category Policy

Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as RoHS-Compliant fulfill the definitions and restrictions defined under Directive 2011/65/EU of The European Parliament and of the Council of June 8, 2011 on the restriction of the use of certain hazardous substances in electrical and electronic equipment (EEE) - recast, unless otherwise specified as non-compliant.

Please note that some Vishay documentation may still make reference to RoHS Directive 2002/95/EC. We confirm that all the products identified as being compliant to Directive 2002/95/EC conform to Directive 2011/65/EU.

Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as Halogen-Free follow Halogen-Free requirements as per JEDEC JS709A standards. Please note that some Vishay documentation may still make reference to the IEC 61249-2-21 definition. We confirm that all the products identified as being compliant to IEC 61249-2-21 conform to JEDEC JS709A standards.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.