TT electronics

# ABAC

## MIL-DTL-38999 Series III



Belief in Technology

# Contents

03 Company Profile
04 About TT Electronics
06 Technical Information
08 Part number explanations
09 Orientation
10 Insert Arrangements
11 Insert Arrangement Specification
14 Receptacle Type 20 / Receptacle Type 24
15 Inline Receptacle Type 12 / Box Mounting Receptacle Type 13
16 Wall Mounting Receptacle with pcb stand-off Type 14
17 Jam Nut Receptacle with pcb stand-off Type 15
18 Bulkhead Connector Type 11 / Recommended Jam Nut Torque Values
19 Fixed Connector with PC Tails
20 MIL-DTL-38999 Plug Type 26 / MIL-DTL-38999 Integral Backshell Type 37
21 Mated Connector Dimensions / Panel Cut out Information
22 Straight backshell for band termination & heat shrink boot
23 Right angle backshell for band termination & heat shrink boot
24 Straight Screen Trap Adapter
25 90° Angled Screen Trap Adapter
26 Fixed Protective Caps
27 Free Protective Caps
28 Stowage Receptacle / Screened Gaskets
29 Contacts
30 Insertion & Extraction
31 Contact Insertaion
32 Contact Extraction
33 Safety Information
34 TT Electronics and the Environment
35 Global Sales Offices

# Company Profile

## There are TT electronics products in every single military vehicle deployed in conflict zones across the globe.

TT electronics plc is an international electronics company that has been supplying innovative high reliability components to the military and defence markets for more than 30 years. The knowledge and experience gained in that time has been brought together in a global team of designers and applications engineers dedicated to supporting the unique requirements of modern military applications.Our industry experience and agile approach to business has given us a pre-eminent position in the supply of connectors and other components to land-based military vehicles.

As a major plc listed on the London stock exchange, TT electronics plc has the financial resources to continually invest in up-to-the-minute manufacturing facilities to address our customer's needs and provide them with the correct solution. With design and manufacturing plants in Europe and the USA, we are able to fulfil the Urgent Operational Requirements (UORs) of defence forces globally with industrial and mil spec compliant connectorsand assemblies at exceptionally short notice.

In the harsh and unforgiving environment of the modern battlefield, it is essential that every single component is fit for purpose. Working closely on site with our OEM and ODM customers has given our engineering team a deep understanding of the changing market trends and requirements of land based military vehicles, enabling them to engineer the best possible component solution.

# About TT electronics plc

TT electronics plc is a global electronics company. Within its electronic components group are multiple facilities for design and manufacture of interconnection systems with engineering teams providing custom solutions.

## Military land based vehicles

Tracked vehicle
Armoured personnel carriers
Land Rover
Unmanned vehicles
Security services

Electrical systems in the modern military vehicle need to provide the user with a ruggedised reliable solution to the interconnection issues encountered in a battlefield theatre environment. With high reliability being taken as a given we are in the position to offer solutions to brave the most demanding of applications.

## Rotary wing aircraft

Military helicoptors
Search and Rescue
Commercial helicoptors

Vibration and salt spray are just two of the hazards facing military aircraft. We have developed a range of screening products that allow the termination of multiple screens in just such environments without degradation to interconnection systems. Design and manufacture of complex cable harnesses form part of our core strengths. We are actively involved with all systems within helicopter operations including UOR activities system upgrades and role fits.

## Military fixed wing aircraft

Jet fighters
Propeller technology
Reconnaissance
Mission control suites

The requirement for electrical protection on military platforms becomes even more critical as both the natural effects of lightning and the effect of warfare can play havoc with electrical systems in the air and on the ground.
We provide cost effective electrical interface systems designed to withstand the effects of EMC, EMI, EMP and HIRF along with the harshest of environmental conditions.

## Missile and defensive suites

Defensive aids suites
Test equipment solutions
Radar equipment interconnects

As the need grows for smaller systems we design lighter, more compact interconnection systems featuring miniaturisation of connector products and lightweight wiring solutions. Screening remains a high priority and a full range of connector accessories for all styles of connector form part of our portfolio to ensure design is not compromised in any way

## Civil aircraft

Landing gear
Flight guidance systems
Engine management

The civil aircraft market demands reliable manufacturing processes. We produce critical systems designed to ensure our solutions are in line with those requirements. Cost efficient, light-weight reliable solutions are an integral part of any design specification.
We have a market leading technology in composite systems, enabling your designers to enhance your product offering to your customer.

## Naval systems

Radar systems
Submarine communications
Panel assemblies

The issues facing naval applications bring a whole new set of problems to the design of interconnection systems. We offer screened cable and conduit systems approved for "above deck full threat EMP protection". The ability to manufacture interconnection panels and a component product range offering salt spray protection, ensures environmental issues are catered for during the design process

# ABAC
## technical information

### Materials

| | |
|---|---|
| Shell: | Aluminium |
| Insulator: | Rigid plastic / silicone rubber |
| Contacts: | Copper alloy |

### Standard Plating Finishes

| | |
|---|---|
| Aluminium parts: | Cadmium Olive drab (W)<br>Electroless Nickel (F)<br>Nickel Flurocarbon Polymer (T)<br>Zinc cobalt green passivate (Q)<br>Black Zinc cobalt (QB) |
| Contacts: | Gold over nickel plated |

* Consult factory for alternative finishes.

### Environmental Ratings

| | | |
|---|---|---|
| Temperature range: | -65˚C to + 175˚C | |
| Shock: | 300g, 3 ms according EN 2591-D2 method A | |
| Vibration: | Sine: | 10 to 2000 Hz, 3x12 hrs (60g, 140-2000 Hz) with temperature cycling |
| | Random: | 50 to 2000 Hz , 2x8 hrs ($1g^2$ / Hz, 100-2000Hz) at T° max.<br>25 to 2000 Hz , 2x8 hrs ($5g^2$ / Hz, 100-300Hz) (at ambient T°)<br>Test with accessories in acc. with EN 2591-D3 |
| Sealing: | Mated connectors meet altitude immersion requirements of MIL-DTL-38999 | |
| Salt spray: | 500 hrs | |
| Resistance to fluids: | Gasoline: JP5 (OTAN F44)<br>Mineral hydraulic fluid: MIL-H-5606 (OTAN H515)<br>Synthetic hydraulic fluid: Skydrol 500 B4<br>Mineral lubricating: MIL-L-7870A (OTAN 0142)<br>Synthetic lubricating: MIL-L-23699 (OTAN 0156), MIL-L7808<br>Cleaning fluid: MIL-DTL-25769 diluted<br>De-icing fluid: MIL-A-8243<br>Extinguishing fluid: Chlorobrométhane<br>Cooling fluid: Coolanol | |

### Mechanical Features

| | |
|---|---|
| Coupling: | 3 start stub acme thread |
| Contact termination: | Crimp |
| Sealing: | Dynamic sealing ring & individual wire seal grommet. IP67 rated. |
| Endurance: | 500 mating / unmating operations |

**Note:** The company reserves the right and may change or vary specification without prior written notice.

# ABAC
## technical information

### Test Voltage Rating (Vrms)

Test Voltage, ac rms, 60 Hz

| Altitude | Service rating M | | Service rating N | | Service rating I | | Service rating II | |
|---|---|---|---|---|---|---|---|---|
| | mated | unmated | mated | unmated | mated | unmated | mated | unmated |
| **Sea Level** | 1300 | 1300 | 1000 | 1000 | 1800 | 1800 | 2300 | 2300 |
| **50,000 ft.** | 800 | 550 | 600 | 400 | 1000 | 600 | 1000 | 800 |
| **70,000 ft.** | 800 | 350 | 600 | 260 | 1000 | 400 | 1000 | 500 |
| **100,000 ft.** | 800 | 200 | 600 | 200 | 1000 | 200 | 1000 | 200 |

### Insulation Resistance

≥ 5 000 MΩ (at 500 Vdc) - at ambient

### Max. Current Rating

≥ 5 000 MΩ (at 500 Vdc)

| Cts Size | 22 | 20 | 16 | 12 | Power |
|---|---|---|---|---|---|
| **Contact Rating (A)** | 5 | 7,5 | 13 | 23 | 45 |

Shell continuity: 2.5 mΩ
Shielding: 90 db at 100 MHz - 50 db at 10 GHz

# ABAC
## part number explanations

### AB Part Number Explanation

| Product Range: | | AB AC | 20 | W | 11 | 35 | P | N | XX |
|---|---|---|---|---|---|---|---|---|---|
| Shell style: | 16 : Square flange receptacle with clinch nuts | | | | | | | | |
| | 20 : Square flange receptacle | | | | | | | | |
| | 24 : Jam nut receptacle | | | | | | | | |
| | 26 : Plug with RFI shielding | | | | | | | | |
| | 12 : Inline cable receptacle | | | | | | | | |
| | 13 : Box Mounting receptacle | | | | | | | | |
| | 14 : Square flange receptacle with PCB stand off | | | | | | | | |
| | 15 : Jam nut receptacle with PCB stand off | | | | | | | | |
| | 37 : Cable Plug with RFI and integral backshell | | | | | | | | |
| Plating: | W : Olive drab cadmium | -65˚C to 175˚C | | | | | | | |
| | F : Electroless Nickel | -65˚C to 200˚C | | | | | | | |
| | T : Nickel Flurocarbon Polymer | -65˚C to 175˚C | | | | | | | |
| | Q : Zinc cobalt green passivate | -65˚C to 175˚C | | | | | | | |
| | QB : Black Zinc cobalt | -65˚C to 175˚C | | | | | | | |
| Shell size: | 9, 11, 13, 15, 17, 19, 21, 23 or 25 | | | | | | | | |
| Contact layout: | See pages 10, 11 & 12 | | | | | | | | |
| Contact type: | P : Pin | A : Pin insert without contacts | | | | | | | |
| | S : Socket | B: Socket insert without contacts | | | | | | | |
| Orientation: | N, A, B, C, D & E (See page 9) | | | | | | | | |
| Modification: | Please consult factory | | | | | | | | |

### MIL-DTL-38999 Part Number Explanation

| Basic Series: | | D38999 | 20 | W | B | 35 | P | N |
|---|---|---|---|---|---|---|---|---|
| Shell style: | 20 : Square flange receptacle | | | | | | | |
| | 24 : Jam nut receptacle | | | | | | | |
| | 26 : Plug with RFI shielding | | | | | | | |
| Plating: | W : Olive drab cadmium | -65˚C to 175˚C | | | | | | |
| Shell size: | A - B - C - D - E - F - G - H - J | | | | | | | |
| Contact layout: | See pages 10, 11 & 12 | | | | | | | |
| Contact type: | P : Pin | A : Pin insert without contacts | | | | | | |
| | S : Socket | B: Socket insert without contacts | | | | | | |
| Orientation: | N, A, B, C, D & E (See page 9) | | | | | | | |

# ABAC
## orientation

Viewed from face of receptacle




Viewed from front of plug




| Shell Size | MS Shell Size | Angles | N | A | B | C | D | E |
|---|---|---|---|---|---|---|---|---|
| 9 | A | A° | 105 | 102 | 80 | 35 | 64 | 91 |
| | | B° | 140 | 132 | 118 | 140 | 155 | 131 |
| | | C° | 215 | 248 | 230 | 205 | 234 | 197 |
| | | D° | 265 | 320 | 312 | 275 | 304 | 240 |
| 11 | B | A° | 95 | 113 | 90 | 53 | 119 | 51 |
| | | B° | 141 | 156 | 145 | 156 | 146 | 141 |
| | | C° | 208 | 182 | 195 | 220 | 176 | 184 |
| | | D° | 236 | 292 | 252 | 255 | 298 | 242 |
| 13 | C | A° | 95 | 113 | 90 | 53 | 119 | 51 |
| | | B° | 141 | 156 | 145 | 156 | 146 | 141 |
| | | C° | 208 | 182 | 195 | 220 | 176 | 184 |
| | | D° | 236 | 292 | 252 | 255 | 298 | 242 |
| 15 | D | A° | 95 | 113 | 90 | 53 | 119 | 51 |
| | | B° | 141 | 156 | 145 | 156 | 146 | 41 |
| | | C° | 208 | 182 | 195 | 220 | 176 | 184 |
| | | D° | 236 | 292 | 252 | 255 | 298 | 242 |
| 17 | E | A° | 80 | 135 | 49 | 66 | 62 | 79 |
| | | B° | 142 | 170 | 169 | 140 | 145 | 153 |
| | | C° | 196 | 200 | 200 | 200 | 180 | 197 |
| | | D° | 293 | 310 | 244 | 257 | 280 | 272 |
| 19 | F | A° | 80 | 135 | 49 | 66 | 62 | 79 |
| | | B° | 142 | 170 | 169 | 140 | 145 | 153 |
| | | C° | 196 | 200 | 200 | 200 | 180 | 197 |
| | | D° | 293 | 310 | 244 | 257 | 280 | 272 |
| 21 | G | A° | 80 | 135 | 49 | 66 | 62 | 79 |
| | | B° | 142 | 170 | 169 | 140 | 145 | 153 |
| | | C° | 196 | 200 | 200 | 200 | 180 | 197 |
| | | D° | 293 | 310 | 244 | 257 | 280 | 272 |
| 23 | H | A° | 80 | 135 | 49 | 66 | 62 | 79 |
| | | B° | 142 | 170 | 169 | 140 | 145 | 153 |
| | | C° | 196 | 200 | 200 | 200 | 180 | 197 |
| | | D° | 293 | 310 | 244 | 257 | 280 | 272 |
| 25 | J | A° | 80 | 135 | 49 | 66 | 62 | 79 |
| | | B° | 142 | 170 | 169 | 140 | 145 | 153 |
| | | C° | 196 | 200 | 200 | 200 | 180 | 197 |
| | | D° | 293 | 310 | 244 | 257 | 280 | 272 |

# ABAC
## insert arrangements

- Size 22D Contact
- Size 20 Contact
- Size 16 Contact
- Size 12 Contact
- Twinax Contact, Size 8

### Shell Size 9




0935
Service M
6 Contacts,
Size 22D




0998
Service I
3 Contacts,
Size 20

### Shell Size 11




1105
Service I
5 Contacts,
Size 20




1135
Service I
13 Contacts,
Size 22D




1198
Service I
6 Contacts,
Size 20




1199
Service I
7 Contacts,
Size 20

### Shell Size 13




1304
Service M
4 Contacts,
Size 16




1308
Service I
8 Contacts,
Size 20




1335
Service M
22 Contacts,
Size 22D




1398
Service I
10 Contacts,
Size 20

### Shell Size 15




1505
Service I
5 Contacts,
Size 16



1515
Service I
14 Contacts,
Size 20
1 Contacts,
Size 16



1518
Service I
18 Contacts,
Size 20



1519
Service I
19 Contact,
Size 20




1535
Service M
37 Contacts,
Size 22D



1597
Service I
8 Contact,
Size 20
4 Contacts,
Size 16

Note: Consult factory for other insert arrangements

## Shell Size 17



1706
Service I
6 Contacts,
Size 12



1708
Service II
8 Contacts,
Size 16



1726
Service I
26 Contacts,
Size 20



1735
Service M
55 Contacts,
Size 22D



1799
Service I
2 Contacts,
Size 16
21 Contacts,
Size 20

## Shell Size 19



1911
Service I
11 Contacts,
Size 16



1928
Service I
2 Contacts, Size 16
26 Contacts,
Size 20



1932
Service M
32 Contacts,
Size 20



1935
Service M
66 Contacts,
Size 22D

## Shell Size 21



2111
Service I
11 Contacts,
Size 12



2116
Service II
16 Contacts,
Size 16



2135
Service M
79 Contacts,
Size 22D



2141
Service I
41 Contacts,
Size 20



2175
Service M
4 Twinax Contacts

## Shell Size 23



2321
Service II
21 Contacts,
Size 16



2332
Service I
32 Contacts,
Size 20



2335
Service M
100 Contacts,
Size 22D



2355
Service I
55 Contacts,
Size 20

Note: Consult factory for other insert arrangements

# ABAC

## insert arrangements continued...

**Shell Size 25**



2520
Service N
10 Contacts, Size 20
13 Contacts, Size 16
4 Coax Contacts, Size 12
3 Twinax Contacts, Size 8



2524
Service I
12 Contacts, Size 12
12 Contacts, Size 16



2535
Service M
128 Contacts, Size 22D

**Shell Size 25**



2546
Service I
40 Contacts, Size 20
4 Contacts, Size 16
2 Coax Contacts, Size 8

Note: Consult factory for other insert arrangements

# ABAC
## insert arrangement specification

| Shell Size | MS Shell Size | Contact Arrangement | No. of Contacts | Size 22D | Size 20 | Size 16 | Size 12 | Size 8 Twinax |
|---|---|---|---|---|---|---|---|---|
| 9 | A | 09-35 | 6 | 6 | | | | |
| | | 09-98 | 3 | | 3 | | | |
| 11 | B | 11-05 | 5 | | 5 | | | |
| | | 11-35 | 13 | 13 | | | | |
| | | 11-98 | 6 | | 6 | | | |
| | | 11-99 | 7 | | 7 | | | |
| 13 | C | 13-04 | 4 | | | 4 | | |
| | | 13-08 | 8 | | 8 | | | |
| | | 13-35 | 22 | 22 | | | | |
| | | 13-98 | 10 | | 10 | | | |
| 15 | D | 15-05 | 5 | | | 5 | | |
| | | 15-15 | 15 | | 14 | 1 | | |
| | | 15-18 | 18 | | 18 | | | |
| | | 15-19 | 19 | | 19 | | | |
| | | 15-35 | 37 | 37 | | | | |
| | | 15-97 | 12 | | 8 | 4 | | |
| 17 | E | 17-06 | 6 | | | | 6 | |
| | | 17-08 | 8 | | | 8 | | |
| | | 17-26 | 26 | | 26 | | | |
| | | 17-35 | 55 | 55 | | | | |
| | | 17-99 | 23 | | 21 | 2 | | |
| 19 | F | 19-11 | 11 | | | 11 | | |
| | | 19-28 | 28 | | 26 | 2 | | |
| | | 19-32 | 32 | | 32 | | | |
| | | 19-35 | 66 | 66 | | | | |
| 21 | G | 21-11 | 11 | | | | 11 | |
| | | 21-16 | 16 | | | 16 | | |
| | | 21-35 | 79 | 79 | | | | |
| | | 21-41 | 41 | | 41 | | | |
| | | 21-75 | 4 | | | | | 4 |
| 23 | H | 23-21 | 21 | | | 21 | | |
| | | 23-32 | 32 | | 32 | | | |
| | | 23-35 | 100 | 100 | | | | |
| | | 23-55 | 55 | | 55 | | | |
| 25 | I | 25-20 | 30 | | 10 | 13 | 4 (coax) | 3 |
| | | 25-24 | 24 | | | 12 | 12 | |
| | | 25-35 | 128 | 128 | | | | |
| | | 25-46 | 46 | | 40 | 4 | | 2 |

# ABAC

## MIL-DTL-38999 receptacle type 20



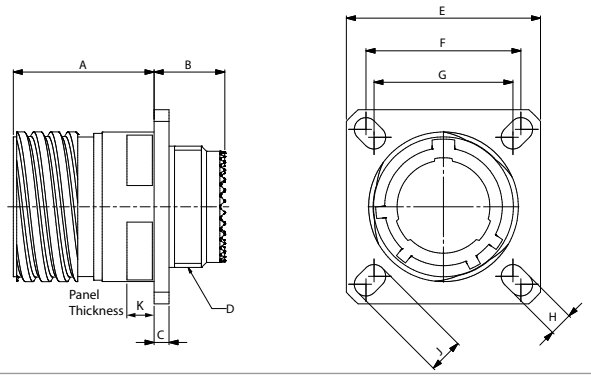


| Shell Size | A max. | B max. | C max. | D thread | E ± 0.30 | F | G | H ± 0.20 | J ± 0.20 | K max. |
|---|---|---|---|---|---|---|---|---|---|---|
| 09 | 20.90 | 10.60 | 2.50 | M12 x 1-6g | 23.80 | 18.26 | 15.09 | 3.25 | 5.49 | 5.94 |
| 11 | 20.90 | 10.60 | 2.50 | M15 x 1-6g | 26.20 | 20.62 | 18.26 | 3.25 | 4.93 | 5.94 |
| 13 | 20.90 | 10.60 | 2.50 | M18 x 1-6g | 28.60 | 23.01 | 20.62 | 3.25 | 4.93 | 5.94 |
| 15 | 20.90 | 10.60 | 2.50 | M22 x 1-6g | 31.00 | 24.61 | 23.01 | 3.25 | 4.93 | 5.94 |
| 17 | 20.90 | 10.60 | 2.50 | M25 x 1-6g | 33.30 | 26.97 | 24.61 | 3.25 | 4.93 | 5.94 |
| 19 | 20.90 | 10.60 | 2.50 | M28 x 1-6g | 36.50 | 29.36 | 26.97 | 3.25 | 4.93 | 5.94 |
| 21 | 20.10 | 11.40 | 3.20 | M31 x 1-6g | 39.70 | 31.75 | 29.36 | 3.25 | 4.93 | 5.18 |
| 23 | 20.10 | 11.40 | 3.20 | M34 x 1-6g | 42.90 | 34.93 | 31.75 | 3.91 | 6.15 | 5.18 |
| 25 | 20.10 | 11.40 | 3.20 | M37 x 1-6g | 46.00 | 38.10 | 34.93 | 3.91 | 6.15 | 5.18 |

# ABAC

## MIL-DTL-38999 receptacle type 24



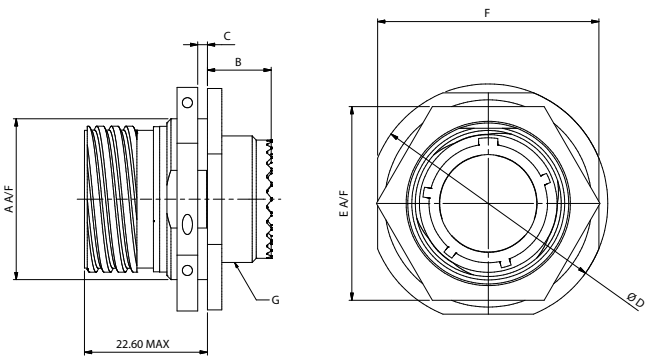


| Shell Size | A + 0.10 - 0.15 | B max. | C max. | D Ø max. | E max. | F ± 0.40 | G thread |
|---|---|---|---|---|---|---|---|
| 09 | 16.53 | 9.90 | 3.20 | 30.50 | 23.00 | 27.00 | M12 x 1-6g |
| 11 | 19.07 | 9.90 | 3.20 | 35.20 | 26.00 | 31.80 | M15 x 1-6g |
| 13 | 23.82 | 9.90 | 3.20 | 38.40 | 31.00 | 34.90 | M18 x 1-6g |
| 15 | 26.97 | 9.90 | 3.20 | 41.60 | 34.00 | 38.10 | M22 x 1-6g |
| 17 | 30.15 | 9.90 | 3.20 | 44.80 | 37.00 | 41.30 | M25 x 1-6g |
| 19 | 33.32 | 9.90 | 3.50 | 49.50 | 41.00 | 46.00 | M28 x 1-6g |
| 21 | 36.50 | 9.90 | 3.50 | 52.70 | 46.00 | 49.20 | M31 x 1-6g |
| 23 | 39.67 | 9.90 | 3.50 | 55.90 | 47.00 | 52.40 | M34 x 1-6g |
| 25 | 42.85 | 9.90 | 3.50 | 59.00 | 52.00 | 55.60 | M37 x 1-6g |

# ABAC
## in line receptacle type 12

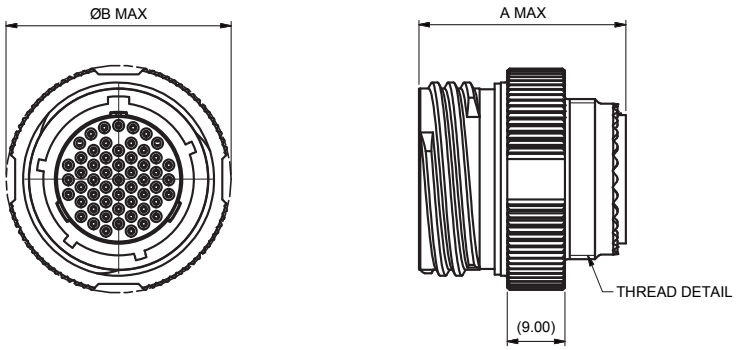


| Shell Size | A Max | ØD Max | Thread Detail |
|---|---|---|---|
| 9 | 33 | 21 | M12x1-6g |
| 11 | 33 | 23.7 | M15x1-6g |
| 13 | 33 | 29.3 | M18x1-6g |
| 15 | 33 | 31.3 | M22x1-6g |
| 17 | 33 | 35.67 | M25x1-6g |
| 19 | 33 | 38.4 | M28x1-6g |
| 21 | 33 | 41.67 | M31x1-6g |
| 23 | 33 | 44.9 | M34x1-6g |
| 25 | 33 | 47.97 | M37x1-6g |

# ABAC
## box mounting receptacle type 13

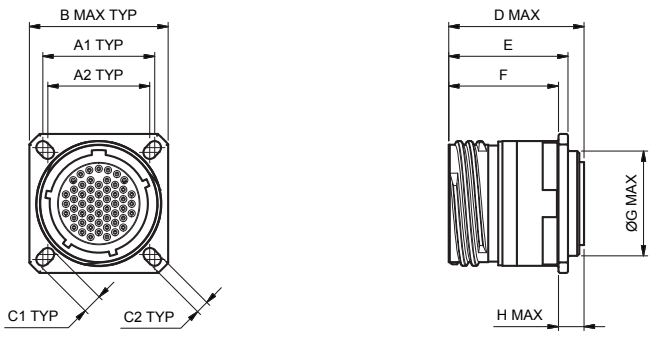


| Shell Size | A1 | A2 | D Max | E | F | ØG Max | H Max | B Max | C1 ±0.20 | C2 ±0.20 |
|---|---|---|---|---|---|---|---|---|---|---|
| 9 | 18.26 | 15.09 | 33.00 | 28.59 - 28.79 | 26.29 - 26.49 | 12.71 | 6.50 | 24.00 | 5.49 | 3.25 |
| 11 | 20.62 | 18.26 | 33.00 | 28.59 - 28.79 | 26.29 - 26.49 | 15.48 | 6.50 | 26.40 | 4.93 | 3.25 |
| 13 | 23.01 | 20.62 | 33.00 | 28.59 - 28.79 | 26.29 - 26.49 | 18.65 | 6.50 | 28.80 | 4.93 | 3.25 |
| 15 | 24.61 | 23.01 | 33.00 | 28.59 - 28.79 | 26.29 - 26.49 | 22.61 | 6.50 | 31.20 | 4.93 | 3.25 |
| 17 | 26.97 | 24.61 | 33.00 | 28.59 - 28.79 | 26.29 - 26.49 | 25.41 | 6.50 | 33.50 | 4.93 | 3.25 |
| 19 | 29.36 | 26.97 | 33.00 | 28.59 - 28.79 | 26.29 - 26.49 | 28.58 | 6.50 | 36.70 | 4.93 | 3.25 |
| 21 | 31.75 | 29.36 | 33.00 | 29.29 - 29.49 | 26.29 - 26.49 | 31.76 | 6.50 | 39.90 | 4.93 | 3.25 |
| 23 | 34.93 | 31.75 | 33.00 | 29.29 - 29.49 | 26.29 - 26.49 | 34.53 | 6.50 | 43.10 | 6.15 | 3.91 |
| 25 | 38.10 | 34.93 | 33.00 | 29.29 - 29.49 | 26.29 - 26.49 | 37.29 | 6.50 | 46.20 | 6.15 | 3.91 |

# ABAC

## wall mounting receptacle with pcb stand-off type 14 (sizes 9 & 11)

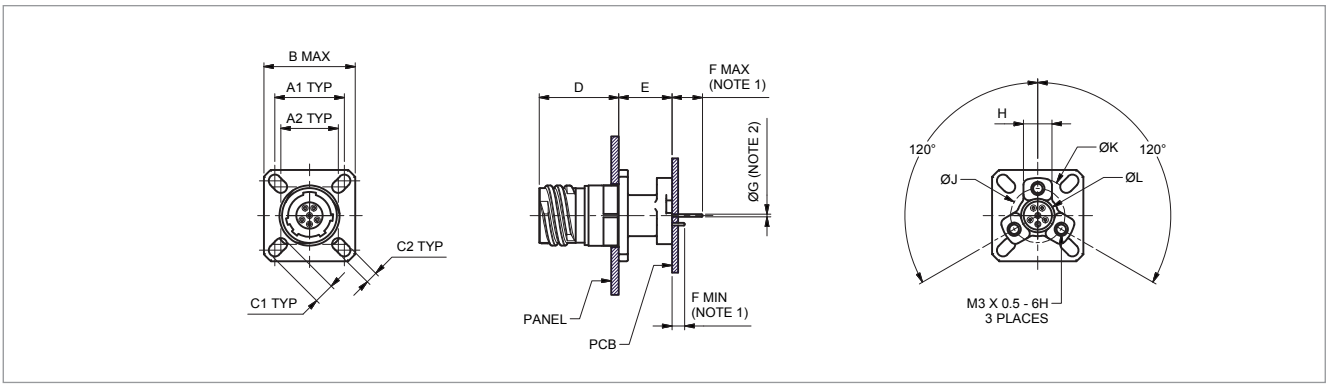


| Shell Size | A1 | A2 | B Max | C1 | C2 | D | E | F Min | F Max | H | ØJ | ØK | ØL |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 9 | 18.26 | 15.09 | 24.1 | 5.29 - 5.69 | 3.05 - 3.45 | 20.80 - 20.90 | 13.90 - 14.00 | 2.41 | 7.86 | 7.36 - 7.46 | 14.3 | 19.70 - 19.80 | 8.8 |
| 11 | 20.62 | 18.26 | 26.5 | 4.73 - 5.13 | 3.05 - 3.45 | 20.80 - 20.90 | 13.90 - 14.00 | 2.41 | 7.86 | 7.36 - 7.46 | 18.1 | 23.50 - 23.60 | 12.6 |

# ABAC

## wall mounting receptacle with pcb stand-off type 14 (sizes 13 - 25)

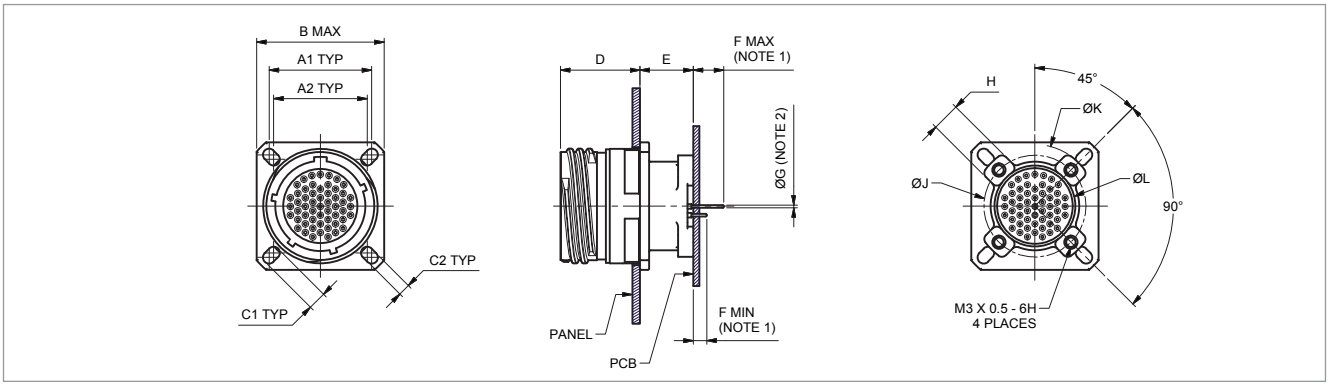


| Shell Size | A1 | A2 | B Max | C1 | C2 | D | E | F Min | F Max | H | ØJ | ØK | ØL |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 13 | 23.01 | 20.62 | 28.9 | 4.73 - 5.13 | 3.05 - 3.45 | 20.80 - 20.90 | 13.90 - 14.00 | 2.41 | 7.86 | 7.36 - 7.46 | 20.46 | 25.86 - 25.96 | 14.96 |
| 15 | 24.61 | 23.01 | 31.3 | 4.73 - 5.13 | 3.05 - 3.45 | 20.80 - 20.90 | 13.90 - 14.00 | 2.41 | 7.86 | 7.36 - 7.46 | 23.52 | 28.92 - 29.02 | 18.02 |
| 17 | 26.97 | 24.61 | 33.6 | 4.73 - 5.13 | 3.05 - 3.45 | 20.80 - 20.90 | 13.90 - 14.00 | 2.41 | 7.86 | 7.36 - 7.46 | 26.81 | 32.20 - 32.30 | 21.3 |
| 19 | 29.39 | 26.97 | 36.8 | 4.73 - 5.13 | 3.05 - 3.45 | 20.80 - 20.90 | 13.90 - 14.00 | 2.41 | 7.86 | 7.36 - 7.46 | 29.36 | 34.76 - 34.86 | 23.86 |
| 21 | 31.75 | 29.39 | 40 | 4.73 - 5.13 | 3.05 - 3.45 | 20.00 - 20.10 | 14.70 - 14.80 | 2.41 | 7.86 | 7.36 - 7.46 | 32.67 | 38.07 - 38.17 | 27.17 |
| 23 | 34.93 | 31.75 | 43.2 | 5.95 - 6.35 | 3.71 - 4.11 | 20.00 - 20.10 | 14.70 - 14.80 | 2.41 | 7.86 | 7.36 - 7.46 | 36.05 | 41.45 - 41.55 | 30.55 |
| 25 | 38.1 | 34.93 | 46.3 | 5.95 - 6.35 | 3.71 - 4.11 | 20.00 - 20.10 | 14.70 - 14.80 | 2.41 | 7.86 | 7.36 - 7.46 | 39.02 | 44.42 - 44.52 | 33.52 |

# ABAC

## jam nut mounting receptacle with pcb stand-off type 15 (sizes 9 & 11)

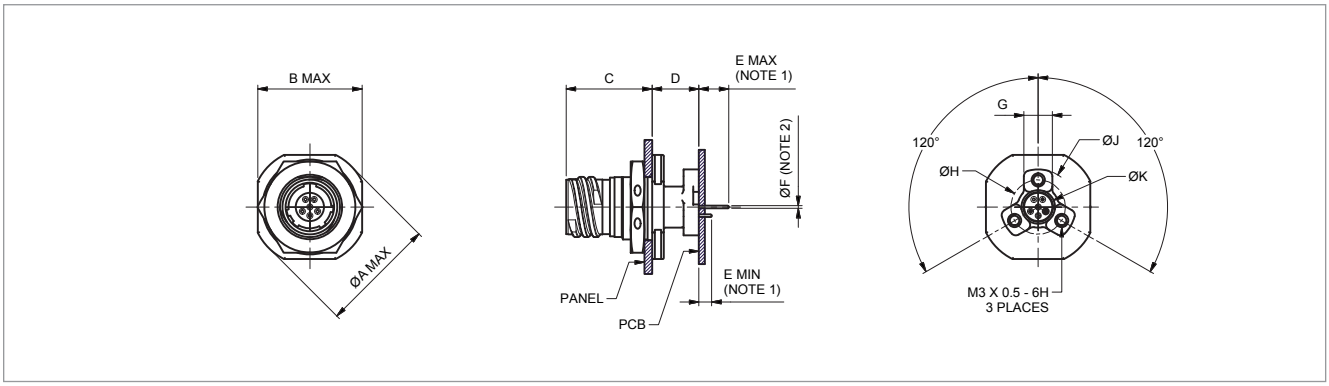


| Shell Size | ØA Max | B Max | C | D | E Min | E Max | G | ØH | ØJ | ØK |
|---|---|---|---|---|---|---|---|---|---|---|
| 9 | 30.50 | 27.40 | 22.50 - 22.60 | 12.20 - 12.30 | 2.41 | 7.86 | 7.36 - 7.46 | 14.3 | 19.70 - 19.80 | 8.8 |
| 11 | 35.20 | 32.20 | 22.50 - 22.60 | 12.20 - 12.30 | 2.41 | 7.86 | 7.36 - 7.46 | 18.1 | 23.50 - 23.60 | 12.6 |

# ABAC

## jam nut mounting receptacle with pcb stand-off type 15 (sizes 13 - 25)

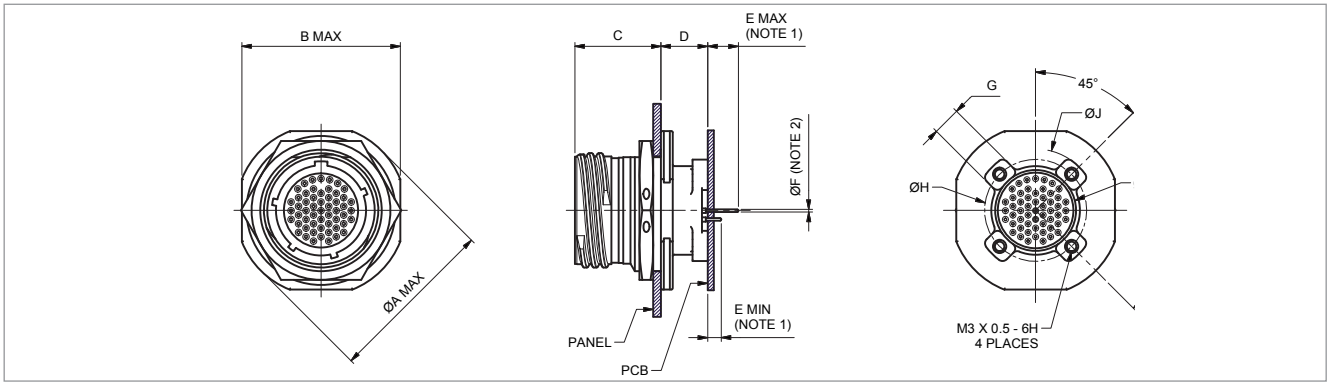


| Shell Size | ØA Max | B Max | C | D | E Min | E Max | G | ØH | ØJ | ØK |
|---|---|---|---|---|---|---|---|---|---|---|
| 13 | 38.40 | 35.30 | 22.50 - 22.60 | 12.20 - 12.30 | 2.41 | 7.86 | 7.36 - 7.46 | 20.46 | 25.86 - 25.96 | 14.96 |
| 15 | 41.60 | 38.50 | 22.50 - 22.60 | 12.20 - 12.30 | 2.41 | 7.86 | 7.36 - 7.46 | 23.52 | 28.92 - 29.02 | 18.02 |
| 17 | 44.80 | 41.70 | 22.50 - 22.60 | 12.20 - 12.30 | 2.41 | 7.86 | 7.36 - 7.46 | 26.81 | 32.20 - 32.30 | 21.3 |
| 19 | 49.50 | 46.40 | 22.50 - 22.60 | 12.20 - 12.30 | 2.41 | 7.86 | 7.36 - 7.46 | 29.36 | 34.76 - 34.86 | 23.86 |
| 21 | 52.70 | 49.60 | 22.50 - 22.60 | 12.20 - 12.30 | 2.41 | 7.86 | 7.36 - 7.46 | 32.67 | 38.07 - 38.17 | 27.17 |
| 23 | 55.90 | 52.80 | 22.50 - 22.60 | 12.20 - 12.30 | 2.41 | 7.86 | 7.36 - 7.46 | 36.05 | 41.45 - 41.55 | 30.55 |
| 25 | 59.00 | 56.00 | 22.50 - 22.60 | 12.20 - 12.30 | 2.41 | 7.86 | 7.36 - 7.46 | 39.02 | 44.42 - 44.52 | 33.5 |

# ABAC
## bulkhead connector type 11

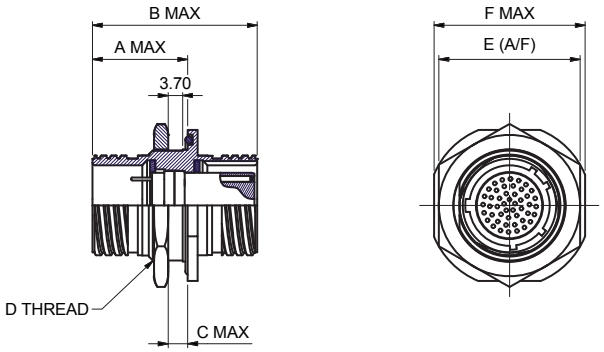


| Shell Size | A max | B max | C max | D Thread | E (A/F) | F max |
|---|---|---|---|---|---|---|
| 9 | 25.50 | 42.10 | 6.40 | M17 x 1.0 | 24.00 | 27.40 |
| 11 | 25.50 | 42.10 | 6.40 | M20 x 1.0 | 27.00 | 32.20 |
| 13 | 25.50 | 42.10 | 6.40 | M25 x 1.0 | 32.00 | 35.30 |
| 15 | 25.50 | 42.10 | 6.40 | M28 x 1.0 | 36.00 | 38.50 |
| 17 | 25.50 | 42.10 | 6.40 | M32 x 1.0 | 37.00 | 41.70 |
| 19 | 25.50 | 42.10 | 6.40 | M35 x 1.0 | 41.00 | 46.40 |
| 21 | 25.50 | 42.10 | 6.40 | M38 x 1.0 | 46.00 | 49.60 |
| 23 | 25.50 | 42.10 | 6.40 | M41 x 1.0 | 50.00 | 52.80 |
| 25 | 25.50 | 42.10 | 6.40 | M44 x 1.0 | 51.00 | 56.00 |

# MIL-DTL-38999
## recommended jam nut torque values

| Shell Size | Inch-pounds |
|---|---|
| 9 | 30/36 |
| 11 | 40/46 |
| 13 | 55/60 |
| 15 | 70/75 |
| 17 | 80/85 |
| 19 | 90/95 |
| 21 | 100/110 |
| 23 | 110/120 |
| 25 | 120/130 |

# ABAC

## fixed connector with pc tails

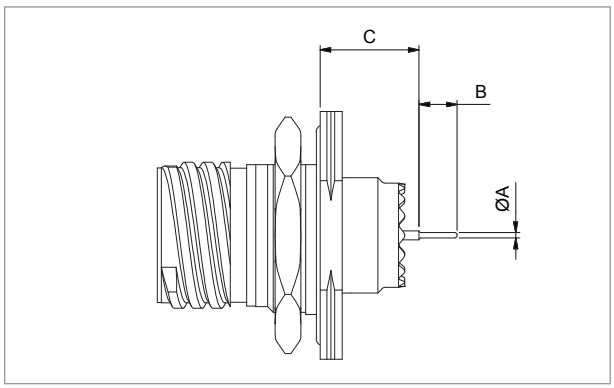


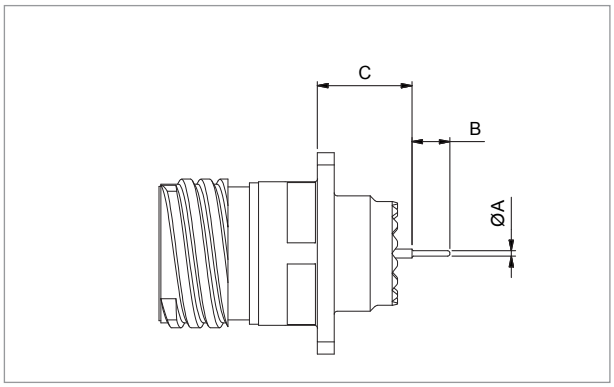


| Type 24 Jam Nut Style | | |
|---|---|---|
| Shell Size | C Min | C Max |
| 9 | 12.21 | 13.36 |
| 11 | 12.21 | 13.36 |
| 13 | 12.32 | 13.34 |
| 15 | 12.32 | 13.34 |
| 17 | 12.21 | 13.36 |
| 19 | 12.01 | 13.16 |
| 21 | 13.01 | 14.16 |
| 23 | 13.01 | 14.16 |
| 25 | 13.03 | 14.16 |

| Type 20 Square Flange Style | | |
|---|---|---|
| Shell Size | C Min | C Max |
| 9 | 10.49 | 11.63 |
| 11 | 10.49 | 11.63 |
| 13 | 10.49 | 11.63 |
| 15 | 10.49 | 11.63 |
| 17 | 10.49 | 11.63 |
| 19 | 10.49 | 11.63 |
| 21 | 10.49 | 11.63 |
| 23 | 10.49 | 11.63 |
| 25 | 10.51 | 11.63 |

| Contacts | | | |
|---|---|---|---|
| Contact Size | Mod Code Ref. | ØA | B |
| 22D | M03 | 0.70 | 8.50 |
| 22D | M09 | 0.70 | 4.00 |
| 22D | M10 | 0.50 | 5.10 |
| 20 | M09 | 0.70 | 5.10 |
| 16 | M09 | 1.15 | 5.10 |

# ABAC

## MIL-DTL-38999 plug type 26

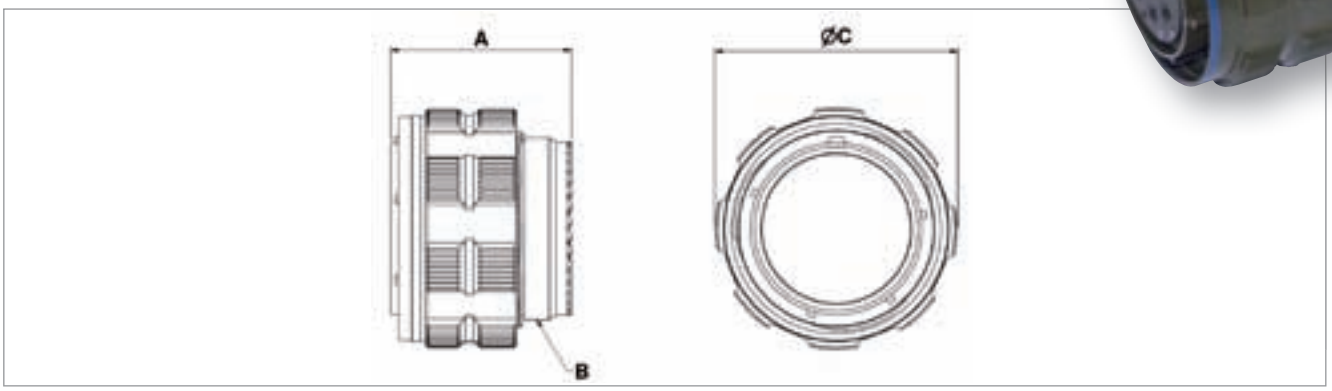


| Shell Size | A Max | B Thread | C Max |
|---|---|---|---|
| 09 | 31.00 | M12 x 1-6g | 21.80 |
| 11 | 31.00 | M15 x 1-6g | 25.00 |
| 13 | 31.00 | M18 x 1-6g | 29.40 |
| 15 | 31.00 | M22 x 1-6g | 32.50 |
| 17 | 31.00 | M25 x 1-6g | 35.70 |
| 19 | 31.00 | M28 x 1-6g | 38.50 |
| 21 | 31.00 | M31 x 1-6g | 41.70 |
| 23 | 31.00 | M34 x 1-6g | 44.90 |
| 25 | 31.00 | M37 x 1-6g | 48.00 |

# ABAC

## plug with integral backshell type 37

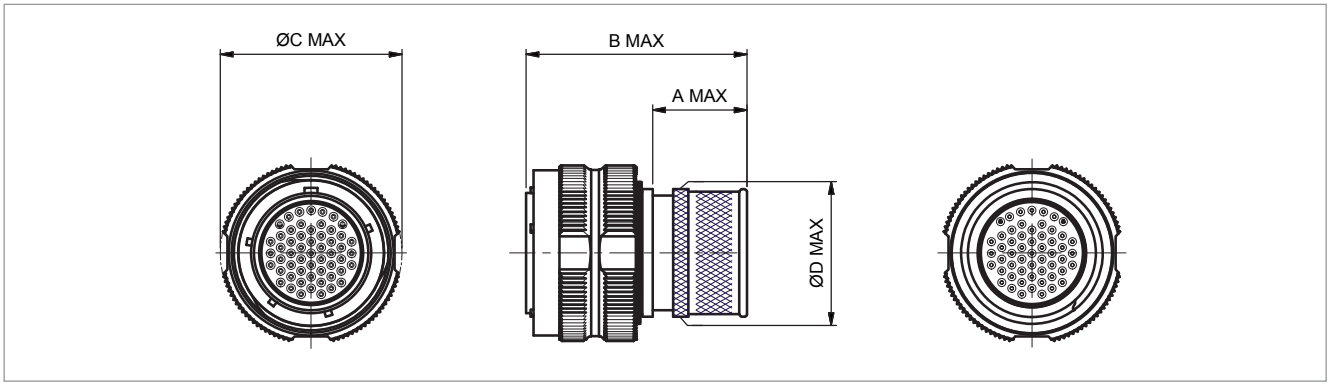


| Shell Size | A Max | B Max | ØC Max | ØD Max |
|---|---|---|---|---|
| 9 | 18.50 | 43.35 | 21.00 | 12.00 |
| 11 | 18.50 | 43.35 | 23.70 | 15.05 |
| 13 | 18.50 | 43.35 | 29.30 | 18.05 |
| 15 | 18.50 | 43.35 | 31.30 | 22.05 |
| 17 | 18.50 | 43.35 | 35.67 | 25.05 |
| 19 | 18.50 | 43.35 | 38.40 | 28.05 |
| 21 | 18.50 | 43.35 | 41.67 | 31.05 |
| 23 | 18.50 | 43.35 | 44.90 | 34.05 |
| 25 | 18.50 | 43.35 | 47.97 | 37.05 |

# MIL-DTL-38999
## mated connector dimensions

| Shell Size | A max | B max | C max | D Max |
|---|---|---|---|---|
| 09 | 37.00 | 52.30 | 38.30 | 53.60 |
| 11 | 37.00 | 52.30 | 38.30 | 53.60 |
| 13 | 37.00 | 52.30 | 38.50 | 53.80 |
| 15 | 37.00 | 52.30 | 38.50 | 53.80 |
| 17 | 37.00 | 52.30 | 38.50 | 53.80 |
| 19 | 37.00 | 52.30 | 38.50 | 53.80 |
| 21 | 36.00 | 51.30 | 38.50 | 53.80 |
| 23 | 36.00 | 51.30 | 38.50 | 53.80 |
| 25 | 36.00 | 51.30 | 38.50 | 53.80 |

# MIL-DTL-38999
## panel cut-out information

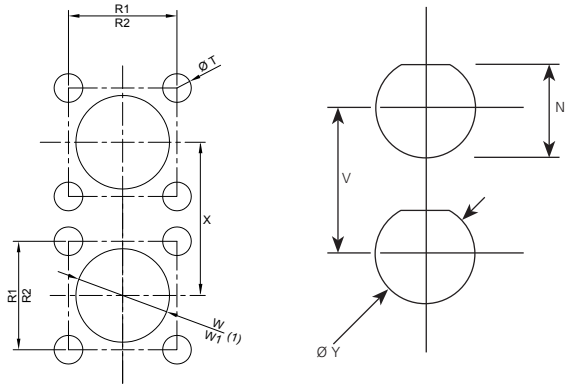


| Shell Size | N -0.25 | R1 Rear Mount | R2 Front Mount | T Ø +/- 0.13 | V min. | W min. Rear Mount | W1 min. Front Mount | X min . + 0.25 | Ø Y |
|---|---|---|---|---|---|---|---|---|---|
| 09 | 16.74 -0.06 | 18.26 | 15.09 | 3.25 | 30.76 | 16.66 | 13.11 | 24.61 | 17.10 |
| 11 | 19.59 | 20.62 | 18.26 | 3.25 | 34.21 | 20.22 | 15.88 | 27.22 | 20.96 |
| 13 | 24.26 | 23.01 | 20.62 | 3.25 | 40.00 | 23.42 | 19.05 | 30.15 | 25.65 |
| 15 | 27.56 | 24.61 | 23.01 | 3.25 | 44.63 | 26.59 | 23.01 | 33.24 | 28.83 |
| 17 | 30.73 | 26.97 | 24.61 | 3.25 | 45.77 | 30.96 | 25.81 | 36.44 | 32.01 |
| 19 | 33.91 | 29.36 | 26.97 | 3.25 | 50.40 | 32.94 | 28.98 | 39.24 | 35.18 |
| 21 | 37.08 | 31.75 | 29.36 | 3.25 | 56.16 | 36.12 | 32.16 | 42.44 | 38.35 |
| 23 | 40.26 | 34.93 | 31.75 | 3.91 | 60.81 | 39.29 | 34.93 | 45.64 | 41.53 |
| 25 | 43.43 | 38.10 | 34.93 | 3.91 | 62.18 | 42.47 | 37.69 | 48.48 | 44.70 |

# ABAC

## straight backshell for band termination & heat shrink boot
## Style: ABAC 01

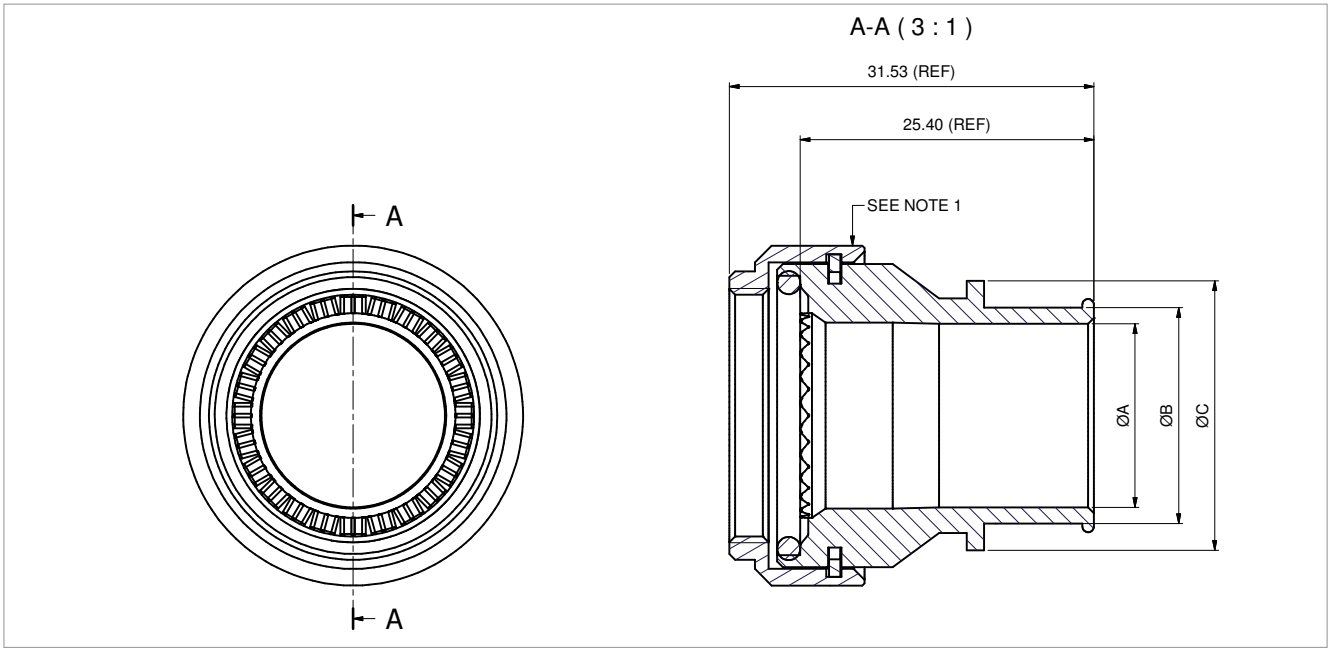


Table 1

| Cable Entry Size | A Ø min. | B Ø max. | C Ø max. |
|---|---|---|---|
| 03 | 4.77 | 9.75 | 13.70 |
| 04 | 6.35 | 9.75 | 13.70 |
| 05 | 7.92 | 10.72 | 15.30 |
| 06 | 9.52 | 12.32 | 17.00 |
| 07 | 11.10 | 13.90 | 18.50 |
| 08 | 12.70 | 15.50 | 20.10 |
| 09 | 14.27 | 17.07 | 21.70 |
| 10 | 15.88 | 18.68 | 23.30 |
| 11 | 17.47 | 20.27 | 24.90 |
| 12 | 19.05 | 21.85 | 26.50 |
| 13 | 20.62 | 23.42 | 28.10 |
| 14 | 22.23 | 25.03 | 29.70 |
| 15 | 23.82 | 26.62 | 31.30 |
| 16 | 25.40 | 28.20 | 32.90 |
| 17 | 27.00 | 29.80 | 34.50 |
| 18 | 28.60 | 31.40 | 36.10 |
| 19 | 30.20 | 33.00 | 37.70 |
| 20 | 31.80 | 34.60 | 39.30 |
| 21 | 33.38 | 36.18 | 40.90 |
| 22 | 35.00 | 37.80 | 42.50 |
| 23 | 36.58 | 39.38 | 44.10 |

Assembly: ABAC.01 . ## . # 15

Cable entry size (see table 1)

Shell Size

Class / Finish

# ABAC

## right angle backshell for band termination & heat shrink boot
## Style: ABAC 03

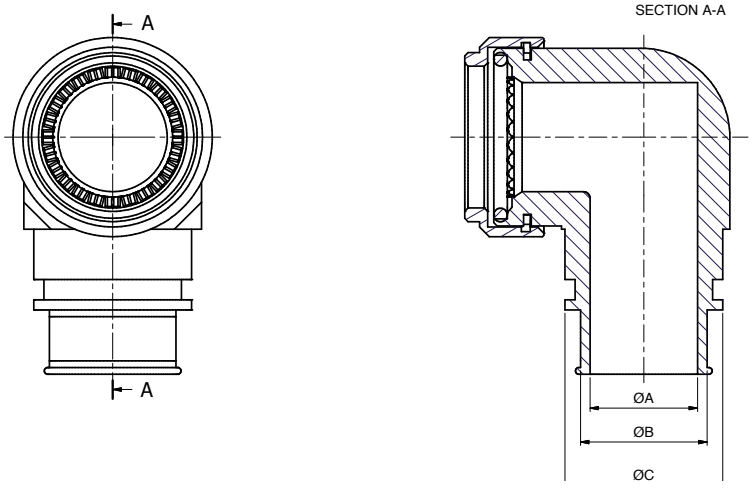


Table 1

| Cable Entry Size | A Ø min. | B Ø max. | C Ø max. |
|---|---|---|---|
| 03 | 4.77 | 9.75 | 13.70 |
| 04 | 6.35 | 9.75 | 13.70 |
| 05 | 7.92 | 10.72 | 15.30 |
| 06 | 9.52 | 12.32 | 17.00 |
| 07 | 11.10 | 13.90 | 18.50 |
| 08 | 12.70 | 15.50 | 20.10 |
| 09 | 14.27 | 17.07 | 21.70 |
| 10 | 15.88 | 18.68 | 23.30 |
| 11 | 17.47 | 20.27 | 24.90 |
| 12 | 19.05 | 21.85 | 26.50 |
| 13 | 20.62 | 23.42 | 28.10 |
| 14 | 22.23 | 25.03 | 29.70 |
| 15 | 23.82 | 26.62 | 31.30 |
| 16 | 25.40 | 28.20 | 32.90 |
| 17 | 27.00 | 29.80 | 34.50 |
| 18 | 28.60 | 31.40 | 36.10 |
| 19 | 30.20 | 33.00 | 37.70 |
| 20 | 31.80 | 34.60 | 39.30 |
| 21 | 33.38 | 36.18 | 40.90 |
| 22 | 35.00 | 37.80 | 42.50 |
| 23 | 36.58 | 39.38 | 44.10 |
| 24 | 38.10 | 40.90 | 45.70 |

Assembly: ABAC.03 . ## . # ##

Cable entry size (see table 1)

Shell Size

Class / Finish

# ABAC

## straight screen trap adapter
## Style: ABAC 10

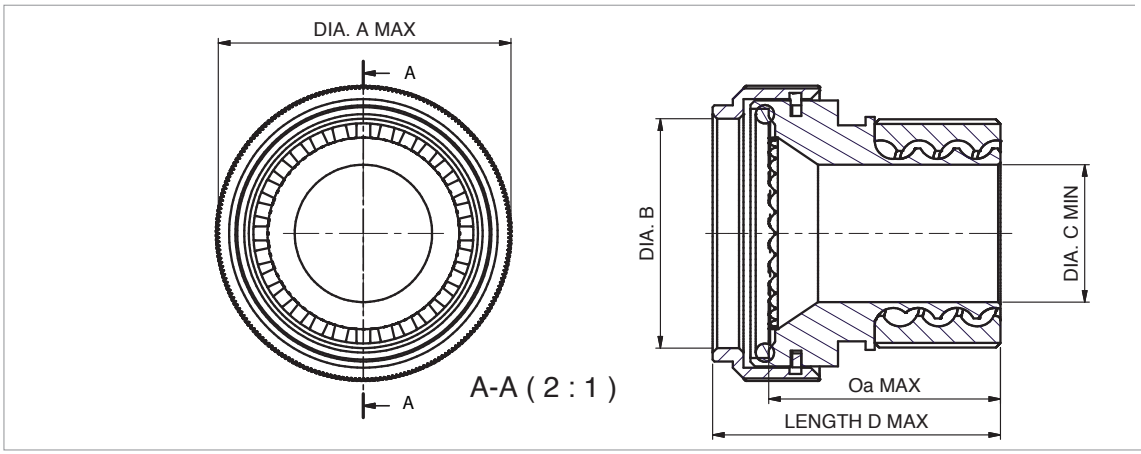


ABAC . 10 . ## . # 21

Accessory Style
Cable Entry Size
Connector Size
Class / Finish

| Cable Size | ØC | Length D Max | Oa max |
|---|---|---|---|
| 03 | 4.70 | 28.58 | 22.00 |
| 04 | 6.30 | | |
| 05 | 7.90 | | |
| 06 | 9.50 | | |
| 07 | 11.10 | | |
| 08 | 12.70 | 33.88 | 27.30 |
| 09 | 14.20 | | |
| 10 | 15.80 | | |
| 11 | 17.40 | | |
| 12 | 19.00 | | |
| 13 | 20.60 | | |
| 14 | 22.20 | | |
| 15 | 23.80 | | |
| 16 | 25.40 | | |
| 17 | 27.00 | | |
| 18 | 28.60 | | |
| 19 | 30.20 | | |
| 20 | 31.80 | | |
| 21 | 33.30 | | |
| 22 | 35.00 | | |
| 23 | 36.50 | | |
| 24 | 38.10 | | |

# ABAC

## 90⁰ angled screen trap adapter

## Style: ABAC 07

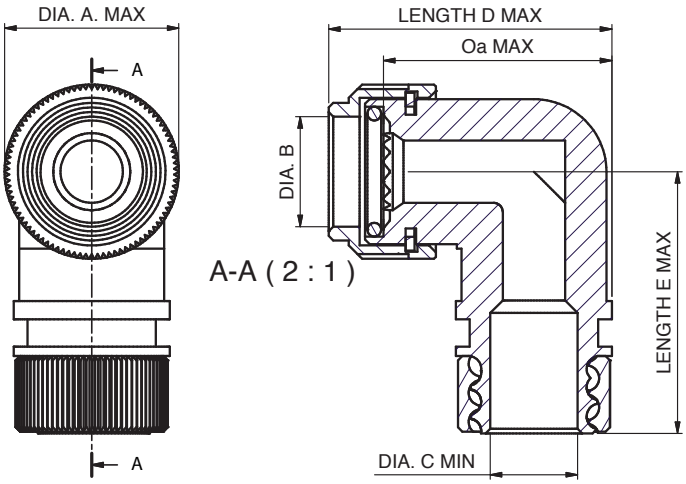


ABAC . 07 . ## . # 21

- Accessory Style
- Cable Entry Size
- Connector Size
- Class / Finish

| Cable Size | ØC | Length D Max | Length E Max | Oa max |
|---|---|---|---|---|
| 03 | 4.70 | 32.79 | 38.35 | 26.41 |
| 04 | 6.30 | 32.79 | | 26.41 |
| 05 | 7.90 | 33.57 | | 27.19 |
| 06 | 9.50 | 35.22 | | 28.84 |
| 07 | 11.10 | 36.76 | | 30.38 |
| 08 | 12.70 | 38.36 | 43.55 | 31.98 |
| 09 | 14.20 | 39.94 | | 33.56 |
| 10 | 15.80 | 41.55 | | 35.17 |
| 11 | 17.40 | 43.14 | | 36.76 |
| 12 | 19.00 | 44.73 | | 38.35 |
| 13 | 20.60 | 46.32 | | 39.94 |
| 14 | 22.20 | 47.92 | | 41.54 |
| 15 | 23.80 | 49.52 | | 43.14 |
| 16 | 25.40 | 50.76 | | 44.38 |
| 17 | 27.00 | 51.56 | | 45.18 |
| 18 | 28.60 | 52.12 | | 45.74 |
| 19 | 30.20 | 52.29 | | 45.91 |
| 20 | 31.80 | 52.94 | | 46.56 |
| 21 | 33.30 | 53.74 | | 47.36 |
| 22 | 35.00 | 54.54 | | 48.16 |
| 23 | 36.50 | 55.34 | | 48.96 |
| 24 | 38.10 | 56.68 | | 50.30 |

# ABAC

## fixed protective caps

## Style: ABAC 33-*-**-R  Part Number: D38999 33-*-**-R

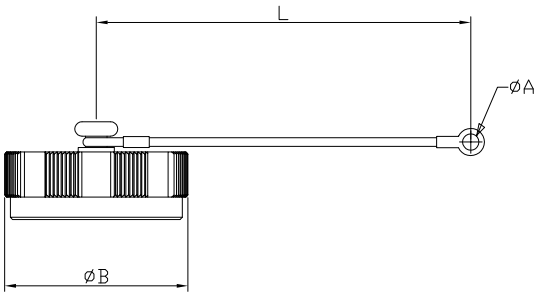


| Shell Size | AB Part No. | A Ø min. | B Ø max. | L + 12.7 - 6.35 | 38999 Part No. |
|---|---|---|---|---|---|
| 09 | ABAC / 33 # 09 R | 3.90 | 22.86 | 127 | D38999 / 33 # 09 R |
| 11 | ABAC / 33 # 11 R | 3.90 | 27.96 | 127 | D38999 / 33 # 11 R |
| 13 | ABAC / 33 # 13 R | 3.90 | 30.48 | 127 | D38999 / 33 # 13 R |
| 15 | ABAC / 3 3 # 15 R | 3.90 | 31.75 | 127 | D38999 / 33 # 15 R |
| 17 | ABAC / 33 # 17 R | 3.90 | 36.83 | 127 | D38999 / 33 # 17 R |
| 19 | ABAC / 33 # 19 R | 3.90 | 38.10 | 127 | D38999 / 33 # 19 R |
| 21 | ABAC / 33 # 21 R | 3.90 | 41.91 | 127 | D38999 / 33 # 21 R |
| 23 | ABAC / 33 # 23 R | 3.90 | 44.45 | 127 | D38999 / 33 # 23 R |
| 25 | ABAC / 33 # 25 R | 3.90 | 48.26 | 127 | D38999 / 33 # 25 R |

Note: replace # with desired plating finish.

# ABAC

## fixed protective caps

## Style: ABAC 33-*-**-N  Part Number: D38999 33-*-**-N

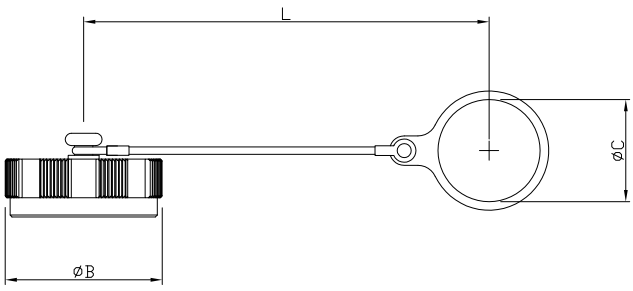


| Shell Size | AB Part No. | C Ø min. | B Ø max. | L + 12.7 - 6.35 | 38999 Part No. |
|---|---|---|---|---|---|
| 09 | ABAC / 33 # 09 N | 17.64 | 22.86 | 127 | D38999 / 33 # 09 N |
| 11 | ABAC / 33 # 11 N | 21.97 | 27.96 | 127 | D38999 / 33 # 11 N |
| 13 | ABAC / 33 # 13 N | 25.12 | 30.48 | 127 | D38999 / 33 # 13 N |
| 15 | ABAC / 33 # 15 N | 29.92 | 31.75 | 127 | D38999 / 33 # 15 N |
| 17 | ABAC / 33 # 17 N | 32.00 | 36.83 | 127 | D38999 / 33 # 17 N |
| 19 | ABAC / 33 # 19 N | 36.27 | 38.10 | 127 | D38999 / 33 # 19 N |
| 21 | ABAC / 33 # 21 N | 38.25 | 41.91 | 127 | D38999 / 33 # 21 N |
| 23 | ABAC / 33 # 23 N | 42.62 | 44.45 | 127 | D38999 / 33 # 23 N |
| 25 | ABAC / 33 # 25 N | 44.45 | 48.26 | 127 | D38999 / 33 # 25 N |

Note: replace # with desired plating finish.

# ABAC

## free protective caps

## Style: ABAC 32-*-**-R/N  Part Number: D38999 32-*-**-R/N

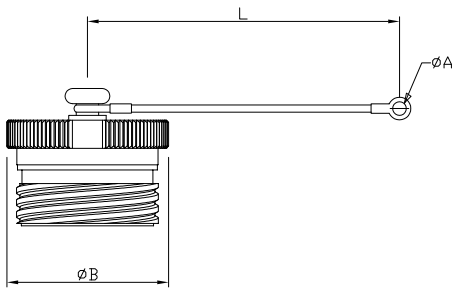


| Shell Size | AB Part No. | A Ø min. | B Ø max. | L + 12.7 - 6.35 | 38999 Part No. |
|---|---|---|---|---|---|
| 09 | ABAC / 32 # 09 R | 3.90 | 22.86 | 127 | D38999 / 32 # 09 R |
| 11 | ABAC / 32 # 11 R | 3.90 | 27.96 | 127 | D38999 / 32 # 11 R |
| 13 | ABAC / 32 # 13 R | 3.90 | 30.48 | 127 | D38999 / 32 # 13 R |
| 15 | ABAC / 32 # 15 R | 3.90 | 31.75 | 127 | D38999 / 32 # 15 R |
| 17 | ABAC / 32 # 17 R | 3.90 | 36.83 | 127 | D38999 / 32 # 17 R |
| 19 | ABAC / 32 # 19 R | 3.90 | 38.10 | 127 | D38999 / 32 # 19 R |
| 21 | ABAC / 32 # 21 R | 3.90 | 41.91 | 127 | D38999 / 32 # 21 R |
| 23 | ABAC / 32 # 23 R | 3.90 | 44.45 | 127 | D38999 / 32 # 23 R |
| 25 | ABAC / 32 # 25 R | 3.90 | 48.26 | 127 | D38999 / 32 # 25 R |

Note: replace # with desired plating finish.

# ABAC

## free protective caps

## Style: ABAC 32-*-**-N  Part Number: D38999 32-*-**-N

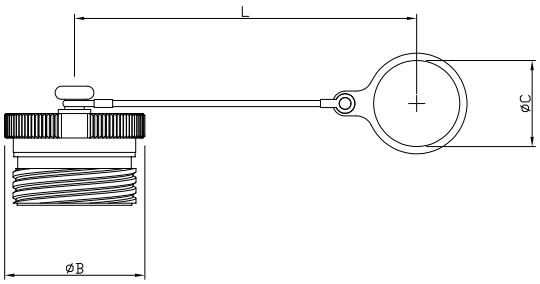


| Shell Size | AB Part No. | C Ø min. | B Ø max. | L + 12,7 - 6,35 | 38999 Part No. |
|---|---|---|---|---|---|
| 09 | ABAC / 32 # 09 N | 17,64 | 22,86 | 127 | D38999 / 32 # 09 N |
| 11 | ABAC / 32 # 11 N | 21,97 | 27,96 | 127 | D38999 / 32 # 11 N |
| 13 | ABAC / 32 # 13 N | 25,12 | 30,48 | 127 | D38999 / 32 # 13 N |
| 15 | ABAC / 32 # 15 N | 29,92 | 31,75 | 127 | D38999 / 32 # 15 N |
| 17 | ABAC / 32 # 17 N | 32,00 | 36,83 | 127 | D38999 / 32 # 17 N |
| 19 | ABAC / 32 # 19 N | 36,27 | 38,10 | 127 | D38999 / 32 # 19 N |
| 21 | ABAC / 32 # 21 N | 38,25 | 41,91 | 127 | D38999 / 32 # 21 N |
| 23 | ABAC / 32 # 23 N | 42,62 | 44,45 | 127 | D38999 / 32 # 23 N |
| 25 | ABAC / 32 # 25 N | 44,45 | 48,26 | 127 | D38999 / 32 # 25 N |

Note: replace # with desired plating finish.

# ABAC

## stowage receptacle

## Style: ABAC 22-**-* Part Number: D38999 22-*-*

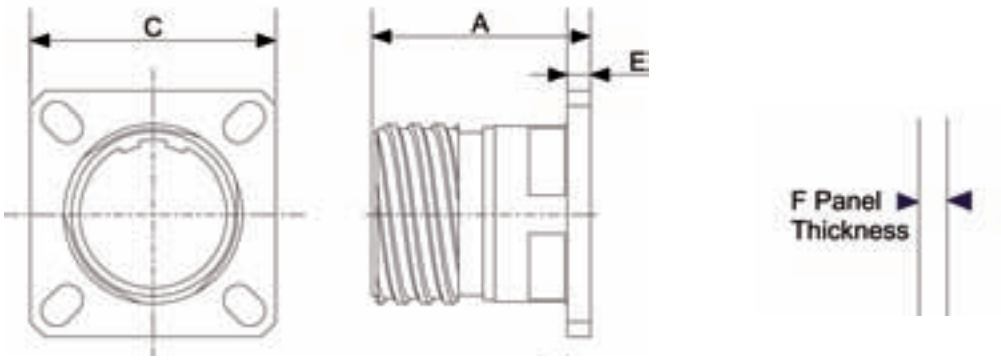


| Shell Size | A max. | C +/- 0.3 | E +/- max. 0.3 | F | AB Part No. |
|---|---|---|---|---|---|
| 09 | 24.2 | 23.8 | 2.5 | 5.94 | ABAC 22 09 # |
| 11 | 24.2 | 26.2 | 2.5 | 5.94 | ABAC 22 11 # |
| 13 | 24.2 | 28.6 | 2.5 | 5.94 | ABAC 22 13 # |
| 15 | 24.2 | 31.0 | 2.5 | 5.94 | ABAC 22 15 # |
| 17 | 24.2 | 33.3 | 2.5 | 5.94 | ABAC 22 17 # |
| 19 | 24.2 | 36.5 | 2.5 | 5.94 | ABAC 22 19 # |
| 21 | 24.1 | 39.7 | 3.2 | 5.18 | ABAC 22 21 # |
| 23 | 24.1 | 42.90 | 3.2 | 5.18 | ABAC 22 23 # |
| 25 | 24.1 | 46.0 | 3.2 | 5.18 | ABAC 22 25 # |

Note: replace # with desired plating finish.

# ABAC

## screened gaskets




| Shell Size | AB Part No. | A max. | B CRS | C Ø | D Ø min. |
|---|---|---|---|---|---|
| 09 | 508/2/38401/109 | 24.33 | 18.26 | 3.12 | 14.22 |
| 11 | 508/2/38401/111 | 26.70 | 20.62 | 3.12 | 17.02 |
| 13 | 508/2/38401/113 | 29.08 | 23.01 | 3.12 | 21.08 |
| 15 | 508/2/38401/115 | 31.47 | 24.61 | 3.12 | 24.38 |
| 17 | 508/2/38401/117 | 33.83 | 26.97 | 3.12 | 27.43 |
| 19 | 508/2/38401/119 | 37.03 | 29.36 | 3.12 | 30.73 |
| 21 | 508/2/38401/121 | 40.18 | 31.75 | 3.12 | 33.78 |
| 23 | 508/2/38401/123 | 43.38 | 34.93 | 3.61 | 37.08 |
| 25 | 508/2/38401/125 | 46.53 | 38.10 | 3.61 | 40.13 |

# ABAC
## contacts

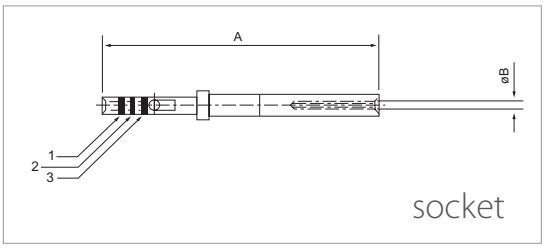


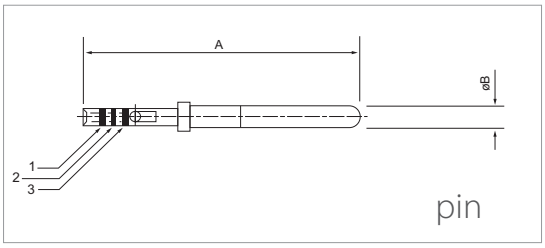


| SIZE | | | SOCKET | | PIN | | Finished Wire Outside Dimensions | | | |
|---|---|---|---|---|---|---|---|---|---|---|
| Contact | Barrel | Wiring Size AWG | MIL-DTL part no. | AB Part no. | MIL-DTL part no. | AB Part no. | Min. inches | Min. mm | Max. inches | Max. mm |
| 22D | 22D | 28, 26, 24, 22 | M 39029/58-348 | 523/4/18241/000 | M 39029/58-360 | 523/4/18219/000 | 0.030 | 0.076 | 0.054 | 1.370 |
| 20 | 20 | 24, 22, 20 | M 39029/56-351 | 523/4/18242/000 | M 39029/58-363 | 523/4/18225/000 | 0.040 | 1.020 | 0.083 | 2.110 |
| 16 | 16 | 20, 18, 16 | M 39029/58-352 | 523/4/18243/000 | M 39029/58-364 | 523/4/18227/000 | 0.650 | 1.650 | 0.109 | 2.770 |
| 12 | 12 | 14, 12 | M 39029/56-353 | 523/4/18244/000 | M 39029/58-365 | 523/4/18229/000 | 0.097 | 2.460 | 1.420 | 3.610 |
| 12 | coax | | M 39029/75-416 | | M 39029/28-24 | | | | | |
| 12 | coax | | M 39029/103-559 | | M 39029/102-558 | | | | | |
| 8 | twinax | | M 39029/91-530 | | M 39029/90-529 | | 0.124 | 3.150 | 0.155 | 3.940 |
| 8 | coax | | M 39029/59-366 | | M 39029/60-367 | | | | | |
| 8 | power | consult factory | | 523/4/18327/000 | | 523/4/18326/000 | 0.124 | 3.150 | 0.155 | 3.940 |

# ABAC
## contacts for use with pcb tail

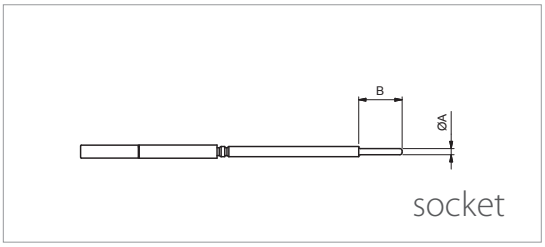


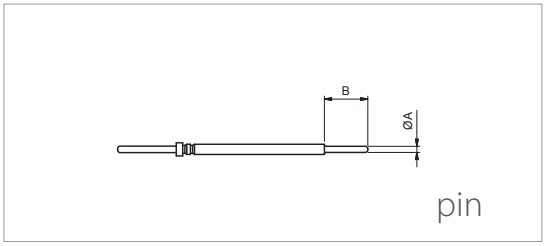


| Contacts | | | |
|---|---|---|---|
| Contact Size | Mod Code Ref. | ØA | B |
| 22D | M03 | 0.70 | 8.50 |
| 22D | M09 | 0.70 | 4.00 |
| 22D | M10 | 0.50 | 5.10 |
| 20 | M09 | 0.70 | 5.10 |
| 16 | M09 | 1.15 | 5.10 |

| Contact | Part No. |
|---|---|
| Size 22D pin contact with PCB tail | 514.2.18970.### |
| Size 22D socket contact with PCB tail | 514.2.18977.### |
| Size 20 pin contact with PCB tail | 514.2.18971.### |
| Size 20 socket contact with PCB tail | 514.2.18978.### |
| Size 16 pin contact with PCB tail | 514.2.18972.### |
| Size 16 socket contact with PCB tail | 514.2.18979.### |

# ABAC
## grommet filler plugs

| Size | Colour Code | MS No./Size | Catalogue No. |
|---|---|---|---|
| 22D | Black | MS27488-22 | 523/2/18230/004 |
| 20 | Red | MS27488-20 | 523/2/18230/003 |
| 16 | Blue | MS27488-16 | 523/2/18230/002 |
| 12 | Yellow | MS27488-12 | 523/2/18230/001 |

# ABAC
## insertion & extraction

The 38999 insertion and extraction tools have been designed for ease of use for operation and dependability. When harnesses are regularly produced using 38999 connectors these tools are highly recommended to replace the temporary tools provided with the connector. The wire gripping feature provides for extraction, without damage to either contact, wire or the sealing features. The metal tips provide the proper balance between the hardness necessary for long usage and the resiliency needed to prevent tip breakage under constant use.

| Contact Size | Contact Part No. | Insertion Tool Part No. | Extraction Tool Part No. |
|---|---|---|---|
| 22D | 523/4/18219/000<br>523/4/18241/000 | 558/I/05267/000 | 558/I/05254/002 |
| 20 | 523/4/18225/000<br>523/I/18242/000 | 558/I/05253/000 | 558/I/05254/000 |
| 16 | 523/4/18227/000<br>523/4/18243/000 | 558/I/05251/000 | 558/I/5252/000 |
| 12 | 523/4/18229/000<br>523/4/18244/000 | 558/I/05251/001 | 558/I/05252/001 |
| 8 | 523/4/18248/000<br>523/4/18249/000 | 558/1/05307/001 | 558/1/05308/001 |

## Crimping Tools

Tools conforming to MIL-C-22520 can be used to crimp 38999 connector contacts.

Recommendation for the various contact types and sizes are as follows:
The following crimp tools are all available from the approved MIL. Spec. tool manufacturers.

| Crimping Tool | Positioner or Turret Die | Contact Type / Size |
|---|---|---|
| M22520/2-01<br>M22520/7-01 | M22520/2-09<br>M22520/7-07 | 22D, Pins |
| M22520/2-01<br>M22520/7-01 | M22520/2-07<br>M22520/7-05 | 22D, Socket |
| M22520/1-01<br>M22520/2-01<br>M22520/7-01 | M22520/1-04<br>M22520/2-10<br>M22520/7-08 | 20 Pin, 20 Socket |
| M22520/1-01<br>M22520/7-01 | M22520/1-04<br>M22520/7-04 | 16 Pin, 16 Socket |
| M22520/1-01 | M22520/1-04 | 12 Pin, 12 Socket |

## Size 8 Twinax Crimping Tool:

| Crimping Tool | Positioner or Turret Die | Contact Type / Size |
|---|---|---|
| M22520/2-01 | K709 | Inner Contact |
| M22520/5-01 | Y631 | Intermediate Contact<br>& Outer Contact |

# ABAC
## contact insertion

### Tool Description

AB Connectors Insertion tools (Fig. 1) are designed to install pin and socket contacts into the MIL-DTL-38999 contact retention system. Positive retention of contacts is accomplished by allowing the locking tabs of the contact retaining spring to engage behind the contact shoulder.

### Preparation for Insertion

1. Remove grommet nut or outlet from the connector and place over the wires to be installed.

2. Insert the crimped contact / wire assembly between the tool tips, making sure that contact shoulder is butted against tips.

### Insertion Procedure

3. Align contact and tool with the selected hole in the connector as nearly perpendicular to the grommet face as possible (Fig. 2).

4. Carefully push the contact into the rubber grommet hole and hard dielectric insert body until the contact shoulder stops against the insert. The contact retaining spring will then be felt or heard locking into place (Fig. 3).

**CAUTION: Do not squeeze the plastic tool handles while the tool tips are inside the connector, Spreading, angling, or rotating the tips can damage them and the connector.**

5. Withdraw the tool completely from the connector by sliding it back along the wire insulation. Remove tool and apply a gentle pull on the wire to confirm that the contact is properly locked into place.

6. Install all other wired contacts in the same manner. Unused holes must be filled with an unwired contact followed by a sealing plug.

7. Reassemble grommet nut or outlet.

**Fig. 1**

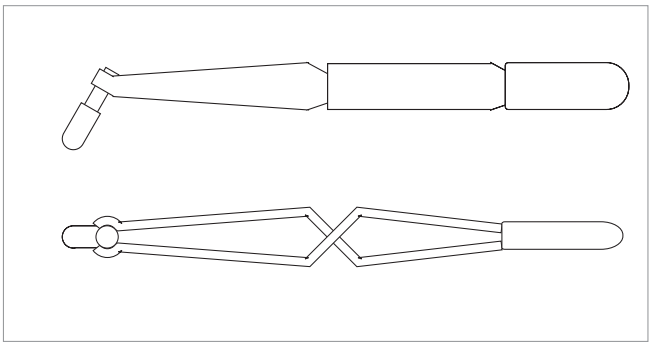

**Fig. 2**

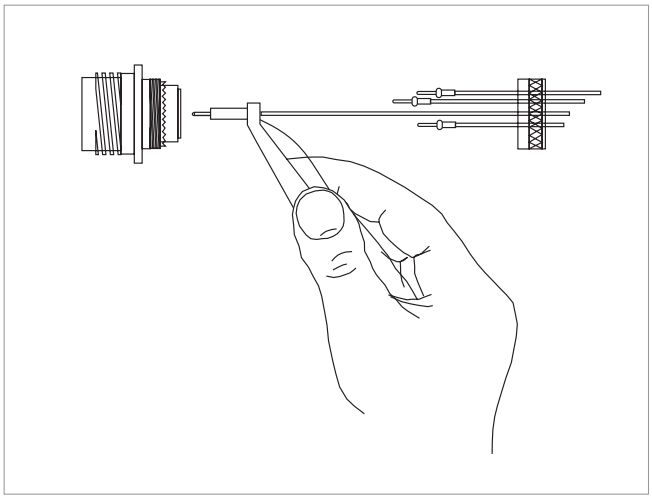

**Fig. 3**

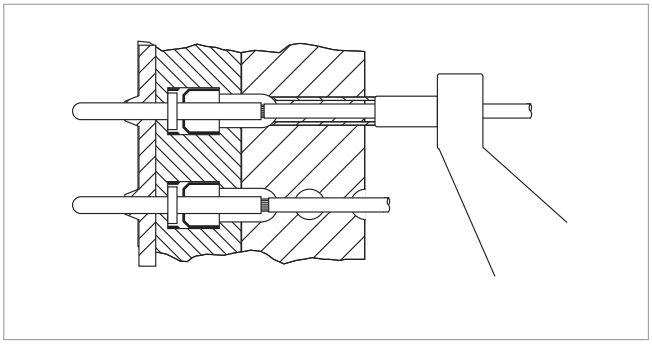

# ABAC
## contact extraction

### Tool Description

AB Connectors Extraction tools (Fig. 1a) are designed to extract pin and socket contacts from the MIL-DTL-38999 contact retention system. Extraction of contacts is accomplished by releasing the locking tabs of the contact retaining spring.

### Preparation for Extraction

1. Disassemble grommet nut or outlet from the connector, allowing it to hang on the wire bundle.

2. Insert the wire of the contact to be extracted between the tool tips (Fig 2a)

### Extraction Procedure

3. Slide the tool tips down the wire insulation into the rubber sealing grommet and hard dielectric insert body until they stop against the contact shoulder (Fig. 3a). If tips catch on the wire barrel and will not enter to full depth, remove tool completely and open and close handles to realign tips.

**CAUTION: Do not squeeze the plastic tool handles while the tool tips are inside the connector. Spreading, angling, or rotating the tips can damage them and the connector.**

4. With the tool tips firmly butted against the contact shoulder, grip the wire insulation against the serrated tool surface without permitting any slack, and exert a light pull on the tool and wire to extract the contact (Fig. 4a). Do not increase pull if contact does not slide out easily - tool tips were not butted properly and excessive tension will damage the contact retaining spring. Remove tool completely and repeat extraction procedure.

5. If wired contact is not replaced, fill unused holes with an unwired contact followed by a sealing plug.

6. Reassemble grommet nut or outlet.

**Fig. 1a**

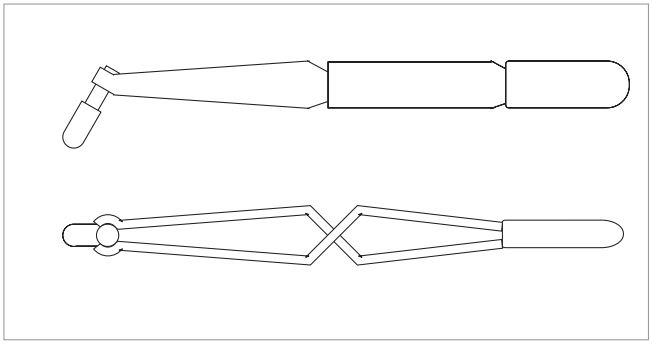

**Fig. 2a**

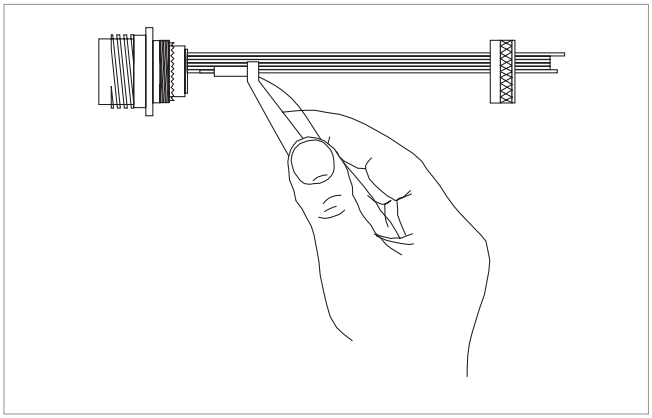

**Fig. 3a**

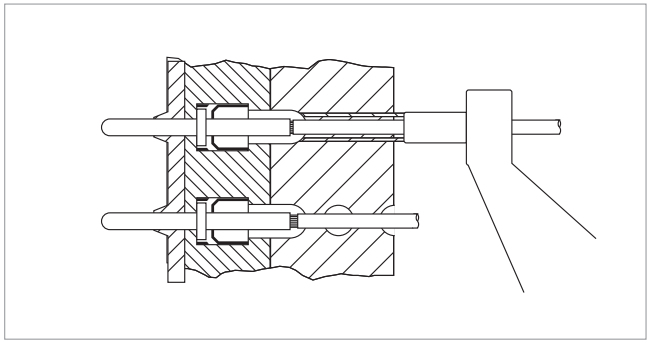

**Fig. 4a**

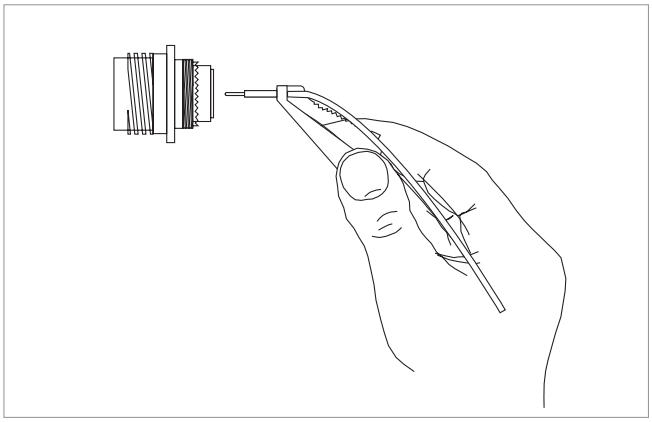

# ABAC
## safety information

This information is to be used in conjunction with the Product Catalogue and Product Specification. Products may be safely used in the applications for which they have been designed and within the specified ratings and environments. If products are exposed to conditions outside the performance ratings or specified environments they may constitute a hazard. In particular it should be noted that:-

**1. Material Content of Products.**

Circular Connectors generally use metalwork parts made of copper, copper alloy, aluminium alloy, aluminium-bronze, phosphor-bronze or steel, which, dependant on the particular application, may be passivated and protected with cadmium or zinc plate – in conjunction with chromated or anodised surface finishes. The insulating materials can be either natural or synthetic rubber, together with plastic or glass filled plastic moulded parts. Contact materials vary with product type but are usually made of copper, copper alloy, nickel, phosphor-bronze, alumel, chromel or steel.

**2. Electric Shock, Burns and Fire.**

Hazard can occur if the product is used outside the specified parameters or if the product is damaged, wrongly wired or poorly assembled, or poorly integrated into larger equipment, or contaminated with conductive fluids. Live circuit terminations must be protected and live circuits never broken by demating products.

Hotspots may be created when resistance is increased due to damage or incorrect integration particularly soldering, crimping or loose terminations. Overheating can cause breakdown of insulation, electric shot, burns or, ultimately, fire. In the event of fire noxious and/or toxic fumes may be released and, in these circumstances, any fire involving the product should be dealt with by personnel properly equipped.

Connector products with exposed terminators or contacts should not be used on the current supply side of a circuit with exposed contacts on an unmated product. Before making a circuit live, the product and wiring should be checked to ensure that there is no damage and no electrically conducting debris present. Circuit resistance checks should also be conducted before making the circuit live. Always ensure that the correct tools, (specified by AB Connectors Ltd.) are employed for crimping and assembly and that connectors are assembled and wired by properly trained personnel.

**3. Disposal of Products.**

Products should not be burnt.

**4. Use Transport and Storage of Products.**

Care must be exercised to avoid damage to any part of the products during transporting, storage or use. The products, as manufactured, are free of sharp edges. Abnormal transit or storage conditions and abuse during installation can give rise to damage. Products should not be used in a damaged condition. Improper storage (particularly of damaged products) can give rise to additional hazards particularly corrosion. Your attention is specifically drawn to the need of proper storage of products containing cadmium and you are advised to see the Guidance Note from the Health and Safety Executive on Cadmium - Health and Safety Precautions.

**Safety Rules**

1. Ensure all conductor wires are capable of withstanding the electrical and environmental conditions of the application.
2. Always use the correct assembly tools for cables, contacts and connectors.
3. Make circuit resistance checks before making a circuit live.
4. Always protect live circuits and never demate a live connector.
5. Never use a damaged connector.
6. Never burn discarded connectors or cable.
7. IF IN DOUBT, ASK.

**N. B.** Additional information on the products and the materials used in them may be obtained from the Sales Department of AB Connectors Ltd.

**Shelf life for rubber components**

AB Connectors incorporate a number of rubber components within their connectors. Most rubbers change in physical properties during storage e.g. excessive hardening, softening, cracking or other surface degradation. These changes may be the result of particular factors or a combination of factors such as light, heat, humidity, oils or solvents.

With a few simple precautions the shelf life may be considerably lengthened.

The storage temperature should be between +5 and +25 degrees C. Direct contact with sources of heat such as boilers, radiators and direct sunlight should be avoided. It is advisable to cover any windows of storage rooms with a red or orange coating or screen. The relative humidity in the storeroom should be below 70%. Very moist or very dry conditions should be avoided. Condensation should not occur.

If the above recommendations are adhered to, then AB Connectors would warrant a shelf life of four years for its products.

**N. B.** The company reserves the right and may change or vary specification without prior written notice.

# TT electronics and the environment

## TT electronics companies adopt a responsible attitude towards the protection of the environment

We strive to meet the requirements of all applicable environmental laws and regulations, to continuously improve environmental performance and to contribute to long-term economic, environmental and social sustainability.

As part of TT electronics' Group Corporate Social Responsibility (CSR) Programme, we engage with industry bodies, like the Electronics Industry Citizenship Coalition (EICC) and Carbon Trust, to support these goals and to maintain ethical supply chains.

The CSR programme has opened up a network for TT electronics, across industry leading bodies, helping us to benchmark our environmental approach.

**Environmental Deployment:**

- Each site is encouraged to attain the latest quality and environmental accreditation and companies have attained ISO 9001, ISO 14001, QS 900 and TS16949, where appropriate.
- Our companies utilise energy efficient means of manufacture and seek to reduce, reuse and recycle waste and arrange for disposal of other waste responsibly.

In collaboration with customers and suppliers, TT electronics' product and process development engineers work continuously to meet the demands of a more environmentally demanding market place.With every new vehicle platform, the increasing use of electronics enables improved techniques to be utilised for reducing emissions and improving fuel economy. The continued drive for a cleaner environment is behind research and development into future generations of vehicles and personal transport systems. Many of these will incorporate new and novel forms of power plants including hybrid engines, fuel cells and plug in electrics. These exciting and technically advanced power sources will be controlled using new generations of electronic functional systems incorporating technology from TT electronics in the form of components and systems.

TT electronics companies have invested, heavily, in design engineering, process control and modern manufacturing equipment. An essential part of product development is the validation of products to customer specific requirements. In most of our companies, this process is carried out in-house on independently certified test and validation facilities.We are committed to partnerships with suppliers and encourage a talented, fully involved and committed workforce to achieve our objectives.

Each of our businesses adopts a high level of customer focus, and is committed to continuous improvement by utilising tools and methods including lean manufacture, Kaizen and Six- Sigma.

We believe that the ultimate measure of quality is customer satisfaction and that continued growth must be based on optimising and improving our quality performance.

# Global Sales Offices

## North America

Email: sales@ttelectronics-na.com

## Europe

Email: sales@ttelectronicseurope.com

## Asia

Email: sales@ttelectronicsasia.com

**TT electronics** Clive House, 12-18 Queens Road, Weybridge, Surrey, KT13 9XB, UK
**www.ttelectronics.com** Email: info@ttelectronics.com

TT electronics

AB Connectors

**AB Connectors Limited** Abercynon, Mountain Ash, Rhondda Cynon Taff, CF45 4SF
**+44 (0) 1443 740331** **www.ttabconectors.com** sales@ttabconnectors.com

**www.ttelectronics.com**

© AB Connectors Ltd

08.11 AB Connectors

Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits,General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.




**Как с нами связаться**

**Телефон:** 8 (812) 309 58 32 (многоканальный)
**Факс:** 8 (812) 320-02-42
**Электронная почта:** org@eplast1.ru
**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.