

# 4N25M, 4N26M, 4N27M, 4N28M, 4N35M, 4N36M, 4N37M, H11A1M, H11A2M, H11A3M, H11A4M, H11A5M General Purpose 6-Pin Phototransistor Optocouplers

## Features

- UL recognized (File # E90700, Volume 2)
- VDE recognized (File # 102497)
  - Add option V (e.g., 4N25VM)


## Applications

- Power supply regulators
- Digital logic inputs
- Microprocessor inputs

## Description


The general purpose optocouplers consist of a gallium arsenide infrared emitting diode driving a silicon phototransistor in a 6-pin dual in-line package.

## Schematic

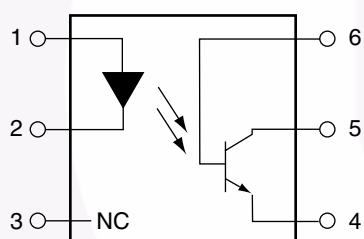

PIN 1. ANODE  
2. CATHODE  
3. NO CONNECTION  
4. EMITTER  
5. COLLECTOR  
6. BASE

## Package Outlines

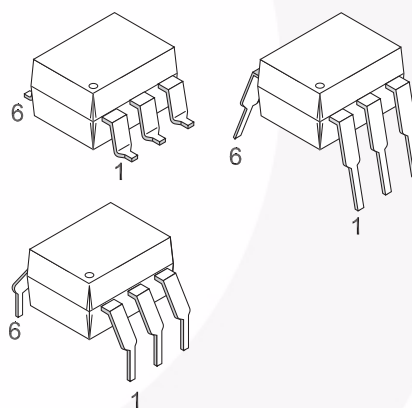

**Absolute Maximum Ratings** ( $T_A = 25^\circ\text{C}$  unless otherwise specified)

Stresses exceeding the absolute maximum ratings may damage the device. The device may not function or be operable above the recommended operating conditions and stressing the parts to these levels is not recommended. In addition, extended exposure to stresses above the recommended operating conditions may affect device reliability. The absolute maximum ratings are stress ratings only.

| Symbol              | Parameter                                                                   | Value          | Units |
|---------------------|-----------------------------------------------------------------------------|----------------|-------|
| TOTAL DEVICE        |                                                                             |                |       |
| T <sub>STG</sub>    | Storage Temperature                                                         | -40 to +150    | °C    |
| T <sub>OPR</sub>    | Operating Temperature                                                       | -40 to +100    | °C    |
| T <sub>SOL</sub>    | Wave solder temperature (see page 8 for reflow solder profile)              | 260 for 10 sec | °C    |
| P <sub>D</sub>      | Total Device Power Dissipation @ T <sub>A</sub> = 25°C<br>Derate above 25°C | 250            | mW    |
|                     |                                                                             | 2.94           |       |
| EMITTER             |                                                                             |                |       |
| I <sub>F</sub>      | DC/Average Forward Input Current                                            | 60             | mA    |
| V <sub>R</sub>      | Reverse Input Voltage                                                       | 6              | V     |
| I <sub>F</sub> (pk) | Forward Current – Peak (300μs, 2% Duty Cycle)                               | 3              | A     |
| P <sub>D</sub>      | LED Power Dissipation @ T <sub>A</sub> = 25°C<br>Derate above 25°C          | 120            | mW    |
|                     |                                                                             | 1.41           | mW/°C |
| DETECTOR            |                                                                             |                |       |
| V <sub>CEO</sub>    | Collector-Emitter Voltage                                                   | 30             | V     |
| V <sub>CBO</sub>    | Collector-Base Voltage                                                      | 70             | V     |
| V <sub>ECO</sub>    | Emitter-Collector Voltage                                                   | 7              | V     |
| P <sub>D</sub>      | Detector Power Dissipation @ T <sub>A</sub> = 25°C<br>Derate above 25°C     | 150            | mW    |
|                     |                                                                             | 1.76           | mW/°C |

**Electrical Characteristics** ( $T_A = 25^\circ\text{C}$  unless otherwise specified)**Individual Component Characteristics**

| Symbol          | Parameter                           | Test Conditions                          | Min. | Typ.* | Max. | Unit          |
|-----------------|-------------------------------------|------------------------------------------|------|-------|------|---------------|
| <b>EMITTER</b>  |                                     |                                          |      |       |      |               |
| $V_F$           | Input Forward Voltage               | $I_F = 10\text{mA}$                      |      | 1.18  | 1.50 | V             |
| $I_R$           | Reverse Leakage Current             | $V_R = 6.0\text{V}$                      |      | 0.001 | 10   | $\mu\text{A}$ |
| <b>DETECTOR</b> |                                     |                                          |      |       |      |               |
| $BV_{CEO}$      | Collector-Emitter Breakdown Voltage | $I_C = 1.0\text{mA}$ , $I_F = 0$         | 30   | 100   |      | V             |
| $BV_{CBO}$      | Collector-Base Breakdown Voltage    | $I_C = 100\mu\text{A}$ , $I_F = 0$       | 70   | 120   |      | V             |
| $BV_{ECO}$      | Emitter-Collector Breakdown Voltage | $I_E = 100\mu\text{A}$ , $I_F = 0$       | 7    | 10    |      | V             |
| $I_{CEO}$       | Collector-Emitter Dark Current      | $V_{CE} = 10\text{V}$ , $I_F = 0$        |      | 1     | 50   | nA            |
| $I_{CBO}$       | Collector-Base Dark Current         | $V_{CB} = 10\text{V}$                    |      |       | 20   | nA            |
| $C_{CE}$        | Capacitance                         | $V_{CE} = 0\text{V}$ , $f = 1\text{MHz}$ |      | 8     |      | pF            |

**Isolation Characteristics**

| Symbol    | Characteristic                 | Test Conditions                       | Min.      | Typ.* | Max. | Units    |
|-----------|--------------------------------|---------------------------------------|-----------|-------|------|----------|
| $V_{ISO}$ | Input-Output Isolation Voltage | $f = 60\text{Hz}$ , $t = 1\text{sec}$ | 7500      |       |      | Vac(pk)  |
| $R_{ISO}$ | Isolation Resistance           | $V_{I-O} = 500\text{VDC}$             | $10^{11}$ |       |      | $\Omega$ |
| $C_{ISO}$ | Isolation Capacitance          | $V_{I-O} = \&$ , $f = 1\text{MHz}$    |           | 0.2   | 2    | pF       |

\*Typical values at  $T_A = 25^\circ\text{C}$

**Electrical Characteristics** (Continued) ( $T_A = 25^\circ\text{C}$  unless otherwise specified)**Transfer Characteristics**

| Symbol             | Parameter                                       | Test Conditions                                                              | Device                                                                         | Min. | Typ.* | Max. | Unit          |
|--------------------|-------------------------------------------------|------------------------------------------------------------------------------|--------------------------------------------------------------------------------|------|-------|------|---------------|
| DC CHARACTERISTICS |                                                 |                                                                              |                                                                                |      |       |      |               |
| CTR                | Current Transfer Ratio,<br>Collector to Emitter | $I_F = 10\text{mA}$ , $V_{CE} = 10\text{V}$                                  | 4N35M, 4N36M,<br>4N37M                                                         | 100  |       |      | %             |
|                    |                                                 |                                                                              | H11A1M                                                                         | 50   |       |      |               |
|                    |                                                 |                                                                              | H11A5M                                                                         | 30   |       |      |               |
|                    |                                                 |                                                                              | 4N25M, 4N26M<br>H11A2M, H11A3M                                                 | 20   |       |      |               |
|                    |                                                 |                                                                              | 4N27M, 4N28M<br>H11A4M                                                         | 10   |       |      |               |
|                    |                                                 | $I_F = 10\text{mA}$ , $V_{CE} = 10\text{V}$ ,<br>$T_A = -55^\circ\text{C}$   | 4N35M, 4N36M,<br>4N37M                                                         | 40   |       |      |               |
|                    |                                                 | $I_F = 10\text{mA}$ , $V_{CE} = 10\text{V}$ ,<br>$T_A = +100^\circ\text{C}$  | 4N35M, 4N36M,<br>4N37M                                                         | 40   |       |      |               |
| $V_{CE(SAT)}$      | Collector-Emitter<br>Saturation Voltage         | $I_C = 2\text{mA}$ , $I_F = 50\text{mA}$                                     | 4N25M, 4N26M,<br>4N27M, 4N28M,                                                 |      |       | 0.5  | V             |
|                    |                                                 | $I_C = 0.5\text{mA}$ , $I_F = 10\text{mA}$                                   | 4N35M, 4N36M,<br>4N37M                                                         |      |       | 0.3  |               |
|                    |                                                 |                                                                              | H11A1M, H11A2M,<br>H11A3M, H11A4M,<br>H11A5M                                   |      |       | 0.4  |               |
| AC CHARACTERISTICS |                                                 |                                                                              |                                                                                |      |       |      |               |
| $T_{ON}$           | Non-Saturated<br>Turn-on Time                   | $I_F = 10\text{mA}$ , $V_{CC} = 10\text{V}$ ,<br>$R_L = 100\Omega$ (Fig. 11) | 4N25M, 4N26M,<br>4N27M, 4N28M,<br>H11A1M, H11A2M,<br>H11A3M, H11A4,<br>H11A5M  |      | 2     |      | $\mu\text{s}$ |
|                    |                                                 | $I_C = 2\text{mA}$ , $V_{CC} = 10\text{V}$ ,<br>$R_L = 100\Omega$ (Fig. 11)  | 4N35M, 4N36M,<br>4N37M                                                         |      | 2     | 10   | $\mu\text{s}$ |
| $T_{OFF}$          | Turn-off Time                                   | $I_F = 10\text{mA}$ , $V_{CC} = 10\text{V}$ ,<br>$R_L = 100\Omega$ (Fig. 11) | 4N25M, 4N26M,<br>4N27M, 4N28M,<br>H11A1M, H11A2M,<br>H11A3M, H11A4M,<br>H11A5M |      | 2     |      | $\mu\text{s}$ |
|                    |                                                 | $I_C = 2\text{mA}$ , $V_{CC} = 10\text{V}$ ,<br>$R_L = 100\Omega$ (Fig. 11)  | 4N35M, 4N36M,<br>4N37M                                                         |      | 2     | 10   |               |

\* Typical values at  $T_A = 25^\circ\text{C}$

## Typical Performance Curves

Fig. 1 LED Forward Voltage vs. Forward Current



Fig. 2 Normalized CTR vs. Forward Current



Fig. 3 Normalized CTR vs. Ambient Temperature



Fig. 4 CTR vs. RBE (Unsaturated)



Fig. 5 CTR vs. RBE (Saturated)

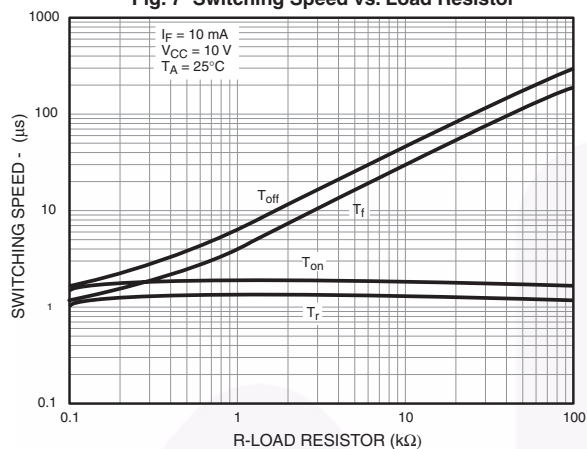


Fig. 6 Collector-Emitter Saturation Voltage vs. Collector Current




# Typical Performance Curves (Continued)


**Fig. 7 Switching Speed vs. Load Resistor**




**Fig. 8 Normalized  $t_{on}$  vs.  $R_{BE}$**

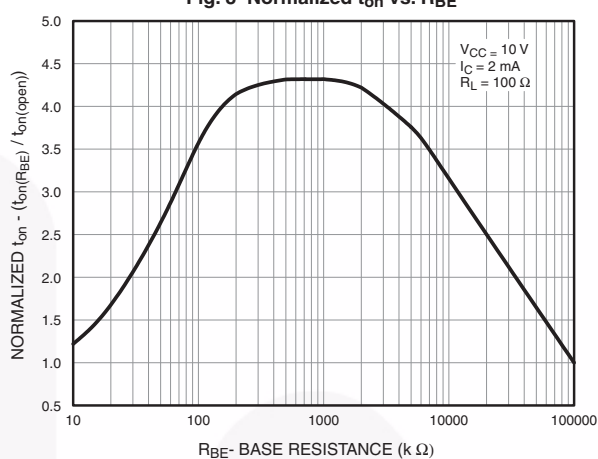


**Fig. 9 Normalized  $t_{off}$  vs.  $R_{BE}$**

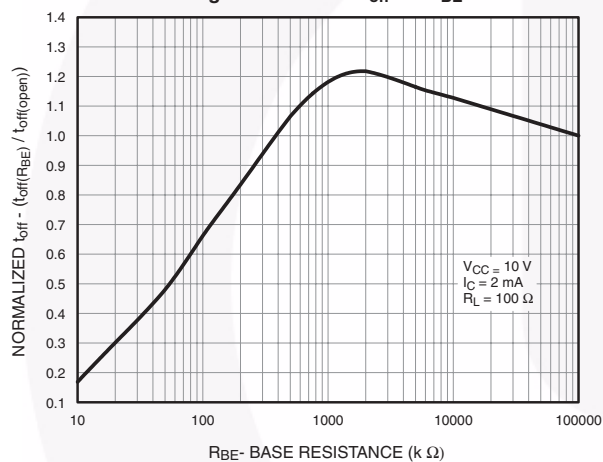


**Fig. 10 Dark Current vs. Ambient Temperature**

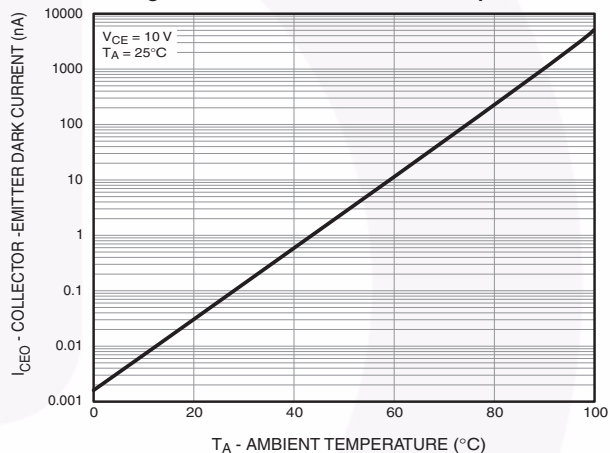

**TEST CIRCUIT**

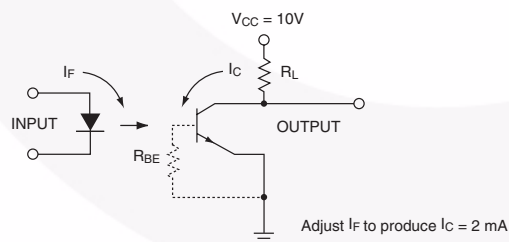

**WAVE FORMS**

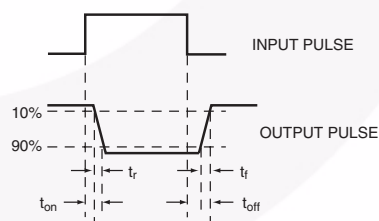

**Figure 11. Switching Time Test Circuit and Waveforms**

## Package Dimensions

### Through Hole



### 0.4" Lead Spacing



### Surface Mount



Recommended Pad Layout



**Note:**  
All dimensions in mm.

## Ordering Information


| Option    | Order Entry Identifier<br>(Example) | Description                            |
|-----------|-------------------------------------|----------------------------------------|
| No option | 4N25M                               | Standard Through Hole Device           |
| S         | 4N25SM                              | Surface Mount Lead Bend                |
| SR2       | 4N25SR2M                            | Surface Mount; Tape and Reel           |
| T         | 4N25TM                              | 0.4" Lead Spacing                      |
| V         | 4N25VM                              | VDE 0884                               |
| TV        | 4N25TVM                             | VDE 0884, 0.4" Lead Spacing            |
| SV        | 4N25SVM                             | VDE 0884, Surface Mount                |
| SR2V      | 4N25SR2VM                           | VDE 0884, Surface Mount, Tape and Reel |

## Marking Information




| Definitions |                                                                                        |
|-------------|----------------------------------------------------------------------------------------|
| 1           | Fairchild logo                                                                         |
| 2           | Device number                                                                          |
| 3           | VDE mark (Note: Only appears on parts ordered with VDE option – See order entry table) |
| 4           | One digit year code, e.g., '7'                                                         |
| 5           | Two digit work week ranging from '01' to '53'                                          |
| 6           | Assembly package code                                                                  |

\*Note – Parts that do not have the 'V' option (see definition 3 above) that are marked with date code '325' or earlier are marked in portrait format.

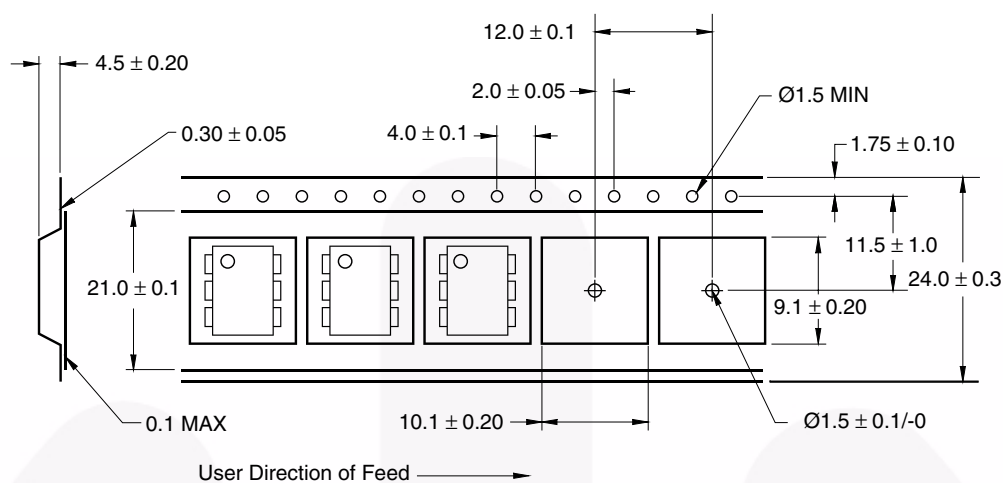

## Reflow Profile

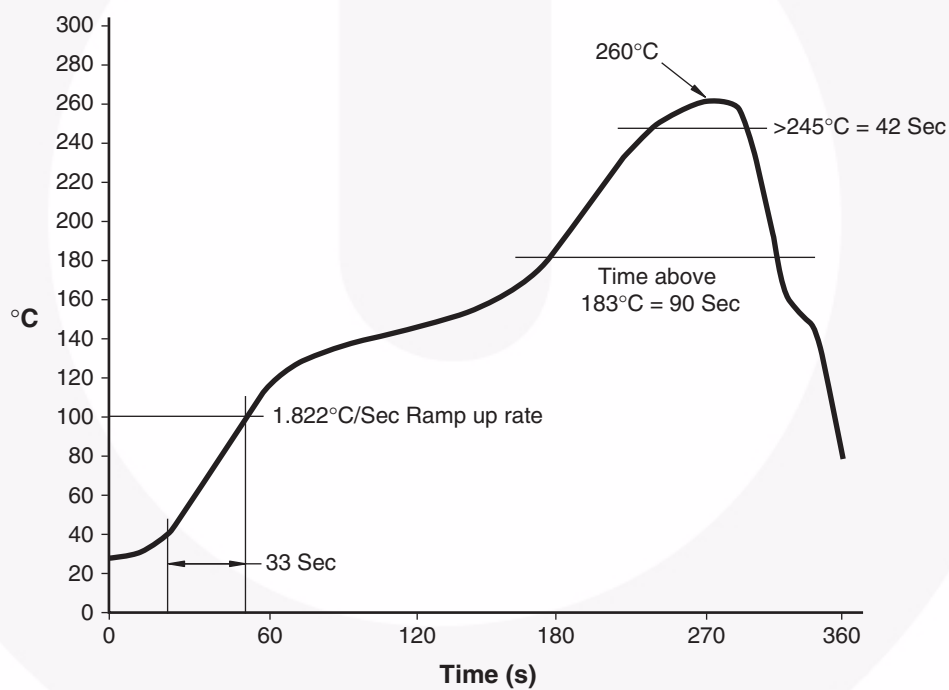



## TRADEMARKS

The following includes registered and unregistered trademarks and service marks, owned by Fairchild Semiconductor and/or its global subsidiaries, and is not intended to be an exhaustive list of all such trademarks.

|                                                                                      |                          |                                                                                                  |                                                                                             |
|--------------------------------------------------------------------------------------|--------------------------|--------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------|
| Build it Now™                                                                        | FRFET®                   | Programmable Active Droop™                                                                       | the power franchise                                                                         |
| CorePLUS™                                                                            | Global Power Resource SM | QFET®                                                                                            | TinyBoost™                                                                                  |
| CorePOWER™                                                                           | Green FPS™               | QS™                                                                                              | TinyBuck™                                                                                   |
| CROSSVOLT™                                                                           | Green FPS™ e-Series™     | Quiet Series™                                                                                    | TinyLogic®                                                                                  |
| CTL™                                                                                 | GTO™                     | RapidConfigure™                                                                                  | TINYOPTO™                                                                                   |
| Current Transfer Logic™                                                              | IntelliMAX™              |  TM             | TinyPower™                                                                                  |
| EcoSPARK®                                                                            | ISOPLANAR™               | Saving our world, 1mW/W/kW at a time™                                                            | TinyPWM™                                                                                    |
| EfficientMax™                                                                        | MegaBuck™                | SmartMax™                                                                                        | TinyWire™                                                                                   |
| EZSWITCH™ *                                                                          | MICROCOUPLER™            | SMART START™                                                                                     | TriFault Detect™                                                                            |
|  TM | MicroFET™                | SPM®                                                                                             | μSerDes™                                                                                    |
|  ®  | MicroPak™                | STEALTH™                                                                                         |  SerDes® |
| Fairchild®                                                                           | MillerDrive™             | SuperFET™                                                                                        | UHC®                                                                                        |
| Fairchild Semiconductor®                                                             | MotionMax™               | SuperSOT™-3                                                                                      | Ultra FRFET™                                                                                |
| FACT Quiet Series™                                                                   | Motion-SPM™              | SuperSOT™-6                                                                                      | UniFET™                                                                                     |
| FACT®                                                                                | OPTOLOGIC®               | SuperSOT™-8                                                                                      | VCX™                                                                                        |
| FAST®                                                                                | OPTOPLANAR®              | SupreMOS™                                                                                        | VisualMax™                                                                                  |
| FastvCore™                                                                           | PDP SPM™                 | SyncFET™                                                                                         | XS™                                                                                         |
| FlashWriter® *                                                                       | Power-SPM™               |  SYSTEM GENERAL |                                                                                             |
| FPS™                                                                                 | PowerTrench®             | The Power Franchise®                                                                             |                                                                                             |
| F-PFS™                                                                               | PowerXS™                 |                                                                                                  |                                                                                             |

\* EZSWITCH™ and FlashWriter® are trademarks of System General Corporation, used under license by Fairchild Semiconductor.

## DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION, OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS. THESE SPECIFICATIONS DO NOT EXPAND THE TERMS OF FAIRCHILD'S WORLDWIDE TERMS AND CONDITIONS, SPECIFICALLY THE WARRANTY THEREIN, WHICH COVERS THESE PRODUCTS.

## LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION.

As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
2. A critical component in any component of a life support, device, or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

## ANTI-COUNTERFEITING POLICY

Fairchild Semiconductor Corporation's Anti-Counterfeiting Policy. Fairchild's Anti-Counterfeiting Policy is also stated on our external website, [www.fairchildsemi.com](http://www.fairchildsemi.com), under Sales Support.

Counterfeiting of semiconductor parts is a growing problem in the industry. All manufacturers of semiconductor products are experiencing counterfeiting of their parts. Customers who inadvertently purchase counterfeit parts experience many problems such as loss of brand reputation, substandard performance, failed applications, and increased cost of production and manufacturing delays. Fairchild is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. Fairchild strongly encourages customers to purchase Fairchild parts either directly from Fairchild or from Authorized Fairchild Distributors who are listed by country on our web page cited above. Products customers buy either from Fairchild directly or from Authorized Fairchild Distributors are genuine parts, have full traceability, meet Fairchild's quality standards for handling and storage and provide access to Fairchild's full range of up-to-date technical and product information. Fairchild and our Authorized Distributors will stand behind all warranties and will appropriately address any warranty issues that may arise. Fairchild will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources. Fairchild is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

## PRODUCT STATUS DEFINITIONS

### Definition of Terms

| Datasheet Identification | Product Status        | Definition                                                                                                                                                                                          |
|--------------------------|-----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Advance Information      | Formative / In Design | Datasheet contains the design specifications for product development. Specifications may change in any manner without notice.                                                                       |
| Preliminary              | First Production      | Datasheet contains preliminary data; supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve design. |
| No Identification Needed | Full Production       | Datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve the design.                                               |
| Obsolete                 | Not In Production     | Datasheet contains specifications on a product that is discontinued by Fairchild Semiconductor. The datasheet is for reference information only.                                                    |

Rev. 138



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.