


## 120 V power Schottky rectifier

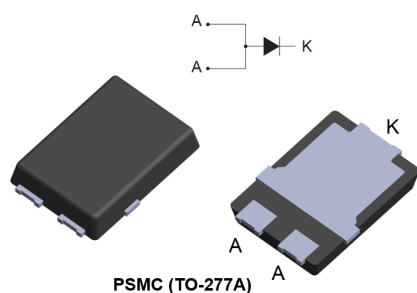

### Features

- Low profile design – package height of 1.1 mm typ.
- Wettable flanks for automatic visual inspection
- Low forward voltage drop
- Avalanche capability
- ECOPACK®2 compliant

### Applications

- Switching diode
- DC / DC converter
- LED Lighting
- SMPS
- Secondary rectification
- Auxiliary power

### Description

This high voltage Schottky barrier rectifier has been optimized for use in high frequency miniature DC/DC converters, reverse battery protection, battery chargers and adaptors.

Packaged in PSMC (TO-277A), the **STPS10M120SF** provides a high level of performance in a compact and flat package which can withstand very high operating junction temperature.

| Product status link          |        |
|------------------------------|--------|
| <a href="#">STPS10M120SF</a> |        |
| Product summary              |        |
| Symbol                       | Value  |
| $I_{F(AV)}$                  | 10 A   |
| $V_{RRM}$                    | 120 V  |
| $T_j$ (max.)                 | 175 °C |
| $V_F$ (typ.)                 | 0.60 V |

# 1 Characteristics

**Table 1. Absolute ratings (limiting values at 25 °C, unless otherwise specified, anode terminals short-circuited)**

| Symbol      | Parameter                                             |                                                       | Value       | Unit |
|-------------|-------------------------------------------------------|-------------------------------------------------------|-------------|------|
| $V_{RRM}$   | Repetitive peak reverse voltage                       |                                                       | 120         | V    |
| $I_{F(AV)}$ | Average forward current, $\delta = 0.5$ square pulse  | $T_c = 150\text{ °C}$                                 | 10          | A    |
| $I_{FSM}$   | Surge non repetitive forward current                  | $t_p = 10\text{ ms}$ sinusoidal                       | 340         | A    |
| $P_{ARM}$   | Repetitive peak avalanche power                       | $t_p = 10\text{ }\mu\text{s}$ , $T_j = 125\text{ °C}$ | 170         | W    |
| $T_{stg}$   | Storage temperature range                             |                                                       | -65 to +175 | °C   |
| $T_j$       | Maximum operating junction temperature <sup>(1)</sup> |                                                       | +175        | °C   |

1.  $(dP_{tot}/dT_j) < (1/R_{th(j-a)})$  condition to avoid thermal runaway for a diode on its own heatsink.

**Table 2. Thermal resistance parameters**

| Symbol        | Parameter        | Typ. value | Unit |
|---------------|------------------|------------|------|
| $R_{th(j-c)}$ | Junction to case | 1.7        | °C/W |

For more information, please refer to the following application note:

- AN5088: Rectifiers thermal management, handling and mounting recommendations

**Table 3. Static electrical characteristics (anode terminals short-circuited)**

| Symbol      | Parameter               | Test conditions       |                     | Min. | Typ. | Max. | Unit          |
|-------------|-------------------------|-----------------------|---------------------|------|------|------|---------------|
| $I_R^{(1)}$ | Reverse leakage current | $T_j = 25\text{ °C}$  | $V_R = V_{RRM}$     | -    |      | 25   | $\mu\text{A}$ |
|             |                         | $T_j = 125\text{ °C}$ |                     | -    | 3    | 10   | mA            |
| $V_F^{(2)}$ | Forward voltage drop    | $T_j = 25\text{ °C}$  | $I_F = 5\text{ A}$  | -    |      | 0.73 | V             |
|             |                         | $T_j = 125\text{ °C}$ |                     | -    | 0.53 | 0.60 |               |
|             |                         | $T_j = 25\text{ °C}$  | $I_F = 10\text{ A}$ | -    |      | 0.82 |               |
|             |                         | $T_j = 125\text{ °C}$ |                     | -    | 0.60 | 0.67 |               |

1. Pulse test:  $t_p = 5\text{ ms}$ ,  $\delta < 2\%$

2. Pulse test:  $t_p = 380\text{ }\mu\text{s}$ ,  $\delta < 2\%$

To evaluate the conduction losses, use the following equation:


$$P = 0.53 \times I_{F(AV)} + 0.014 \times I_{F(RMS)}^2$$

For more information, please refer to the following application notes related to the power losses:


- AN604: Calculation of conduction losses in a power rectifier
- AN4021: Calculation of reverse losses in a power diode

## 1.1 Characteristics curves


**Figure 1. Average forward current versus case temperature ( $\delta = 0.5$ )**

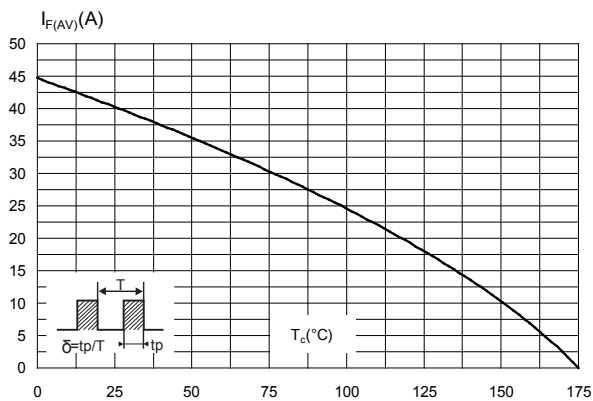


**Figure 2. Relative variation of thermal impedance junction to case versus pulse duration**



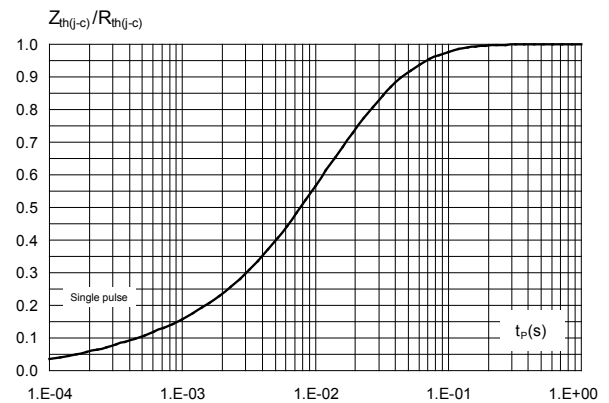


**Figure 3. Reverse leakage current versus reverse voltage applied (typical values)**

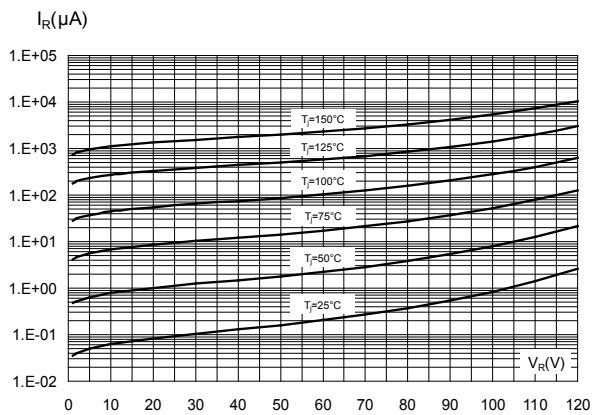

**Figure 4. Junction capacitance versus reverse voltage applied (typical values)**

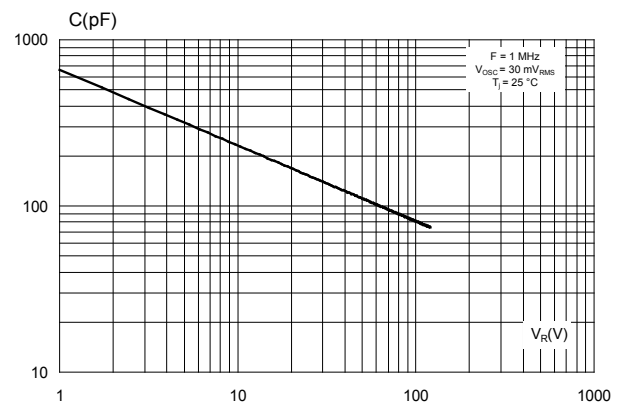


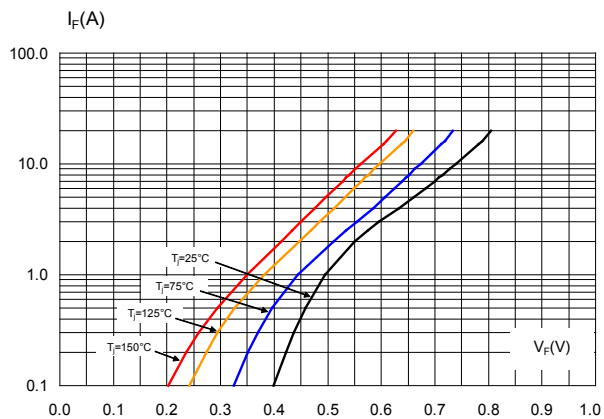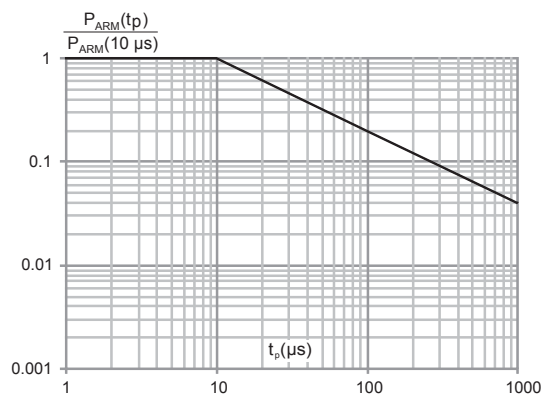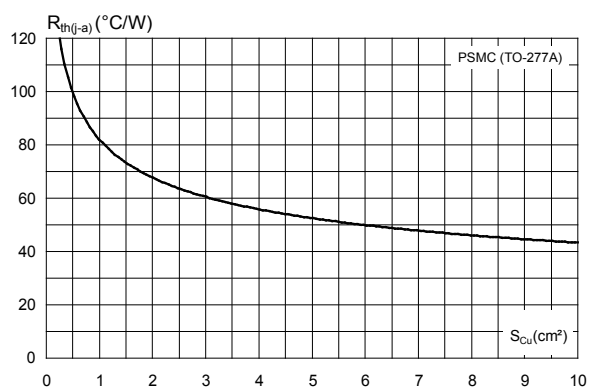**Figure 5. Forward voltage drop versus forward current (typical values)**

**Figure 6. Normalized avalanche power derating versus pulse duration ( $T_J = 125^\circ\text{C}$ )**

**Figure 7. Thermal resistance junction to ambient versus copper surface under tab (typical values, epoxy printed board FR4,  $e_{Cu} = 35\ \mu\text{m}$ ) (PSMC (TO-277A))**

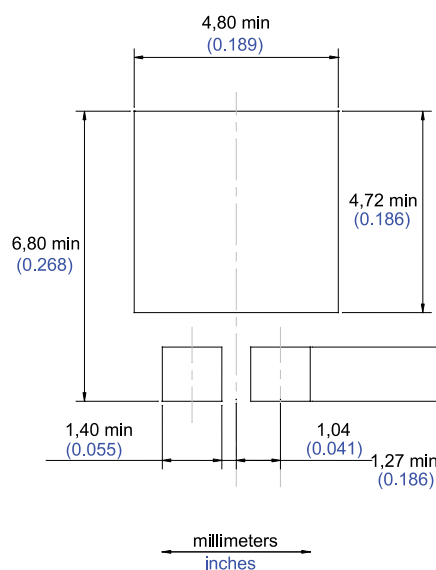


**Table 4. PSMC (TO-277A) package mechanical data**

| Ref. | Dimensions  |      |      |                             |       |       |
|------|-------------|------|------|-----------------------------|-------|-------|
|      | Millimeters |      |      | Inches (for reference only) |       |       |
|      | Min.        | Typ. | Max. | Min.                        | Typ.  | Max.  |
| A    | 1.00        | 1.10 | 1.20 | 0.039                       | 0.043 | 0.047 |
| b    | 1.05        | 1.20 | 1.35 | 0.041                       | 0.047 | 0.053 |
| b2   | 1.90        | 2.05 | 2.20 | 0.075                       | 0.081 | 0.087 |
| b4   |             | 0.75 |      |                             | 0.029 |       |
| C    | 0.15        | 0.23 | 0.40 | 0.006                       | 0.009 | 0.016 |
| D    | 4.45        | 4.60 | 4.75 | 0.175                       | 0.181 | 0.187 |
| D1   | 4.25        | 4.40 | 4.45 | 0.167                       | 0.173 | 0.175 |
| D2   | 3.40        | 3.60 | 3.70 | 0.134                       | 0.142 | 0.146 |
| E    | 6.35        | 6.50 | 6.65 | 0.250                       | 0.256 | 0.262 |
| E1   | 6.05        | 6.10 | 6.15 | 0.238                       | 0.240 | 0.242 |
| E2   | 4.50        | 4.60 | 4.70 | 0.177                       | 0.181 | 0.185 |
| E3   |             | 3.94 |      |                             | 1.55  |       |
| e    |             | 2.13 |      |                             | 0.084 |       |
| e1   |             | 3.33 |      |                             | 0.131 |       |
| G    |             | 1.20 |      |                             | 0.047 |       |
| G1   |             | 0.70 |      |                             | 0.027 |       |
| L    | 0.90        | 1.05 | 1.24 | 0.035                       | 0.041 | 0.049 |
| L4   | 0.02        |      |      | 0.0008                      |       |       |
| L5   | 0.02        |      |      | 0.0008                      |       |       |

**Figure 9. PSMC (TO-277A) package footprint in mm (in inches)**


### 3 Ordering information

**Table 5. Ordering information**

| Order code   | Marking | Package        | Weight | Base qty. | Delivery mode |
|--------------|---------|----------------|--------|-----------|---------------|
| STPS10M120SF | S10M120 | PSMC (TO-277A) | 90 mg  | 6000      | Tape and Reel |

## Revision history

**Table 6. Document revision history**

| Date        | Version | Changes                                                 |
|-------------|---------|---------------------------------------------------------|
| 30-Jul-2018 | 1       | Initial release.                                        |
| 07-Nov-2018 | 2       | Updated <a href="#">Table 5. Ordering information</a> . |

**IMPORTANT NOTICE – PLEASE READ CAREFULLY**

STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST's terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers' products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2018 STMicroelectronics – All rights reserved



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.