

JUXTA F Series

General Specifications

Model : FG3A/V

JUXTA

AC Voltage Transmitter (R.M.S.)

1. GENERAL

This instrument converts AC voltage signals to current or voltage signals.

- AC/DC conversion is made by root mean square.

2. SPECIFICATIONS

IO Specifications	
Input signal	0~V ₁₀₀ V AC (V ₁₀₀ =100% input voltage) 0.1 ≤ V ₁₀₀ ≤ 150V AC
Input resistance	Approx. 1MΩ
Input frequency	40Hz~1kHz
Permissible over-input	120% (continuous), 200% (1 minute)
Output signal	DC current or voltage signal
Zero point adjustment range	±5% of span
Span adjustment range	±5% of span
Standard performance	
Precision rating	±0.3% of span
Response speed	300ms 63% response (10~90%)
Insulation resistance	100MΩ min (at 500V DC) between input~output, input~power supply and output~power supply
Voltage withstand	1500V AC/minute between input~output, input~power supply 500V AC/minute between output~power supply
Ambient temperature and humidity	Normal operating condition: 0~50°C, 5~90% RH Operating limit: -10~60°C, 5~95% RH Storage condition: -40~70°C, 5~95% RH (no condensation)
Power supply voltage	24V DC ±10% (ripple : 10% P-P max)
Effect of power supply voltage fluctuation	±0.1% max of span per 24V DC ±10% fluctuation
Effect of change in ambient temperature	±0.2% max of span per 10°C change in temperature
Current dissipation	24V DC 90mA (FG3A), 60mA (FG3V)
Mountings and dimensions	
Material	Case: ABS plastic
Boards	Both sides glass-epoxy
Mounting methods	Rack, wall, or DIN rail
Connection method	M4-screw terminals
External dimensions	72 x 24 x 127 mm (h x w x d)
Weight	130g
Accessories	
Tag number label : x 1	
Mounting blocks: x2	M4 mounting screws: x2

TYPE NO.

OUTPUT SPECIFICATION

A: Current

V: Voltage

Input signals

1: AC voltage signals

OUTPUT SIGNAL

FG3A

FG3V

A: 4~20mA DC

1: 0~10mV DC

B: 2~10mA DC

2: 0~100mV DC

C: 1~5mA DC

3: 0~1V DC

D: 0~20mA DC

4: 0~10V DC

E: 0~16mA DC

5: 0~5V DC

F: 0~10mA DC

6: 1~5V DC

G: 0~1mA DC

7: $-10 \sim +10\text{V DC}$

Z: (custom) current signal

0: (custom) voltage signal

(24mA max)

(±10V max)

POWER SUPPLY


24V DC $\pm$ 10%

OUTPUT RESISTANCE AND PERMISSIBLE LOAD RESISTANCE


FG3A (DC Current Output)		
Output Signal	Output Resistance	Permissible Load Resistance
4~20mA DC	5MΩ min	0~750Ω
2~10mA DC		0~1500Ω
1~ 5mA DC		0~3000Ω
0~20mA DC		0~750Ω
0~16mA DC		0~900Ω
0~10mA DC		0~1500Ω
0~ 1 mA DC		0~15kΩ
Others where I _{load} =24mA max		(15/100)Ω max

FG3V (DC Voltage Output)			
Output Signal		Output Resistance	Permissible Load Resistance
0~10mV DC		100Ω max	250kΩ min
0~100mV DC			
0~1V DC		1Ω max	2kΩ min
0~10V DC			10kΩ min
0~5V DC			2kΩ min
1~5V DC			2kΩ min
-10~+10V DC			10kΩ min
Others where V ₁₀₀ =24mA max	V ₁₀₀ ≤100mV	100Ω max	250kΩ min
	V ₁₀₀ >100mV	1Ω max	10kΩ min

WIRING DIAGRAM

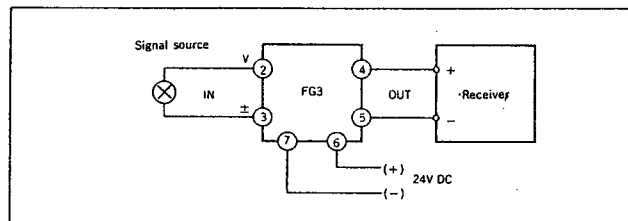

EXTERNAL DIMENSION

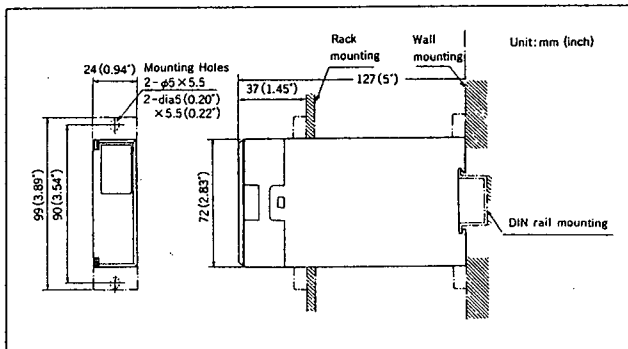

Subject to change without notice for grade up quality and performance



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.