

VOLTAGE DETECTOR

■ GENERAL DESCRIPTION

The NJU7704/05 is a low quiescent current voltage detector featuring high precision detection voltage.

The detection voltage is internally fixed with an accuracy of 1.0%.

The NJU7704/05 are useful for preventing malfunction of microcomputer or DSP etc. through detect a drop in voltage of battery or power supply.


The delay function achieves set wait time when supply voltage is unstable. Moreover, the delay function can make a sequence that other devices in application work and stabilize before microcomputer or DSP works.

Delay time can be set by an external capacitor. Manual reset function can output reset signal irrespective of detection voltage.

NJU7704 is Nch. Open Drain and NJU7705 is a C-MOS output type.

Small packaging makes NJU7704 and NJU7705 suitable for space conscious applications.

■ PACKAGE OUTLINE



NJU7704/05F




NJU7704/05F3


■ FEATURES

- High Precision Detection Voltage $\pm 1.0\%$
- Low Quiescent Current $0.9\mu\text{A typ.}$
- Detection Voltage Range $1.5\sim 6.0\text{V}(0.1\text{V Step})$
- Adjustable delay time with external capacitor
- Manual Reset
Active "L" : NJU770****A
Active "H" : NJU770****B
- Output Configuration
NJU7704: Nch. Open Drain type
NJU7705: C-MOS Output type
- Package Outline
SOT-23-5: NJU770*F
SC88A : NJU770*F3


■ PIN CONFIGURATION

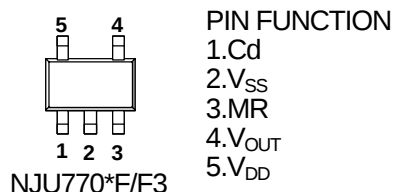


■ EQUIVALENT CIRCUIT

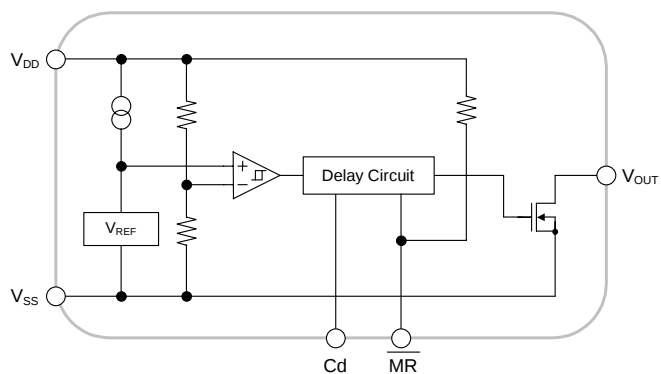


NJU7704***A

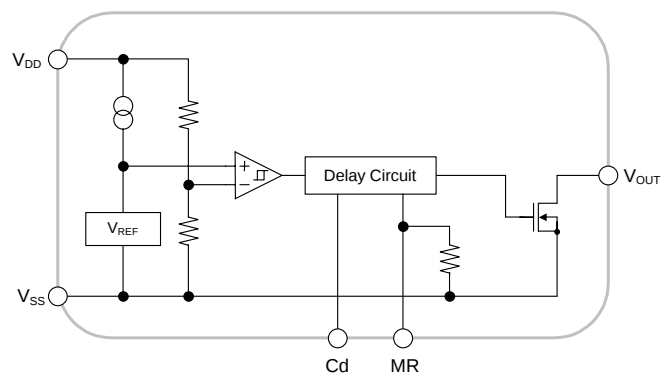

NJU7704F**B

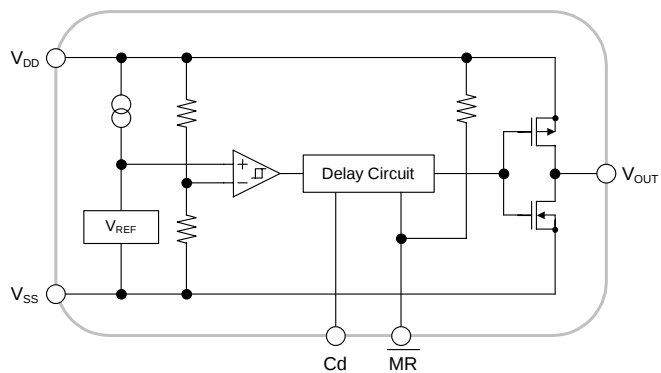

NJU7705***A

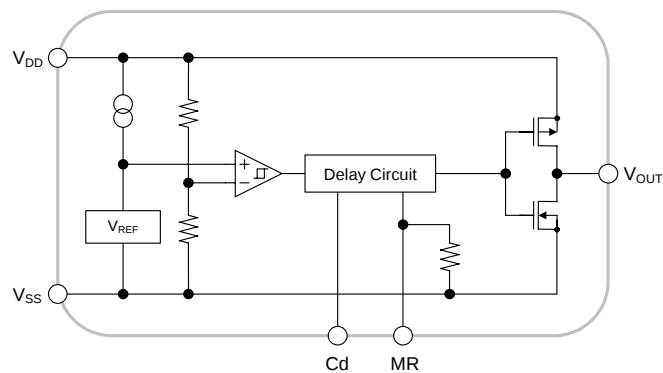

NJU7705***B

■ DETECTION VOLTAGE RANK LIST

Device Name	V _{DET}	MR Logic
NJU770*F3-/F15A	1.5V	Active "L"
NJU770*F3-/F19A	1.9V	
NJU770*F3-/F02A	2.0V	
NJU770*F3-/F21A	2.1V	
NJU770*F3-/F22A	2.2V	
NJU770*F3-/F23A	2.3V	
NJU770*F3-/F25A	2.5V	
NJU770*F3-/F27A	2.7V	
NJU770*F3-/F28A	2.8V	
NJU770*F3-/F29A	2.9V	
NJU770*F3-/F03A	3.0V	
NJU770*F3-/F32A	3.2V	
NJU770*F3-/F39A	3.9V	
NJU770*F3-/F42A	4.2V	
NJU770*F3-/F43A	4.3V	
NJU770*F3-/F44A	4.4V	
NJU770*F3-/F45A	4.5V	
NJU770*F3-/F48A	4.8V	
NJU770*F3-/F06A	6.0V	
NJU770*F3-/F19B	1.9V	Active "H"
NJU770*F3-/F27B	2.7V	
NJU770*F3-/F28B	2.8V	
NJU770*F3-/F03B	3.0V	
NJU770*F3-/F42B	4.2V	

■ NJU7704

■ ABSOLUTE MAXIMUM RATINGS

(Ta=25°C)

PARAMETER	SYMBOL	RATINGS	UNIT
Input Voltage	V_{DD}	+10	V
Output Voltage	V_{OUT}	$V_{SS}-0.3 \sim +10$	V
Input Voltage of Cd pin	V_{Cd}	$V_{SS}-0.3 \sim V_{DD}+0.3$	V
Input Voltage of MR pin	V_{MR}	$V_{SS}-0.3 \sim V_{DD}+0.3$	V
Output Current	I_{OUT}	50	mA
Power Dissipation	P_D	SOT-23-5	350(*1)
			200(*2)
		SC88A	250(*1)
Operating Temperature	T_{opr}	-40 ~ +85	°C
Storage Temperature	T_{stg}	-40 ~ +125	°C

(*1) : Mounted on glass epoxy board based on EIA/JEDEC. (114.3x76.2x1.6mm: 2Layers)

(*2) : Device itself

■ ELECTRICAL CHARACTERISTICS


(Ta=25°C)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Detection Voltage	V_{DET}		-1.0%	-	+1.0%	V
Hysteresis Voltage	V_{HYS}		70	90	130	mV
Quiescent Current	I_{SS}	$V_{DD}=V_{DET}+1V$	$V_{DET}=1.5V \sim 1.9V$ Version	0.7	1.5	μA
			$V_{DET}=2.0V \sim 6.0V$ Version	0.9	2.0	
Output Current	I_{OUT}	$N_{ch}, V_{DS}=0.5V$	$V_{DD}=1.2V$	0.75	2.0	mA
			$V_{DD}=2.4V$ ($\geq 2.7V$ Version)	4.5	7.0	
Output Leak Current	I_{LEAK}	$V_{DD}=V_{OUT}=9V$	-	-	0.1	μA
Detection Voltage Temperature Coefficient	$\Delta V_{DET} / \Delta T_a$	$T_a=0 \sim +85^\circ C$	-	± 100	-	ppm/°C
Delay Time	t_d	$V_{DD}=V_{DET}+1V, C_d=4.7nF$	8	10	12	ms
Input Voltage of MR pin (Active "L")	V_{MR_H}		1.5	-	V_{DD}	V
	V_{MR_L}		0	-	0.3	
Input Voltage of MR pin (Active "H")	V_{MR_H}		$V_{DD}-0.3$	-	V_{DD}	V
	V_{MR_L}		0	-	$V_{DD}-1.5$	
Impedance of MR pin	R_{MR}		1.0	2.0	3.0	M Ω
Operating Voltage (*3)	V_{DD}	$R_L=100k\Omega$	0.8	-	9	V


(*3): The minimum operating voltage(V_{OPL}) indicates the same value of the input voltage(V_{DD}) on condition that V_{OUT} becomes 10% or less of the input voltage(V_{DD}).

■ TEST CIRCUIT


● Circuit Operating Current TEST CIRCUIT

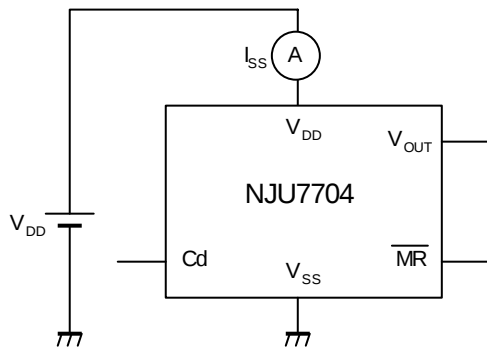


● Detection voltage/Minimum operating voltage

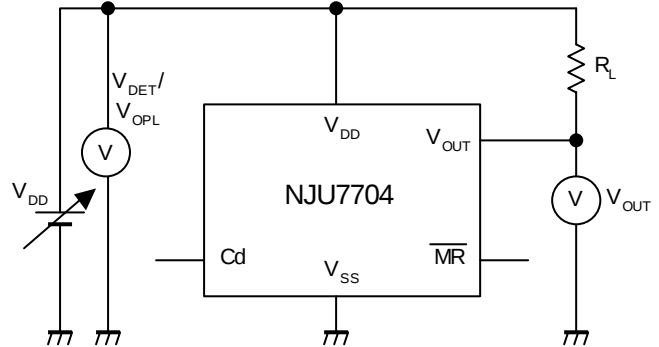


● MR pin Input voltage TEST CIRCUIT

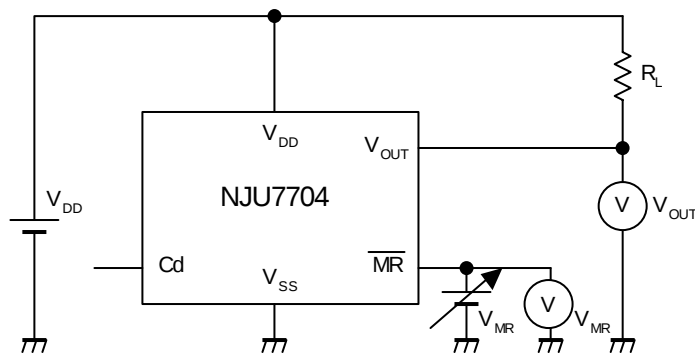

● Leak current / Output current TEST CIRCUIT

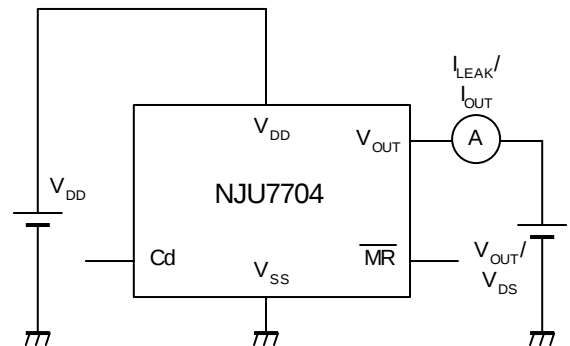


● Delay time TEST CIRCUIT

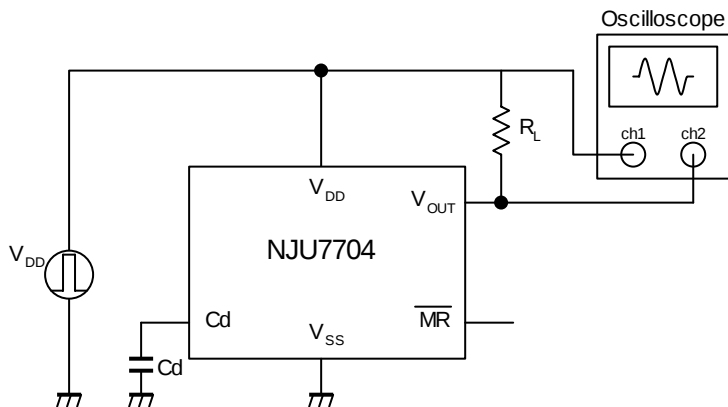


■ TYPICAL APPLICATION

① Power Supply Monitor Circuit (V_{DD} line COMMON)

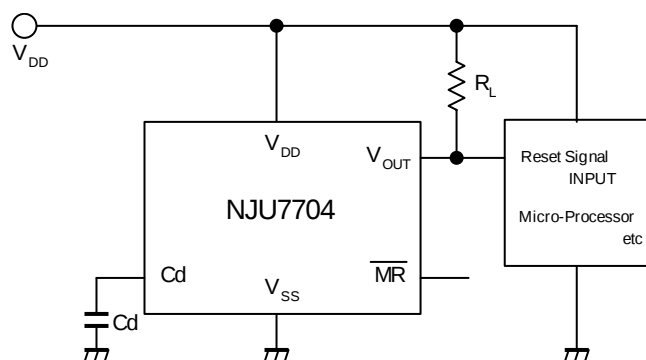

② Power Supply Monitor Circuit (V_{DD} line SEPARATE)

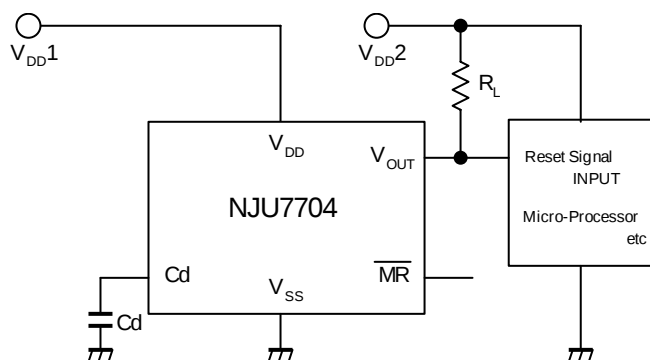

■ NJU7705

■ ABSOLUTE MAXIMUM RATINGS

(Ta=25°C)

PARAMETER	SYMBOL	RATINGS	UNIT
Input Voltage	V_{DD}	+10	V
Output Voltage	V_{OUT}	$V_{SS}-0.3\sim+10$	V
Input Voltage of Cd pin	V_{Cd}	$V_{SS}-0.3\sim V_{DD}+0.3$	V
Input Voltage of MR pin	V_{MR}	$V_{SS}-0.3\sim V_{DD}+0.3$	V
Output Current	I_{OUT}	50	mA
Power Dissipation	P_D	SOT-23-5	350(*4)
			200(*5)
		SC88A	250(*4)
Operating Temperature	T_{opr}	-40~+85	°C
Storage Temperature	T_{stg}	-40~+125	°C

(*4) : Mounted on glass epoxy board based on EIA/JEDEC. (114.3x76.2x1.6mm: 2Layers)

(*5) : Device itself

■ ELECTRICAL CHARACTERISTICS


(Ta=25°C)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Detection Voltage	V_{DET}		-1.0%	-	+1.0%	V
Hysteresis Voltage	V_{HYS}		70	90	130	mV
Quiescent Current	I_{SS}	$V_{DD}=V_{DET}+1V$	$V_{DET}=1.5V\sim 2.9V$ Version	-	0.7	1.5
			$V_{DET}=2.6V\sim 6.0V$ Version	-	0.9	2.0
Output Current	I_{OUT}	$Nch, V_{DS}=0.5V$	$V_{DD}=1.2V$	0.75	2.0	-
			$V_{DD}=2.4V$ ($\geq 2.7V$ Version)	4.5	7.0	-
		$Pch, V_{DS}=0.5V$	$V_{DD}=4.8V$ ($\leq 3.9V$ Version)	2.0	3.5	-
			$V_{DD}=6.0V$ (4.0~5.6V Version)	2.5	4.0	-
			$V_{DD}=8.4V$ ($\geq 5.7V$ Version)	3.0	5.0	-
Detection Voltage Temperature Coefficient	$\Delta V_{DET} / \Delta Ta$	$Ta=0\sim+85^\circ C$	-	± 100	-	ppm/°C
Delay Time	t_d	$V_{DD}=V_{DET}+1V, Cd=4.7nF$	8	10	12	ms
Input Voltage of MR pin (Active "L")	V_{MR_H}		1.5	-	V_{DD}	V
	V_{MR_L}		0	-	0.3	
Input Voltage of MR pin (Active "H")	V_{MR_H}		$V_{DD}-0.3$	-	V_{DD}	V
	V_{MR_L}		0	-	$V_{DD}-1.5$	
Impedance of MR pin	R_{MR}		1.0	2.0	3.0	MΩ
Operating Voltage (*6)	V_{DD}	$R_L=100k\Omega$	0.8	-	9	V


(*6): The minimum operating voltage(V_{OPL}) indicates the same value of the input voltage(V_{DD}) on condition that V_{OUT} becomes 10% or less of the input voltage(V_{DD}).

■ TEST CIRCUIT


● Circuit Operating Current TEST CIRCUIT

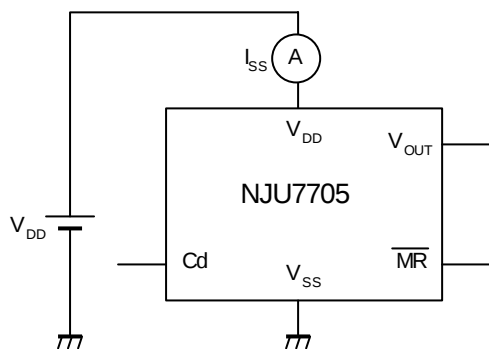


● Detection voltage TEST CIRCUIT

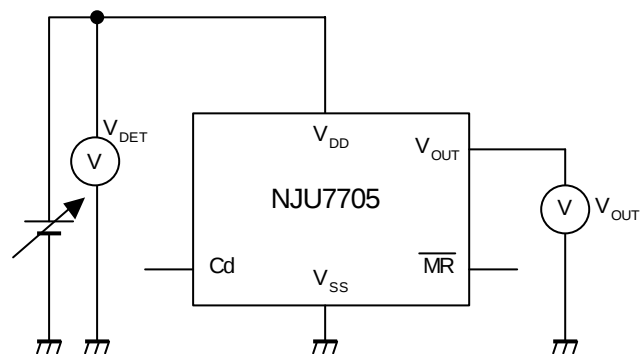


● MR pin Input voltage TEST CIRCUIT

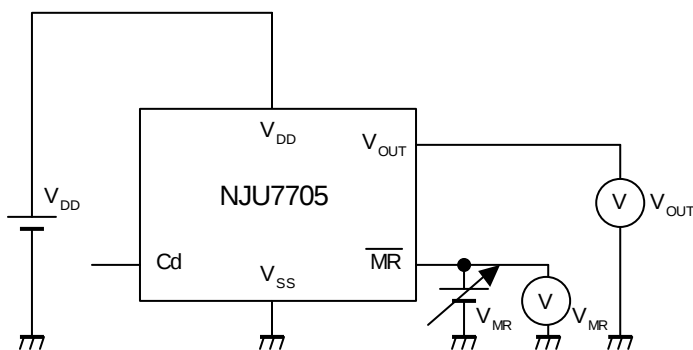


● Nch Output current TEST CIRCUIT

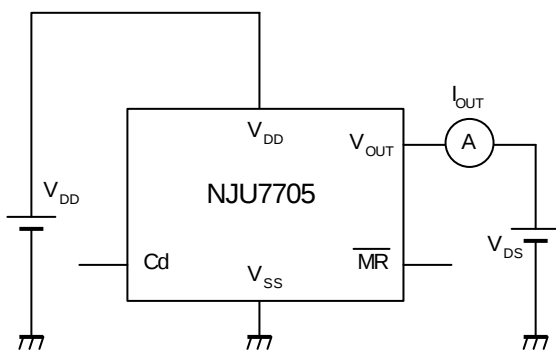


● Pch Output current TEST CIRCUIT

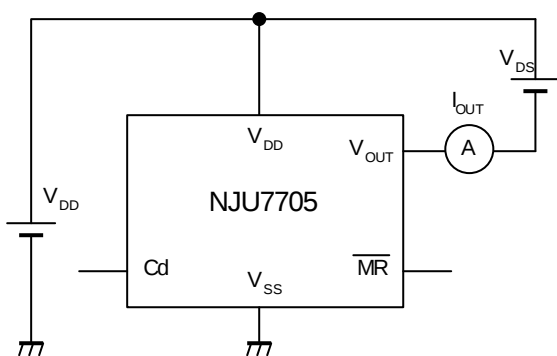

● Delay time TEST CIRCUIT

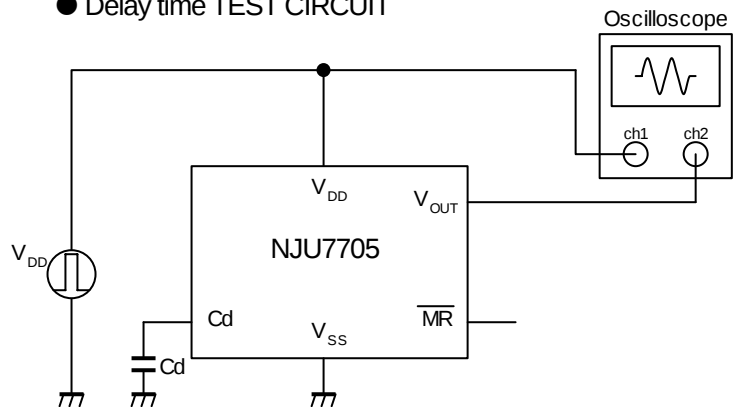


● Minimum operating voltage TEST CIRCUIT

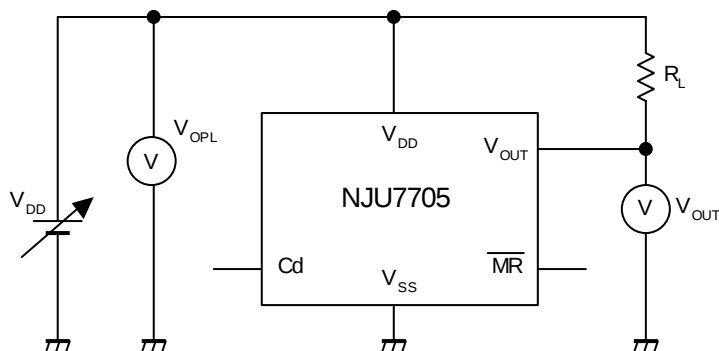


■ TYPICAL APPLICATION

① Power Supply Monitor Circuit (V_{DD} line COMMON)

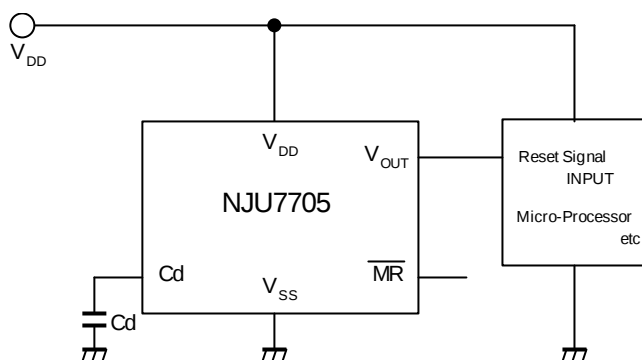

FUNCTIONAL DESCRIPTION

(1) Basic Operation

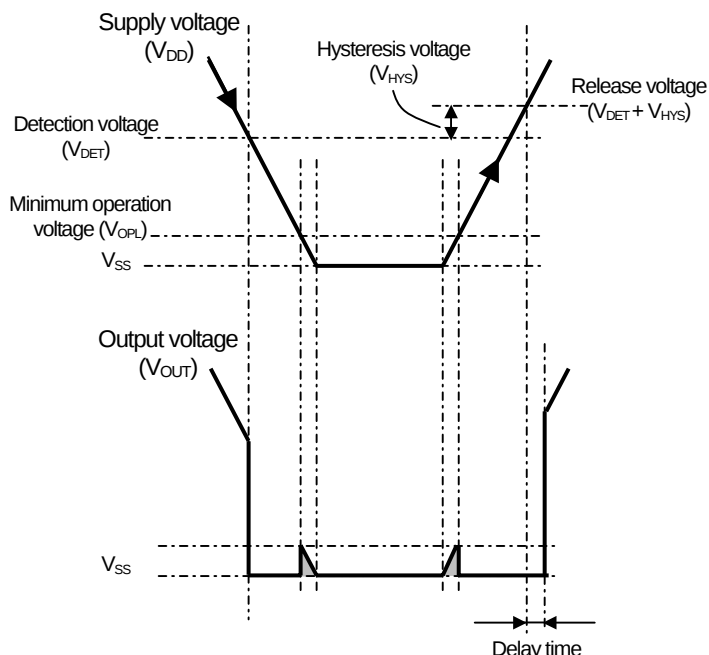

- (1) When supply voltage (V_{DD}) drops below detection voltage (V_{DET}), Output voltage (V_{OUT}) changes "H" to "L" to alert reset state.
- (2) The reset state is kept while V_{DD} is lower than release voltage. The release voltage is a sum of V_{DET} and Hysteresis voltage (V_{HYS}). Please refer to the (*7) below.
- (3) When V_{DD} becomes higher than the release voltage and reset release delay time set by the external capacitors is past, then V_{OUT} changes from "L" to "H" to resume normal state.


(*7) V_{HYS} is to avoid unstable V_{OUT} state caused by rapid voltage change at nearby V_{DET} .

(*8): C-MOS output product (NJU7705) : When V_{DD} less than V_{OPL} , V_{OUT} is free of the shaded region.

(2) Description of Delay Time

Delay time can be set by the external capacitor. The delay time is given by the following:

$$\text{External delay capacitor (nF)} = \text{Required delay time : } t_d(\text{ms}) / 10(\text{ms}) \times 4.7(\text{nF})$$

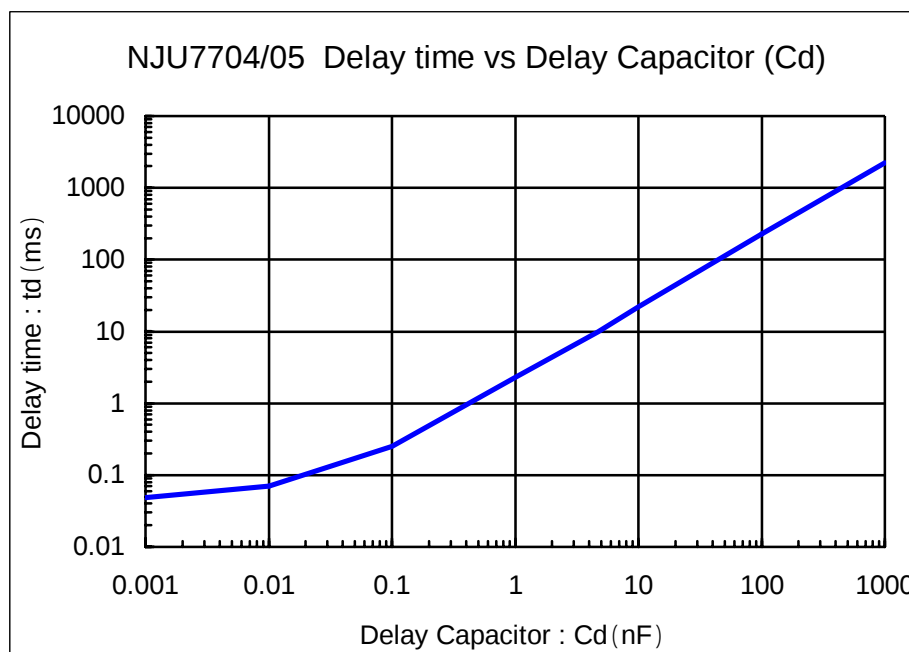

(3) Description of Manual Reset

Reset signal can output independently with MR.





Logic of MR	Operation
Active "L"	$V_{MR} = \text{"L"} \Rightarrow \text{Reset "ON"}$
Active "H"	$V_{MR} = \text{"H"} \Rightarrow \text{Reset "ON"}$

If Manual Reset is not required, please connect MR terminal as following.

Logic of MR	Connection
Active "L"	Connect MR terminal to V_{DD} or open
Active "H"	Connect MR terminal to GND or open

NJU7704/05

■ TYPICAL CHARACTERISTICS

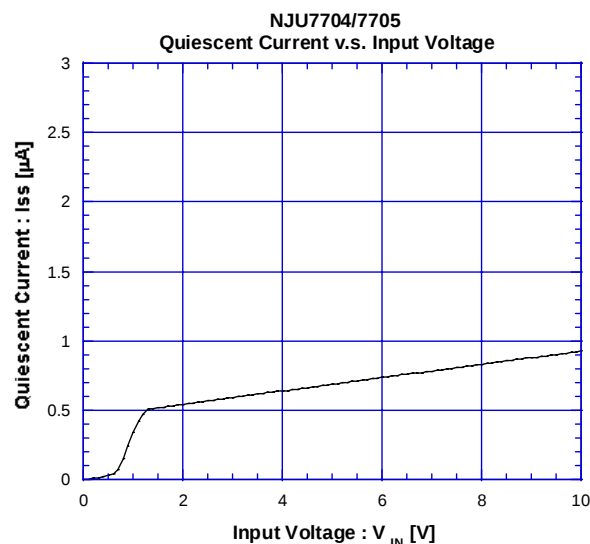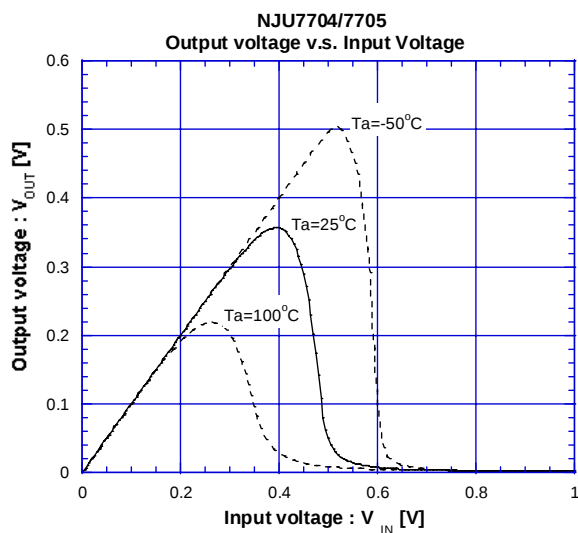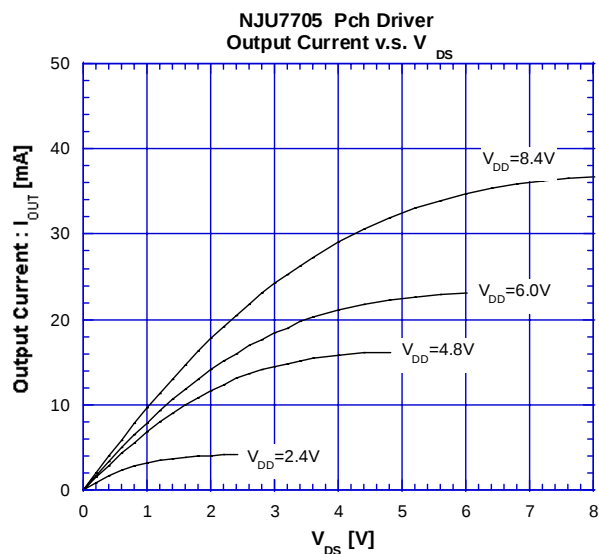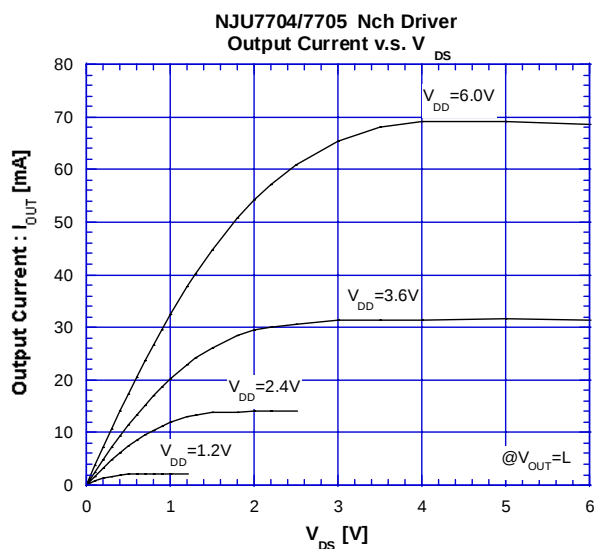

[CAUTION]
The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[NJR:](#)

[NJU7704F3-43A-TE1](#) [NJU7704F21A-TE1](#) [NJU7704F3-27A-TE2](#) [NJU7704F28A-TE1](#) [NJU7704F3-21A-TE1](#)
[NJU7704F3-02A-TE1](#) [NJU7705F3-03A-TE1](#) [NJU7705F3-15A-TE1](#) [NJU7704F27B-TE1](#) [NJU7704F3-28A-TE1](#)
[NJU7704F3-25A-TE1](#) [NJU7704F3-06A-TE1](#) [NJU7705F28A-TE1](#) [NJU7705F3-45A-TE1](#) [NJU7705F3-28A-TE1](#)
[NJU7704F3-27B-TE1](#) [NJU7704F43A-TE1](#) [NJU7704F23A-TE1](#) [NJU7705F3-23A-TE1](#) [NJU7704F03A-TE1](#)
[NJU7705F23A-TE1](#) [NJU7705F43A-TE1](#) [NJU7705F03A-TE1](#) [NJU7704F3-19A-TE1](#) [NJU7704F3-22A-TE1](#)
[NJU7705F3-22A-TE1](#) [NJU7704F06A-TE1](#) [NJU7704F3-19B-TE1](#) [NJU7704F3-29A-TE1](#) [NJU7705F3-32A-TE1](#)
[NJU7704F27A-TE1](#) [NJU7705F22A-TE1](#) [NJU7705F15A-TE1](#) [NJU7705F3-19B-TE1](#) [NJU7704F3-23A-TE1](#)
[NJU7705F3-29A-TE1](#) [NJU7705F29A-TE1](#) [NJU7705F28B-TE1](#) [NJU7705F21A-TE1](#) [NJU7705F3-42A-TE1](#)
[NJU7705F19B-TE1](#) [NJU7704F3-39A-TE1](#) [NJU7705F27B-TE1](#) [NJU7704F3-42A-TE1](#) [NJU7705F3-39A-TE1](#)
[NJU7705F45A-TE1](#) [NJU7705F02A-TE1](#) [NJU7705F25A-TE1](#) [NJU7704F3-45A-TE1](#) [NJU7705F39A-TE1](#)
[NJU7705F19A-TE1](#) [NJU7705F42A-TE1](#) [NJU7705F3-28B-TE1](#) [NJU7704F15A-TE1](#) [NJU7704F19A-TE1](#)
[NJU7704F45A-TE1](#) [NJU7705F3-02A-TE1](#) [NJU7705F3-27B-TE1](#) [NJU7704F3-15A-TE1](#) [NJU7705F3-27A-TE1](#)
[NJU7704F19B-TE1](#) [NJU7704F39A-TE1](#) [NJU7704F3-32A-TE1](#) [NJU7704F32A-TE1](#) [NJU7705F32A-TE1](#) [NJU7705F3-](#)
[43A-TE1](#) [NJU7704F3-28B-TE1](#) [NJU7704F02A-TE1](#) [NJU7704F25A-TE1](#) [NJU7705F3-21A-TE1](#) [NJU7704F42A-TE1](#)
[NJU7705F3-25A-TE1](#) [NJU7705F27A-TE1](#) [NJU7704F29A-TE1](#) [NJU7705F3-19A-TE1](#) [NJU7704F3-03A-TE1](#)
[NJU7704F28B-TE1](#) [NJU7705F3-06A-TE1](#) [NJU7704F22A-TE1](#) [NJU7705F06A-TE1](#)



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.