

SEALED, ILLUMINATED ROCKER SWITCHES

K3
SEALED
ROCKERS

ATTRACTIVE & RUGGED FOR WET & DUSTY ENVIRONMENTS

The OTTO K3 rocker switch is a quality, precision switch designed to comply with standards established for appliance, marine (ignition protection) and off-road vehicles along with other demanding applications where rugged rocker switches are required.

K3 sealed rocker switches snap into industry-standard panel cutouts. Choose illuminated and printed legends, thru-panel drain option and switching compatibility from low level to 20 amps.

The K3 offers a choice of LED, incandescent and neon illumination. Legends can be stamped onto a non-illuminated button, stamped onto an illuminated lens or laser etched into the lens and backlit.

Available in standard and low level contact ratings, the K3 rockers will fit a wide range of applications. Expect a minimum of 25,000 cycles at a full rated load of 20 amps resistive or 15 amps inductive. 100,000 cycles mechanical. A full complement of switch operation is available including momentary and maintained action in 2 or 3-position switches in SPST, SPDT, SPTT, DPST and DPDT circuit arrangements.

OTTO can provide custom colors upon request. Value-added assemblies with wire leads are also available. Please consult the factory for assistance.

Features:

- **Sealed watertight per IP68S**
- **Snap-in panel mounting into industry standard panel cutout**
- **Optional panel seal gasket**
- **Thru-panel drain option**
- **LED, neon & incandescent lighting**
- **0.250" Quick Connect terminals**
- **Optional one-piece connector**
- **Optional terminal barriers**
- **Low level up to 20 amp switch**
- **Configurable Single Pole Triple Throw (SPTT) with external jumpers**
- **RoHS/WEEE/Reach compliant**



Standard Characteristics/Ratings:		
ELECTRICAL RATINGS:		
Load	Sea Level @ 12/28VDC	Sea Level @ 125VAC, 60Hz
Resistive	20A	16A
Inductive	15A	15A
Lamp	5A	5A
Motor	0.5HP @ 110VAC	
DWV	1050Vrms except across light terminals	
Low Level	10mA @ 30mV	
Electrical Life:	25,000 cycles	
LIGHTING:		
Light Source	Rating	
Incandescent	(VDC) 6V, 12V, 24V	
Neon	(VAC) 125V, 250V	
LED	(VDC) 2V, 6V, 12V, 24V	
Mechanical Life:	100,000 cycles	
Seal:	IP68S	
Operating Temp Range:	-40°C to +85°C	
MATERIALS:		
Case:	Thermoplastic, black	
Button:	Thermoplastic	
Terminals/Contact:	Brass, silver alloy with silver plate, gold flash for low level	
Terminal Hardware:	K3 series recommended Quick Connect terminals: AMP 60253-2 for 12-16 AWG AMP 42100-2 for 14-18 AWG	
Mounting Hardware:	None provided	


SEALED, ILLUMINATED ROCKER SWITCHES

K3 SERIES PART NUMBER CODE

Part Number Code Continued Below

K3		X		XX		X		X																																																																																																																																																																													
Base Options		Case Style/Button Color		Switch Action/Circuit		Light Source Type		Light Circuit																																																																																																																																																																													
A. With Keying Pin Only Standard Rating Silver Plate B. Without Barriers or Pin Standard Rating Silver Plate C. With Terminal Barriers Only Standard Rating Silver Plate D. With Keying Pin Only Low Level Rating Gold Plate E. Without Barriers or Pin Low Level Rating Gold Plate F. With Terminal Barriers Only Low Level Rating Gold Plate G. With Keying Pin Only Standard Rating No Plate H. Without Barriers or Pin Standard Rating No Plate J. With Terminal Barriers Only Standard Rating No Plate		A. Case With Drain Holes Button Color: Black B. Case Without Drain Holes Button Color: Black C. Case With Drain Holes Button Color: Red D. Case Without Drain Holes Button Color: Red E. Case With Drain Holes Button Color: White F. Case Without Drain Holes Button Color: White NOTE: Switch case is black for all options below: 1. Case With Drain Holes Button Not Included 2. Case Without Drain Holes Button Not Included		<table><thead><tr><th></th><th>Position "A"</th><th>Position "B"</th><th>Position "C"</th><th>Circuit</th></tr></thead><tbody><tr><td>1A.</td><td>3-4</td><td>NONE</td><td>OFF</td><td>SPST</td></tr><tr><td>2A.</td><td>3-4/8-9</td><td>NONE</td><td>OFF</td><td>DPST</td></tr><tr><td>1B.</td><td>3-4</td><td>NONE</td><td>3-2</td><td>SPDT</td></tr><tr><td>2B.</td><td>3-4/8-9</td><td>NONE</td><td>3-2/8-7</td><td>DPDT</td></tr><tr><td>1C.</td><td>(3-4)</td><td>NONE</td><td>OFF</td><td>SPST</td></tr><tr><td>2C.</td><td>(3-4)/(8-9)</td><td>NONE</td><td>OFF</td><td>DPST</td></tr><tr><td>1D.</td><td>(3-4)</td><td>NONE</td><td>3-2</td><td>SPDT</td></tr><tr><td>2D.</td><td>(3-4)/(8-9)</td><td>NONE</td><td>3-2/8-7</td><td>DPDT</td></tr><tr><td>1E.</td><td>(3-4)</td><td>OFF</td><td>(3-2)</td><td>SPDT</td></tr><tr><td>2E.</td><td>(3-4)/(8-9)</td><td>OFF</td><td>(3-2)/(8-7)</td><td>DPDT</td></tr><tr><td>1F.</td><td>3-4</td><td>OFF</td><td>3-2</td><td>SPDT</td></tr><tr><td>2F.</td><td>3-4/8-9</td><td>OFF</td><td>3-2/8-7</td><td>DPDT</td></tr><tr><td>1G.</td><td>(3-4)</td><td>OFF</td><td>3-2</td><td>SPDT</td></tr><tr><td>2G.</td><td>(3-4)/(8-9)</td><td>OFF</td><td>3-2/8-7</td><td>DPDT</td></tr></tbody></table> <table><thead><tr><th></th><th>Position "A"</th><th>Position "B"</th><th>Position "C"</th><th>Special Circuits</th></tr></thead><tbody><tr><td>1H.</td><td>3-4/8-9</td><td>8-9</td><td>OFF</td><td>ON/ON/OFF</td></tr><tr><td>1J.</td><td>3-4/8-9</td><td>8-9</td><td>NONE</td><td>ON/ON/NONE</td></tr><tr><td>1K.</td><td>(3-4)/(8-9)</td><td>8-9</td><td>OFF</td><td>(ON)/ON/OFF</td></tr><tr><td>1L.</td><td>(3-4)/(8-9)</td><td>8-9</td><td>NONE</td><td>(ON)/ON/NONE</td></tr><tr><td>1M.</td><td>3-4/8-9</td><td>3-2/8-9</td><td>3-2/8-7</td><td>ON/ON/ON</td></tr><tr><td>1N.</td><td>(3-4)/(8-9)</td><td>3-2/8-9</td><td>3-2/8-7</td><td>(ON)/ON/ON</td></tr><tr><td>1P.</td><td>(3-4)/(8-9)</td><td>3-2/8-9</td><td>(3-2)/(8-7)</td><td>(ON)/ON/(ON)</td></tr><tr><td>2R.</td><td>3-4/8-9</td><td>OFF/8-9</td><td>OFF/OFF</td><td>ON/OFF/OFF</td></tr><tr><td>2S.</td><td>(3-4)/8-9</td><td>OFF/8-9</td><td>OFF/OFF</td><td>(ON)/OFF/OFF</td></tr><tr><td></td><td></td><td></td><td></td><td>ON/ON/OFF</td></tr></tbody></table>			Position "A"	Position "B"	Position "C"	Circuit	1A.	3-4	NONE	OFF	SPST	2A.	3-4/8-9	NONE	OFF	DPST	1B.	3-4	NONE	3-2	SPDT	2B.	3-4/8-9	NONE	3-2/8-7	DPDT	1C.	(3-4)	NONE	OFF	SPST	2C.	(3-4)/(8-9)	NONE	OFF	DPST	1D.	(3-4)	NONE	3-2	SPDT	2D.	(3-4)/(8-9)	NONE	3-2/8-7	DPDT	1E.	(3-4)	OFF	(3-2)	SPDT	2E.	(3-4)/(8-9)	OFF	(3-2)/(8-7)	DPDT	1F.	3-4	OFF	3-2	SPDT	2F.	3-4/8-9	OFF	3-2/8-7	DPDT	1G.	(3-4)	OFF	3-2	SPDT	2G.	(3-4)/(8-9)	OFF	3-2/8-7	DPDT		Position "A"	Position "B"	Position "C"	Special Circuits	1H.	3-4/8-9	8-9	OFF	ON/ON/OFF	1J.	3-4/8-9	8-9	NONE	ON/ON/NONE	1K.	(3-4)/(8-9)	8-9	OFF	(ON)/ON/OFF	1L.	(3-4)/(8-9)	8-9	NONE	(ON)/ON/NONE	1M.	3-4/8-9	3-2/8-9	3-2/8-7	ON/ON/ON	1N.	(3-4)/(8-9)	3-2/8-9	3-2/8-7	(ON)/ON/ON	1P.	(3-4)/(8-9)	3-2/8-9	(3-2)/(8-7)	(ON)/ON/(ON)	2R.	3-4/8-9	OFF/8-9	OFF/OFF	ON/OFF/OFF	2S.	(3-4)/8-9	OFF/8-9	OFF/OFF	(ON)/OFF/OFF					ON/ON/OFF	A. No Illumination B. 6V Incandescent C. 12V Incandescent D. 24V Incandescent E. 125VAC Neon F. 250VAC Neon G. 2V Red LED H. 2V Green LED J. 2V Amber LED K. 6V Red LED L. 6V Green LED M. 6V Amber LED N. 12V Red LED P. 12V Green LED Q. 12V Amber LED R. 24V Red LED S. 24V Green LED T. 24V Amber LED		<table><thead><tr><th></th><th>Circuit</th><th>Terminal Connections</th></tr></thead><tbody><tr><td>A.</td><td>None</td><td>None</td></tr><tr><td>B.</td><td>Dep. in "A"</td><td>1(-) & 4(+)</td></tr><tr><td>C.</td><td>Dep. in "C"</td><td>2(+) & 5(-)</td></tr><tr><td>D.</td><td>Ind. in "A"</td><td>1(-) & 6(+)</td></tr><tr><td>E.</td><td>Ind. in "C"</td><td>5(-) & 10(+)</td></tr><tr><td>F.</td><td>Dep. in "A"</td><td>1(-) & 4(+)</td></tr><tr><td>J.</td><td>Dep. in "C"</td><td>2(+) & 5(-)</td></tr><tr><td>G.</td><td>Dep. in "A"</td><td>1(-) & 4(+)</td></tr><tr><td>L.</td><td>Ind. in "C"</td><td>5(-) & 10(+)</td></tr><tr><td>H.</td><td>Ind. in "A"</td><td>1(-) & 6(+)</td></tr><tr><td>N.</td><td>Dep. in "C"</td><td>2(+) & 5(-)</td></tr><tr><td>J.</td><td>Ind. in "A"</td><td>1(-) & 6(+)</td></tr><tr><td>Q.</td><td>Ind. in "C"</td><td>5(-) & 10(+)</td></tr></tbody></table> NOTE: Polarity only applies to LED circuits.			Circuit	Terminal Connections	A.	None	None	B.	Dep. in "A"	1(-) & 4(+)	C.	Dep. in "C"	2(+) & 5(-)	D.	Ind. in "A"	1(-) & 6(+)	E.	Ind. in "C"	5(-) & 10(+)	F.	Dep. in "A"	1(-) & 4(+)	J.	Dep. in "C"	2(+) & 5(-)	G.	Dep. in "A"	1(-) & 4(+)	L.	Ind. in "C"	5(-) & 10(+)	H.	Ind. in "A"	1(-) & 6(+)	N.	Dep. in "C"	2(+) & 5(-)	J.	Ind. in "A"	1(-) & 6(+)	Q.	Ind. in "C"	5(-) & 10(+)
	Position "A"	Position "B"	Position "C"	Circuit																																																																																																																																																																																	
1A.	3-4	NONE	OFF	SPST																																																																																																																																																																																	
2A.	3-4/8-9	NONE	OFF	DPST																																																																																																																																																																																	
1B.	3-4	NONE	3-2	SPDT																																																																																																																																																																																	
2B.	3-4/8-9	NONE	3-2/8-7	DPDT																																																																																																																																																																																	
1C.	(3-4)	NONE	OFF	SPST																																																																																																																																																																																	
2C.	(3-4)/(8-9)	NONE	OFF	DPST																																																																																																																																																																																	
1D.	(3-4)	NONE	3-2	SPDT																																																																																																																																																																																	
2D.	(3-4)/(8-9)	NONE	3-2/8-7	DPDT																																																																																																																																																																																	
1E.	(3-4)	OFF	(3-2)	SPDT																																																																																																																																																																																	
2E.	(3-4)/(8-9)	OFF	(3-2)/(8-7)	DPDT																																																																																																																																																																																	
1F.	3-4	OFF	3-2	SPDT																																																																																																																																																																																	
2F.	3-4/8-9	OFF	3-2/8-7	DPDT																																																																																																																																																																																	
1G.	(3-4)	OFF	3-2	SPDT																																																																																																																																																																																	
2G.	(3-4)/(8-9)	OFF	3-2/8-7	DPDT																																																																																																																																																																																	
	Position "A"	Position "B"	Position "C"	Special Circuits																																																																																																																																																																																	
1H.	3-4/8-9	8-9	OFF	ON/ON/OFF																																																																																																																																																																																	
1J.	3-4/8-9	8-9	NONE	ON/ON/NONE																																																																																																																																																																																	
1K.	(3-4)/(8-9)	8-9	OFF	(ON)/ON/OFF																																																																																																																																																																																	
1L.	(3-4)/(8-9)	8-9	NONE	(ON)/ON/NONE																																																																																																																																																																																	
1M.	3-4/8-9	3-2/8-9	3-2/8-7	ON/ON/ON																																																																																																																																																																																	
1N.	(3-4)/(8-9)	3-2/8-9	3-2/8-7	(ON)/ON/ON																																																																																																																																																																																	
1P.	(3-4)/(8-9)	3-2/8-9	(3-2)/(8-7)	(ON)/ON/(ON)																																																																																																																																																																																	
2R.	3-4/8-9	OFF/8-9	OFF/OFF	ON/OFF/OFF																																																																																																																																																																																	
2S.	(3-4)/8-9	OFF/8-9	OFF/OFF	(ON)/OFF/OFF																																																																																																																																																																																	
				ON/ON/OFF																																																																																																																																																																																	
	Circuit	Terminal Connections																																																																																																																																																																																			
A.	None	None																																																																																																																																																																																			
B.	Dep. in "A"	1(-) & 4(+)																																																																																																																																																																																			
C.	Dep. in "C"	2(+) & 5(-)																																																																																																																																																																																			
D.	Ind. in "A"	1(-) & 6(+)																																																																																																																																																																																			
E.	Ind. in "C"	5(-) & 10(+)																																																																																																																																																																																			
F.	Dep. in "A"	1(-) & 4(+)																																																																																																																																																																																			
J.	Dep. in "C"	2(+) & 5(-)																																																																																																																																																																																			
G.	Dep. in "A"	1(-) & 4(+)																																																																																																																																																																																			
L.	Ind. in "C"	5(-) & 10(+)																																																																																																																																																																																			
H.	Ind. in "A"	1(-) & 6(+)																																																																																																																																																																																			
N.	Dep. in "C"	2(+) & 5(-)																																																																																																																																																																																			
J.	Ind. in "A"	1(-) & 6(+)																																																																																																																																																																																			
Q.	Ind. in "C"	5(-) & 10(+)																																																																																																																																																																																			

SWITCH ACTION/CIRCUIT

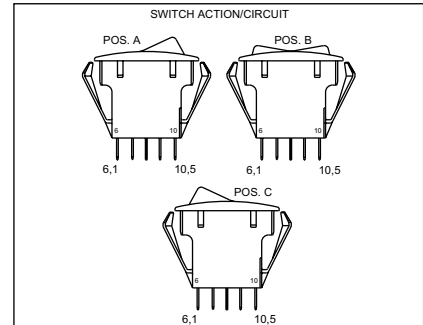

NOTE: () denotes momentary action.

K3 PART NUMBER CODE - CONTINUED FROM ABOVE



X		XX		X		X	
Lens Color		Legend Style		Legend Color		Legend Orientation	
Position "A" 1. Transparent Red 2. Transparent Green 3. Transparent Amber ① 4. Clear ① 5. Translucent White ② Z. No Lens ③		Position "A" ZZ. No Legend		Position "A" 1. Red 2. Black 9. White B. Backlight/ Daylight White ④ D. Backlight/ Deadfront ④ Z. No Legend		Position "A" 1. Red 2. Black 9. White B. Backlight/ Daylight White ④ D. Backlight/ Deadfront ④ Z. No Legend	
Position "C" 1. Transparent Red 2. Transparent Green 3. Transparent Amber ① 4. Clear ① 5. Translucent White ② Z. No Lens ③		Position "C" ZZ. No Legend		Position "C" 1. Red 2. Black 9. White B. Backlight/ Daylight White ④ D. Backlight/ Deadfront ④ Z. No Legend		Position "C" 1. Std. 2. 90° 3. 180° 4. 270°	
NOTE: It is not recommended to use green LEDs with translucent white lenses. This will reduce light intensity. Use clear lenses with green LEDs for maximum light intensity. ① Recommended for neon lamps. ② Special Order: Ultra bright green LED to be used with translucent white lenses. ③ Legend colors "B" & "D" are only available on lens color "Z".		NOTE: For all other legend options, refer to the legend table, find the two digit code and enter the code in the appropriate position(s).		④ For legend color "B" and "D", please use button color "A" & "B" and lens color "Z" for each position.			

STOP HERE for
lighted switches
without legends.

Example: K3AAIFNH-44

STOP HERE for
unlighted switches
without legends.

Example: K3AAIFAA



K3 Connector
P/N 801775-2A Without Latches
P/N 801775-2B With Latches

Panel Seal Gasket
P/N 807037

Order separately for use with switches with-
out drain holes.

Panel Plug
See Panel Plug (PP) page 160.



• K3 panel plugs available as shown on page 160.

Recommended Quick Connect Terminals:
AMP 60253-2 for 12-16 AWG
AMP 42100-2 for 14-18 AWG


SEALED, ILLUMINATED ROCKER SWITCHES

K3
SEALED
ROCKERS



SNAP-IN PANEL MOUNTING, ATTRACTIVE & RUGGED FOR WET & DUSTY ENVIRONMENTS

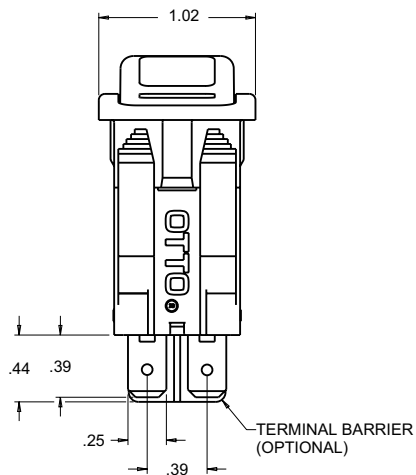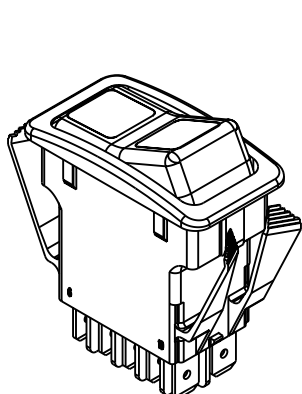

SWITCH SHOWN WITH TERMINAL BARRIERS
CONNECTOR KEY FEATURE OPTIONAL

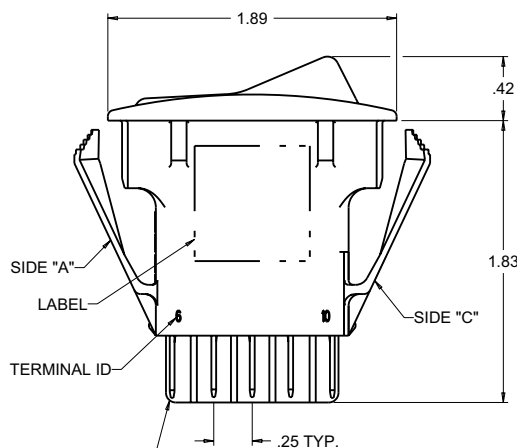

SWITCH SHOWN IN POSITION "A"

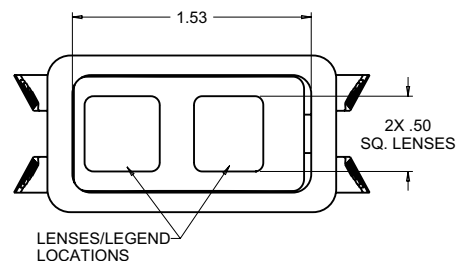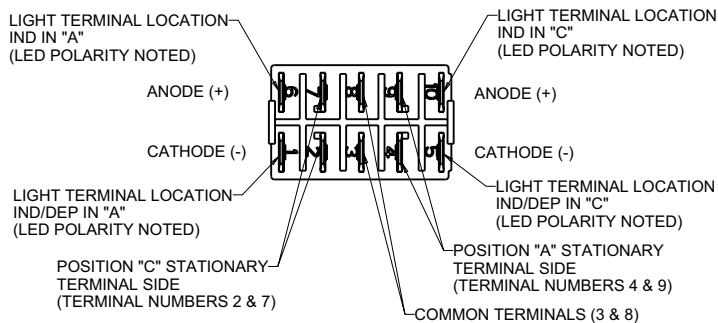

POS "A" POS "B" POS "C" SPECIAL CIRCUIT - ON-ON-ON SCHEMATIC	K3...2A... DPST-ON-NONE-OFF SCHEMATIC	K3...2B... DPDT-ON-NONE-ON SCHEMATIC	K3...2C... DPST-(ON)-NONE-OFF SCHEMATIC	K3...2D... DPDT-(ON)-NONE-ON SCHEMATIC	GENERAL SCHEMATIC INFORMATION ○ INDICATES MAINTAIN ACTION (FIXED POSITION) ▼ INDICATES MOMENTARY ACTION (AUTOMATIC RETURN POSITION) FOR OTHER LIGHTING SCHEMATICS REPLACE FOLLOWING SYMBOLS: INCANDESCENT (REPLACE RESISTOR & LED) NEON (REPLACE LED)
K3...2E... DPDT-(ON)-OFF-(ON) SCHEMATIC	K3...2F... DPDT-ON-OFF-ON SCHEMATIC	K3...2G... DPDT-(ON)-OFF-ON SCHEMATIC	K3...2BNC-Z DPDT-ON-NONE-ON SCHEMATIC W/DEPENDENT LED IN "A"	K3...2BNC-Z DPDT-ON-NONE-ON SCHEMATIC W/DEPENDENT LED IN "C"	K3...2BNC-Z DPDT-ON-NONE-ON SCHEMATIC W/DEPENDENT LED IN "A"
K3...2BNC-Z DPDT-ON-NONE-ON SCHEMATIC W/INDEPENDENT LED IN "A"	K3...2BNC-Z DPDT-ON-NONE-ON SCHEMATIC W/INDEPENDENT LED IN "C"	K3...2BNC-Z DPDT-ON-NONE-ON SCHEMATIC W/INDEPENDENT LED IN "A" & "C"	K3...2BNC-Z DPDT-ON-NONE-ON SCHEMATIC W/INDEPENDENT LED IN "A" & "C"	K3...2BNC-Z DPDT-ON-NONE-ON SCHEMATIC W/INDEPENDENT LED IN "A" & "C"	K3...2BNC-Z DPDT-ON-NONE-ON SCHEMATIC W/INDEPENDENT LED IN "A" & "C"

SNAP-IN PANEL MOUNTING

Standard Legends Per SAE Specifications

STANDARD LEGENDS PER SAE SPECIFICATIONS					
A1		ANCHOR	K2		UNLOCK
B1		BATTERY	L1		LIGHT
B2		ELECTRIC POWER	L2		MASTER LIGHTING SWITCH
C1		AC/COOLING SYSTEMS	L3		HEADLIGHTS
C2		DEHUMIDIFIER	L4		HEADLIGHTS-LOW / DIPPED BEAM
C3		HEATER/INTERIOR HEATING	L5		HEADLIGHTS-HIGH / UPPER BEAM
D1		WINDSHIELD DEFROSTER	L6		PARKING LIGHT
D2		REAR WINDOW DEFROSTER	L7		WORK LAMP
D3		MIRROR DEFROSTER	L8		WORK LAMP
E1		ENGINE/START	L9		INTERIOR DOME LIGHT
E2		ENGINE/STOP	M1		BEACON
E3		ON/START	M2		HAZARD/POSITION LIGHTS
E4		OFF/STOP	M3		CLEARANCE LIGHTS
E5	ON	ON	M4		SIDE MARKER LIGHT
E6	OFF	OFF	M5		RUNNING LIGHTS (UNDER POWER)
E7		ENGINE ELECTRIC PREHEAT	M6		ANCHOR LIGHT
E8		ENGINE-GAS INJECTION	M7		RUNNING/ANCHOR LIGHTS
F1		FRONT FOG LIGHTS	M8		SEARCH LIGHT
F2		REAR FOG LIGHTS	M9		LEFT TURN SIGNAL
G1		FUEL	MA		RIGHT TURN SIGNAL
H1		HORN	P1		BILGE PUMP #1
H2		HORN REAR	P2		BILGE PUMP #2
K1		LOCK	P3		BILGE PUMP #3
			P4		BILGE PUMP
P5		BILGE BLOWER	R1		LIFT
R2		LOWER	R3		UP
R4		DOWN	R5		RIGHT
R6		LEFT	R7	FWD	FORWARD
R8	REV	REVERSE	S1		RADIO
S2		MUTE	T1		FAST
T2		SLOW	T3		TRIM TAB / TRIMMING OPERATION
T4		TRANSMISSION	V1		VENTILATING / AC FAN
W1		WINDSHIELD WIPER	W2		WINDSHIELD-WASHER
W3		WINDSHIELD-WASHER/WIPER	W4		REAR WINDOW WIPER
W5		REAR WINDOW-WASHER	W6		REAR WINDOW-WASHER/WIPER
ZZ		NO LEGEND			

For legends not shown, please consult an OTTO representative.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.