


856880

1880 MHz SAW Filter

Applications

- General purpose wireless
- Wireless infrastructure
- Base Station applications

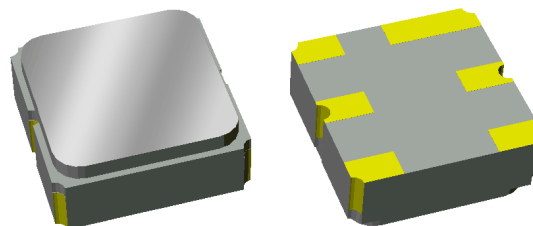

Product Features

- Usable bandwidth 60 MHz
- Low Loss
- Excellent power handling
- Single-ended operation
- No matching required for operation at 50Ω
- Small Size: 3.00 x 3.00 x 1.22 mm
- Ceramic Surface Mount Package (SMP)
- Hermetically Sealed
- RoHS compliant, Pb-free 

General Description


856880 is a general purpose Uplink filter for Band 2. This filter was specifically designed in a 3x3mm hermetic package for base station applications and is part of our wide portfolio of RF filters in the same package.

Low insertion loss, coupled with low amplitude variation and high attenuation makes this filter a natural choice for our customers uplink RF filtering needs.

No matching components are required, making filter implementation easy.

Functional Block Diagram

Top view

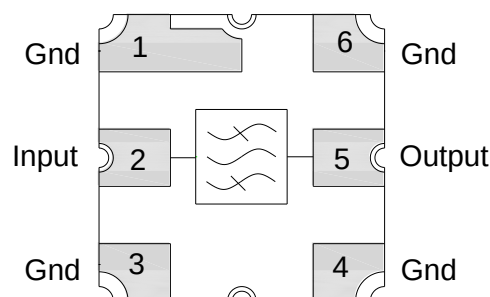

Pin Configuration

Pin # SE	Description
2	Input
5	Output
1,3,4,6	Case Ground

Ordering Information

Part No.	Description
856880	packaged part
856880-EVB	evaluation board

Standard T/R size = 5000 units/reel.

Specifications

Electrical Specifications ⁽¹⁾

Specified Temperature Range: ⁽²⁾ -30 to +85 °C

Parameter ⁽³⁾	Conditions	Min	Typical ⁽⁴⁾	Max	Units
Center Frequency		-	1880	-	MHz
Maximum Insertion Loss	1850 – 1910 MHz	-	2.3	3.0	dB
Amplitude Variation	1850 – 1910 MHz	-	0.5	1.0	dB p-p
Amplitude Variation over any 5MHz window	1850 – 1910 MHz	-	0.2	0.8	dB p-p
Phase Ripple	1850 – 1910 MHz	-	12	30	deg p-p
Group Delay Variation	1850 – 1910 MHz	-	7.7	25	ns p-p
Absolute Group Delay	1850 – 1910 MHz	-	10	30	ns
Relative Attenuation ⁽⁵⁾	50 – 110 MHz	35	55.5	-	dB
	300 – 400 MHz	35	45.0	-	dB
	920 – 965 MHz	35	41.0	-	dB
	965 – 1300 MHz	25	40.5	-	dB
	1300 – 1635 MHz	25	37.0	-	dB
	1635 – 1665 MHz	25	37.7	-	dB
	1665 – 1730 MHz	25	34.7	-	dB
	1730 – 1790 MHz	10	19.7	-	dB
	2030 – 2090 MHz	20	25.2	-	dB
	2573 – 2621 MHz	30	34.2	-	dB
	4074 – 4162 MHz	20	31.0	-	dB
	4791 – 4879 MHz	18	23.0	-	dB
Input/output VSWR	1850 – 1910 MHz	-	1.75	2:1	-
Source Impedance ⁽⁶⁾	Single-ended	-	50	-	Ω
Load Impedance ⁽⁶⁾	Single-ended	-	50	-	Ω

Notes:

1. All specifications are based on the TriQuint schematic shown on page 3
2. In production, devices will be tested at room temperature to a guardbanded specification to ensure electrical compliance over temperature
3. Electrical margin has been built into the design to account for the variations due to temperature drift and manufacturing tolerances
4. Typical values are based on average measurements at room temperature, unless otherwise noted
5. Relative to maximum insertion loss in passband
6. This is the optimum impedance in order to achieve the performance shown

Absolute Maximum Ratings

Parameter	Rating
Operable Temperature	-40 to +85 °C
Storage Temperature	-40 to +85 °C
Input Power ⁽⁷⁾	+22 dBm

7. Input Power is targeted for an applied CW modulated RF in the 1850 – 1910 MHz band at 55 °C for a minimum of 125 hrs


Operation of this device outside the parameter ranges given above may cause permanent damage.

856880


1880 MHz SAW Filter

Reference Design

Schematic

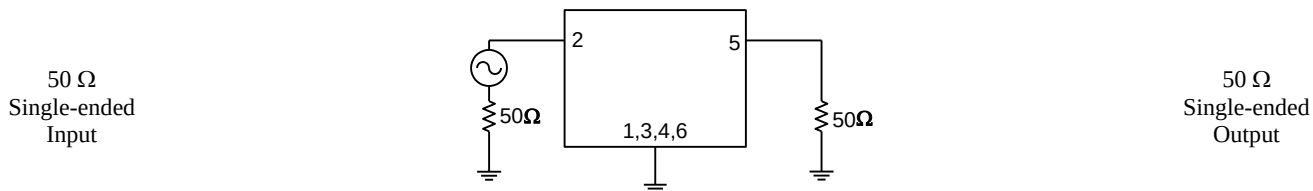


PC Board

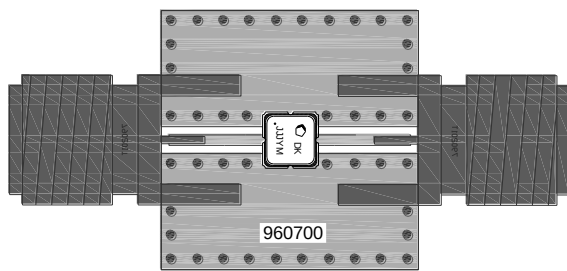

Notes:

Top, middle & bottom layers: 1 oz copper
Substrates: FR4 dielectric, .031" thick
Finish plating: Nickel: 3-8 μ m thick, Gold: .03-.2 μ m thick
Hole plating: Copper min .0008 μ m thick

Mounting Configuration

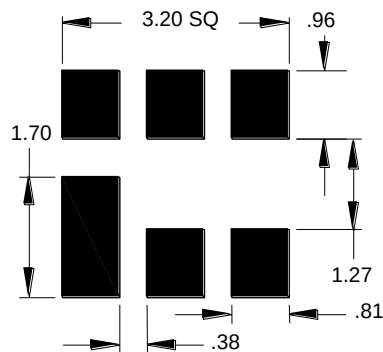

Notes:

1. All dimensions are in millimeters.
2. This footprint represents a recommendation only.





Bill of Material

Reference Desg.	Value	Description	Manufacturer	Part Number
SMA	N/A	SMA connector	Radiall USA Inc.	9602-1111-018
PCB	N/A	3-layer	multiple	960700

856880

1880 MHz SAW Filter

Typical Performance (at room temperature)

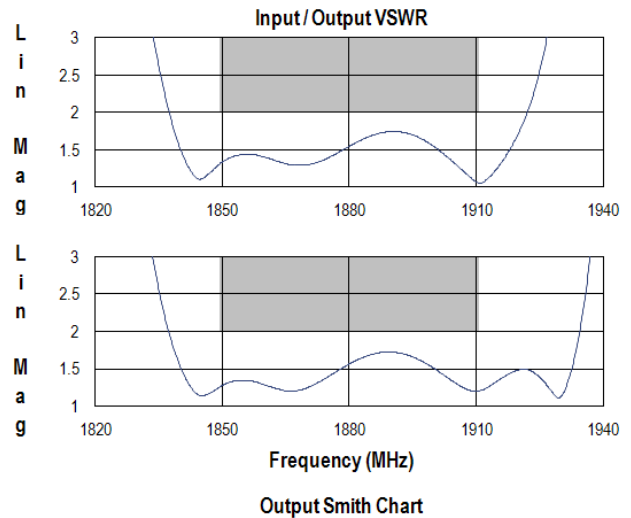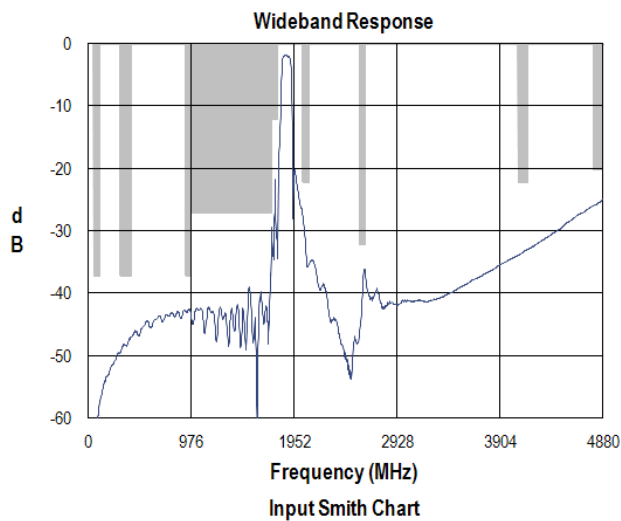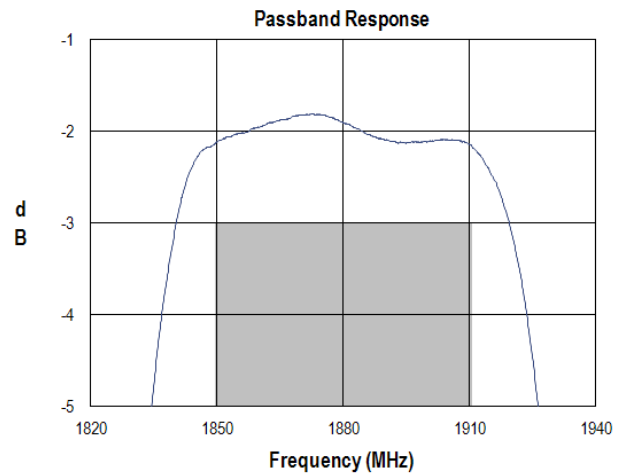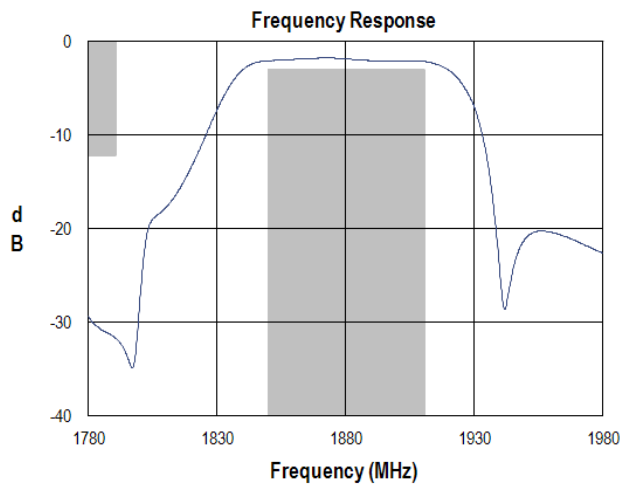


856880

1880 MHz SAW Filter

Mechanical Information

Package Information, Dimensions and Marking

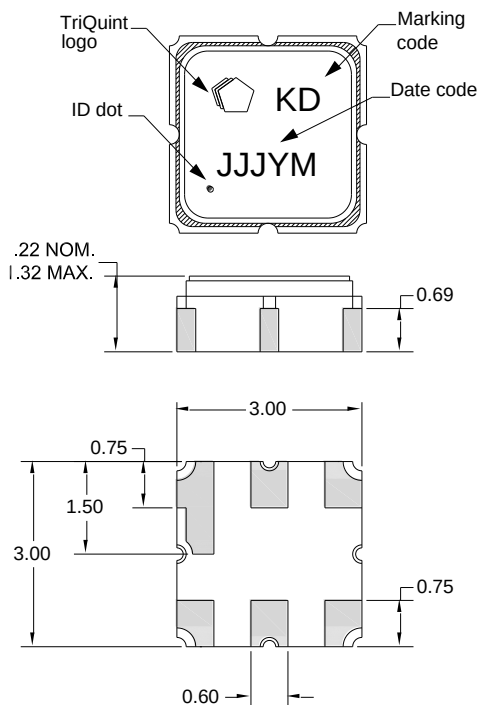

Package Style: SMP-12A

Dimensions: 3.00 x 3.00 x 1.22 mm

Body: Al_2O_3 ceramic

Lid: Kovar, Ni plated

Terminations: Au plating 0.5 - 1.0 μm , over a 2-6 μm Ni plating



All dimensions shown are nominal in millimeters

All tolerances are $\pm 0.15 mm$ except overall length and width $\pm 0.10 mm$

The date code consists of: day of the current year (Julian, 3 digits), Y = last digit of the year, and M = manufacturing site code

Tape and Reel Information

Standard T/R size = 5000 units/reel. All dimensions are in millimeters

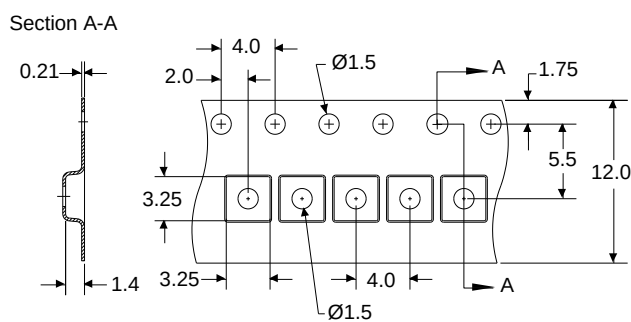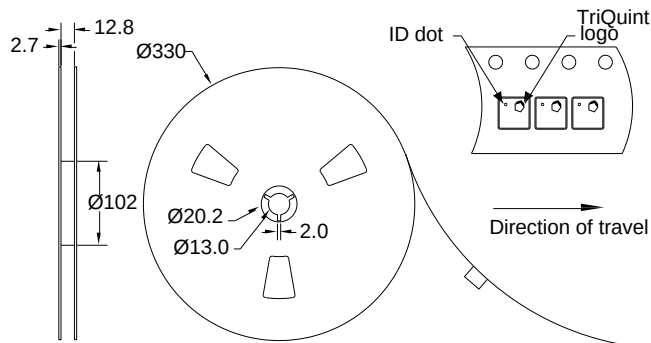

856880

1880 MHz SAW Filter

Product Compliance Information

ESD Information



Caution! ESD-Sensitive Device

ESD Rating: 0

Value: Passes $\geq 50V$ min.

Test: Human Body Model (HBM)

Standard: JEDEC Standard JESD22-A114

ESD Rating: A

Value: Passes $\geq 50V$ min.

Test: Machine Model (MM)

Standard: JEDEC Standard JESD22-A115

MSL Rating

Devices are Hermetic, therefore MSL is not applicable

Solderability

Compatible with the latest version of J-STD-020, lead free solder, 260°C

Refer to [Soldering Profile](#) for recommended guidelines.

This part is compliant with EU 2002/95/EC RoHS directive (Restrictions on the Use of Certain Hazardous Substances in Electrical and Electronic Equipment).

This product also has the following attributes:

- Halogen Free (Chlorine, Bromine)
- Antimony Free
- TBBP-A ($C_{15}H_{12}Br_4O_2$) Free
- PFOS Free
- SVHC Free

Contact Information

For the latest specifications, additional product information, worldwide sales and distribution locations, and information about TriQuint:

Web: www.triquint.com
Email: info-sales@tqs.com

Tel: +1.407.886.8860
Fax: +1.407.886.7061

For technical questions and application information:

Email: flapplication.engineering@tqs.com

Important Notice

The information contained herein is believed to be reliable. TriQuint makes no warranties regarding the information contained herein. TriQuint assumes no responsibility or liability whatsoever for any of the information contained herein. TriQuint assumes no responsibility or liability whatsoever for the use of the information contained herein. The information contained herein is provided "AS IS, WHERE IS" and with all faults, and the entire risk associated with such information is entirely with the user. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for TriQuint products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information.

TriQuint products are not warranted or authorized for use as critical components in medical, life-saving, or life-sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.