

## ISL9012

Dual LDO with Low Noise, Low  $I_Q$ , and High PSRR

FN9220

Rev 4.00


December 10, 2015

ISL9012 is a high performance dual LDO capable of sourcing 150mA current from Channel 1, and 300mA from Channel 2. The device has a low standby current and high-PSRR and is stable with output capacitance of 1 $\mu$ F to 10 $\mu$ F with ESR of up to 200m $\Omega$ .

The device integrates a Power-On-Reset (POR) function for the VO2 output. The POR delay for VO2 can be externally programmed by connecting a timing capacitor to the CPOR pin. A reference bypass pin is also provided for connecting a noise-filtering capacitor for low noise and high PSRR applications.

The quiescent current is typically only 45 $\mu$ A with both LDO's enabled and active. Separate enable pins control each individual LDO output. When both enable pins are low, the device is in shutdown, typically drawing less than 0.1 $\mu$ A.

Several combinations of voltage outputs are standard. Output voltage options for each LDO range from 1.5V to 3.3V. Other output voltage options are available on request.

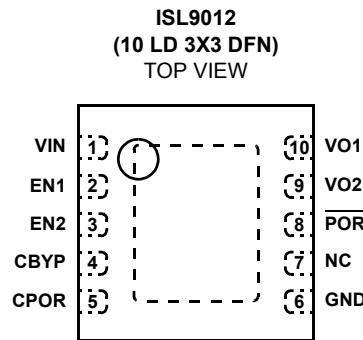**Pinout****Features**

- Integrates two high performance LDOs
  - VO1 - 150mA output
  - VO2 - 300mA output
- Excellent transient response to large current steps
- Excellent load regulation: 1% voltage change across full range of load current
- High PSRR: 70dB @ 1kHz
- Wide input voltage capability: 2.3V to 6.5V
- Extremely low quiescent current: 45 $\mu$ A (both LDOs on)
- Low dropout voltage: typically 120mV @ 150mA
- Low output noise: typically 30 $\mu$ V<sub>RMS</sub> @ 100 $\mu$ A (1.5V)
- Stable with 1 to 10 $\mu$ F ceramic capacitors
- Separate enable pins for each LDO
- POR output, with adjustable delay time indicates when the VO2 output is good
- Soft-start to limit input current surge during enable
- Current limit and overheat protection
- $\pm 1.8\%$  accuracy over all operating conditions
- Tiny 10 Ld 3x3mm DFN package
- -40°C to +85°C operating temperature range
- Pin compatible with Micrel MIC2212
- Pb-free (RoHS compliant)

**Applications**

- PDAs, Cell Phones and Smart Phones
- Portable Instruments, MP3 Players
- Handheld Devices including Medical Handhelds

**Ordering Information**

| PART NUMBER<br>(Notes 1, 2, 3)   | PART MARKING | VO1 VOLTAGE<br>(V) | VO2 VOLTAGE<br>(V) | TEMP RANGE<br>(°C) | PACKAGE<br>(Pb-free) | PKG. DWG. # |
|--|--------------|--------------------|--------------------|--------------------|----------------------|-------------|
| ISL9012IRNNZ   | DCTA         | 3.3                | 3.3                | -40 to +85         | 10 Ld 3x3 DFN        | L10.3x3C    |
| ISL9012IRNJZ (No longer available, recommended replacement: ISL9000AIRNJZ)   | DAPA         | 3.3                | 2.8                | -40 to +85         | 10 Ld 3x3 DFN        | L10.3x3C    |
| ISL9012IRNFZ (No longer available, recommended replacement: ISL9000AIRNFZ)   | DARA         | 3.3                | 2.5                | -40 to +85         | 10 Ld 3x3 DFN        | L10.3x3C    |
| ISL9012IRMNZ   | DCYA         | 3.0                | 3.3                | -40 to +85         | 10 Ld 3x3 DFN        | L10.3x3C    |
| ISL9012IRMMZ (No longer available, recommended replacement: ISL9000AIRMGZ-T) | DAAK         | 3.0                | 3.0                | -40 to +85         | 10 Ld 3x3 DFN        | L10.3x3C    |
| ISL9012IRMGZ   | DCBC         | 3.0                | 2.7                | -40 to +85         | 10 Ld 3x3 DFN        | L10.3x3C    |
| ISL9012IRJNZ   | DCBD         | 2.8                | 3.3                | -40 to +85         | 10 Ld 3x3 DFN        | L10.3x3C    |
| ISL9012IRJMZ (No longer available, recommended replacement: ISL9000AIRJBZ-T) | DAAH         | 2.8                | 3.0                | -40 to +85         | 10 Ld 3x3 DFN        | L10.3x3C    |
| ISL9012IRJRZ (No longer available, recommended replacement: ISL9000AIRJNZ-T) | DAAG         | 2.8                | 2.6                | -40 to +85         | 10 Ld 3x3 DFN        | L10.3x3C    |
| ISL9012IRJCZ (No longer available, recommended replacement: ISL9000AIRJBZ-T) | DAAF         | 2.8                | 1.8                | -40 to +85         | 10 Ld 3x3 DFN        | L10.3x3C    |
| ISL9012IRFDZ   | DCBK         | 2.5                | 2.0                | -40 to +85         | 10 Ld 3x3 DFN        | L10.3x3C    |
| ISL9012IRFCZ   | DCBL         | 2.5                | 2.0                | -40 to +85         | 10 Ld 3x3 DFN        | L10.3x3C    |
| ISL9012IRCJZ   | DCBN         | 1.8                | 2.8                | -40 to +85         | 10 Ld 3x3 DFN        | L10.3x3C    |
| ISL9012IRCCZ   | DCBP         | 1.8                | 1.8                | -40 to +85         | 10 Ld 3x3 DFN        | L10.3x3C    |

## NOTES:

1. Add "-T" suffix for tape and reel. Please refer to TB347 for details on reel specifications.
2. For other output voltages, contact Intersil Marketing.
3. These Intersil Pb-free plastic packaged products employ special Pb-free material sets; molding compounds/die attach materials and 100% matte tin plate PLUS ANNEAL - e3 termination finish, which is RoHS compliant and compatible with both SnPb and Pb-free soldering operations. Intersil Pb-free products are MSL classified at Pb-free peak reflow temperatures that meet or exceed the Pb-free requirements of IPC/JEDEC J STD-020.

**Absolute Maximum Ratings**

|   |                      |
|---|----------------------|
| Supply Voltage (VIN) . . . . .                  | +7.1V                |
| V <sub>O1</sub> , V <sub>O2</sub> Pin . . . . . | +3.6V                |
| All Other Pins . . . . .                        | -0.3 to (VIN + 0.3)V |

**Recommended Operating Conditions**

|   |                |
|---|----------------|
| Ambient Temperature Range (T <sub>A</sub> ) . . . . . | -40°C to +85°C |
| Supply Voltage (VIN) . . . . .                        | 2.3V to 6.5V   |

*CAUTION: Do not operate at or near the maximum ratings listed for extended periods of time. Exposure to such conditions may adversely impact product reliability and result in failures not covered by warranty.*

## NOTES:

4.  $\theta_{JA}$  is measured in free air with the component mounted on a high effective thermal conductivity test board with "direct attach" features. See Tech Brief TB379.
5.  $\theta_{JC}$ , "case temperature" location is at the center of the exposed metal pad on the package underside. See Tech Brief TB379.

**Electrical Specifications**

Unless otherwise noted, all parameters are guaranteed over the operational supply voltage and temperature range of the device as follows:

T<sub>A</sub> = -40°C to +85°C; V<sub>IN</sub> = (V<sub>O</sub> + 0.5V) to 6.5V with a minimum V<sub>IN</sub> of 2.3V; C<sub>IN</sub> = 1μF; C<sub>O</sub> = 1μF; C<sub>BYP</sub> = 0.01μF; C<sub>POR</sub> = 0.01μF

| PARAMETER                    | SYMBOL           | TEST CONDITIONS   | MIN<br>(Note 8) | TYP | MAX<br>(Note 8) | UNITS |
|------------------------------|------------------|---|-----------------|-----|-----------------|-------|
| <b>DC CHARACTERISTICS</b>    |                  |   |                 |     |                 |       |
| Supply Voltage               | V <sub>IN</sub>  |   | 2.3             |     | 6.5             | V     |
| Ground Current               |                  | Quiescent condition: I <sub>O1</sub> = 0μA; I <sub>O2</sub> = 0μA   |                 |     |                 |       |
|                              | I <sub>DD1</sub> | One LDO active  |                 | 25  | 40              | μA    |
|                              | I <sub>DD2</sub> | Both LDO active   |                 | 45  | 60              | μA    |
| Shutdown Current             | I <sub>DDS</sub> | @+25°C  |                 | 0.1 | 1.0             | μA    |
| UVLO Threshold               | V <sub>UV+</sub> |   | 1.9             | 2.1 | 2.3             | V     |
|                              | V <sub>UV-</sub> |   | 1.6             | 1.8 | 2.0             | V     |
| Regulation Voltage Accuracy  |                  | Variation from nominal voltage output, V <sub>IN</sub> = V <sub>O</sub> + 0.5 to 5.5V, T <sub>J</sub> = -40°C to +125°C | -1.8            |     | +1.8            | %     |
| Line Regulation              |                  | V <sub>IN</sub> = (V <sub>OUT</sub> + 1.0V relative to highest output voltage) to 5.5V                                  | -0.2            | 0   | 0.2             | %/V   |
| Load Regulation              |                  | I <sub>OUT</sub> = 100μA to 150mA (VO1 and VO2)   |                 | 0.1 | 0.7             | %     |
|                              |                  | I <sub>OUT</sub> = 100μA to 300mA (VO2)   |                 |     | 1.0             | %     |
| Maximum Output Current       | I <sub>MAX</sub> | VO1: Continuous   | 150             |     |                 | mA    |
|                              |                  | VO2: Continuous   | 300             |     |                 | mA    |
| Internal Current Limit       | I <sub>LIM</sub> |   | 350             | 475 | 600             | mA    |
| Dropout Voltage (Note 7)     | V <sub>DO1</sub> | I <sub>O</sub> = 150mA; V <sub>O</sub> > 2.1V (VO1)   |                 | 125 | 200             | mV    |
|                              | V <sub>DO2</sub> | I <sub>O</sub> = 300mA; V <sub>O</sub> < 2.5V (VO2)   |                 | 300 | 500             | mV    |
|                              | V <sub>DO3</sub> | I <sub>O</sub> = 300mA; 2.5V ≤ V <sub>O</sub> ≤ 2.8V (VO2)  |                 | 250 | 400             | mV    |
|                              | V <sub>DO4</sub> | I <sub>O</sub> = 300mA; V <sub>O</sub> > 2.8V (VO2)   |                 | 200 | 325             | mV    |
| Thermal Shutdown Temperature | T <sub>SD+</sub> |   |                 | 145 |                 | °C    |
|                              | T <sub>SD-</sub> |   |                 | 110 |                 | °C    |
| <b>AC CHARACTERISTICS</b>    |                  |   |                 |     |                 |       |
| Ripple Rejection             |                  | I <sub>O</sub> = 10mA, V <sub>IN</sub> = 2.8V(min), V <sub>O</sub> = 1.8V, C <sub>BYP</sub> = 0.1μF                     |                 |     |                 |       |
|                              |                  | @ 1kHz  |                 | 70  |                 | dB    |
|                              |                  | @ 10kHz   |                 | 55  |                 | dB    |
|                              |                  | @ 100kHz  |                 | 40  |                 | dB    |

**Electrical Specifications**

Unless otherwise noted, all parameters are guaranteed over the operational supply voltage and temperature range of the device as follows:

$T_A = -40^\circ\text{C}$  to  $+85^\circ\text{C}$ ;  $V_{IN} = (V_O + 0.5\text{V})$  to  $6.5\text{V}$  with a minimum  $V_{IN}$  of  $2.3\text{V}$ ;  $C_{IN} = 1\mu\text{F}$ ;  $C_O = 1\mu\text{F}$ ;  $C_{BYP} = 0.01\mu\text{F}$ ;  $C_{POR} = 0.01\mu\text{F}$  (Continued)

| PARAMETER                              | SYMBOL           | TEST CONDITIONS  | MIN<br>(Note 8) | TYP | MAX<br>(Note 8) | UNITS                      |
|--|------------------|--|-----------------|-----|-----------------|----------------------------|
| Output Noise Voltage                   |                  | $I_O = 100\mu\text{A}$ , $V_O = 1.5\text{V}$ , $T_A = +25^\circ\text{C}$ , $C_{BYP} = 0.1\mu\text{F}$<br>$\text{BW} = 10\text{Hz}$ to $100\text{kHz}$ (Note 6) |                 | 30  |                 | $\mu\text{V}_{\text{rms}}$ |
| <b>DEVICE START-UP CHARACTERISTICS</b> |                  |  |                 |     |                 |                            |
| Device Enable Time                     | $t_{EN}$         | Time from assertion of the $\text{ENx}$ pin to when the output voltage reaches 95% of the $V_{O(\text{nom})}$  |                 | 250 | 500             | $\mu\text{s}$              |
| LDO Soft-start Ramp Rate               | $t_{SSR}$        | Slope of linear portion of LDO output voltage ramp during start-up   |                 | 30  | 60              | $\mu\text{s}/\text{V}$     |
| <b>EN1, EN2 PIN CHARACTERISTICS</b>    |                  |  |                 |     |                 |                            |
| Input Low Voltage                      | $V_{IL}$         |  | -0.3            |     | 0.5             | $\text{V}$                 |
| Input High Voltage                     | $V_{IH}$         |  | 1.4             |     | $V_{IN}+0.3$    | $\text{V}$                 |
| Input Leakage Current                  | $I_{IL}, I_{IH}$ |  |                 |     | 0.1             | $\mu\text{A}$              |
| Pin Capacitance                        | $C_{PIN}$        | Informative  |                 | 5   |                 | $\text{pF}$                |
| <b>POR PIN CHARACTERISTICS</b>         |                  |  |                 |     |                 |                            |
| POR Thresholds                         | $V_{POR+}$       | As a percentage of nominal output voltage  | 91              | 94  | 97              | %                          |
|  | $V_{POR-}$       |  | 87              | 90  | 93              | %                          |
| POR Delay                              | $t_{PLH}$        | $\text{CPOR} = 0.01\mu\text{F}$  | 100             | 200 | 300             | $\text{ms}$                |
|  | $t_{PHL}$        |  |                 | 25  |                 | $\mu\text{s}$              |
| POR Pin Output Low Voltage             | $V_{OL}$         | @ $I_{OL} = 1.0\text{mA}$  |                 |     | 0.2             | $\text{V}$                 |
| POR Pin Internal Pull-Up Resistance    | $R_{POR}$        |  | 78              | 100 | 180             | $\text{k}\Omega$           |

## NOTES:

6. Limits established by characterization and are not production tested.
7.  $V_{Ox} = 0.98*V_{Ox(\text{NOM})}$ ; Valid for  $V_{Ox}$  greater than  $1.85\text{V}$ .
8. Parts are 100% tested at  $+25^\circ\text{C}$ . Temperature limits established by characterization and are not production tested.

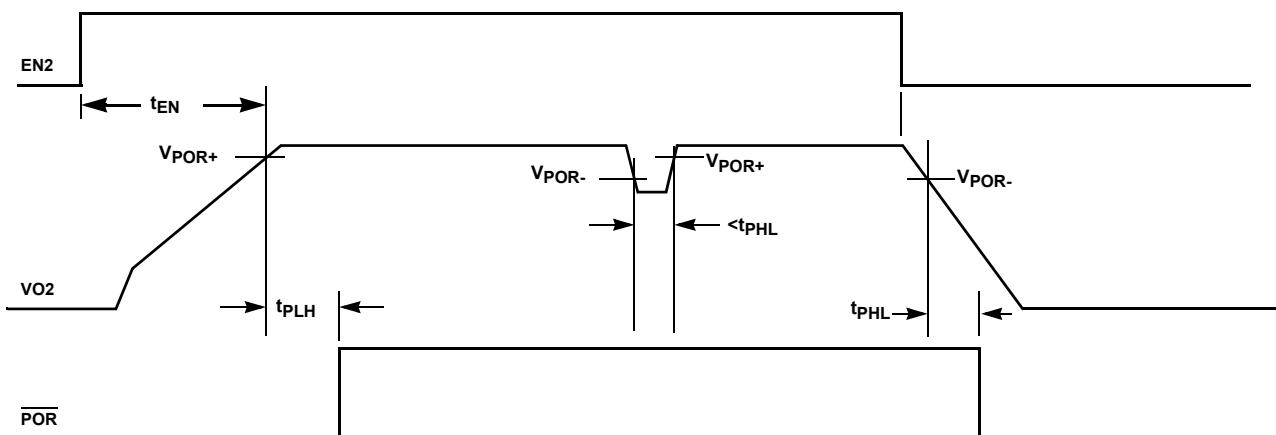


FIGURE 1. TIMING PARAMETER DEFINITION

## Typical Performance Curves

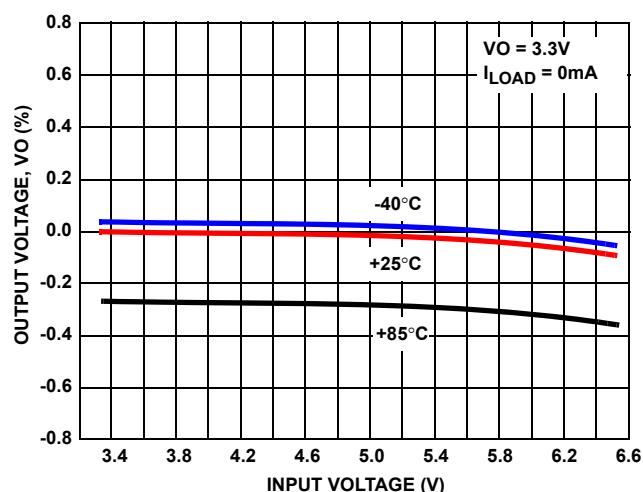


FIGURE 2. OUTPUT VOLTAGE vs INPUT VOLTAGE (3.3V OUTPUT)

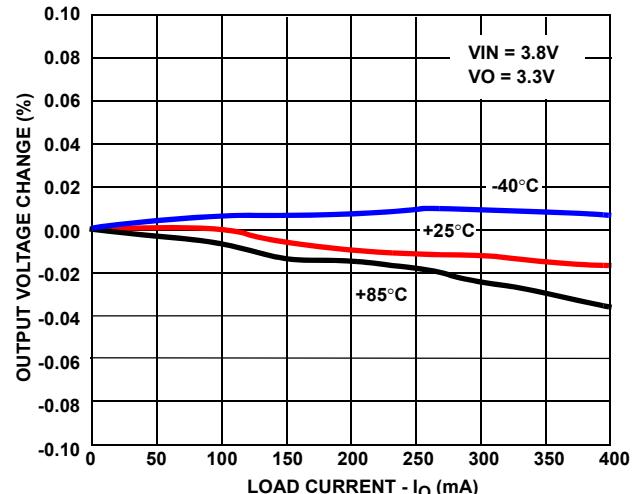


FIGURE 3. OUTPUT VOLTAGE CHANGE vs LOAD CURRENT

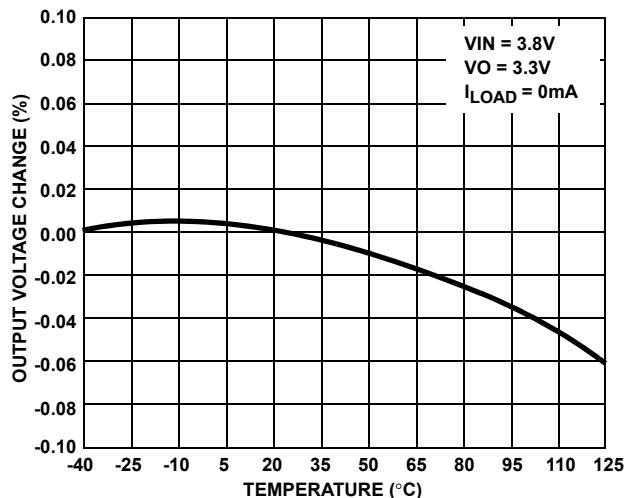


FIGURE 4. OUTPUT VOLTAGE CHANGE vs TEMPERATURE

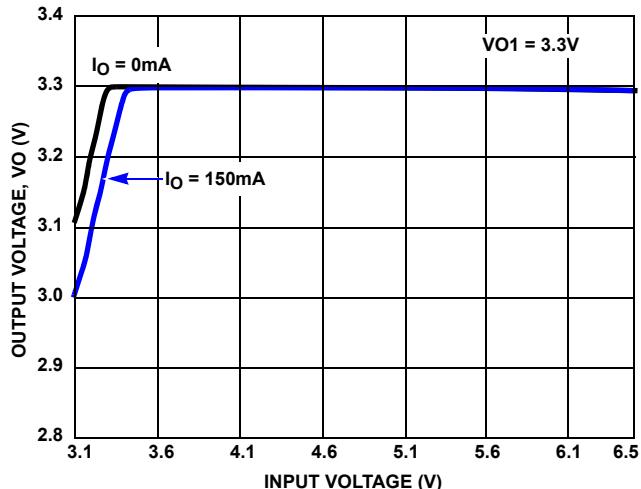


FIGURE 5. OUTPUT VOLTAGE vs INPUT VOLTAGE (VO1 = 3.3V)

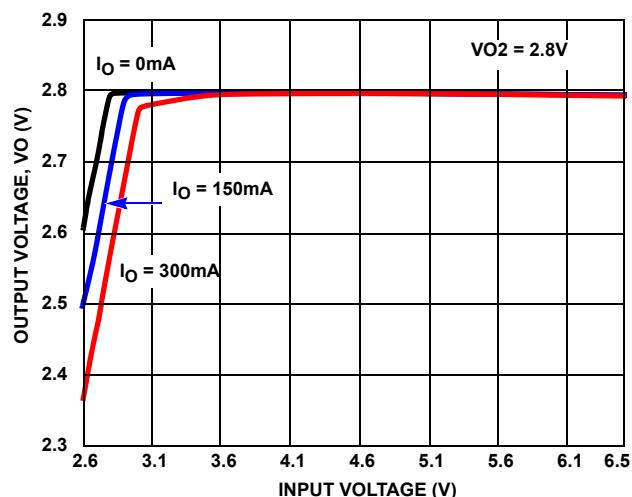


FIGURE 6. OUTPUT VOLTAGE vs INPUT VOLTAGE (VO2 = 2.8V)

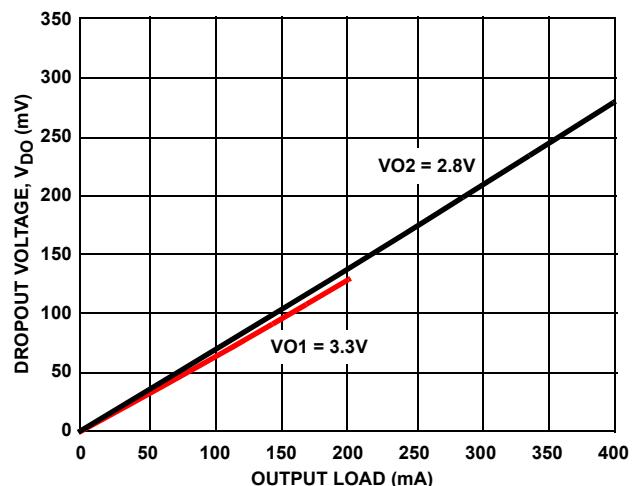
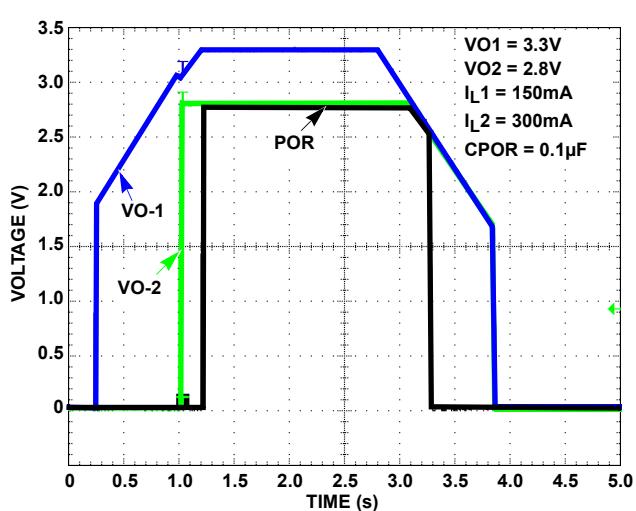
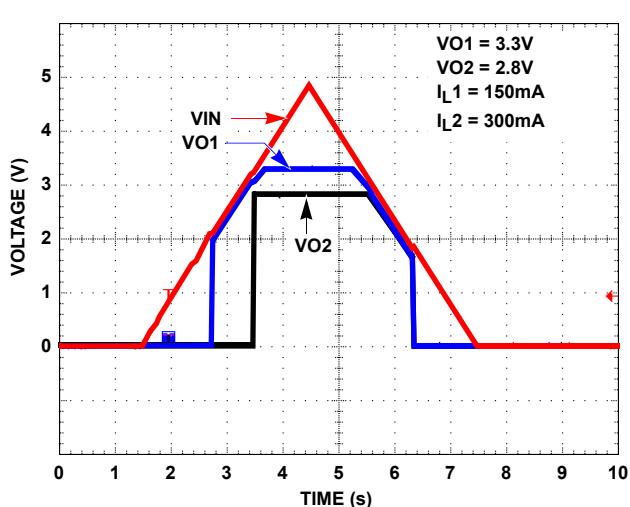
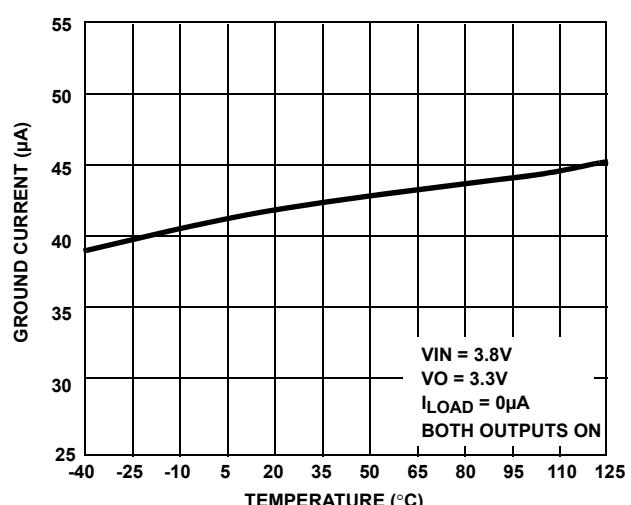
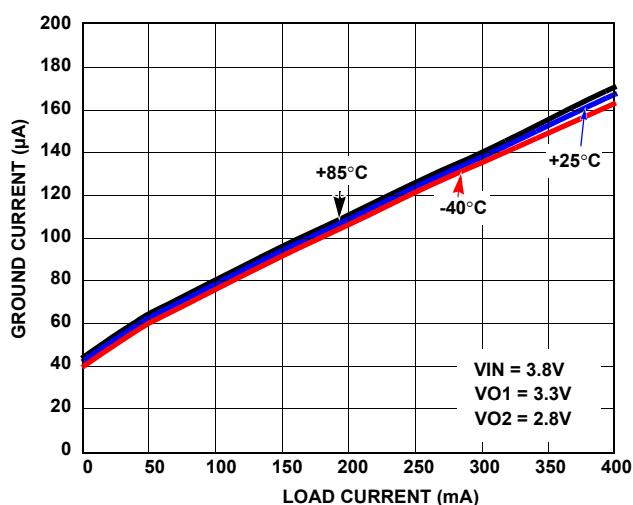
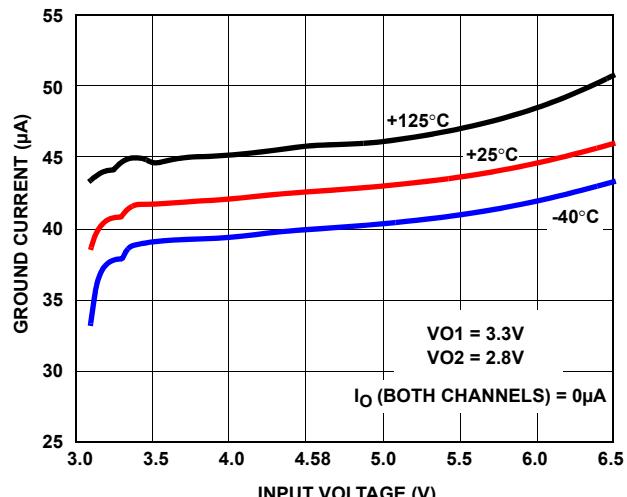
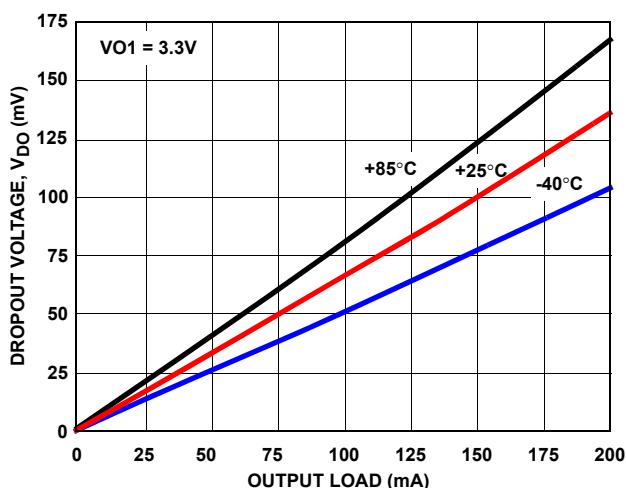


FIGURE 7. VO1 DROPOUT VOLTAGE vs LOAD CURRENT

**Typical Performance Curves (Continued)**

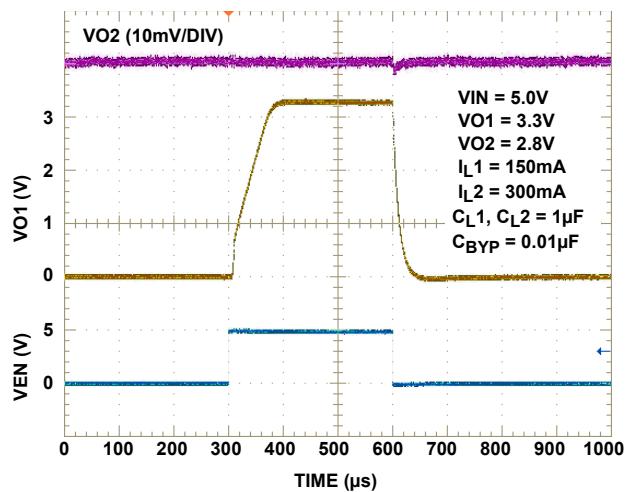
**Typical Performance Curves (Continued)**

FIGURE 14. TURN ON/TURN OFF RESPONSE

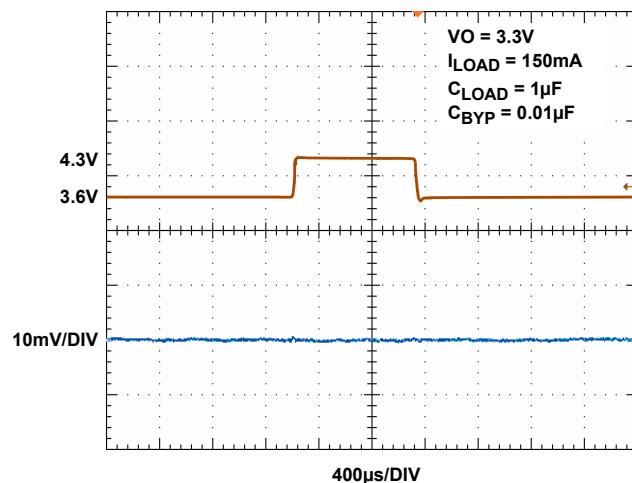


FIGURE 15. LINE TRANSIENT RESPONSE, 3.3V OUTPUT

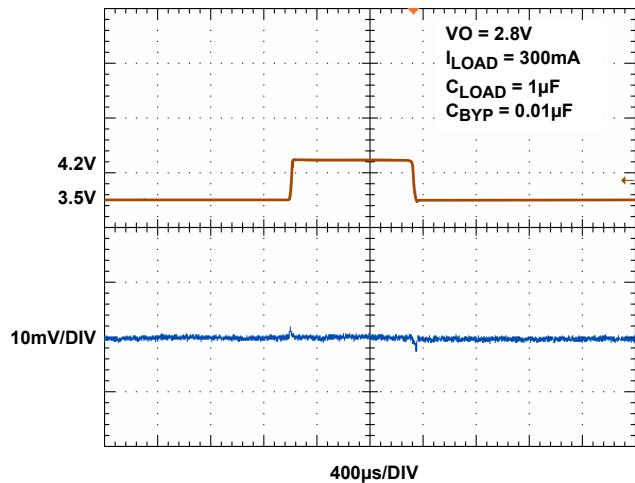


FIGURE 16. LINE TRANSIENT RESPONSE, 2.8V OUTPUT

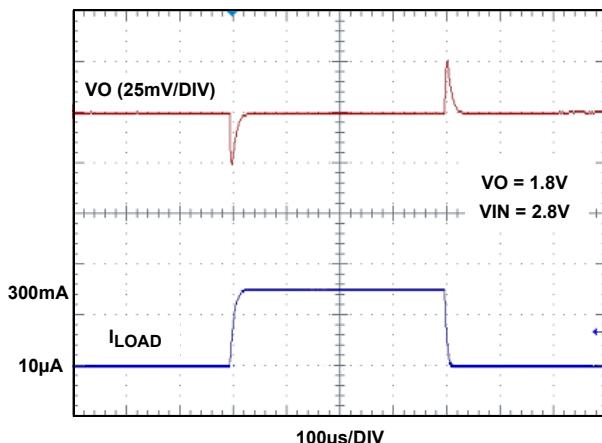


FIGURE 17. LOAD TRANSIENT RESPONSE

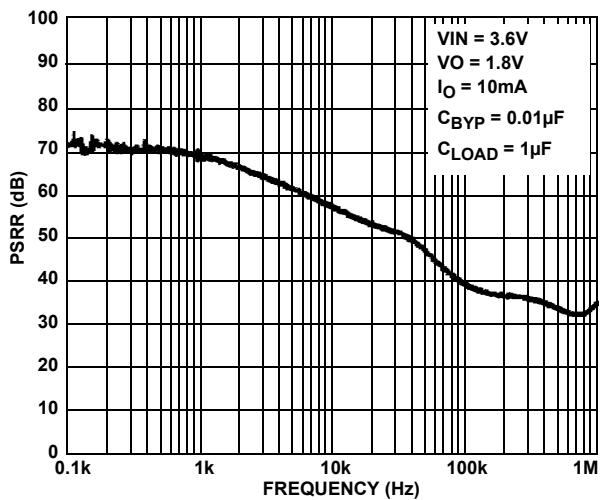


FIGURE 18. PSRR vs FREQUENCY

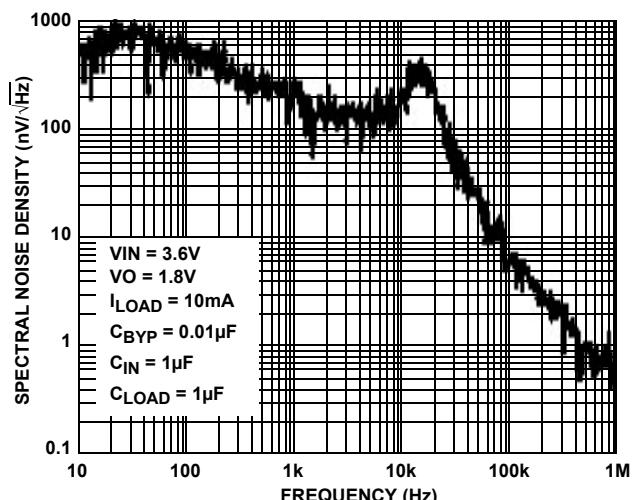
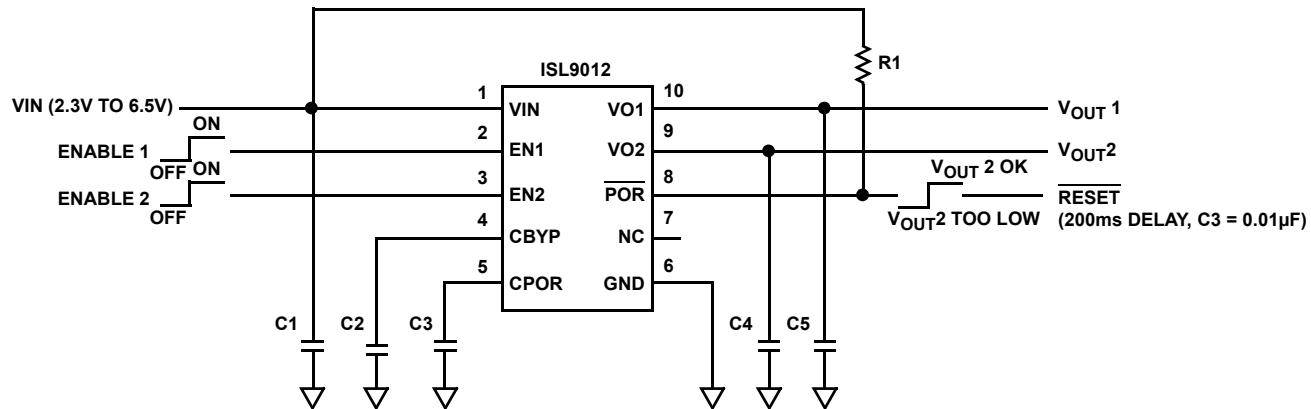



FIGURE 19. SPECTRAL NOISE DENSITY vs FREQUENCY

**Pin Description**

| PIN NUMBER | PIN NAME                | TYPE                              | DESCRIPTION  |
|------------|-------------------------|-----------------------------------|--|
| 1          | VIN                     | Analog I/O                        | Supply Voltage/LDO Input:<br>Connect a 1 $\mu$ F capacitor to GND.   |
| 2          | EN1                     | Low Voltage Compatible CMOS Input | LDO-1 Enable.  |
| 3          | EN2                     | Low Voltage Compatible CMOS Input | LDO-2 Enable.  |
| 4          | CBYP                    | Analog I/O                        | Reference Bypass Capacitor Pin:<br>Optionally connect capacitor of value 0.01 $\mu$ F to 1 $\mu$ F between this pin and GND to tune in the desired noise and PSRR performance.   |
| 5          | CPOR                    | Analog I/O                        | POR Delay Setting Capacitor Pin:<br>Connect a capacitor between this pin and GND to delay the $\overline{\text{POR}}$ output release after LDO-2 output reaches 94% of its specified voltage level (200ms delay per 0.01 $\mu$ F). |
| 6          | GND                     | Ground                            | GND is the connection to system ground. Connect to PCB Ground plane.   |
| 7          | NC                      | NC                                | No Connection.   |
| 8          | $\overline{\text{POR}}$ | Open Drain Output (1mA)           | Open-drain POR Output for LDO-2 (active-low).  |
| 9          | VO2                     | Analog I/O                        | LDO-2 Output:<br>Connect capacitor of value 1 $\mu$ F to 10 $\mu$ F to GND (1 $\mu$ F recommended).  |
| 10         | VO1                     | Analog I/O                        | LDO-1 Output:<br>Connect capacitor of value 1 $\mu$ F to 10 $\mu$ F to GND (1 $\mu$ F recommended).  |

**Typical Application**C1, C4, C5: 1 $\mu$ F X5R CERAMIC CAPACITORC2: 0.01 $\mu$ F X5R CERAMIC CAPACITORC3: 0.01 $\mu$ F X5R CERAMIC CAPACITORR1: 100k $\Omega$  RESISTOR, 5%

## Block Diagram

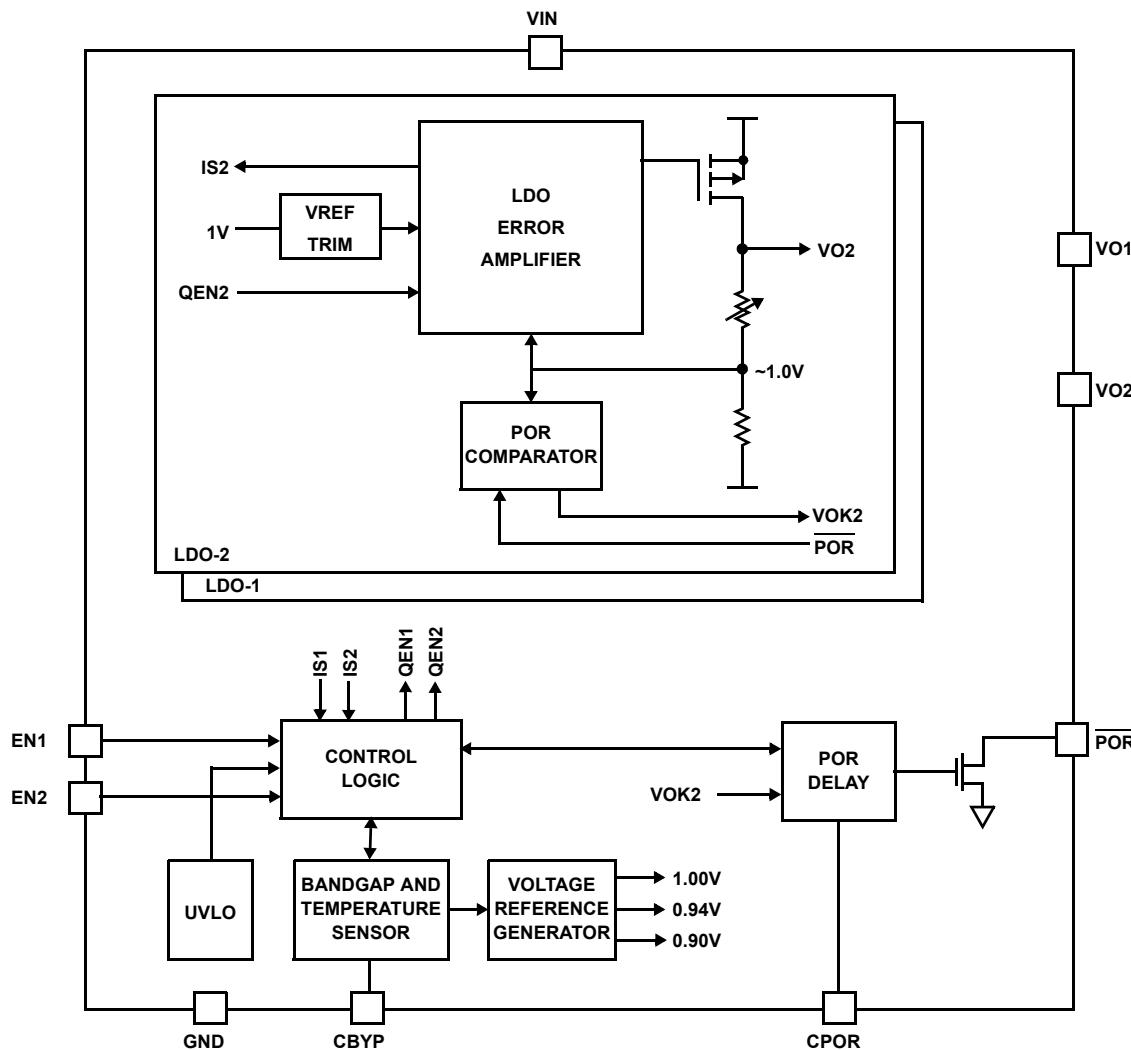

## Functional Description

The ISL9012 contains all circuitry required to implement two high performance LDO's. High performance is achieved through a circuit that delivers fast transient response to varying load conditions. In a quiescent condition, the ISL9012 adjusts its biasing to achieve the lowest standby current consumption.

The device also integrates current limit protection, smart thermal shutdown protection, staged turn-on and soft-start. Smart Thermal shutdown protects the device against overheating. Staged turn-on and soft-start minimize start-up input current surges without causing excessive device turn-on time.

### Power Control

The ISL9012 has two separate enable pins, EN1 and EN2, to individually control power to each of the LDO outputs. When both EN1 and EN2 are low, the device is in shutdown

mode. During this condition, all on-chip circuits are off, and the device draws minimum current, typically less than  $0.1\mu\text{A}$ . When one or both of the enable pins are asserted, the device first polls the output of the UVLO detector to ensure that VIN voltage is at least about 2.1V. Once verified, the device initiates a start-up sequence. During the start-up sequence, trim settings are first read and latched. Then, sequentially, the bandgap, reference voltage and current generation circuitry power up. Once the references are stable, a fast-start circuit quickly charges the external reference bypass capacitor (connected to the CBYP pin) to the proper operating voltage. After the bypass capacitor has been charged, the LDO's power up.

If EN1 is brought high, and EN2 goes high before the VO1 output stabilizes, the ISL9012 delays the VO2 turn-on until the VO1 output reaches its target level.

If EN2 is brought high, and EN1 goes high before VO2 starts its output ramp, then VO1 turns on first and the ISL9012

delays the VO2 turn-on until the VO1 output reaches its target level.

If EN2 is brought high, and EN1 goes high after VO2 starts its output ramp, then the ISL9012 immediately starts to ramp up the VO1 output.

If both EN1 and EN2 are high, the VO1 output has priority, and is always powered up first.

During operation, whenever the VIN voltage drops below about 1.8V, the ISL9012 immediately disables both LDO outputs. When VIN rises back above 2.1V, the device re-initiates its start-up sequence and LDO operation will resume automatically.

### Reference Generation

The reference generation circuitry includes a trimmed bandgap, a trimmed voltage reference divider, a trimmed current reference generator, and an RC noise filter. The filter includes the external capacitor connected to the CBYP pin. A 0.01 $\mu$ F capacitor connected CBYP implements a 100Hz lowpass filter, and is recommended for most high performance applications. For the lowest noise application, a 0.1 $\mu$ F or greater CBYP capacitor should be used. This filters the reference noise to below the 10Hz to 1kHz frequency band, which is crucial in many noise-sensitive applications.

The bandgap generates a zero temperature coefficient (TC) voltage for the reference divider. The reference divider provides the regulation reference, POR detection thresholds, and other voltage references required for current generation and over-temperature detection.

The current generator outputs references required for adaptive biasing as well as references for LDO output current limit and thermal shutdown determination.

### LDO Regulation and Programmable Output Divider

The LDO Regulator is implemented with a high-gain operational amplifier driving a PMOS pass transistor. The design of the ISL9012 provides a regulator that has low quiescent current, fast transient response, and overall stability across all operating and load current conditions. LDO stability is guaranteed for a 1 $\mu$ F to 10 $\mu$ F output capacitor that has a tolerance better than 20% and ESR less than 200m $\Omega$ . The design is performance-optimized for a 1 $\mu$ F capacitor. Unless limited by the application, use of an output capacitor value above 4.7 $\mu$ F is not recommended as LDO performance improvement is minimal.

Soft-start circuitry integrated into each LDO limits the initial ramp-up rate to about 30 $\mu$ s/V to minimize current surge. The ISL9012 provides short-circuit protection by limiting the output current to about 475mA.

Each LDO uses an independently trimmed 1V reference. An internal resistor divider drops the LDO output voltage down to 1V. This is compared to the 1V reference for regulation. The resistor division ratio is programmed in the factory to one of the

following output voltages: 1.5V, 1.8V, 1.85V, 2.5V, 2.6V, 2.7V, 2.8V, 2.85V, 2.9V, 3.0V, and 3.3V.

### Power-On Reset Generation

LDO-2 has a Power-on Reset signal generation circuit which outputs to the POR pin. The POR signal is generated as follows:

A POR comparator continuously monitors the voltage of the LDO-2 output. The LDO enters a power-good state when the output voltage is above 94% of the expected output voltage for a period exceeding the LDO PGOOD entry delay time. In the power-good state, the open-drain POR output is in a high-impedance state. An external resistor can be added between the POR output and either LDO output or the input voltage, VIN.

The power-good state is exited when the LDO-2 output falls below 90% of the expected output voltage for a period longer than the PGOOD exit delay time. While power-good is false, the ISL9012 pulls the respective POR pin low.

The PGOOD entry and exit delays are determined by the value of the external capacitor connected to the CPOR pin. For a 0.01 $\mu$ F capacitor, the entry and exit delays are 200ms and 25 $\mu$ s respectively. Larger or smaller capacitor values will yield proportionately longer or shorter delay times. The POR exit delay should never be allowed to be less than 10 $\mu$ s to ensure sufficient immunity against transient induced false POR triggering.

### Overheat Detection

The bandgap outputs a proportional-to-temperature current that is indicative of the temperature of the silicon. This current is compared with references to determine if the device is in danger of damage due to overheating. When the die temperature reaches about +145°C, one or both of the LDO's momentarily shut down until the die cools sufficiently. In the overheat condition, only the LDO sourcing more than 50mA will be shut off. This does not affect the operation of the other LDO. If both LDOs source more than 50mA and an overheat condition occurs, both LDO outputs are disabled. Once the die temperature falls back below about +110°C, the disabled LDO(s) are re-enabled and soft-start automatically takes place.

## Revision History

The revision history provided is for informational purposes only and is believed to be accurate, but not warranted. Please go to the web to make sure that you have the latest revision.

| DATE              | REVISION | CHANGE   |
|-------------------|----------|--|
| December 10, 2015 | FN9220.4 | <p>Added Rev History beginning with Rev 4.</p> <p>Added About Intersil. Verbiage.</p> <p>Updated Ordering Information table on page 2</p> <p>Updated POD L10.3x3C to most current version. Revision changes are as follows:</p> <p>Updated Format to new standard</p> <p>Removed package outline and included center to center distance between lands on recommended land pattern.</p> <p>Removed Note 4 "Dimension b applies to the metallized terminal and is measured between 0.18mm and 0.30mm from the terminal tip." since it is not applicable to this package. Renumbered notes accordingly.</p> <p>Tiebar Note 4 updated</p> <p>From: Tiebar shown (if present) is a non-functional feature.</p> <p>To: Tiebar shown (if present) is a non-functional feature and may be located on any of the 4 sides (or ends).</p> |

## About Intersil

Intersil Corporation is a leading provider of innovative power management and precision analog solutions. The company's products address some of the largest markets within the industrial and infrastructure, mobile computing and high-end consumer markets.

For the most updated datasheet, application notes, related documentation and related parts, please see the respective product information page found at [www.intersil.com](http://www.intersil.com).

You may report errors or suggestions for improving this datasheet by visiting [www.intersil.com/ask](http://www.intersil.com/ask).

Reliability reports are also available from our website at [www.intersil.com/support](http://www.intersil.com/support)

© Copyright Intersil Americas LLC 2005-2015. All Rights Reserved.

All trademarks and registered trademarks are the property of their respective owners.

For additional products, see [www.intersil.com/en/products.html](http://www.intersil.com/en/products.html)

Intersil products are manufactured, assembled and tested utilizing ISO9001 quality systems as noted in the quality certifications found at [www.intersil.com/en/support/qualandreliability.html](http://www.intersil.com/en/support/qualandreliability.html)

*Intersil products are sold by description only. Intersil may modify the circuit design and/or specifications of products at any time without notice, provided that such modification does not, in Intersil's sole judgment, affect the form, fit or function of the product. Accordingly, the reader is cautioned to verify that datasheets are current before placing orders. Information furnished by Intersil is believed to be accurate and reliable. However, no responsibility is assumed by Intersil or its subsidiaries for its use; nor for any infringements of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Intersil or its subsidiaries.*



For information regarding Intersil Corporation and its products, see [www.intersil.com](http://www.intersil.com)

# Package Outline Drawing

## L10.3x3C

10 LEAD DUAL FLAT PACKAGE (DFN)

Rev 4, 3/15

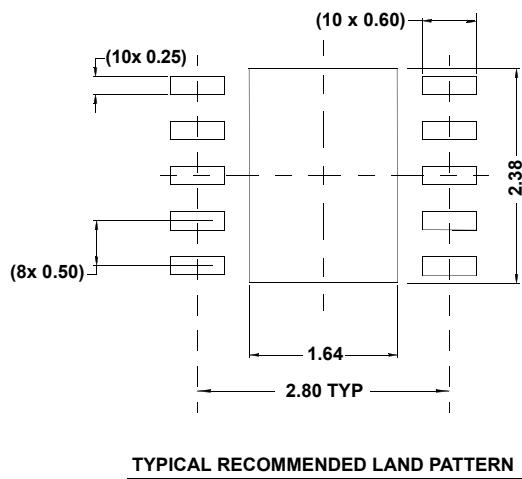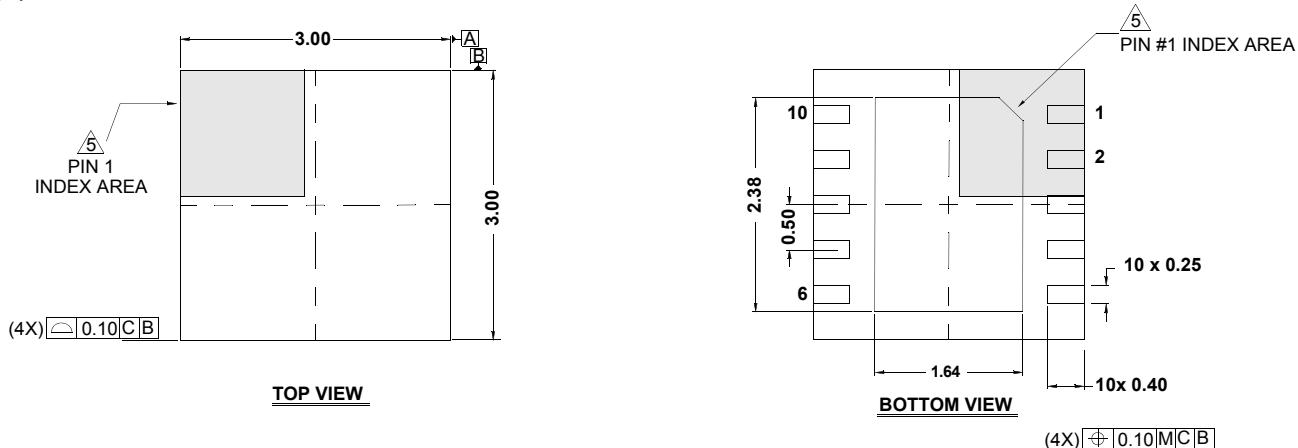

### NOTES:

- Dimensions are in millimeters.  
Dimensions in ( ) for Reference Only.
- Dimensioning and tolerancing conform to AMSE Y14.5m-1994.
- Unless otherwise specified, tolerance : Decimal  $\pm 0.05$
- Tiebar shown (if present) is a non-functional feature and may be located on any of the 4 sides (or ends).
- The configuration of the pin #1 identifier is optional, but must be located within the zone indicated. The pin #1 identifier may be either a mold or mark feature.
- Compliant to JEDEC MO-229-WEED-3 except for E-PAD dimensions.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

#### Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помошь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помошь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: [org@eplast1.ru](mailto:org@eplast1.ru)

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.