


# G3VM-35□G□/351VY/401G□/401VY

MOS FET Relays SOP 4-pin, General-purpose Type

## General-purpose MOS FET Relays in SOP 4-pin packages for a wide range of applications

- Contact form: 1a (SPST-NO) or 1b (SPST-NC)
- Load voltage: 350 V or 400 V

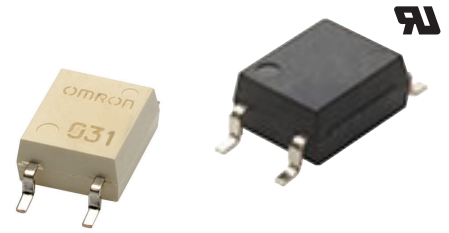

RoHS Compliant

Note: The actual product is marked differently from the image shown here.

### Application Examples



- Semiconductor test equipment
- Test & Measurement equipment
- Communication equipment
- Various battery-driven devices
- Security equipment
- Industrial equipment
- Power circuit
- Amusement equipment

### Package

(Unit : mm, Average)

SOP 4-pin

Special SOP 4-pin



Note: The actual product is marked differently from the image shown here.

### Model Number Legend

G3VM-□□□□□  
1 2 3 4 5

- 1. Load Voltage**  
35 : 350 V  
40 : 400 V
- 2. Contact form**  
1 : 1a (SPST-NO)  
3 : 1b (SPST-NC)

- 4. Additional functions**  
None: Dielectric strength between I/O 1500 V  
Y: Dielectric strength between I/O 3750 V

- 3. Package**  
G : SOP 4-pin  
V : Special SOP 4-pin

- 5. Other informations**  
When specifications overlap, serial code is added in the recorded order.

### Ordering Information

Package	Contact form	Terminals	Load voltage (peak value) *	Continuous load current (peak value) *	Stick packaging		Tape packaging	
					Model	Minimum package quantity	Model	Minimum package quantity
SOP4	1a (SPST-NO)	Surface-mounting Terminals	350 V	100 mA	G3VM-351G1	100 pcs.	G3VM-351G1(TR)	2,500 pcs.
Special SOP 4-PIN				110 mA	G3VM-351VY	125 pcs.	G3VM-351VY(TR05)	500 pcs.
	120 mA			G3VM-353G	3,000 pcs.	G3VM-353G(TR)		
SOP4	1b (SPST-NC)		400 V	100 mA	G3VM-401G1	100 pcs.	G3VM-401G1(TR)	2,500 pcs.
Special SOP 4-PIN	1a (SPST-NO)			120 mA	G3VM-401G		G3VM-401G(TR)	
				110mA	G3VM-401VY	125 pcs.	G3VM-401VY(TR05)	

\* The AC peak and DC value are given for the load voltage and continuous load current.

Note: To order tape packaging for Relays with surface-mounting terminals, add "(TR)", "(TR05)" to the end of the model number.

SOP

G3VM-35□G□/351VY/401G□/401VY

### Absolute Maximum Ratings (Ta = 25°C)


Item		Symbol	G3VM-351G1	G3VM-351VY	G3VM-353G	G3VM-401G1	G3VM-401G	G3VM-401VY	Unit	Measurement conditions		
Input	LED forward current	IF	50	30	50	30	50	30	mA			
	LED forward current reduction rate	$\Delta I_F/^\circ C$	-0.5	-0.3	-0.5	-0.3	-0.5	-0.3	mA/°C	Ta ≥ 25°C		
	LED reverse voltage	VR	5	6	5			6	V			
Connection temperature		TJ	125							°C		
Output	Load voltage (AC peak/DC)	V <sub>OFF</sub>	350			400				V		
	Continuous load current (AC peak/DC)	Io	100	110	120	100	120	110	mA			
	ON current reduction rate	$\Delta I_o/^\circ C$	-1.0	-1.1	-1.2	-1.0	-1.2	-1.1	mA/°C	Ta ≥ 25°C		
	Pulse ON current	I <sub>op</sub>	300	330	360	300	360	330	mA	t=100 ms, Duty=1/10		
	Connection temperature		TJ	125							°C	
	Dielectric strength between I/O *		V <sub>I-O</sub>	1500	3750	1500			3750	V <sub>rms</sub>	AC for 1 min	
Ambient operating temperature		Ta	-40 to +85	-40 to +110	-40 to +85			-40 to +110	°C	With no icing or condensation		
Ambient storage temperature		T <sub>stg</sub>	-55 to +125							°C		
Soldering temperature		-	260							°C	10 s	

\* The dielectric strength between the input and output was checked by applying voltage between all pins as a group on the LED side and all pins as a group on the light-receiving side.

### Electrical Characteristics (Ta = 25°C)

Item		Symbol	G3VM-351G1	G3VM-351VY	G3VM-353G	G3VM-401G1	G3VM-401G	G3VM-401VY	Unit	Measurement conditions	
Input	LED forward voltage	Minimum	1.0	1.1	1.0	1.1	1.0	1.1	V	I <sub>F</sub> =10 mA	
		Typical	1.15	1.27	1.15	1.27	1.15	1.27			
		Maximum	1.3	1.4	1.3	1.4	1.3	1.4			
	Reverse current	I <sub>R</sub>	Maximum 10							μA	V <sub>R</sub> =5 V
	Capacitance between terminals	C <sub>T</sub>	Typical 30							pF	V=0, f=1 MHz
	Trigger LED forward current	I <sub>FT</sub> (I <sub>FC</sub> ) *2	Typical	0.4	0.8	1	-	1	0.8	mA	G3VM-351G1/401G1 : I <sub>o</sub> =100 mA G3VM-351VY/401VY : I <sub>o</sub> =110 mA G3VM-353G : I <sub>OFF</sub> =10 μA G3VM-401G : I <sub>o</sub> =120 mA
Maximum			1	3		0.2	3				
Release LED forward current	I <sub>FC</sub> (I <sub>FT</sub> ) *2	Minimum	0.1			-	0.1		mA	G3VM-351G1/351VY/401G1/401G/401VY : I <sub>OFF</sub> =100 μA G3VM-353G : I <sub>o</sub> =120 mA	
		Typical	-	0.4	-	0.001	-	0.5			
Output	Maximum resistance with output ON	Typical	35 (25)	35 (22)	15	18	17	40 (30)	Ω	G3VM-351G1 : I <sub>F</sub> =2 mA, I <sub>o</sub> =100 mA Values in parentheses are for t < 1 s. G3VM-351VY/401VY : I <sub>F</sub> =5 mA, I <sub>o</sub> =110 mA Values in parentheses are for t < 1 s. G3VM-353G : I <sub>o</sub> =120 mA G3VM-401G1 : I <sub>F</sub> =0.5 mA, I <sub>o</sub> =100 mA, t < 1 s G3VM-401G : I <sub>F</sub> =5 mA, I <sub>o</sub> =120 mA	
		Maximum	50 (35)		25	35		65 (45)			
	Current leakage when the relay is open	I <sub>LEAK</sub>	Typical	1	1	-	1	-	1	nA	G3VM-351G1/351VY : V <sub>OFF</sub> =350 V G3VM-353G : V <sub>OFF</sub> =350 V, I <sub>F</sub> =5 mA G3VM-401G1/401G/401VY : V <sub>OFF</sub> =400 V
			Maximum	1,000							
Capacitance between terminals	C <sub>OFF</sub>	Typical	35	30	65	70		30	pF	G3VM-351G1/351VY/401G1/401G/401VY : V=0, f=1 MHz G3VM-353G : V=0, f=1 MHz, I <sub>F</sub> =5 mA	
Capacitance between I/O terminals	C <sub>I-O</sub>	Typical	0.8							pF	f=1 MHz, V <sub>s</sub> =0 V
Insulation resistance between I/O terminals	R <sub>I-O</sub>	Minimum	1000							MΩ	V <sub>I-O</sub> =500 VDC, R <sub>oH</sub> ≤60%
		Typical	10 <sup>8</sup>								
Turn-ON time	t <sub>ON</sub>	Typical	1	0.5	-	2	0.3	0.5	ms	G3VM-351G1 : I <sub>F</sub> =2 mA, R <sub>L</sub> =200 Ω, V <sub>DD</sub> =20 V G3VM-401G1 : I <sub>F</sub> =0.5 mA, R <sub>L</sub> =200 Ω, V <sub>DD</sub> =20 V Others : I <sub>F</sub> =5 mA, R <sub>L</sub> =200 Ω, V <sub>DD</sub> =20 V *1	
		Maximum	5	1		10	1				
Turn-OFF time	t <sub>OFF</sub>	Typical	1	0.1	-	1	0.1		ms	G3VM-351G1 : I <sub>F</sub> =2 mA, R <sub>L</sub> =200 Ω, V <sub>DD</sub> =20 V G3VM-401G1 : I <sub>F</sub> =0.5 mA, R <sub>L</sub> =200 Ω, V <sub>DD</sub> =20 V Others : I <sub>F</sub> =5 mA, R <sub>L</sub> =200 Ω, V <sub>DD</sub> =20 V *1	
		Maximum	3	0.5	3	5	1	0.5			

\*1. Turn-ON and Turn-OFF Times

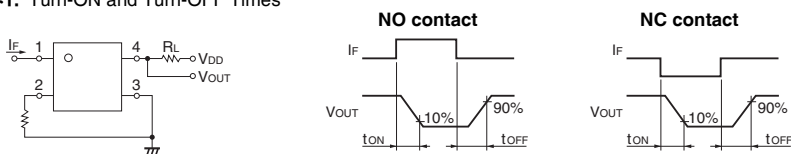

\*2. These values are for Relays with NC contacts

## Recommended Operating Conditions

For usage with high reliability, Recommended Operation Conditions is a measure that takes into account the derating of Absolute Maximum Ratings and Electrical Characteristics.

Each item on this list is an independent condition, so it is not simultaneously satisfy several conditions.

Item	Symbol		G3VM-351G1	G3VM-351VY	G3VM-353G	G3VM-401G1	G3VM-401G	G3VM-401VY	Unit
Load voltage (AC peak/DC)	V <sub>DD</sub>	Maximum	280			320			V
Operating LED forward current	I <sub>F</sub>	Minimum	–	5		–	5		mA
		Typical	2	7.5	–	0.5	7.5		
		Maximum	25						
Continuous load current (AC peak/DC)	I <sub>O</sub>	Maximum	80	110	120	80	120	110	
Ambient operating temperature	T <sub>a</sub>	Minimum	-20						°C
		Maximum	65	100	65			100	

## Spacing and Insulation


Item	G3VM-35□G□/401G□	G3VM-351VY/401VY	Unit
	Minimum		
Creepage distances	4.0	5.0	mm
Clearance distances	4.0	5.0	
Internal isolation thickness	0.1	0.2	

SOP


G3VM-35□G□/351VY/401G□/401VY

## Engineering Data


### LED forward current vs. Ambient temperature

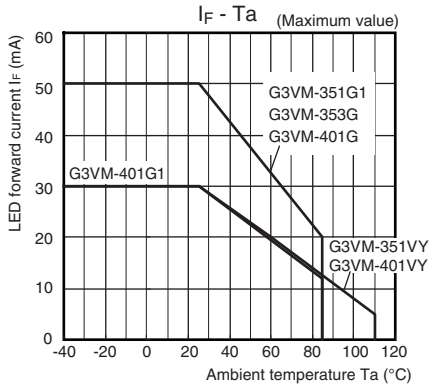


### Continuous load current vs. Ambient temperature

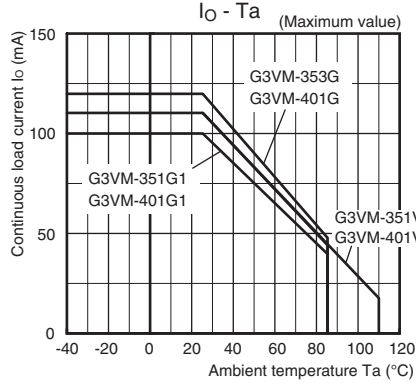


### LED forward current vs. LED forward voltage

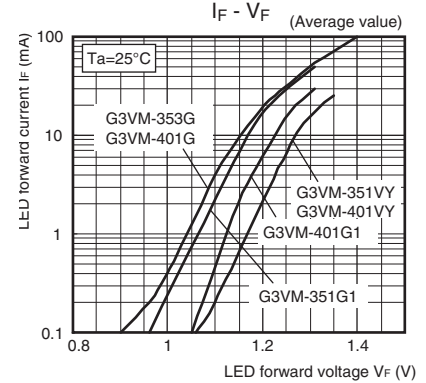


### Continuous load current vs. On-state voltage

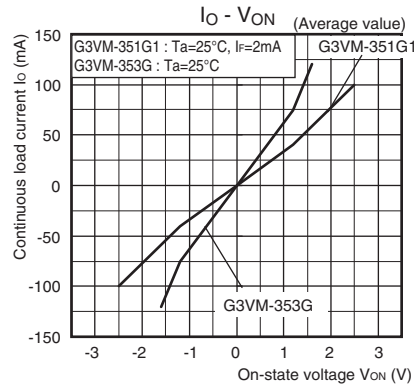


### G3VM-351VY/401G/401G1/401VY

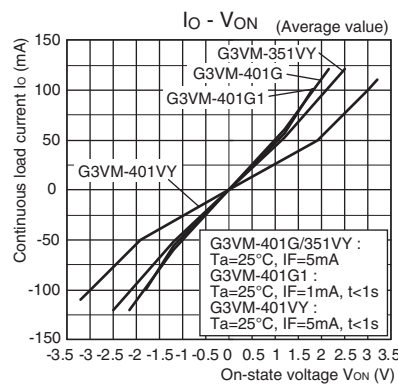


### On-state resistance vs. Ambient temperature

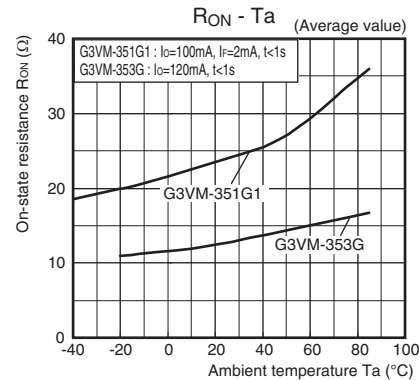


### G3VM-351VY/401G/401G1/401VY

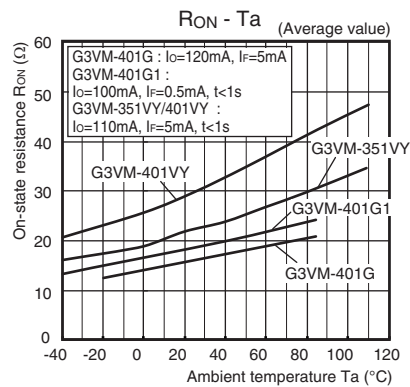


### Trigger LED forward current vs. Ambient temperature

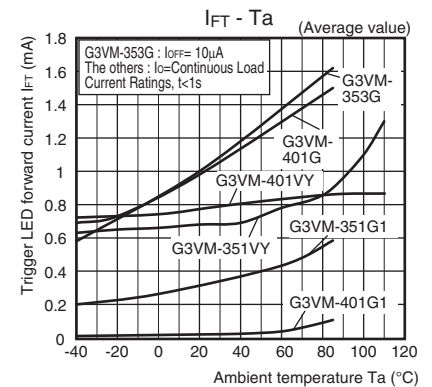

### Turn ON, Turn OFF time vs. LED forward current

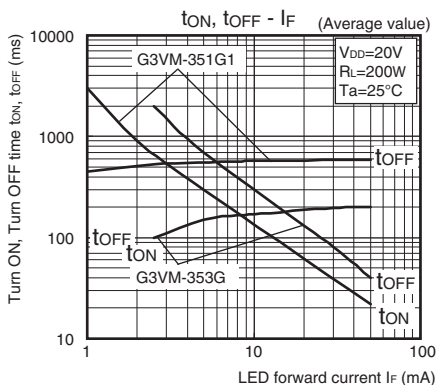


### G3VM-351VY/401G/401G1/401VY

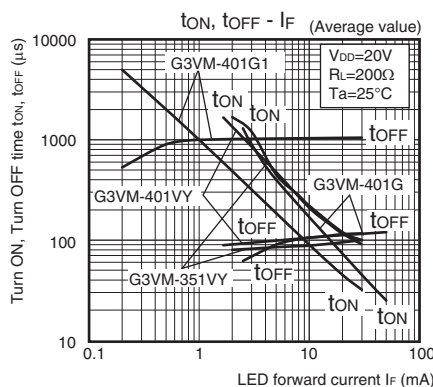


## Engineering Data


### ● Turn ON, Turn OFF time vs. Ambient temperature G3VM-351G1/353G

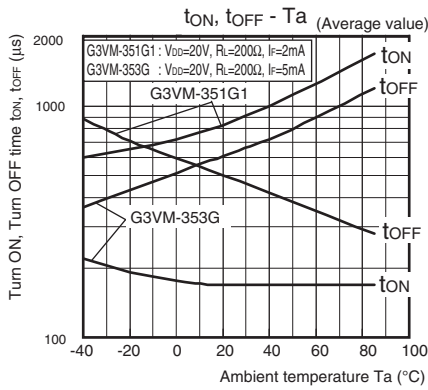


### G3VM-351VY/401G/401G1/401VY

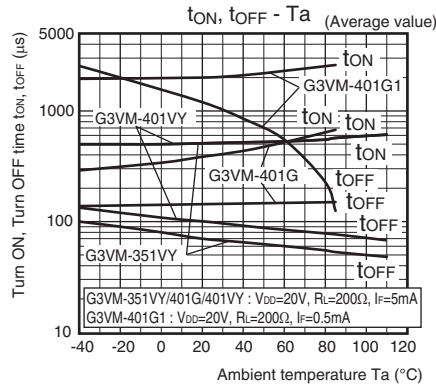


### ● Current leakage vs. Ambient temperature G3VM-351G1/353G/351VY/401G/401G1

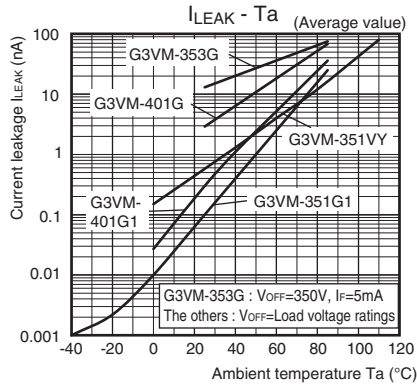

### G3VM-401VY

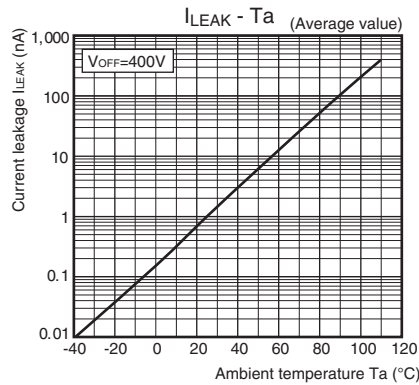

### ● Current leakage vs. Load voltage

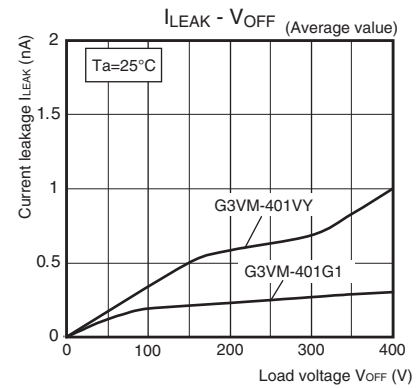


## ■ Appearance / Terminal Arrangement / Internal Connections


### ● Appearance

#### SOP (Small Outline Package)

SOP 4-pin

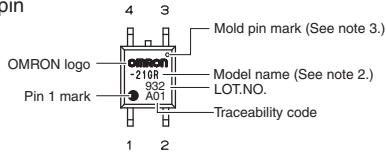


#### Special SOP 4-pin (G3VM-351VY/401VY)

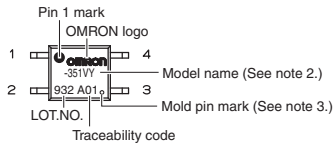


- Note 1:** The actual product is marked differently from the image shown here.
- Note 2:** "G3VM" does not appear in the model number on the Relay.
- Note 3:** The indentation in the corner diagonally opposite from the pin 1 mark is from a pin on the mold.

### ● Terminal Arrangement/Internal Connections (Top View)

G3VM-351G1/VY  
G3VM-401G1/G/VY



G3VM-353G



## ■ Dimensions (Unit: mm)


### SOP (Small Outline Package)

SOP 4-pin




#### Surface-mounting Terminals

Weight: 0.1 g

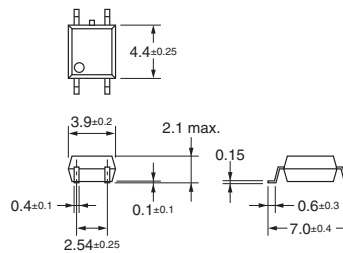


#### Actual Mounting Pad Dimensions

(Recommended Value, Top View)




**Note:** The actual product is marked differently from the image shown here.

### Special SOP 4-pin \* (G3VM-351VY/401VY)




#### Surface-mounting Terminals

Weight: 0.1 g



#### Actual Mounting Pad Dimensions

(Recommended Value, Top View)



\* The external dimensions are different from those of the standard SOP 4-pin, but the mounting pad dimensions are the same.  
**Note:** The actual product is marked differently from the image shown here.

## ■ Approved Standards

UL recognized

Model	Approved Standards	Contact form	File No.
G3VM-351G1 G3VM-401G G3VM-351VY G3VM-401VY	UL (recognized)	1a (SPST-NO)	E80555
G3VM-353G		1b (SPST-NC)	

Models Certified by BSI for EN/IEC Standards

Model	Approved Standards	Contact form	File No.
G3VM-401G	EN62368-1 (BSI certified)	1a (SPST-NO)	VC669262

## ■ Safety Precautions

- Refer to the *Common Precautions for All MOS FET Relays* for precautions that apply to all MOS FET Relays.

SOP

G3VM-35□G□/351VY/401G□/401VY

Please check each region's Terms & Conditions by region website.

## OMRON Corporation

Electronic and Mechanical Components Company

### Regional Contact

#### Americas

<https://www.components.omron.com/>

#### Asia-Pacific

<https://ecb.omron.com.sg/>

#### Korea

<https://www.omron-ecb.co.kr/>

#### Europe

<http://components.omron.eu/>

#### China

<https://www.ecb.omron.com.cn/>

#### Japan

<https://www.omron.co.jp/ecb/>

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Omron:

[G3VM-351VY\(TR05\)](#) [G3VM-351VY\(TR\)](#) [G3VM-351VY](#)





Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.