




**NO CONTENT ON THE ATTACHED DOCUMENT HAS CHANGED**



**THIS PAGE INTENTIONALLY LEFT BLANK**

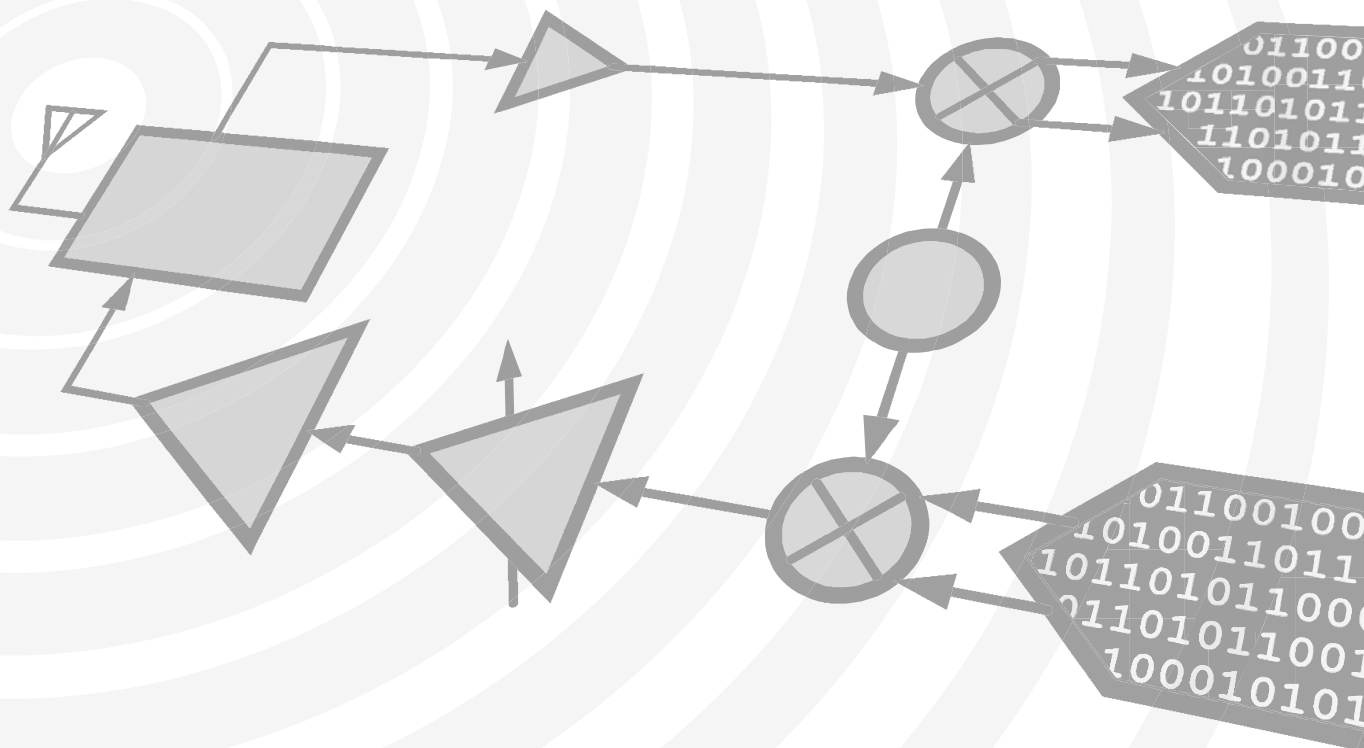

MICROWAVE CORPORATION v00.0410



# HMC187AMS8 / 187AMS8E

## GaAs MMIC SMT PASSIVE FREQUENCY DOUBLER, 0.85 - 2.0 GHz INPUT

### Typical Applications


The HMC187AMS8(E) is ideal for:

- Wireless Local Loop
- LMDS, VSAT, and Point-to-Point Radios
- UNII & HiperLAN
- Test Equipment

### Features

Conversion Loss: 15 dB  
Fo, 3Fo, 4Fo Isolation: 40 dB  
Input Drive Level: 10 to 20 dBm

### Functional Diagram

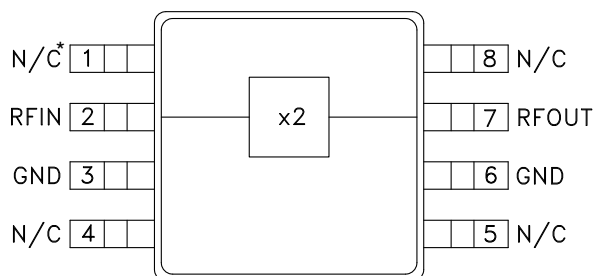

### General Description

The HMC187AMS8(E) is a miniature frequency doubler MMIC in plastic 8-lead MSOP package. The suppression of undesired fundamental and higher order harmonics is 40 dB typical with respect to input signal levels. The doubler uses the same diode/balun technology used in Hittite MMIC mixers. The doubler is ideal for high volume applications where frequency doubling of a lower frequency is more economical than directly generating a higher frequency. The passive Schottky diode doubler technology contributes no measurable additive phase noise onto the multiplied signal.

### Electrical Specifications, $T_A = +25^\circ\text{C}$ , As a Function of Drive Level

| Parameter                                      | Input = +10 dBm |      |      | Input = +15 dBm |      |      | Input = +20 dBm |      |      | Units |
|------------------------------------------------|-----------------|------|------|-----------------|------|------|-----------------|------|------|-------|
|                                                | Min.            | Typ. | Max. | Min.            | Typ. | Max. | Min.            | Typ. | Max. |       |
| Frequency Range, Input                         | 1.25 - 1.75     |      |      | 1.0 - 1.75      |      |      | 0.85 - 2.0      |      |      | GHz   |
| Frequency Range, Output                        | 2.5 - 3.5       |      |      | 2.0 - 3.5       |      |      | 1.7 - 4.0       |      |      | GHz   |
| Conversion Loss                                |                 | 18   | 22   |                 | 14   | 17   |                 | 15   | 18   | dB    |
| FO Isolation<br>(with respect to input level)  |                 |      |      | 35              | 45   |      |                 |      |      | dB    |
| 3FO Isolation<br>(with respect to input level) |                 |      |      | 42              | 46   |      |                 |      |      | dB    |
| 4FO Isolation<br>(with respect to input level) |                 |      |      | 30              | 40   |      |                 |      |      | dB    |

\* N/C denotes no internal connection, however, it is recommended to connect these pins to ground.




MICROWAVE CORPORATION v00.0410




## HMC187AMS8 / 187AMS8E

### GaAs MMIC SMT PASSIVE FREQUENCY DOUBLER, 0.85 - 2.0 GHz INPUT

**Conversion Gain @ +15 dBm Drive Level**

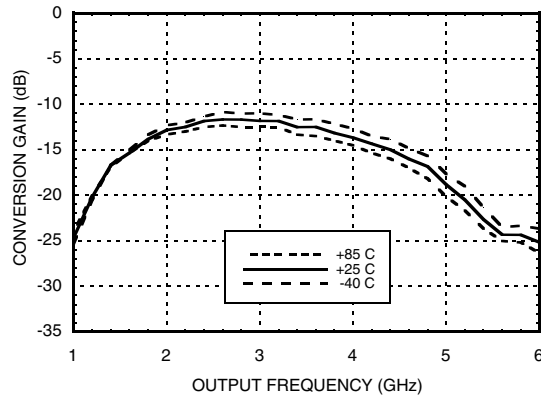


**Isolation @ +15 dBm Drive Level\***

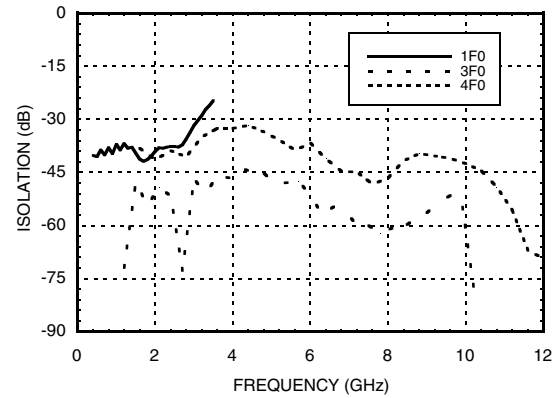


\*With respect to input level

**Input Return Loss vs. Drive Level**

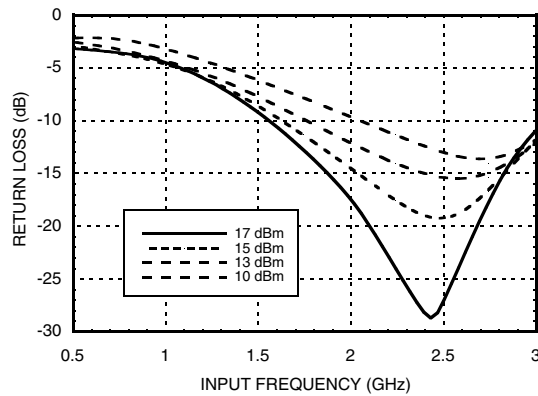

**Output Return Loss for Several Input Frequencies**

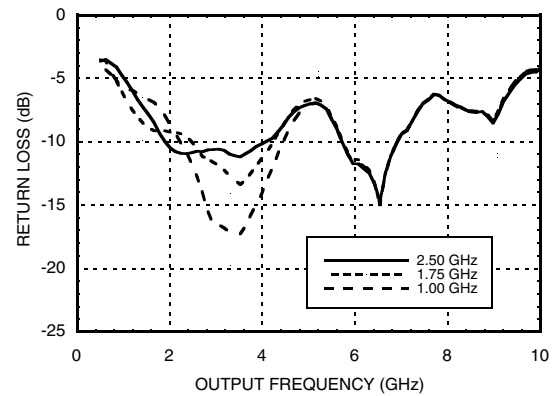

5

FREQ. MULTIPLIERS - PASSIVE - SMT




MICROWAVE CORPORATION v00.0410




## HMC187AMS8 / 187AMS8E

### GaAs MMIC SMT PASSIVE FREQUENCY DOUBLER, 0.85 - 2.0 GHz INPUT


**Conversion Gain @ 25°C vs. Drive Level**

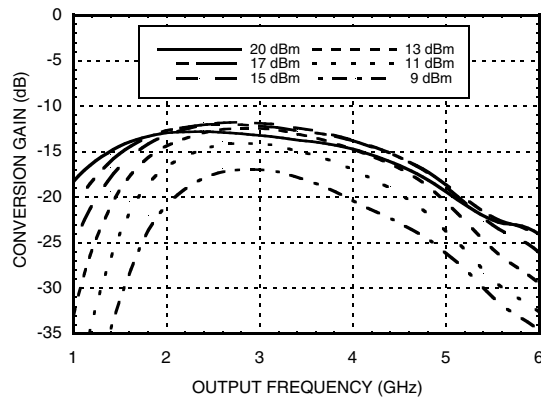


**Output Return Loss with 1 GHz Input**

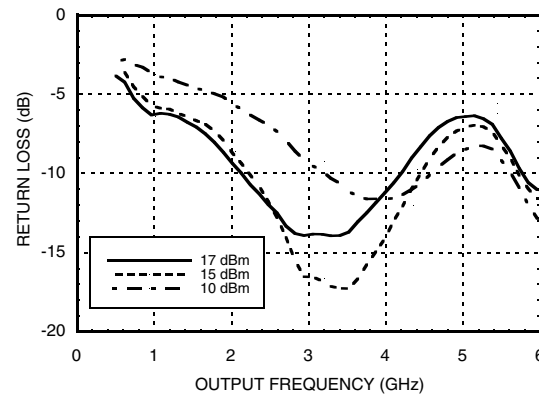


**Conversion Gain @ -40°C vs. Drive Level**

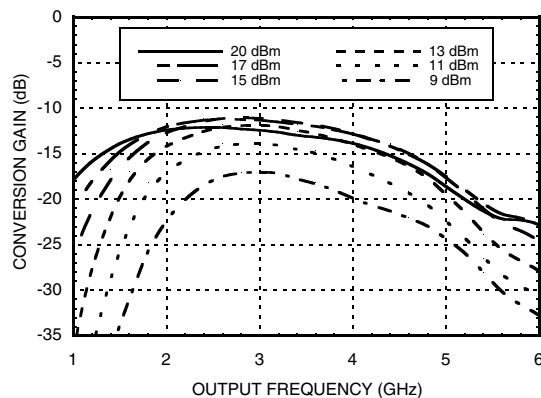


**Output Return Loss with 1.75 GHz Input**

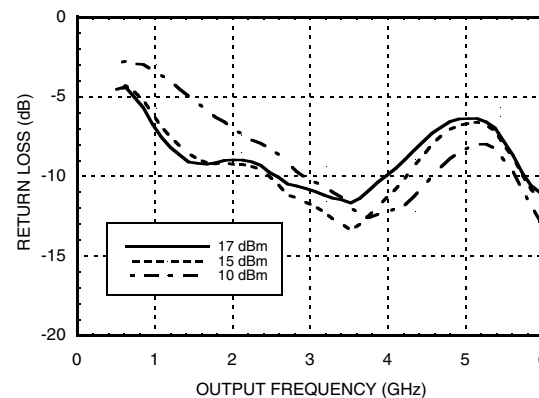

**Conversion Gain @ +85°C vs. Drive Level**

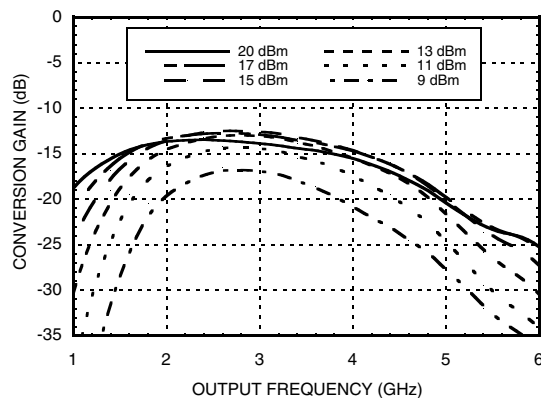

**Output Return Loss with 2.5 GHz Input**

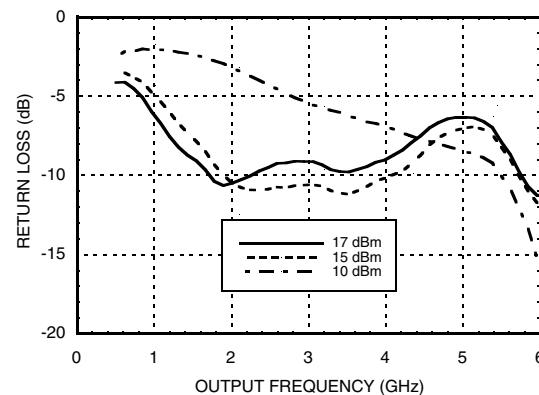



MICROWAVE CORPORATION v00.0410



# HMC187AMS8 / 187AMS8E

## GaAs MMIC SMT PASSIVE FREQUENCY DOUBLER, 0.85 - 2.0 GHz INPUT


### Absolute Maximum Ratings

|                       |                |
|-----------------------|----------------|
| Input Drive           | +27 dBm        |
| Storage Temperature   | -65 to +150 °C |
| Operating Temperature | -40 to +85 °C  |



ELECTROSTATIC SENSITIVE DEVICE  
OBSERVE HANDLING PRECAUTIONS

### Outline Drawing

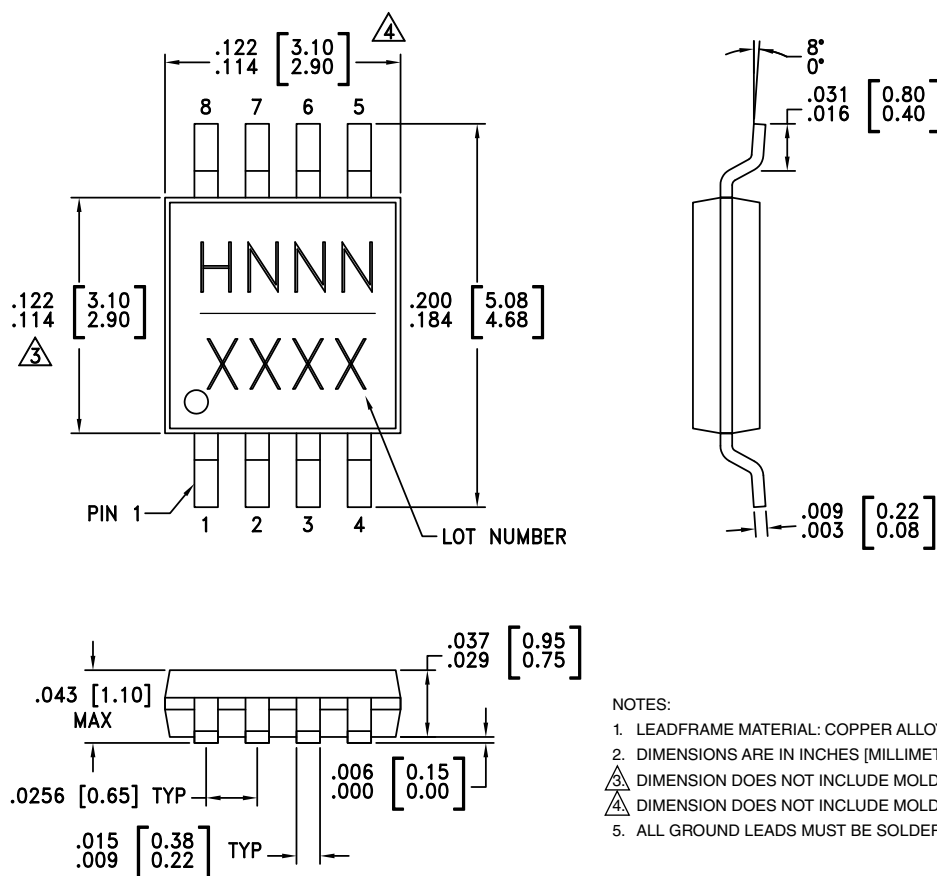

### Package Information

| Part Number | Package Body Material                              | Lead Finish   | MSL Rating          | Package Marking <sup>[3]</sup> |
|-------------|----------------------------------------------------|---------------|---------------------|--------------------------------|
| HMC187AMS8  | Low Stress Injection Molded Plastic                | Sn/Pb Solder  | MSL1 <sup>[1]</sup> | H187A<br>XXXX                  |
| HMC187AMS8E | RoHS-compliant Low Stress Injection Molded Plastic | 100% matte Sn | MSL1 <sup>[2]</sup> | H187A<br>XXXX                  |

[1] Max peak reflow temperature of 235 °C

[2] Max peak reflow temperature of 260 °C

[3] 4-Digit lot number XXXX

For price, delivery and to place orders: Hittite Microwave Corporation, 20 Alpha Road, Chelmsford, MA 01824

Phone: 978-250-3343 Fax: 978-250-3373 Order On-line at [www.hittite.com](http://www.hittite.com)

Application Support: Phone: 978-250-3343 or [apps@hittite.com](mailto:apps@hittite.com)



MICROWAVE CORPORATION v00.0410




## HMC187AMS8 / 187AMS8E

### GaAs MMIC SMT PASSIVE FREQUENCY DOUBLER, 0.85 - 2.0 GHz INPUT

#### Pin Description

| Pin Number | Function | Description                                                                                                                                | Interface Schematic |
|------------|----------|--------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
| 1, 4, 5, 8 | N/C      | These pins are not connected internally; however, all data shown herein was measured with these pins connected to RF/DC ground externally. |                     |
| 3, 6       | GND      | All ground leads must be soldered to PCB RF/DC ground.                                                                                     |                     |
| 2          | RFIN     | Pin is DC coupled and matched to 50 Ohms.                                                                                                  |                     |
| 7          | RFOUT    | Pin is DC coupled and matched to 50 Ohms.                                                                                                  |                     |

### Evaluation PCB

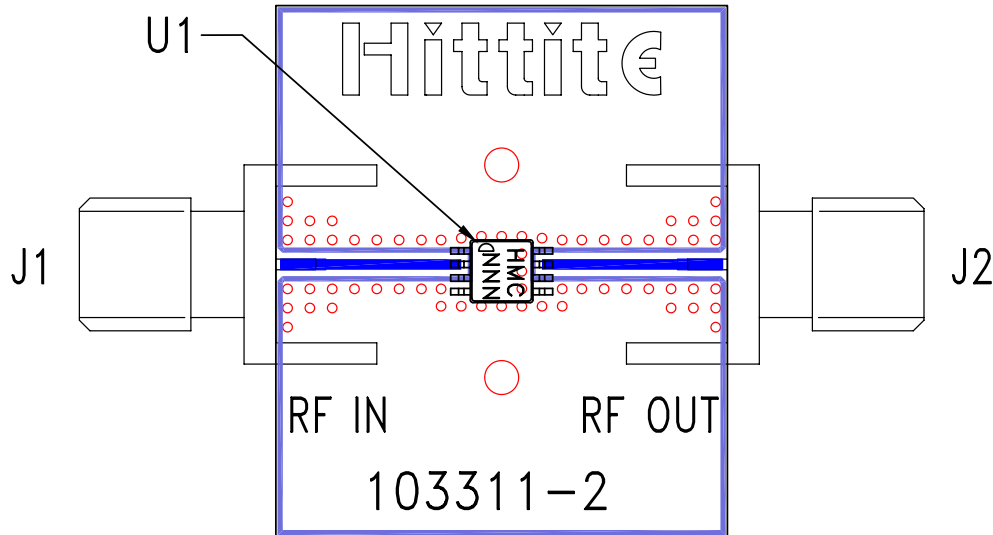

### List of Materials for Evaluation PCB 103313 <sup>[1]</sup>

| Item    | Description             |
|---------|-------------------------|
| J1, J2  | PCB Mount SMA Connector |
| U1      | HMC187AMS8(E) Doubler   |
| PCB [2] | 103311 Eval Board       |

[1] Reference this number when ordering complete evaluation PCB

[2] Circuit Board Material: Rogers 4350

The circuit board used in the application should be generated with proper RF circuit design techniques. Signal lines should have 50 ohm impedance while the package N/C and ground leads should be connected directly to the ground plane similar to that shown. The evaluation circuit board shown is available from Hittite upon request.





Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.