

# MAX941/MAX942/ MAX944

# High-Speed, Low-Power, 3V/5V, Rail-to-Rail, Single-Supply Comparators

## General Description

The MAX941/MAX942/MAX944 are single/dual/quad high-speed comparators optimized for systems powered from a 3V or 5V supply. These devices combine high speed, low power, and rail-to-rail inputs. Propagation delay is 80ns, while supply current is only 350µA per comparator.

The input common-mode range of the MAX941/MAX942/MAX944 extends beyond both power-supply rails. The outputs pull to within 0.4V of either supply rail without external pullup circuitry, making these devices ideal for interface with both CMOS and TTL logic. All input and output pins can tolerate a continuous short-circuit fault condition to either rail. Internal hysteresis ensures clean output switching, even with slow-moving input signals. The MAX941 features latch enable and device shutdown.

The single MAX941 and dual MAX942 are offered in a tiny µMAX® package. Both the single and dual MAX942 are available in 8-pin DIP and SO packages. The quad MAX944 comes in 14-pin DIP and narrow SO packages.

## Applications

- 3V/5V Systems
- Battery-Powered Systems
- Threshold Detectors/Discriminators
- Line Receivers
- Zero-Crossing Detectors
- Sampling Circuits

## Features

- Available in µMAX Package
- Optimized for 3V and 5V Applications (Operation Down to 2.7V)
- Fast, 80ns Propagation Delay (5mV Overdrive)
- Rail-to-Rail Input Voltage Range
- Low 350µA Supply Current per Comparator
- Low, 1mV Offset Voltage
- Internal Hysteresis for Clean Switching
- Outputs Swing 200mV of Power Rails
- CMOS/TTL-Compatible Outputs
- Output Latch (MAX941 Only)
- Shutdown Function (MAX941 Only)

## Ordering Information


| PART        | TEMP RANGE      | PIN-PACKAGE |
|-------------|-----------------|-------------|
| MAX941CPA   | 0°C to +70°C    | 8 PDIP      |
| MAX941CSA   | 0°C to +70°C    | 8 SO        |
| MAX941EPA   | -40°C to +85°C  | 8 PDIP      |
| MAX941ESA   | -40°C to +85°C  | 8 SO        |
| MAX941EUA-T | -40°C to +85°C  | 8 µMAX      |
| MAX941AUA-T | -40°C to +125°C | 8 µMAX      |

T = Tape and reel.

Ordering Information continued at end of data sheet.

µMAX is a registered trademark of Maxim Integrated Products, Inc.

## Pin Configurations

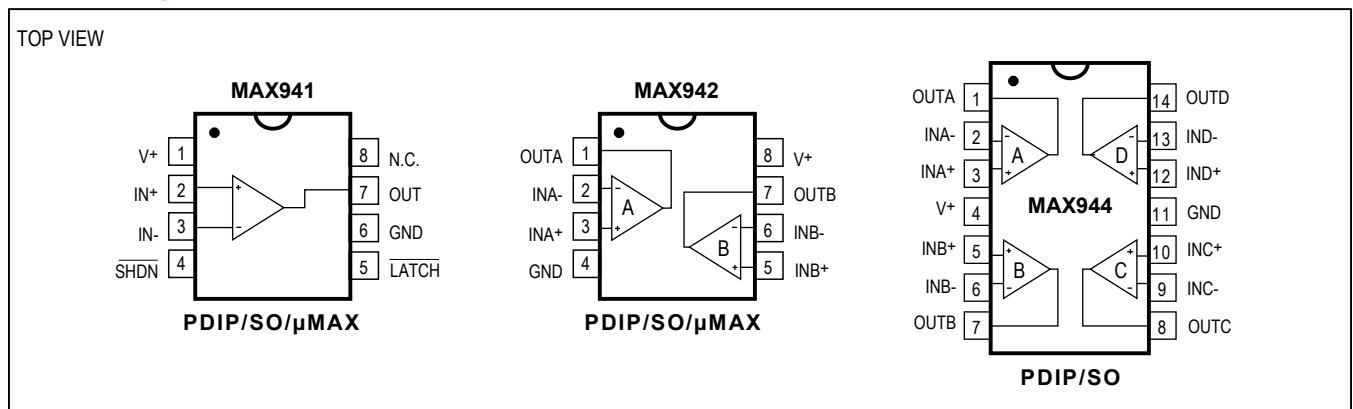

MAX941/MAX942/  
MAX944

High-Speed, Low-Power, 3V/5V, Rail-to-Rail,  
Single-Supply Comparators

Absolute Maximum Ratings

|  |   |
|--|---|
| Power-Supply Ranges  | 8-Pin $\mu$ MAX (derate 4.1mW/°C above +70°C).....330mW   |
| Supply Voltage V+ to GND.....+6.5V                         | 14-Pin Plastic DIP (derate 10.00mW/°C above +70°C)..800mW |
| Differential Input Voltage .....-0.3V to (V+ + 0.3V)       | 14-Pin SO (derate 8.33mW/°C above +70°C).....667mW        |
| Common-Mode Input Voltage.....-0.3V to (V+ + 0.3V)         | Operating Temperature Ranges                              |
| LATCH Input (MAX941 only).....-0.3V to (V+ + 0.3V)         | MAX94_C_.....0°C to +70°C                                 |
| SHDN Control Input (MAX941 only) .....-0.3V to (V+ + 0.3V) | MAX94_E_.....-40°C to +85°C                               |
| Current Into Input Pins ..... $\pm$ 20mA                   | MAX94_AUA.....-40°C to +125°C                             |
| Continuous Power Dissipation (T <sub>A</sub> = +70°C)      | MAX942MSA.....-55°C to +125°C                             |
| 8-Pin Plastic DIP (derate 9.09mW/°C above +70°C)..727mW    | Storage Temperature Range.....-65°C to +150°C             |
| 8-Pin SO (derate 5.88mW/°C above +70°C).....471mW          | Lead Temperature (soldering, 10s).....+300°C              |

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

Electrical Characteristics

(V+ = 2.7V to 5.5V, T<sub>A</sub> = T<sub>MIN</sub> to T<sub>MAX</sub>, unless otherwise noted. Typical values are at T<sub>A</sub> = +25°C.) (Note 14)

| PARAMETER                        | SYMBOL             | CONDITIONS  |                        | MIN  | TYP      | MAX      | UNITS     |    |
|----------------------------------|--------------------|---|------------------------|--|----------|----------|-----------|----|
| Positive Supply Voltage          | V+                 |   |                        | 2.7  |          | 5.5      | V         |    |
| Input Voltage Range              | V <sub>CMR</sub>   | (Note 1)  |                        | -0.2   |          | V+ + 0.2 | V         |    |
| Input-Referred Trip Points       | V <sub>TRIP</sub>  | V <sub>CM</sub> = 0V or V <sub>CM</sub> = V+ (Note 2)   | T <sub>A</sub> = +25°C | MAX94_C_-, MAX94_EP_-, MAX94_ES_-, MAX942MSA | 1        | 3        | mV        |    |
|                                  |                    |   |                        | MAX941_UA/MAX942_UA                          | 1        | 4        |           |    |
|                                  |                    | T <sub>A</sub> = T <sub>MIN</sub> to T <sub>MAX</sub>   |                        | MAX94_C_-, MAX94_EP_-, MAX94_ES_-, MAX942MSA |          | 4        |           | mV |
|                                  |                    |   |                        | MAX941_UA/MAX942_UA                          |          | 6        |           |    |
| Input Offset Voltage             | V <sub>OS</sub>    | V <sub>CM</sub> = 0V or V <sub>CM</sub> = V+ (Note 3)   | T <sub>A</sub> = +25°C | MAX94_C_-, MAX94_EP_-, MAX94_ES_-, MAX942MSA | 1        | 2        | mV        |    |
|                                  |                    |   |                        | MAX941_UA/MAX942_UA                          | 1        | 3        |           |    |
|                                  |                    | T <sub>A</sub> = T <sub>MIN</sub> to T <sub>MAX</sub>   |                        | MAX94_C_-, MAX94_EP_-, MAX94_ES_-, MAX942MSA |          | 3        |           | mV |
|                                  |                    |   |                        | MAX941_UA/MAX942_UA                          |          | 5.5      |           |    |
| Input Bias Current               | I <sub>B</sub>     | V <sub>IN</sub> = V <sub>OS</sub> , V <sub>CM</sub> = 0V or V <sub>CM</sub> = V+ (Note 4)     |                        | MAX94_C                                      | 150      | 300      | nA        |    |
|                                  |                    |   |                        | MAX94_E/A, MAX942MSA                         | 150      | 400      |           |    |
| Input Offset Current             | I <sub>OS</sub>    | V <sub>IN</sub> = V <sub>OS</sub> , V <sub>CM</sub> = 0V or V+                                |                        |  | 10       | 150      | nA        |    |
| Input Differential Clamp Voltage | V <sub>CLAMP</sub> | Force 100 $\mu$ A into IN+, IN- = GND, measure V <sub>IN+</sub> - V <sub>IN-</sub> , Figure 3 |                        |  | 2.2      |          | V         |    |
| Common-Mode Rejection Ratio      | CMRR               | (Note 5)  |                        | MAX94_C_-, MAX94_EP_-, MAX94_ES_-, MAX942MSA | 80       | 300      | $\mu$ V/V |    |
|                                  |                    |   |                        | MAX941_UA/MAX942_UA                          | 80       | 800      |           |    |
| Power-Supply Rejection Ratio     | PSRR               | 2.7V $\leq$ V+ $\leq$ 5.5V, V <sub>CM</sub> = 0V  |                        | MAX94_C_-, MAX94_EP_-, MAX94_ES_-, MAX942MSA | 80       | 300      | $\mu$ V/V |    |
|                                  |                    |   |                        | MAX941_UA/MAX942_UA                          | 80       | 350      |           |    |
| Output High Voltage              | V <sub>OH</sub>    | I <sub>SOURCE</sub> = 400 $\mu$ A   |                        | V+ - 0.4                                     | V+ - 0.2 |          | V         |    |
|                                  |                    | I <sub>SOURCE</sub> = 4mA   |                        | V+ - 0.4                                     | V+ - 0.3 |          |           |    |
| Output Low Voltage               | V <sub>OL</sub>    | I <sub>SINK</sub> = 400 $\mu$ A   |                        |  | 0.2      | 0.4      | V         |    |
|                                  |                    | I <sub>SINK</sub> = 4mA   |                        |  | 0.3      | 0.4      |           |    |
| Output Leakage Current           | I <sub>LEAK</sub>  | (Note 6)  |                        |  |          | 1        | $\mu$ A   |    |

Electrical Characteristics (continued)










(V+ = 2.7V to 5.5V, T<sub>A</sub> = T<sub>MIN</sub> to T<sub>MAX</sub>, unless otherwise noted. Typical values are at T<sub>A</sub> = +25°C.) (Note 14)

| PARAMETER                        | SYMBOL                                 | CONDITIONS                              |                      | MIN | TYP        | MAX        | UNITS |
|----------------------------------|--|---|----------------------|-----|------------|------------|-------|
| Supply Current per Comparator    | I <sub>CC</sub>                        | V+ = 3V                                 | MAX941               |     | 380        | 600        | μA    |
|                                  |  |   | MAX942/MAX944        |     | 350        | 500        |       |
|                                  |  | V+ = 5V                                 | MAX941               |     | 430        | 700        |       |
|                                  |  |   | MAX942/MAX944        |     | 400        | 600        |       |
|                                  |  | MAX941 only, shutdown mode (V+ = 3V)    |                      |     | 12         | 60         |       |
| Power Dissipation per Comparator | PD                                     | (Note 7)                                | MAX941               |     | 1.0        | 4.2        | mW    |
|                                  |  |   | MAX942/MAX944        |     | 1.0        | 3.6        |       |
| Propagation Delay                | t <sub>PD+</sub> ,<br>t <sub>PD-</sub> | (Note 8)                                | MAX94_C              |     | 80         | 150        | ns    |
|                                  |  |   | MAX94_E/A, MAX942MSA |     | 80         | 200        |       |
| Differential Propagation Delay   | dt <sub>PD</sub>                       | (Note 9)                                |                      |     | 10         |            | ns    |
| Propagation Delay Skew           |  | (Note 10)                               |                      |     | 10         |            | ns    |
| Logic-Input Voltage High         | V <sub>IH</sub>                        | (Note 11)                               |                      |     | V+/2 + 0.4 |            | V     |
| Logic-Input Voltage Low          | V <sub>IL</sub>                        | (Note 11)                               |                      |     |            | V+/2 - 0.4 | V     |
| Logic-Input Current              | I <sub>IL</sub> , I <sub>IH</sub>      | V <sub>LOGIC</sub> = 0V or V+ (Note 11) |                      |     | 2          | 10         | μA    |
| Data-to-Latch Setup Time         | t <sub>S</sub>                         | (Note 12)                               |                      |     | 20         |            | ns    |
| Latch-to-Data Hold Time          | t <sub>H</sub>                         | (Note 12)                               |                      |     | 30         |            | ns    |
| Latch Pulse Width                | t <sub>LPW</sub>                       | MAX941 only                             |                      |     | 50         |            | ns    |
| Latch Propagation Delay          | t <sub>LPD</sub>                       | MAX941 only                             |                      |     | 70         |            | ns    |
| Shutdown Time                    |  | (Note 13)                               |                      |     | 3          |            | ns    |
| Shutdown Disable Time            |  | (Note 13)                               |                      |     | 10         |            | ns    |

- Note 1:** Inferred from the CMRR test. Note also that either or both inputs can be driven to the absolute maximum limit (0.3V beyond either supply rail) without damage or false output inversion.
- Note 2:** The input-referred trip points are the extremities of the differential input voltage required to make the comparator output change state. The difference between the upper and lower trip points is equal to the width of the input-referred hysteresis zone (see Figure 1).
- Note 3:** V<sub>OS</sub> is defined as the center of the input-referred hysteresis zone (see Figure 1).
- Note 4:** The polarity of IB reverses direction as V<sub>CM</sub> approaches either supply rail. See *Typical Operating Characteristics* for more detail.
- Note 5:** Specified over the full common-mode range (V<sub>CMR</sub>).
- Note 6:** Applies to the MAX941 only when in shutdown mode. Specification is for current flowing into or out of the output pin for V<sub>OUT</sub> driven to any voltage from V+ to GND.
- Note 7:** Typical power dissipation specified with V+ = 3V; maximum with V+ = 5.5V.
- Note 8:** Parameter is guaranteed by design and specified with V<sub>OD</sub> = 5mV and C<sub>LOAD</sub> = 15pF in parallel with 400μA of sink or source current. V<sub>OS</sub> is added to the overdrive voltage for low values of overdrive (see Figure 2).
- Note 9:** Specified between any two channels in the MAX942/MAX944.
- Note 10:** Specified as the difference between t<sub>PD+</sub> and t<sub>PD-</sub> for any one comparator.
- Note 11:** Applies to the MAX941 only for both SHDN and LATCH pins.
- Note 12:** Applies to the MAX941 only. Comparator is active with LATCH pin driven high and is latched with LATCH pin driven low (see Figure 2).
- Note 13:** Applicable to the MAX941 only. Comparator is active with SHDN pin driven high and is in shutdown with SHDN pin driven low. Shutdown disable time is the delay when SHDN is driven high to the time the output is valid.
- Note 14:** The MAX941\_UA and MAX942\_UA are 100% production tested at T<sub>A</sub> = +25°C. Specifications over temperature are guaranteed by design.









Typical Operating Characteristics

(V+ = 3.0V, T<sub>A</sub> = +25°C, unless otherwise noted.)

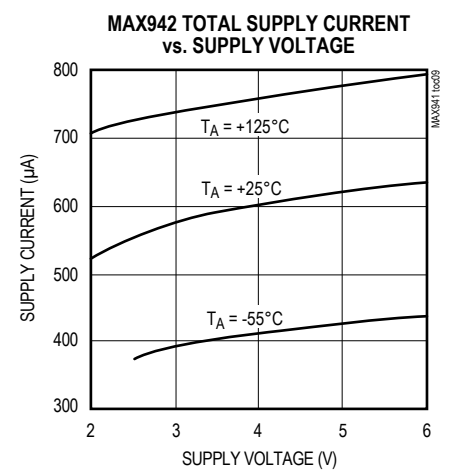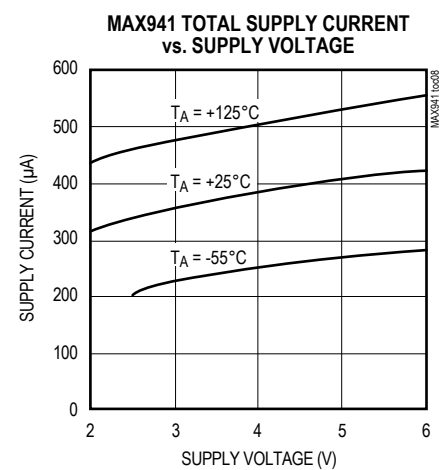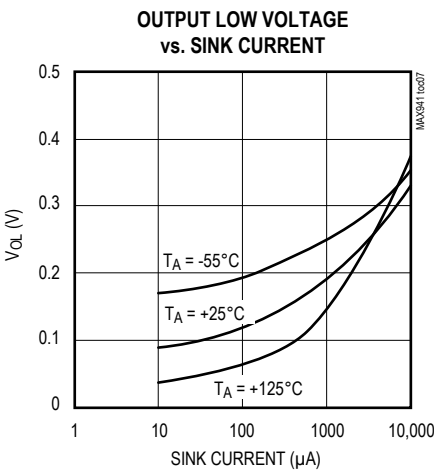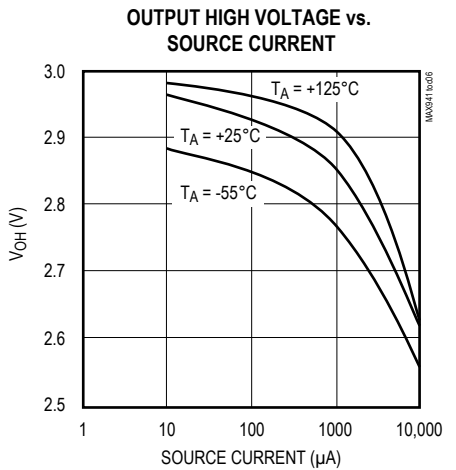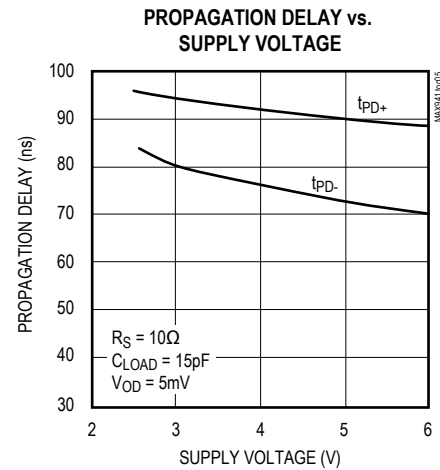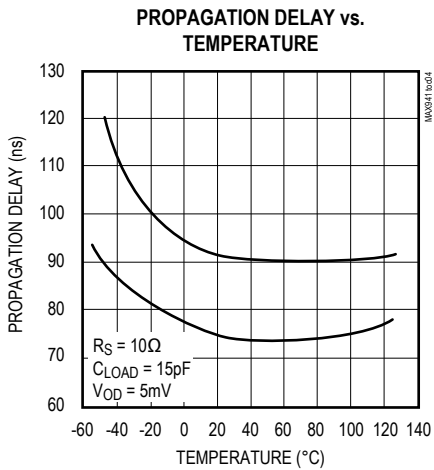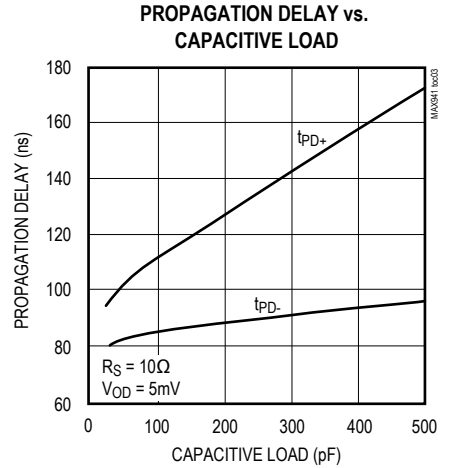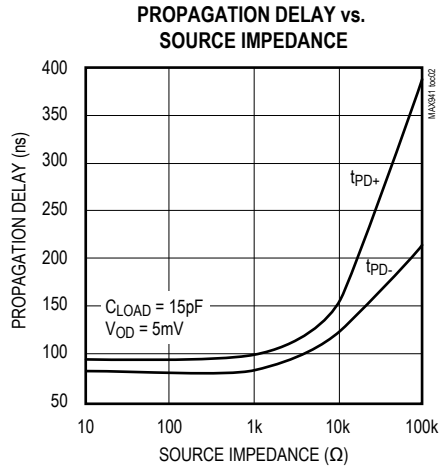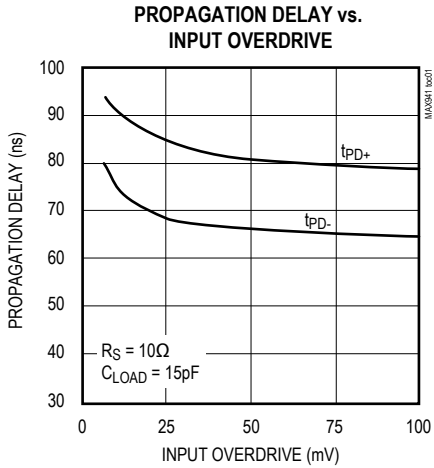



Typical Operating Characteristics (continued)

( $V_+ = 3.0V$ ,  $T_A = +25^\circ C$ , unless otherwise noted.)

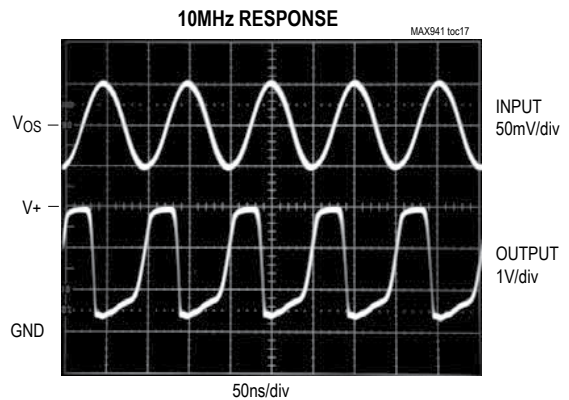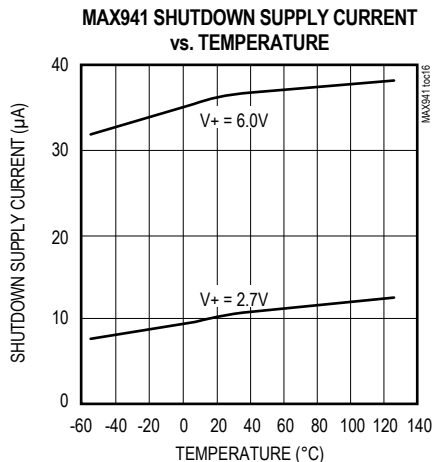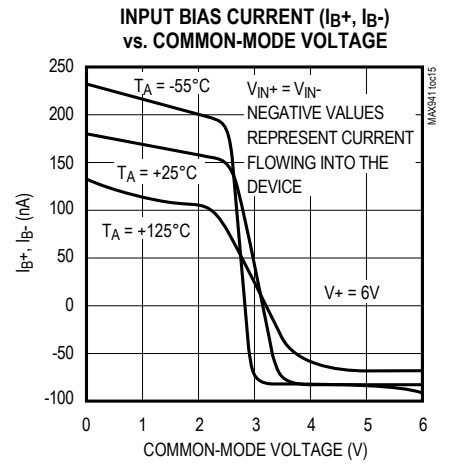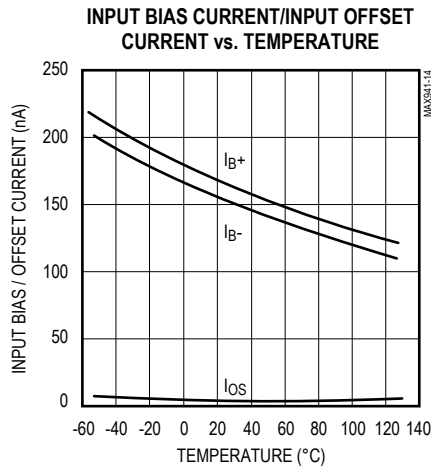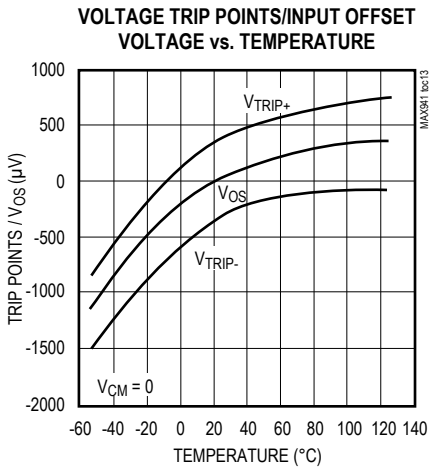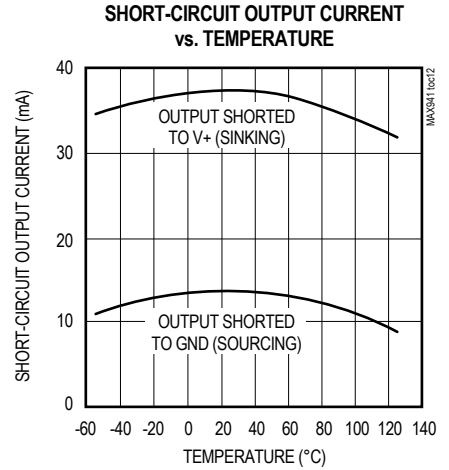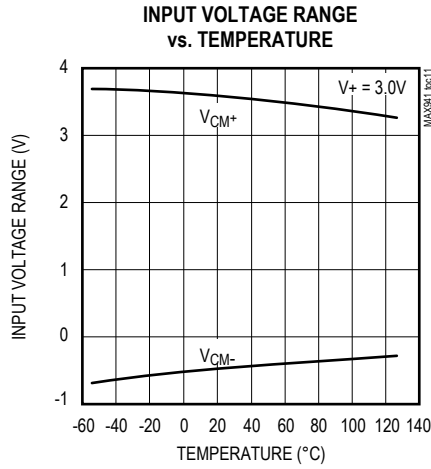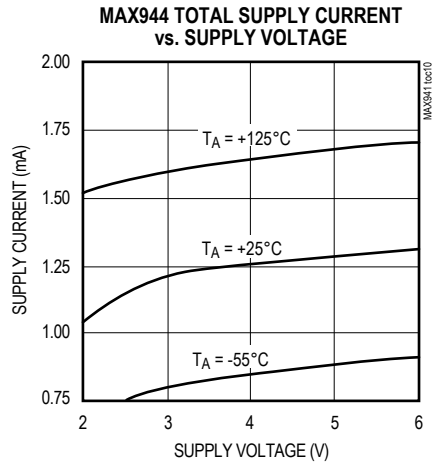

Typical Operating Characteristics (continued)

(V+ = 3.0V, TA = +25°C, unless otherwise noted.)

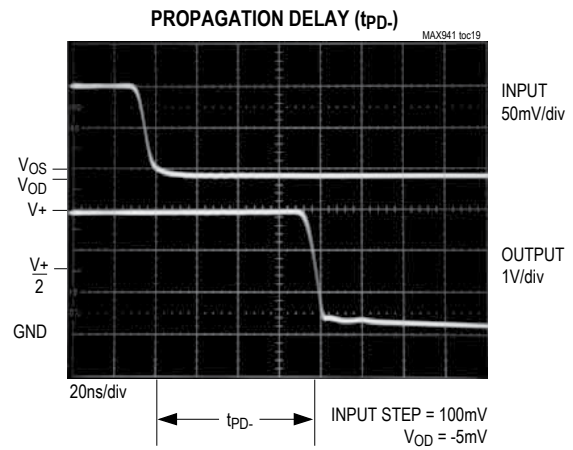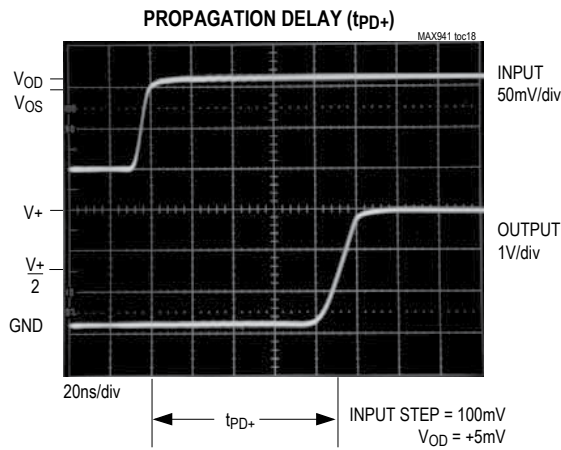

Pin Description

| PIN    |        |        | NAME                      | FUNCTION  |
|--------|--------|--------|---------------------------|---|
| MAX941 | MAX942 | MAX944 |                           |   |
| —      | 1      | 1      | OUTA                      | Comparator A Output   |
| —      | 2      | 2      | INA-                      | Comparator A Inverting Input  |
| —      | 3      | 3      | INA+                      | Comparator A Noninverting Input   |
| 1      | 8      | 4      | V+                        | Positive Supply (V+ to GND must be ≤ 6.5V)  |
| —      | 5      | 5      | INB+                      | Comparator B Noninverting Input   |
| —      | 6      | 6      | INB-                      | Comparator B Inverting Input  |
| —      | 7      | 7      | OUTB                      | Comparator B Output   |
| —      | —      | 8      | OUTC                      | Comparator C Output   |
| —      | —      | 9      | INC-                      | Comparator C Inverting Input  |
| —      | —      | 10     | INC+                      | Comparator C Noninverting Input   |
| 6      | 4      | 11     | GND                       | Ground  |
| —      | —      | 12     | IND+                      | Comparator D Noninverting Input   |
| —      | —      | 13     | IND-                      | Comparator D Inverting Input  |
| —      | —      | 14     | OUTD                      | Comparator D Output   |
| 2      | —      | —      | IN+                       | Noninverting Input  |
| 3      | —      | —      | IN-                       | Inverting Input   |
| 4      | —      | —      | $\overline{\text{SHDN}}$  | Shutdown: MAX941 is active when $\overline{\text{SHDN}}$ is driven high; MAX941 is in shutdown when $\overline{\text{SHDN}}$ is driven low. |
| 5      | —      | —      | $\overline{\text{LATCH}}$ | The output is latched when $\overline{\text{LATCH}}$ is low. The latch is transparent when $\overline{\text{LATCH}}$ is high.               |
| 7      | —      | —      | OUT                       | Comparator Output   |
| 8      | —      | —      | N.C.                      | No Connection. Not internally connected.  |

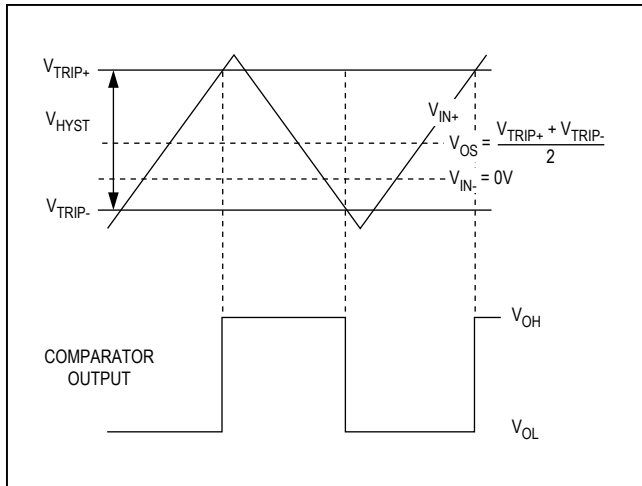


Figure 1. Input and Output Waveform, Noninverting Input Varied

## Detailed Description

The MAX941/MAX942/MAX944 single-supply comparators feature internal hysteresis, high speed, and low power. Their outputs are guaranteed to pull within 0.4V of either supply rail without external pullup or pulldown circuitry. Rail-to-rail input voltage range and low-voltage single-supply operation make these devices ideal for portable equipment. The MAX941/MAX942/MAX944 interface directly to CMOS and TTL logic.

## Timing

Most high-speed comparators oscillate in the linear region because of noise or undesired parasitic feedback. This tends to occur when the voltage on one input is at or equal to the voltage on the other input. To counter the parasitic effects and noise, the MAX941/MAX942/MAX944 have internal hysteresis.

The hysteresis in a comparator creates two trip points: one for the rising input voltage and one for the falling input voltage (Figure 1). The difference between the trip points is the hysteresis. When the comparator's input voltages are equal, the hysteresis effectively causes one comparator input voltage to move quickly past the other, thus taking the input out of the region where oscillation occurs. Standard comparators require hysteresis to be added with external resistors. The MAX941/MAX942/MAX944's

fixed internal hysteresis eliminates these resistors and the equations needed to determine appropriate values.

Figure 1 illustrates the case where IN- is fixed and IN+ is varied. If the inputs were reversed, the figure would look the same, except the output would be inverted.

The MAX941 includes an internal latch that allows storage of comparison results. The LATCH pin has a high input impedance. If LATCH is high, the latch is transparent (i.e., the comparator operates as though the latch is not present). The comparator's output state is stored when LATCH is pulled low. All timing constraints must be met when using the latch function (Figure 2).

## Shutdown Mode (MAX941 Only)

The MAX941 shuts down when SHDN is low. When shut down, the supply current drops to less than 60µA, and the three-state output becomes high impedance. The SHDN pin has a high input impedance. Connect SHDN to V+ for normal operation. Exit shutdown with LATCH high; otherwise, the output will be indeterminate.

## Input Stage Circuitry

The MAX941/MAX942/MAX944 include internal protection circuitry that prevents damage to the precision input stage from large differential input voltages. This protection circuitry consists of two back-to-back diodes between IN+ and IN- as well as two 4.1kΩ resistors (Figure 3). The diodes limit the differential voltage applied to the internal circuitry of the comparators to be no more than 2VF, where VF is the forward voltage drop of the diode (about 0.7V at +25°C).

For a large differential input voltage (exceeding 2VF), this protection circuitry increases the input bias current at IN+ (source) and IN- (sink).

$$\text{Input Current} = \frac{(\text{IN}+ - \text{IN}-) - 2V_F}{2 \times 4.1\text{k}\Omega}$$

Input current with large differential input voltages should not be confused with input bias current (IB). As long as the differential input voltage is less than 2VF, this input current is equal to IB. The protection circuitry also allows for the input common-mode range of the MAX941/MAX942/MAX944 to extend beyond both power-supply rails. The output is in the correct logic state if one or both inputs are within the common-mode range.

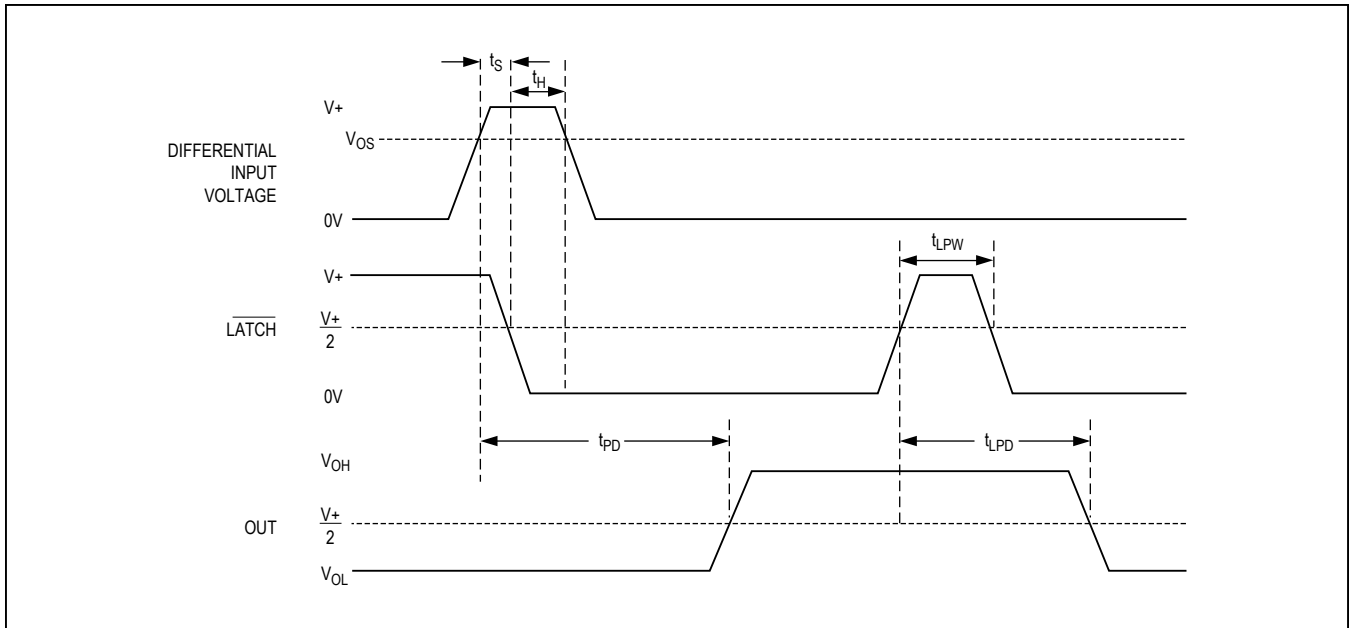


Figure 2. MAX941 Timing Diagram with Latch Operator

### Output Stage Circuitry

The MAX941/MAX942/MAX944 contain a current-driven output stage as shown in Figure 4. During an output transition,  $I_{SOURCE}$  or  $I_{SINK}$  is pushed or pulled to the output pin. The output source or sink current is high during the transition, creating a rapid slew rate. Once the output voltage reaches  $V_{OH}$  or  $V_{OL}$ , the source or sink current decreases to a small value, capable of maintaining the  $V_{OH}$  or  $V_{OL}$  static condition. This significant decrease in current conserves power after an output transition has occurred.

One consequence of a current-driven output stage is a linear dependence between the slew rate and the load capacitance. A heavy capacitive load will slow down a voltage output transition. This can be useful in noisesensitive applications where fast edges may cause interference.

### Applications Information

#### Circuit Layout and Bypassing

The high gain bandwidth of the MAX941/MAX942/MAX944 requires design precautions to realize the comparators' full high-speed capability. The recommended precautions are:

- 1) Use a printed circuit board with a good, unbroken, low-inductance ground plane.
- 2) Place a decoupling capacitor (a 0.1 $\mu$ F ceramic capacitor is a good choice) as close to  $V+$  as possible.
- 3) Pay close attention to the decoupling capacitor's bandwidth, keeping leads short.
- 4) On the inputs and outputs, keep lead lengths short to avoid unwanted parasitic feedback around the comparators.
- 5) Solder the device directly to the printed circuit board instead of using a socket.



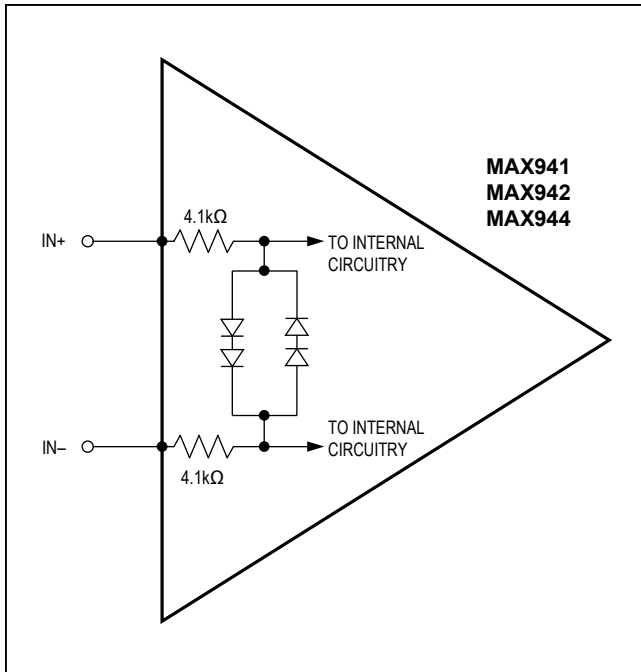


Figure 3. Input Stage Circuitry

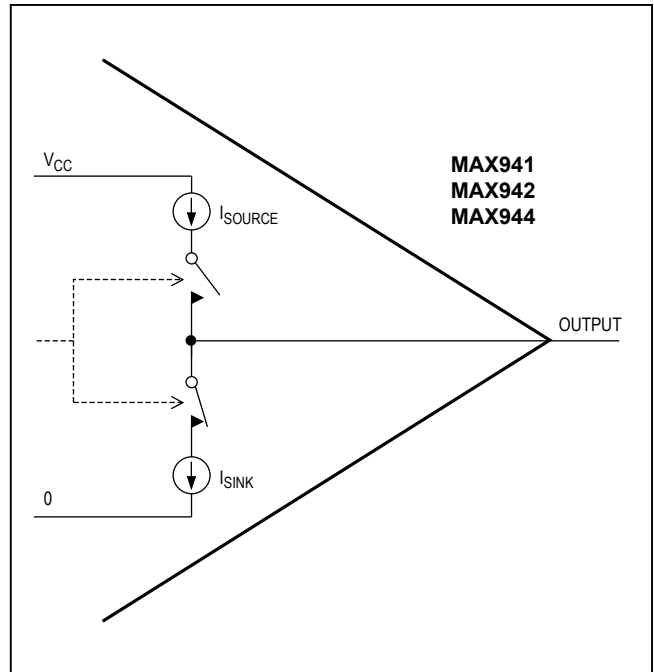


Figure 4. Output Stage Circuitry

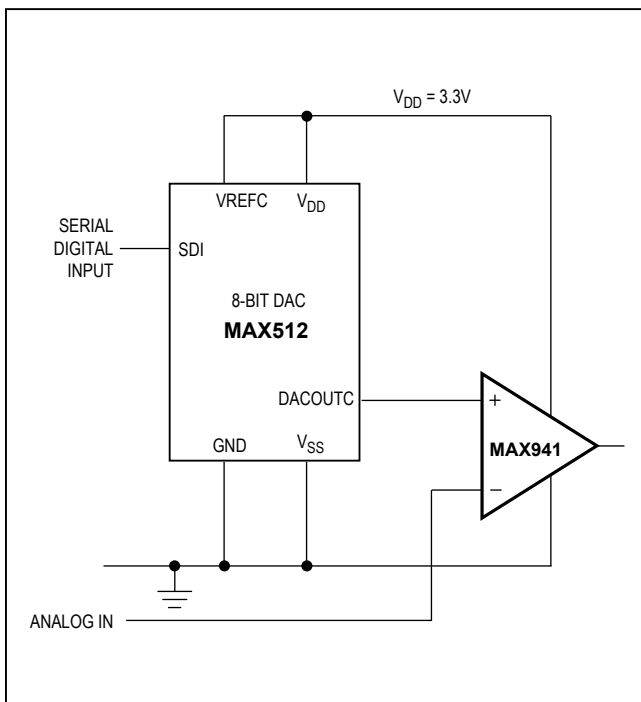


Figure 5. 3.3V Digitally Controlled Threshold Detector

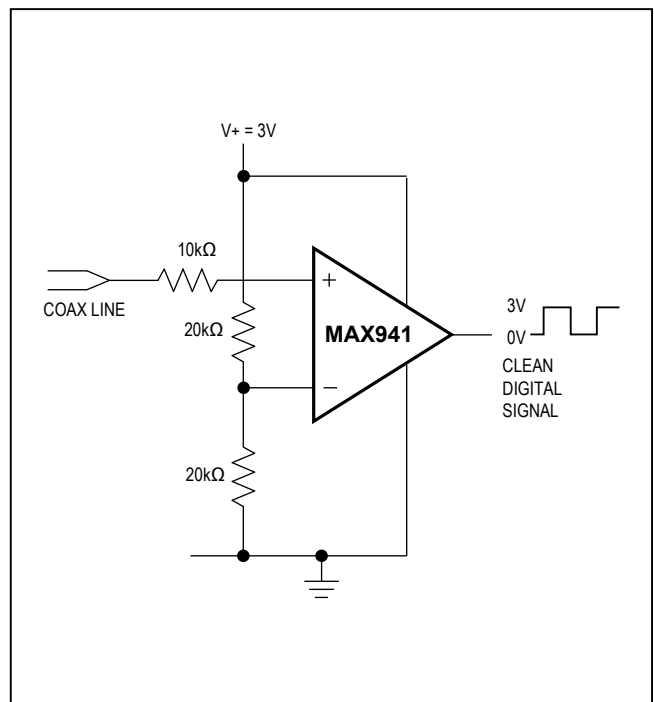


Figure 6. Line Transceiver Application

MAX941/MAX942/  
MAX944

High-Speed, Low-Power, 3V/5V, Rail-to-Rail,  
Single-Supply Comparators

### Ordering Information (continued)

| PART                 | TEMP RANGE      | PIN-<br>PACKAGE |
|----------------------|-----------------|-----------------|
| <b>MAX942</b> MSA/PR | -55°C to +125°C | 8 SO            |
| MAX942CPA            | 0°C to +70°C    | 8 PDIP          |
| MAX942CSA            | 0°C to +70°C    | 8 SO            |
| MAX942EPA            | -40°C to +85°C  | 8 PDIP          |
| MAX942ESA            | -40°C to +85°C  | 8 SO            |
| MAX942EUA-T          | -40°C to +85°C  | 8 $\mu$ MAX     |
| MAX942AUA-T          | -40°C to +125°C | 8 $\mu$ MAX     |
| <b>MAX944</b> CPD    | 0°C to +70°C    | 14 PDIP         |
| MAX944CSD            | 0°C to +70°C    | 14 SO           |
| MAX944EPD            | -40°C to +85°C  | 14 PDIP         |
| MAX944ESD            | -40°C to +85°C  | 14 SO           |

T = Tape and reel.

### Chip Information

PROCESS: BIPOLAR

## Package Information

For the latest package outline information and land patterns (footprints), go to [www.maximintegrated.com/packages](http://www.maximintegrated.com/packages). Note that a "+", "#", or "-" in the package code indicates RoHS status only. Package drawings may show a different suffix character, but the drawing pertains to the package regardless of RoHS status.

| PACKAGE TYPE | PACKAGE CODE | OUTLINE NO.             | LAND PATTERN NO.        |
|--------------|--------------|-------------------------|-------------------------|
| 8 $\mu$ MAX  | U8-1         | <a href="#">21-0036</a> | <a href="#">90-0092</a> |
| 8 PDIP       | P8-1         | <a href="#">21-0043</a> | —                       |
| 8 SO         | S8-2         | <a href="#">21-0041</a> | <a href="#">90-0096</a> |
| 14 PDIP      | P14-3        | <a href="#">21-0043</a> | —                       |
| 14 SO        | S14-1        | <a href="#">21-0041</a> | <a href="#">90-0112</a> |

## Revision History

| REVISION NUMBER | REVISION DATE | DESCRIPTION  | PAGES CHANGED |
|-----------------|---------------|--|---------------|
| 8               | 12/08         | Added SO package diagram and removed transistor count                                      | 10            |
| 9               | 3/09          | Corrected <i>Ordering Information</i> for MAX944ESD  | 10            |
| 10              | 9/14          | Corrected <i>Electrical Characteristics</i> and removed automotive reference from Features | 1, 3          |

For pricing, delivery, and ordering information, please contact Maxim Direct at 1-888-629-4642, or visit Maxim Integrated's website at [www.maximintegrated.com](http://www.maximintegrated.com).

*Maxim Integrated cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim Integrated product. No circuit patent licenses are implied. Maxim Integrated reserves the right to change the circuitry and specifications without notice at any time. The parametric values (min and max limits) shown in the Electrical Characteristics table are guaranteed. Other parametric values quoted in this data sheet are provided for guidance.*



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.