

Small Plastic Package, Quad SPDT Analog Switch


Features

- CMOS Technology for Bus and Analog Applications
- Low On-Resistance: 0.5Ω
- Wide V_{DD} Range: 1.8V to 4.2V
- Rail-to-Rail Signal Range
- High Off Isolation: -83dB @ 100kHz
- Channel-to-Channel Crosstalk Rejection: -97dB @ 100kHz
- Break-Before-Make Switching
- Extended Industrial Temperature Range: -40 °C to 85 °C
- ESD protection: 4kV(HBM)
- Packaging (Pb-free & Green): 16-PinTQFN 3x3 (ZH16)

Applications

- Cell Phones
- PDAs
- MP3 Players
- Portable Instrumentation
- Computer Peripherals
- Speaker Headset Switching
- Power Routing
- Relay Replacement
- Audio and Video Signal Routing
- PCMCIA Cards
- Modems

Pin Configuration (top view)

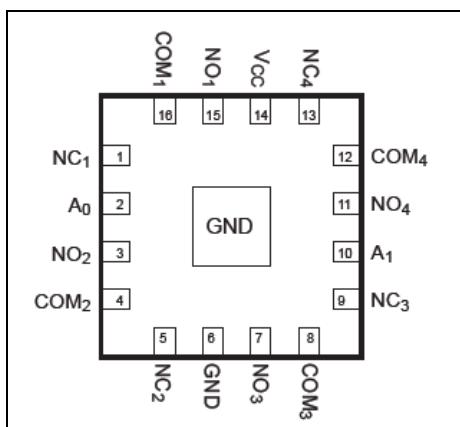

Description

PI3A412 is a quad single-pole double throw (SPDT) CMOS switch. It can be used as an analog switch or as a low-delay bus switch. Specified over a wide operating power supply voltage, 1.8V to 4.2V, the PI3A412 has an On-Resistance of 0.5Ω at +4.2V.

Control inputs(Ax) are independent of supply voltage.

Pin Description


| Pin no | Name | Description |
|--------|-----------------|------------------------------|
| 1 | NC1 | Data Port (Normally connect) |
| 2 | A0 | Logic Input Control |
| 3 | NO2 | Data Port (Normally open) |
| 4 | COM2 | Common Output / Data Port |
| 5 | NC2 | Data Port (Normally connect) |
| 6 | GND | Ground |
| 7 | NO3 | Data Port (Normally open) |
| 8 | COM3 | Common Output / Data Port |
| 9 | NC3 | Data Port (Normally connect) |
| 10 | A1 | Logic Input Control |
| 11 | NO4 | Data Port (Normally open) |
| 12 | COM4 | Common Output / Data Port |
| 13 | NC4 | Data Port (Normally connect) |
| 14 | V _{CC} | Positive Power Supply |
| 15 | NO1 | Data Port (Normally open) |
| 16 | COM1 | Common Output / Data Port |

Logic Function Table

| Logic Input (IN _X) | Function |
|--------------------------------|---|
| 0 | NC _X Connected to COM _X |
| 1 | NO _X Connected to COM _X |

Note: x = 1, 2, 3 or 4

Functional Block Diagram

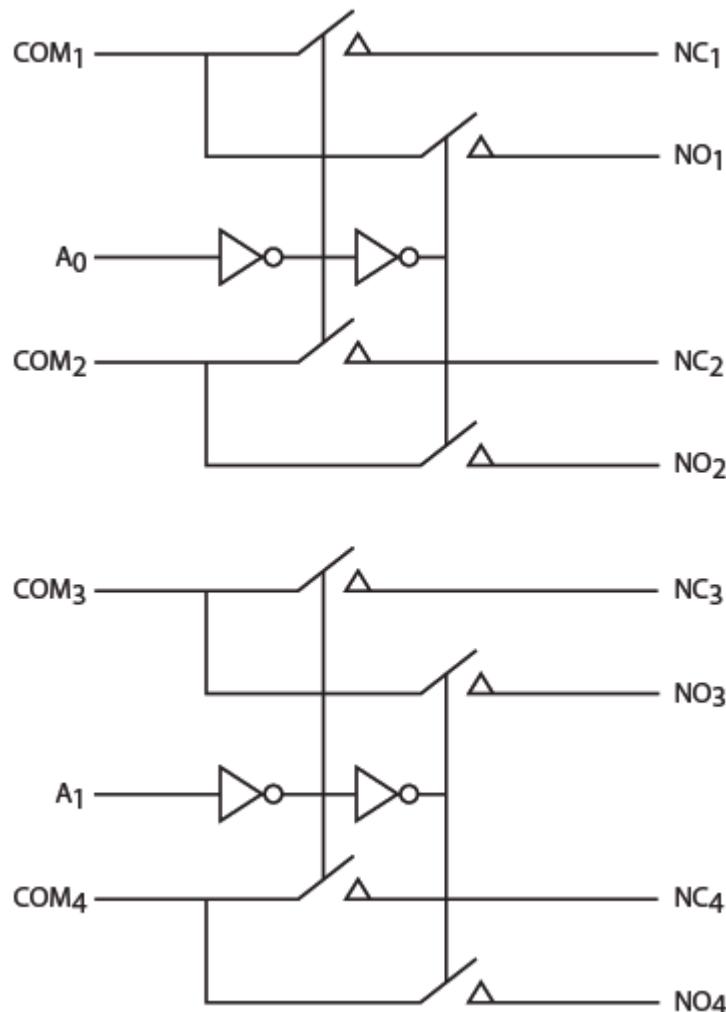

| A0 | Function | A1 | Function |
|----|---|----|---|
| 0 | NC _X Connected to COM _X | 0 | NC _Y Connected to COM _Y |
| 1 | NO _X Connected to COM _X | 1 | NO _Y Connected to COM _Y |

Notes:

1. X = 1 or 2
2. Y = 3 or 4

Maximum Ratings

| | |
|--|-----------------|
| Storage Temperature..... | -65°C to +150°C |
| Ambient Temperature with Power Applied..... | -40°C to +85°C |
| Supply Voltage V _{DD} | -0.5Vto +4.6V |
| Control Input Voltage V _{INX} | 0Vto +4.6V |
| DC Input Voltage V _{INPUT} | -0.5Vto +4.6V |
| Continuous Current NO_NC_COM_..... | ±400mA |
| Peak Current NO_NC_COM_ (pulsed at 1ms 10% duty cycle) | ±500mA |
| ESD (HBM) | 4kV |

Note:

Stresses greater than those listed under MAXIMUM RATINGS may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability.

The input and output negative voltage ratings may be exceeded if the input and output diode current ratings are observed.

Control input must be held HIGH or LOW; it must not float.

Recommended Operating Conditions

| Symbol | Parameter | Conditions | Min. | Typ. | Max. | Unit |
|---------------------------------|--------------------------|------------|------|------|-----------------|------|
| V _{CC} | Operating Voltage | - | 1.8 | - | 4.2 | V |
| V _{IN} | Control Input Voltage | - | 0 | - | V _{CC} | V |
| V _{INPUT} | Switch Input Voltage | - | -0.3 | - | V _{CC} | V |
| T _A | Operating Temperature | - | -40 | 25 | 85 | °C |
| t _r , t _f | Input Rise and Fall Time | - | 0 | - | 10 | ns/V |


PI3A412
Small Plastic Package, Quad SPDT Analog Switch

DC Electrical Characteristics

+3.0V Supply ($V_{DD} = 2.7V$ to $3.6V$, $V_{IH}=+1.6V$, $V_{IL}=+0.4V$, $T_A = -40^\circ C$ to $85^\circ C$, unless otherwise noted. Typical values are at $3.0V$ and $+25^\circ C$.)

| Parameter | Symbol | Test Conditions | TEMP | Min. | Typ. | Max. | Units |
|---|---|--|-----------------|--------|------|----------|-------|
| ANALOG SWITCH | | | | | | | |
| Analog Signal Range | V_{NO} , V_{NC} , V_{COM} | | -40 °C to 85 °C | 0 | - | V_{CC} | V |
| On-Resistance | R_{ON} | $V_{CC} = 2.7V$, $I_{COM} = 100mA$, V_{NO} or $V_{NC} = 1V$, Test Circuit 1 | +25 °C | - | 0.6 | 0.9 | Ω |
| | | | -40 °C to 85 °C | - | - | 1 | |
| On-Resistance Match Between Channels | ΔR_{ON} | $V_{CC} = 2.7V$, $I_{COM} = 100mA$, V_{NO} or $V_{NC} = 1V$, Test Circuit 1 | +25 °C | - | 0.05 | 0.2 | Ω |
| On-Resistance Flatness | R_{ONF} | $V_{CC} = 2.7V$, $I_{COM} = 100mA$, V_{NO} or $V_{NC} = 1V$, 2.5V, Test Circuit 1 | +25 °C | - | 0.05 | 0.15 | Ω |
| | | | -40 °C to 85 °C | - | 0.1 | 0.2 | |
| Source Off Leakage Current | $I_{OFF(NO)}$ or $I_{OFF(NC)}$ | $V_{CC}=3.6V$, V_{NO} or $V_{NC} = 3.3V/0.3V$, $V_{COM} = 0.3V/3.3V$ | -40 °C to 85 °C | - | - | 1 | μA |
| Channel On Leakage Current | $I_{NC(ON)}$, $I_{NO(ON)}$, $I_{COM(ON)}$ | $V_{CC} = 3.6V$, V_{NO} or $V_{NC} = 3V/0.3V$, $V_{COM} = 3V/0.3V$, or floating | -40 °C to 85 °C | - | - | 1 | |
| DIGITAL INPUTS | | | | | | | |
| Input Logic High | V_{IH} | | -40 °C to 85 °C | 1.2 | - | - | V |
| Input Logic Low | V_{IL} | | -40 °C to 85 °C | - | - | 0.5 | |
| IN Input Leakage Current | I_{IN} | $V_{CC} = 2.7V$, $V_{IN}=0$ or $2.7V$ | -40 °C to 85 °C | - | - | 1 | μA |
| DYNAMIC CHARACTERISTICS | | | | | | | |
| Turn-On Time | t_{ON} | $V_{CC} = 3.3V$, V_{NO} or $V_{NC}=2.0V$, $R_L=50\Omega$, $C_L=35pF$, See Test Circuit Figure 2. | +25 °C | - | 16 | - | ns |
| Turn-Off Time | t_{OFF} | | +25 °C | - | 60 | - | ns |
| Break-Before-Make Delay | t_D | $V_{IH}=1.5V$, $V_{IL}=0V$, See Test Circuit Figure 3. | +25 °C | - | 10 | - | ns |
| NC-NO and COM-NC/NO Off-Isolation | O_{ISO} | $V_{BIAS} = 1.5V$, $V_{IN}=0dBm$, $V_{IH}=1.5V$, $V_{IL}=0V$. See Test Circuit Figure 4 & Figure 5 | 100kHz | +25 °C | - | -81 | dB |
| | | | 1MHz | +25 °C | - | -61 | |
| | | | 10MHz | +25 °C | - | -39 | |
| Channel-to-Channel Crosstalk | X_{TALK} | $V_{BIAS} = 1.5V$, $V_{IN} = 0dBm$, $V_{IH}=1.5V$, $V_{IL}=0V$ See Test Circuit Figure 6. | 100kHz | +25 °C | - | -97 | dB |
| | | | 1MHz | +25 °C | - | -98 | |
| | | | 10MHz | +25 °C | - | -77 | |
| 3dB Bandwidth | f_{3dB} | $V_{BIAS} = 1.5V$, $V_{IN}=0dBm$, $V_{IH}=1.5V$, $V_{IL}=0V$. See Test Circuit Figure 7. | +25 °C | - | 79 | - | MHz |
| Charge Injection Select Input to Common I/O | Q | $V_{IN} = GND$, $R_S = 0$, $C_L = 1nF$, $V_{IH}=1.5V$, $V_{IL}=0V$ See Test Circuit Figure 8. | +25 °C | - | 35 | - | pC |
| Off Capacitance | $C_{NC(OFF)}$ | $f=1MHz$, See Test Circuit Figure 9 | +25 °C | - | 20 | - | pF |
| Off capacitance | $C_{NO(OFF)}$ | | +25 °C | - | 20 | - | |
| On Capacitance | C_{ON} | $f=1MHz$, See Test Circuit Figure 10 | +25 °C | - | 55 | - | |


PI3A412
Small Plastic Package, Quad SPDT Analog Switch

+4.2V Supply ($V_{DD} = 4.2V$, $T_A = -40^\circ C$ to $85^\circ C$, unless otherwise noted. Typical values are at 4.2V and $+25^\circ C$.)

| Parameter | Symbol | Test Conditions | TEMP | Min. | Typ. | Max. | Units | |
|---|---|---|-----------------|--------|------|----------|-------|----|
| Analog Switch | | | | | | | | |
| Analog Signal Range | V_{NO} , V_{NC} , V_{COM} | | -40 °C to 85 °C | 0 | - | V_{CC} | V | |
| On-Resistance | R_{ON} | $V_{CC} = 4.2V$, $I_{COM} = 100mA$, V_{NO} or $V_{NC} = 1V$, <i>Test Circuit 1</i> | +25 °C | - | 0.5 | 0.75 | Ω | |
| | | | -40 °C to 85 °C | - | - | 0.85 | | |
| On-Resistance Match Between Channels | ΔR_{ON} | $V_{CC} = 4.2V$, $I_{COM} = 100mA$, V_{NO} or $V_{NC} = 1V$, <i>Test Circuit 1</i> | +25 °C | - | 0.05 | 0.15 | Ω | |
| | | | -40 °C to 85 °C | - | 0.1 | 0.2 | | |
| On-Resistance Flatness | R_{ONF} | $V_{CC} = 4.2V$, $I_{COM} = 100mA$, V_{NO} or $V_{NC} = 1V$, 2.5V, <i>Test Circuit 1</i> | +25 °C | - | 0.1 | 0.22 | Ω | |
| | | | -40 °C to 85 °C | - | - | 0.26 | | |
| Source Off Leakage Current | $I_{OFF(NO)}$ or $I_{OFF(NC)}$ | $V_{CC} = 4.2V$, V_{NO} or $V_{NC} = 3.3V/0.3V$, $V_{COM} = 0.3V/3V$ | -40 °C to 85 °C | - | - | 1 | μA | |
| Channel On Leakage Current | $I_{NC(ON)}$, $I_{NO(ON)}$, $I_{COM(ON)}$ | $V_{CC} = 4.2V$, V_{NO} or $V_{NC} = 3V/0.3V$, $V_{COM} = 3V/0.3V$, or floating | -40 °C to 85 °C | - | - | 1 | | |
| DIGITAL INPUTS | | | | | | | | |
| Input Logic High | V_{IH} | - | -40 °C to 85 °C | 1.2 | - | - | V | |
| Input Logic Low | V_{IL} | - | -40 °C to 85 °C | - | - | 0.5 | | |
| IN Input Leakage Current | I_{IN} | $V_{CC} = 4.2V$, $V_{IN}=0$ or $4.2V$ | -40 °C to 85 °C | - | - | 1 | μA | |
| DYNAMIC CHARACTERISTICS | | | | | | | | |
| Turn-On Time | t_{ON} | $V_{IH}=4.2V$, $V_{IL}=2.0V$, $R_L=50\Omega$, $C_L=35pF$, <i>See Test Circuit Figure 2.</i> | +25 °C | - | 13 | - | ns | |
| Turn-Off Time | t_{OFF} | | +25 °C | - | 38 | - | ns | |
| Break-Before-Make Delay | t_D | V_{NO} or $V_{NC}=1.5V$, $R_L=50\Omega$, $C_L=35pF$ <i>See Test Circuit Figure 3.</i> | +25 °C | - | 8 | - | ns | |
| NC-NO and COM- NC/NO Off-Isolation | O_{ISO} | Signal = 0dBm, V_{NO} or V_{NC} centered between V_{CC} and GND, $R_L = 50\Omega$, <i>See Test Circuit Figure 4 & Figure 5.</i> | 100kHz | +25 °C | - | -83 | - | dB |
| | | | 1MHz | +25 °C | - | -61 | - | |
| | | | 10MHz | +25 °C | - | -40 | - | |
| Channel-to-channel Crosstalk | X_{TALK} | $V_{BIAS} = 2.1V$, V_{IN} =0dBm, $V_{IH}=3V$, $V_{IL}=0V$ <i>See Test Circuit Figure 6.</i> | 100kHz | +25 °C | - | -97 | - | dB |
| | | | 1MHz | +25 °C | - | -97 | - | |
| | | | 10MHz | +25 °C | - | -77 | - | |
| 3dB Bandwidth | f_{3dB} | $V_{BIAS} = 2.1V$, $V_{IN}=0dBm$, $V_{IH}=3V$, $V_{IL}=0V$. <i>See Test Circuit Figure 7.</i> | +25 °C | - | 78 | - | MHz | |
| Charge Injection Select Input to Common I/O | Q | $V_{IN} = GND$, $R_S = 0$, $C_L = 1nF$, <i>See Test Circuit Figure 8.</i> | +25 °C | - | 50 | - | pC | |
| Off Capacitance | $C_{NC(OFF)}$ | $f=1MHz$, <i>See Test Circuit Figure 9</i> | +25 °C | - | 20 | - | pF | |
| Off capacitance | $C_{NO(OFF)}$ | | | - | 20 | - | | |
| On Capacitance | C_{ON} | $f=1MHz$, <i>See Test Circuit Figure 10</i> | +25 °C | - | 55 | - | | |
| POWER REQUIREMENTS | | | | | | | | |
| Power Supply Range | V_{CC} | - | -40 °C to 85 °C | 1.8 | - | 4.2 | V | |
| Power Supply Current | I_{CC} | $V_{CC} = 4.2V$, $V_{IN}=0V$ or V_{CC} | -40 °C to 85 °C | - | - | 1 | μA | |

Test Circuits and Timing Diagrams

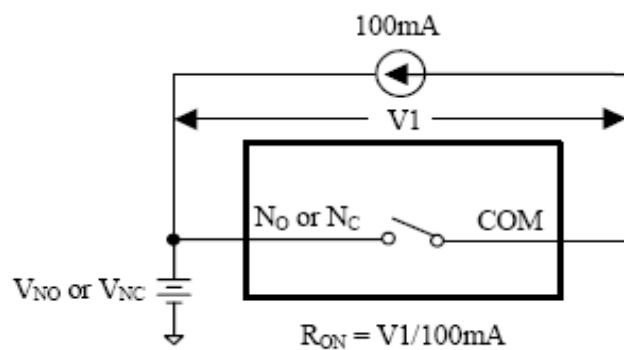


Figure 1. On Resistance

Notes:

- Unused input (NC or NO) must be grounded.

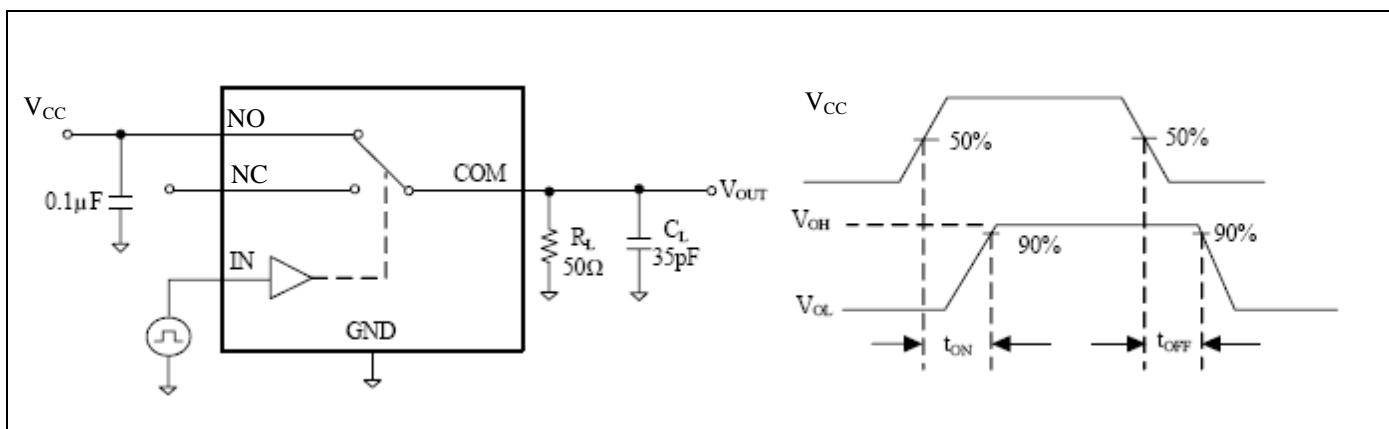


Figure 2. Switching Times

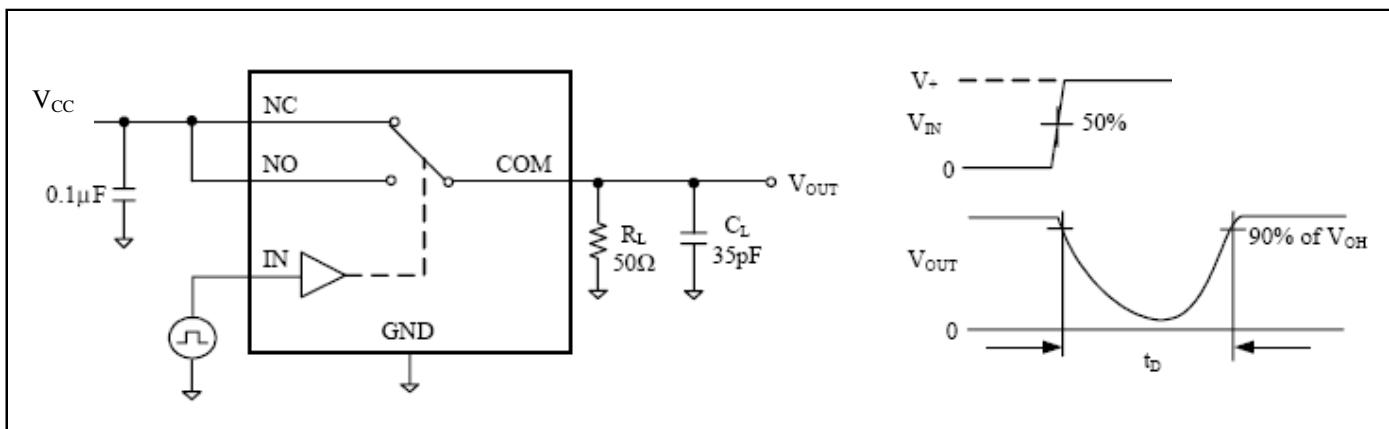
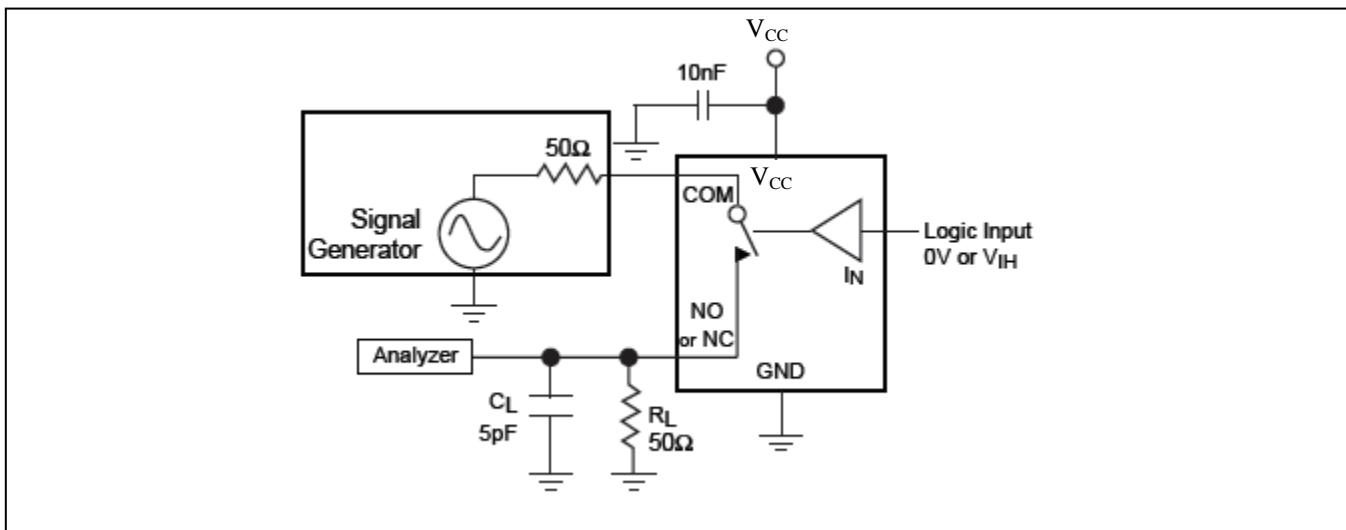
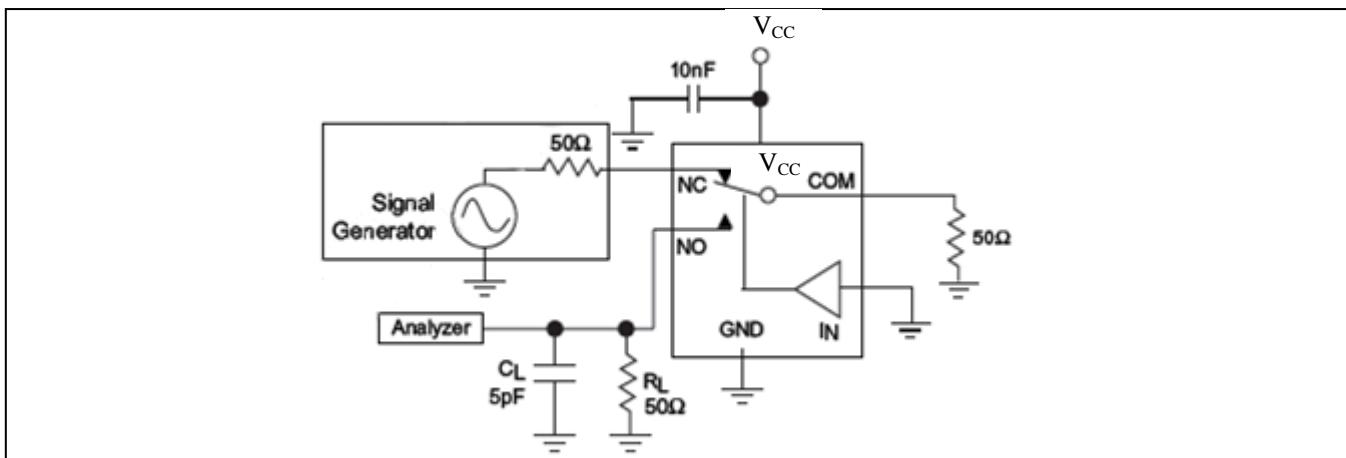
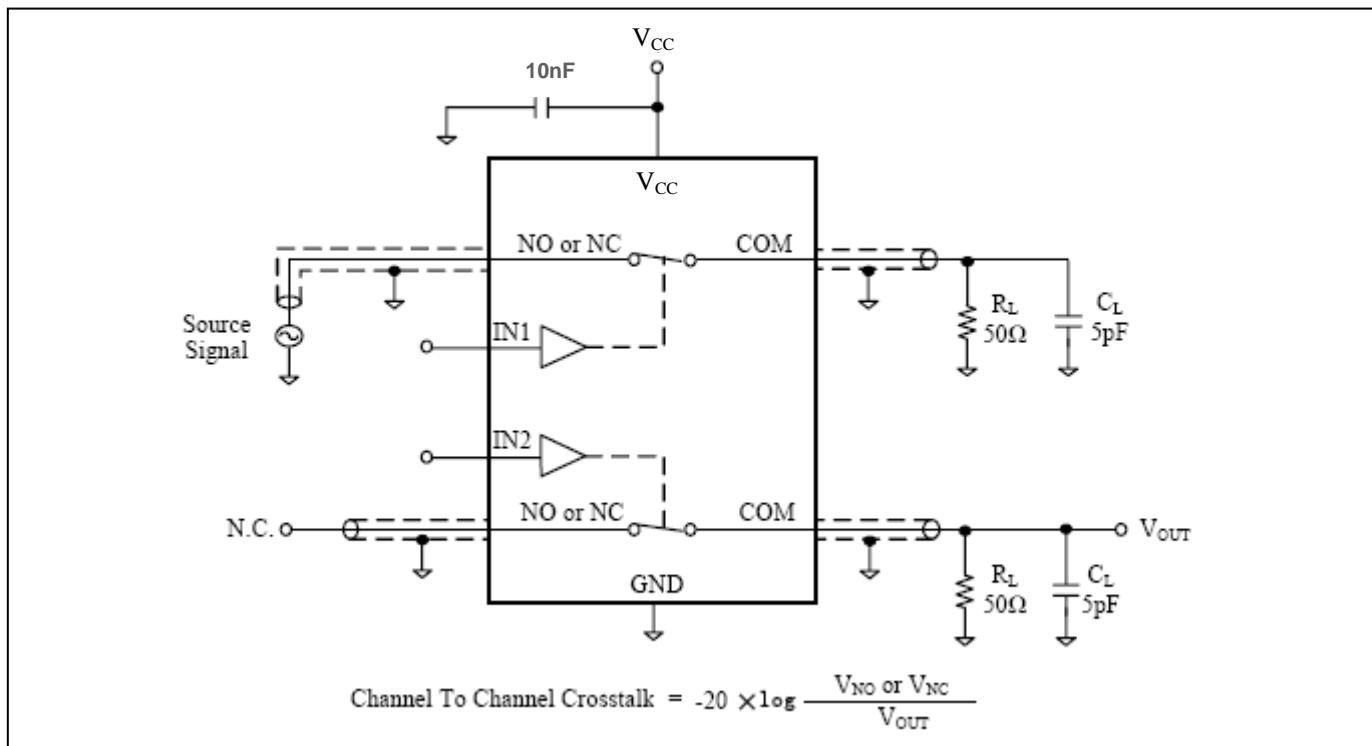
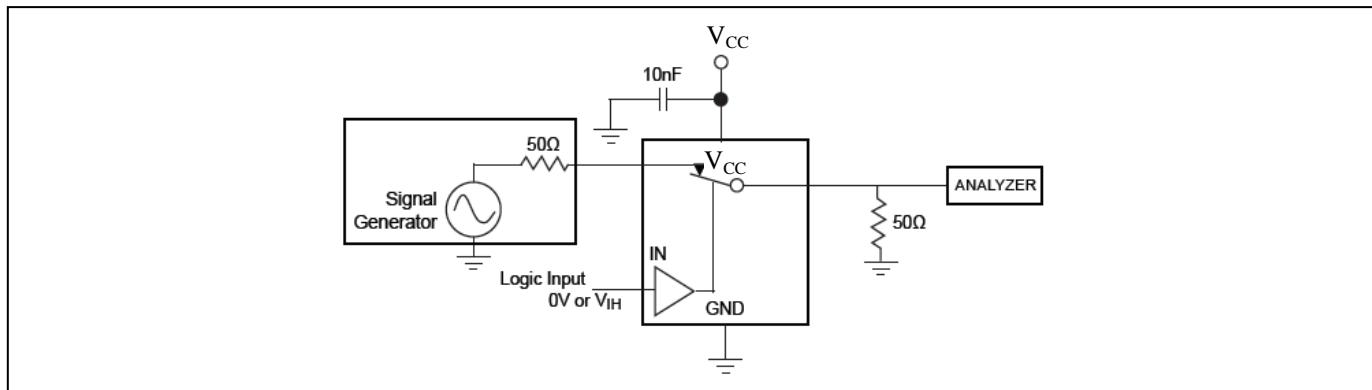
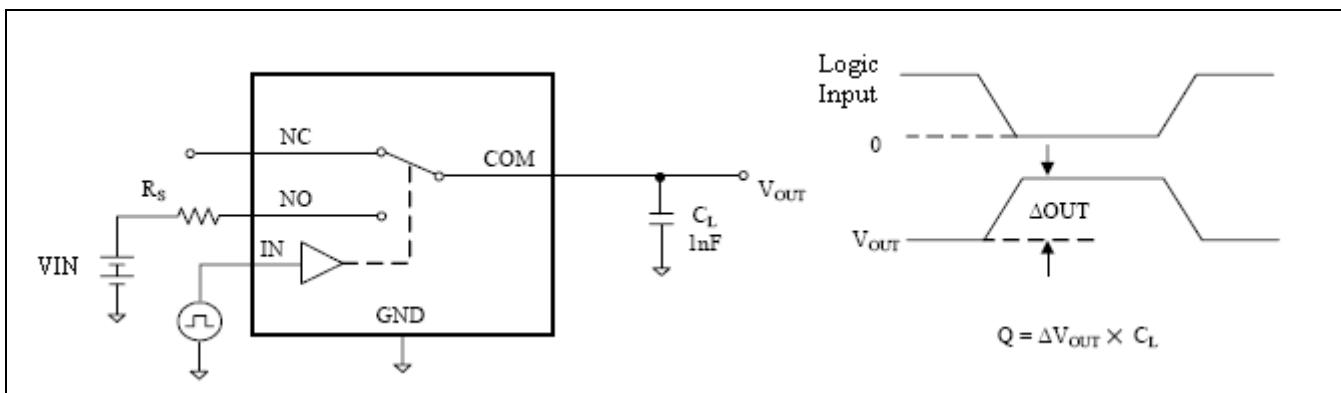
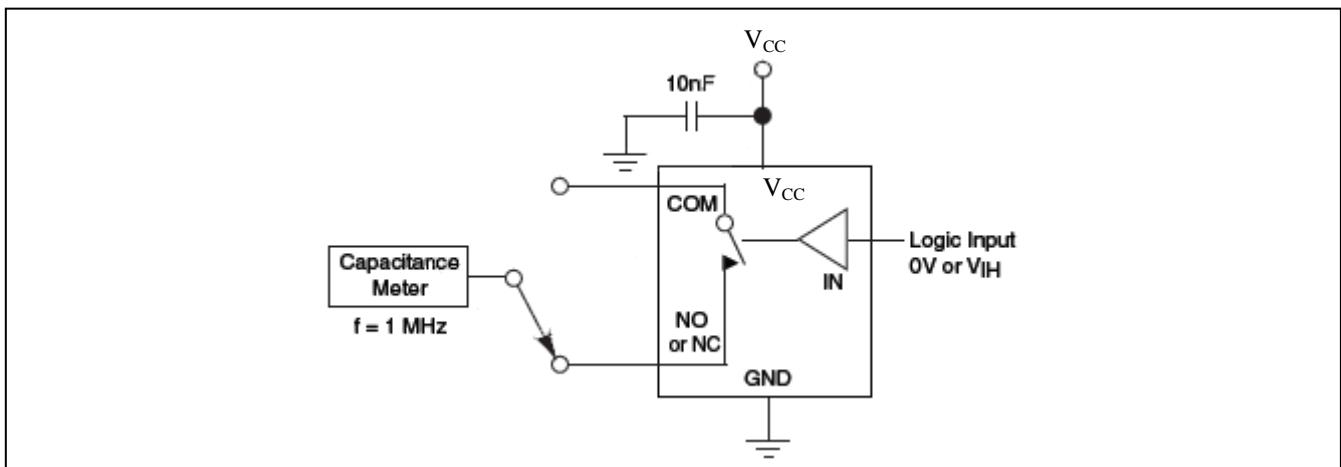
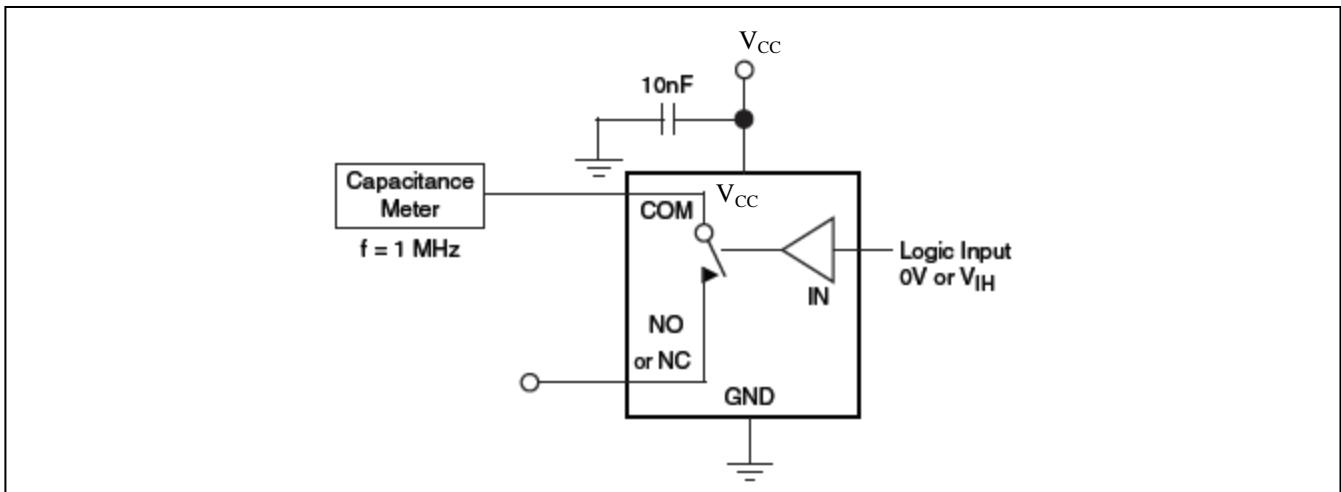


Figure 3. Break Before Make Interval Timing

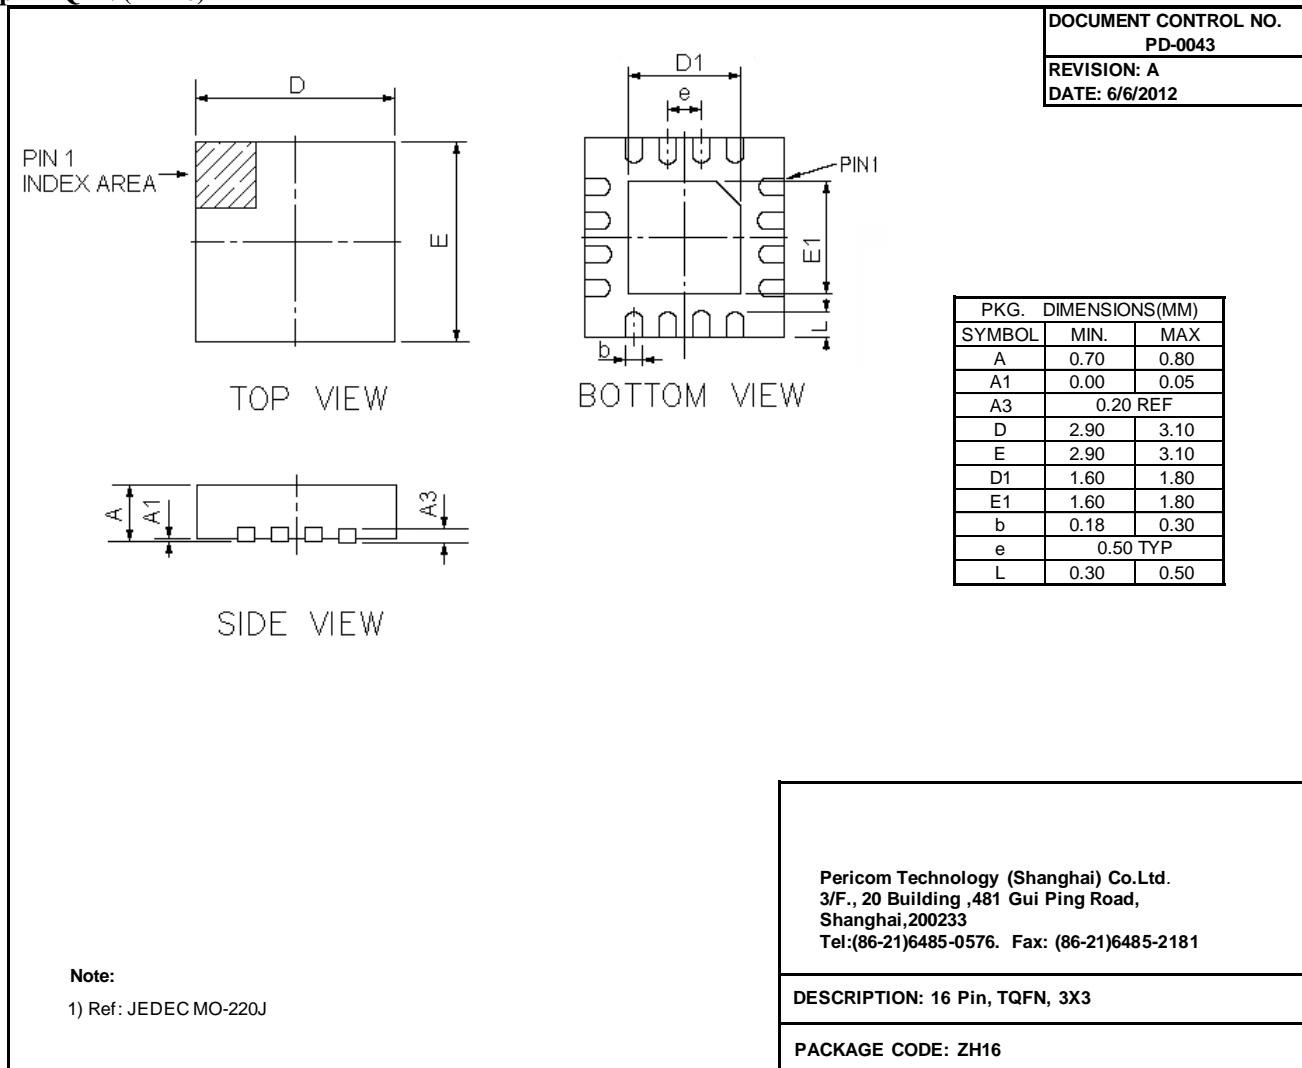

Figure 4. COM-NC/NO Isolation

Figure 5. NC-NO Isolation


Figure 6. Channel-to-Channel Crosstalk

Figure 7. Bandwidth


Figure 8. Charge Injection

Figure 9. Channel Off Capacitance

Figure 10. Channel On Capacitance

Mechanical Information

16-pin TQFN (ZH16)



Ordering Information

| Part Number | Packaging Code | Package |
|-------------|----------------|---------------------------------|
| PI3A412ZHE | ZH | Lead Free and Green 16-pin TQFN |

Notes:

- E = Pb-free and Green
- Adding X Suffix= Tape/Reel



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помошь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помошь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.