
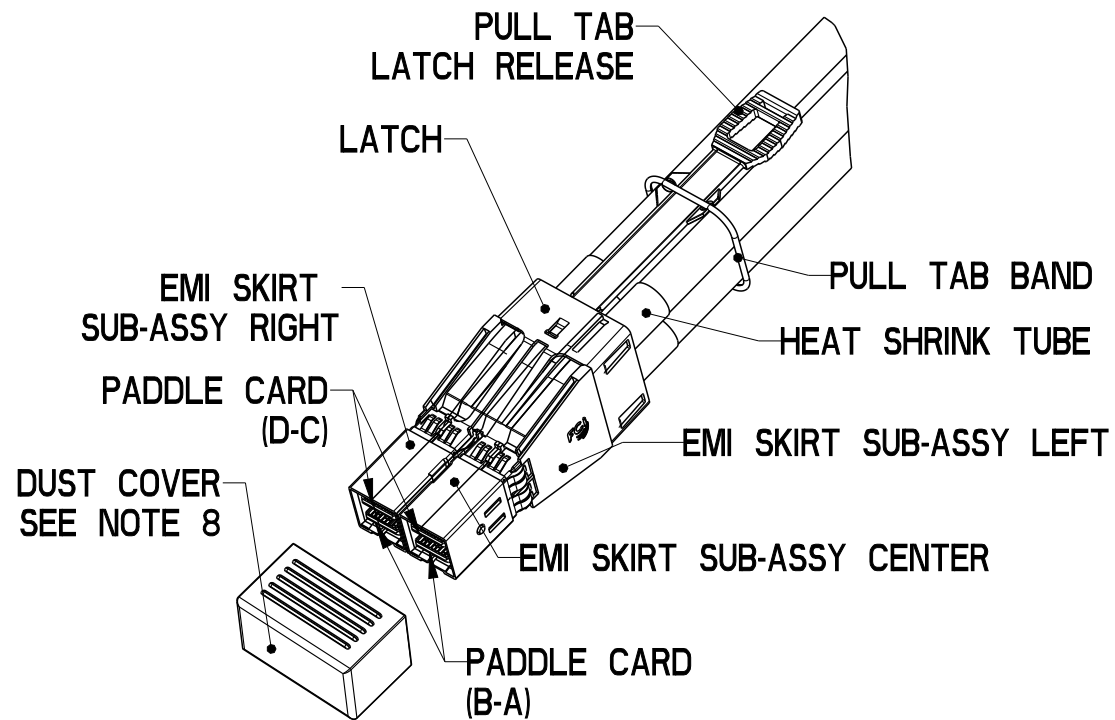
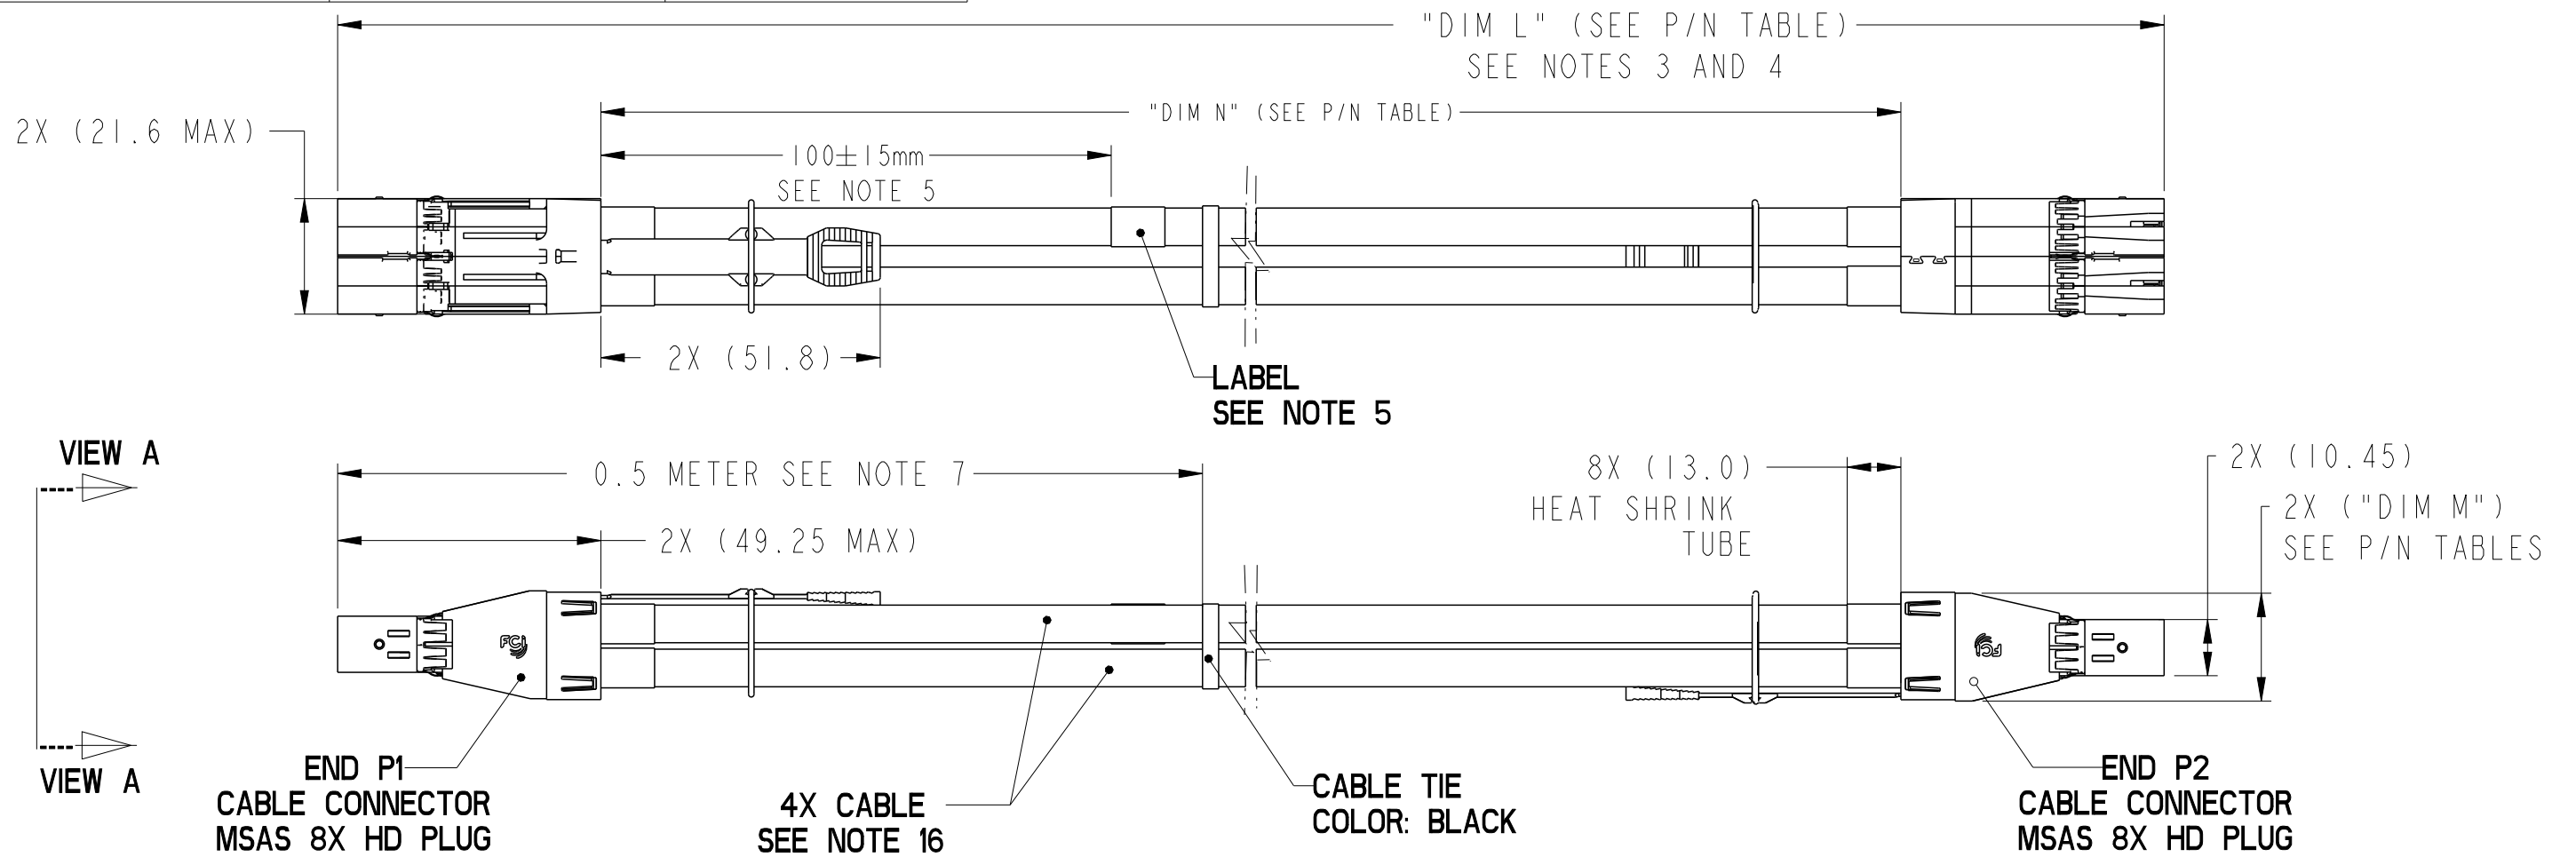



PRODUCT NUMBER	DESCRIPTION	NOTES
10117950-XXXXLF	NON-HF	SEE SHT. 3
10117950-XXXXHLF	HALOGEN FREE (H)	SEE SHT. 3




ISOMETRIC VIEW
MINI SAS 8X HD
2X

dr	Deborah Ingram	2011/11/16	projection 	mm 	size	A3	scale	4:5	
eng	Tom Feng	2016/06/15			ecn no	ELX-N-24288-1			
chr	-	-				rel level			Released
appr	Michael Zhou	2016/09/22	product family		C&A				
Amphenol FCi	title	FINAL ASSEMBLY (PASSIVE)			dwg no	10117950		rev	
		MSAS HD 8X ASSEMBLY (12 Gbps)						E	
www.fci.com	cat. no.	-	Product - Customer Drw				sheet 1 of 4		

PRODUCT NUMBER	DESCRIPTION
10117950-XXXXLF	NON-HF
10117950-XXXXHLF	HALOGEN FREE (H)

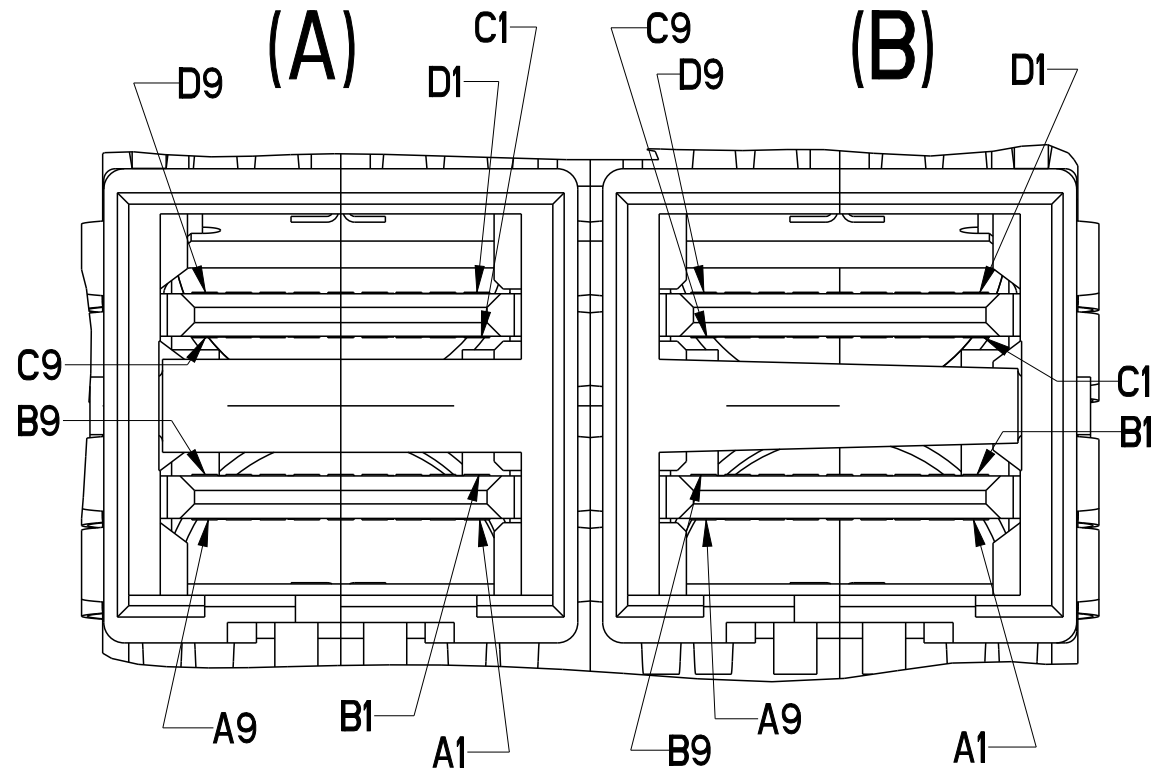

VIEW A (END P1)
SCALE 6:1

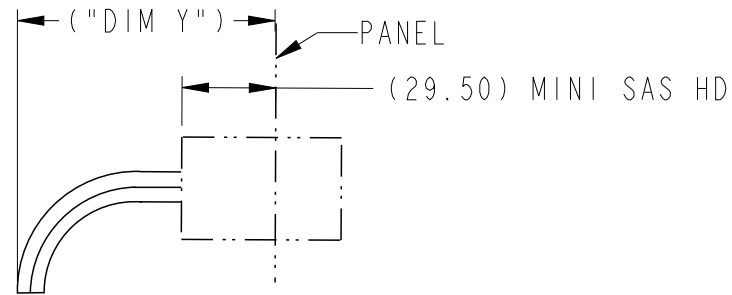

BEND RADIUS
TOP VIEW OF CONNECTOR

△ MINI SAS HD MINIMUM CABLE BEND TABLE		
CABLE	("DIM Y") HF	("DIM Y") (NON-HF)
24 AWG	101.2	101.2
26 AWG	95	92.2
28 AWG	88	85.2
30 AWG	83.8	79.6

LENGEND:

	HIGH-SPEED SERIAL DIFFERENTIAL PAIRS
	SIGNAL RETURN
	POWER AND MANAGEMENT INTERFACE

P1-(A) TO P2-(A)
P1-(B) TO P2-(B)

WIRING LIST (SEE NOTE 6)

END P1 / (A) (B)			END P2 / (A) (B)		
POSITION	SYMBOL		POSITION	SYMBOL	
D9	GROUND	-----	B9	GROUND	-----
D8	Tx2-	---○--▶	B8	Rx2-	---○--▶
D7	Tx2+	---○--▶	B7	Rx2+	---○--▶
D6	GROUND	-----	B6	GROUND	-----
D5	Tx0-	---○--▶	B5	Rx0-	---○--▶
D4	Tx0+	---○--▶	B4	Rx0+	---○--▶
D3	GROUND	-----	B3	GROUND	-----
D2	Vman	◀▶	B2	ModPrsL	◀▶
D1	Vact	◀▶	B1	Vact	◀▶
C1	SCL	◀▶	A1	Reserved	◀▶
C2	SDA	◀▶	A2	IntL	◀▶
C3	GROUND	-----	A3	GROUND	-----
C4	Tx1+	---○--▶	A4	Rx1+	---○--▶
C5	Tx1-	---○--▶	A5	Rx1-	---○--▶
C6	GROUND	-----	A6	GROUND	-----
C7	Tx3+	---○--▶	A7	Rx3+	---○--▶
C8	Tx3-	---○--▶	A8	Rx3-	---○--▶
C9	GROUND	-----	A9	GROUND	-----
B9	GROUND	-----	D9	GROUND	-----
B8	Rx2-	◀---○--	D8	Tx2-	◀---○--
B7	Rx2+	◀---○--	D7	Tx2+	◀---○--
B6	GROUND	-----	D6	GROUND	-----
B5	Rx0-	◀---○--	D5	Tx0-	◀---○--
B4	Rx0+	◀---○--	D4	Tx0+	◀---○--
B3	GROUND	-----	D3	GROUND	-----
B2	ModPrsL	◀▶	D2	Vman	◀▶
B1	Vact	◀▶	D1	Vact	◀▶
A1	Reserved	◀▶	C1	SCL	◀▶
A2	IntL	◀▶	C2	SDA	◀▶
A3	GROUND	-----	C3	GROUND	-----
A4	Rx1+	◀---○--	C4	Tx1+	◀---○--
A5	Rx1-	◀---○--	C5	Tx1-	◀---○--
A6	GROUND	-----	C6	GROUND	-----
A7	Rx3+	◀---○--	C7	Tx3+	◀---○--
A8	Rx3-	◀---○--	C8	Tx3-	◀---○--
A9	GROUND	-----	C9	GROUND	-----

SHIELD-----▶SHIELD

dr	Deborah Ingram	2011/11/16	projection	mm	size	A3	scale	1:1
eng	Tom Feng	2016/06/15			ecn no	ELX-N-24288-1		
chr	-	-			rel level	Released		
appr	Michael Zhou	2016/09/22	product family		C&A			
Amphenol FCI	title	FINAL ASSEMBLY (PASSIVE)			dwg no	10117950		rev
		MSAS HD 8X ASSEMBLY (12 Gbps)						
www.fci.com	cat. no.	-	Product - Customer Drw				sheet 2 of 4	

Amphenol
FCi

© 2016 AFCI

A

B

C

D



△ PART NUMBER (NON-HALOGEN FREE) SEE NOTE 12 AND 16	LENGTH "DIM L" (Meters)	LENGTH "DIM N" (Meters)	("DIM M") (mm)	AWG
10117950-2004LF	(0.43)	0.33	17.3	30
10117950-2005LF	0.5		17.3	30
10117950-2010LF	1.0		17.3	30
10117950-2015LF	1.5		17.3	30
10117950-2020LF	2.0		17.3	30
10117950-3010LF	1.0		17.3	28
10117950-3015LF	1.5		17.3	28
10117950-3020LF	2.0		17.3	28
10117950-3025LF	2.5		17.3	28
10117950-3030LF	3.0		17.3	28
10117950-4010LF	1.0		20.1	26
10117950-4015LF	1.5		20.1	26
10117950-4020LF	2.0		20.1	26
10117950-4025LF	2.5		20.1	26
10117950-4030LF	3.0		20.1	26
10117950-4035LF	3.5		20.1	26
10117950-4040LF	4.0		20.1	26
10117950-4045LF	4.5		20.1	26
10117950-4050LF	5.0		20.1	26
10117950-4055LF	5.5		20.1	26
10117950-4060LF	6.0		20.1	26
10117950-5010LF	1.0		20.1	24
10117950-5015LF	1.5		20.1	24
10117950-5020LF	2.0		20.1	24
10117950-5025LF	2.5		20.1	24
10117950-5030LF	3.0		20.1	24
10117950-5035LF	3.5		20.1	24
10117950-5040LF	4.0		20.1	24
10117950-5045LF	4.5		20.1	24
10117950-5050LF	5.0		20.1	24
10117950-5055LF	5.5		20.1	24
10117950-5060LF	6.0		20.1	24
10117950-5065LF	6.5		20.1	24
10117950-5070LF	7.0		20.1	24
10117950-5075LF	7.5		20.1	24
10117950-5080LF	8.0		20.1	24

△ PART NUMBER (HALOGEN FREE) SEE NOTE 11 AND 16	LENGTH "DIM L" (Meters)	LENGTH "DIM N" (Meters)	("DIM M") (mm)	AWG
10117950-2004HLF	(0.43)	0.33	17.3	30
10117950-2005HLF	0.5		17.3	30
10117950-2010HLF	1.0		17.3	30
10117950-2015HLF	1.5		17.3	30
10117950-2020HLF	2.0		17.3	30
10117950-3010HLF	1.0		17.3	28
10117950-3015HLF	1.5		17.3	28
10117950-3020HLF	2.0		17.3	28
10117950-3025HLF	2.5		17.3	28
10117950-3030HLF	3.0		17.3	28
10117950-4010HLF	1.0		20.1	26
10117950-4015HLF	1.5		20.1	26
10117950-4020HLF	2.0		20.1	26
10117950-4025HLF	2.5		20.1	26
10117950-4030HLF	3.0		20.1	26
10117950-4035HLF	3.5		20.1	26
10117950-4040HLF	4.0		20.1	26
10117950-4045HLF	4.5		20.1	26
10117950-4050HLF	5.0		20.1	26
10117950-4055HLF	5.5		20.1	26
10117950-4060HLF	6.0		20.1	26
10117950-5010HLF	1.0		20.1	24
10117950-5015HLF	1.5		20.1	24
10117950-5020HLF	2.0		20.1	24
10117950-5025HLF	2.5		20.1	24
10117950-5030HLF	3.0		20.1	24
10117950-5035HLF	3.5		20.1	24
10117950-5040HLF	4.0		20.1	24
10117950-5045HLF	4.5		20.1	24
10117950-5050HLF	5.0		20.1	24
10117950-5055HLF	5.5		20.1	24
10117950-5060HLF	6.0		20.1	24
10117950-5065HLF	6.5		20.1	24
10117950-5070HLF	7.0		20.1	24
10117950-5075HLF	7.5		20.1	24
10117950-5080HLF	8.0		20.1	24
10117950-5090HLF ONLY USE EXT MSHD INTERFACE DON'T MEET SAS3.0 APPLICATION	9.0		20.1	24
10117950-5100HLF ONLY USE EXT MSHD INTERFACE DON'T MEET SAS3.0 APPLICATION	10.0		20.1	24

A

B

C

D

dr	Deborah Ingram	2011/11/16	projection	mm	size	A3	scale	1:1			
eng	Tom Feng	2016/06/15			ecn no	ELX-N-24288-1					
chr	-	-									
appr	Michael Zhou	2016/09/22	product family		C&A	rel level	Released				
Amphenol FCI		title			FINAL ASSEMBLY (PASSIVE)		dwg no	10117950	rev	E	
		MSAS HD 8X ASSEMBLY (12 Gbps)									
www.fci.com		cat. no.			-	Product - Customer Drw			sheet 3 of 4		

PRODUCT NUMBER	DESCRIPTION
10117950-XXXXLF	NON-HF
10117950-XXXXHLF	HALOGEN FREE (H)

NOTES:

1. MATERIAL:
BACK SHELLS: ZINC ALLOY/ COPPER UNDERPLATE/ NICKEL OVERPLATE
PULL TAB: THERMOPLASTIC POLYMER
LATCH : STAINLESS STEEL
FERRULE: BRASS
EMI SKIRT: STAINLESS STEEL
LOCTITE
PADDLE CARD: PRINTED CIRCUIT SUBSTRATE
HEAT SHRINK TUBE: POLYOLEFIN
2. THIS PRODUCT MEETS THE RESTRICTION OF HAZARDOUS SUBSTANCES IN ELECTRICAL AND ELECTRONIC EQUIPMENT (RoHS) DIRECTIVE (2011/65/EU)


3. THIS DIMENSION IS A FINISHED PRODUCT LENGTH.
4. UNLESS OTHERWISE SPECIFIED ASSEMBLED LENGTH TOLERANCE IS TO BE:
"DIM L" < 1 METER = $\pm 25\text{mm}$
"DIM L" 1 METER TO 4 METERS = $\pm 2\%$ OF "DIM L"
"DIM L" > 4 METERS = $+0.00/-4\%$ OF "DIM L"

5. LABEL DETAILS:

	MANUFACTURER CODE OR NAME	COUNTRY ORIGIN
	FCI P/N	
	FCI CUSTOMER DRAWING REVISION	
	FCI SERIAL NUMBER	
	BAR CODE OF SERIAL NUMBER	

FONT SHALL BE CLEARLY VISIBLE AND BLACK IN COLOR.

SERIAL NUMBER IS ONLY USED FOR TRACKING PRODUCT,DETAIL IS AS BELOW :

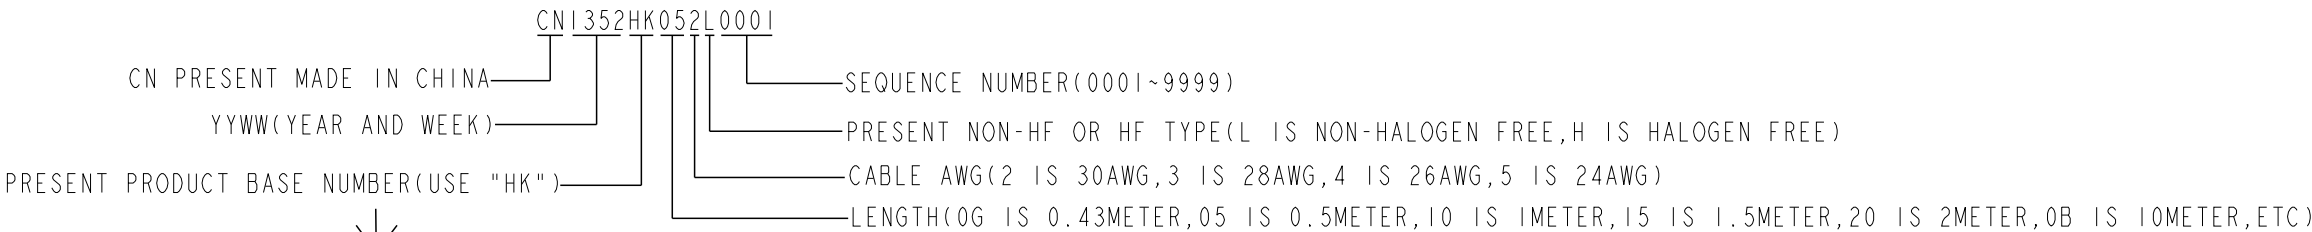

CABLE LABEL EXAMPLE:

FCI	CHINA
10117950-2005LF	
REV.E	
CN1352HK052L0001	

6. ALL CABLE ASSEMBLIES 100% TESTED FOR CONTINUITY AS DEFINED IN WIRING LIST.
7. PLACE A CABLE TIE EVERY 0.5 METER ON ALL ASSEMBLIES, UNLESS OTHERWISE SPECIFIED.
IN CASE OF 0.5 METER CABLE ASSEMBLY, CABLE TIE IS TO BE APPLIED AT THE MIDWAY POINT.
8. OTHER TESTING PERFORMED AS REQUIRED BY PRODUCT SPECIFICATION: GS-12-651.
9. PACKAGING OF LEAD FREE PRODUCTS MEETS LABELING AND PACKAGING PER SPECIFICATION GS-14-920.
PACKAGE CABLE ASSEMBLIES PER GS-14-1272.
DUST COVERS ARE TO BE ASSEMBLED PRIOR TO PACKAGING.
FCI PACKAGE TRACKING BAG LABEL IS ONLY FOR REFERENCE.

NOTES CONTINUED:

10. A " $\triangle$ " SYMBOL WILL BE NEXT TO ANY DIMENSION, VIEW, OR NOTE WHICH HAS BEEN MODIFIED WITH THE CURRENT DRAWING REVISION. THE CURRENT REVISION WILL BE SHOWN IN THE SYMBOL.
11. "H" PRODUCT NUMBERS DESIGNATE THE USE OF HALOGEN FREE RAW CABLE.
12. HALOGEN FREE RAW CABLE CAN BE USED AS A SUBSTITUTE ON NON-HF PRODUCT NUMBERS.
13. CABLE ASSEMBLY CAN MEET SAS 3.0 SPECIFICATION.
14. MATES TO SERIES: 10112626 or 10112627 Or 10112628
15. EEPROM INFORMATION REFER TO FCI LATEST PRODUCT SPEC. GS-12-651.
16. CABLE IS OPTIONAL,WHICH HAD BEEN QUALIFIED BY FCI AND MEET FCI PRODUCT SPEC. GS-12-651.

dr	Deborah Ingram	2011/11/16	projection	mm	size	A3	scale	1:2			
eng	Tom Feng	2016/06/15			ec n no	ELX-N-24288-1					
chr	-	-			rel level	Released					
appr	Michael Zhou	2016/09/22	product family		C&A						
Amphenol FCI		title			FINAL ASSEMBLY (PASSIVE)		dwg no		10117950	rev	E
		MSAS HD 8X ASSEMBLY (12 Gbps)									
www.fci.com		cat. no.		-	Product - Customer Drw				sheet 4 of 4		



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.