

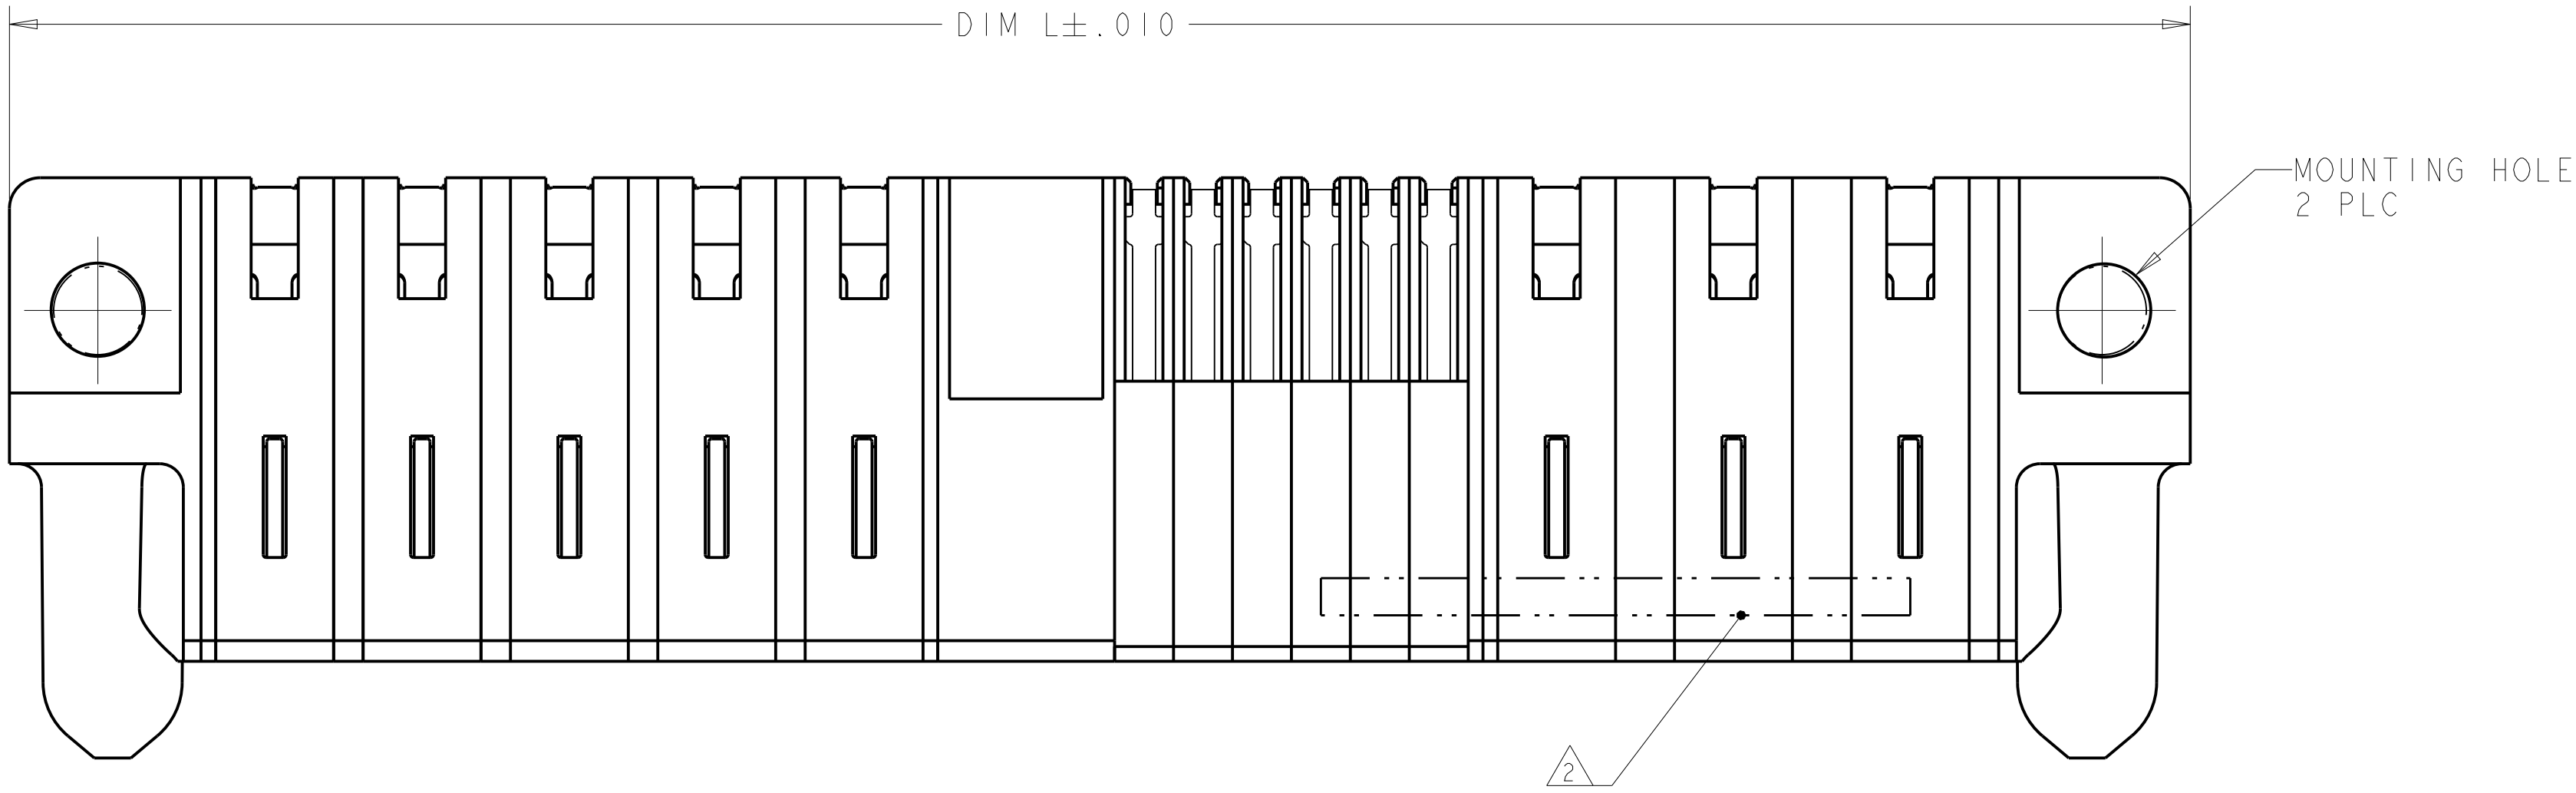
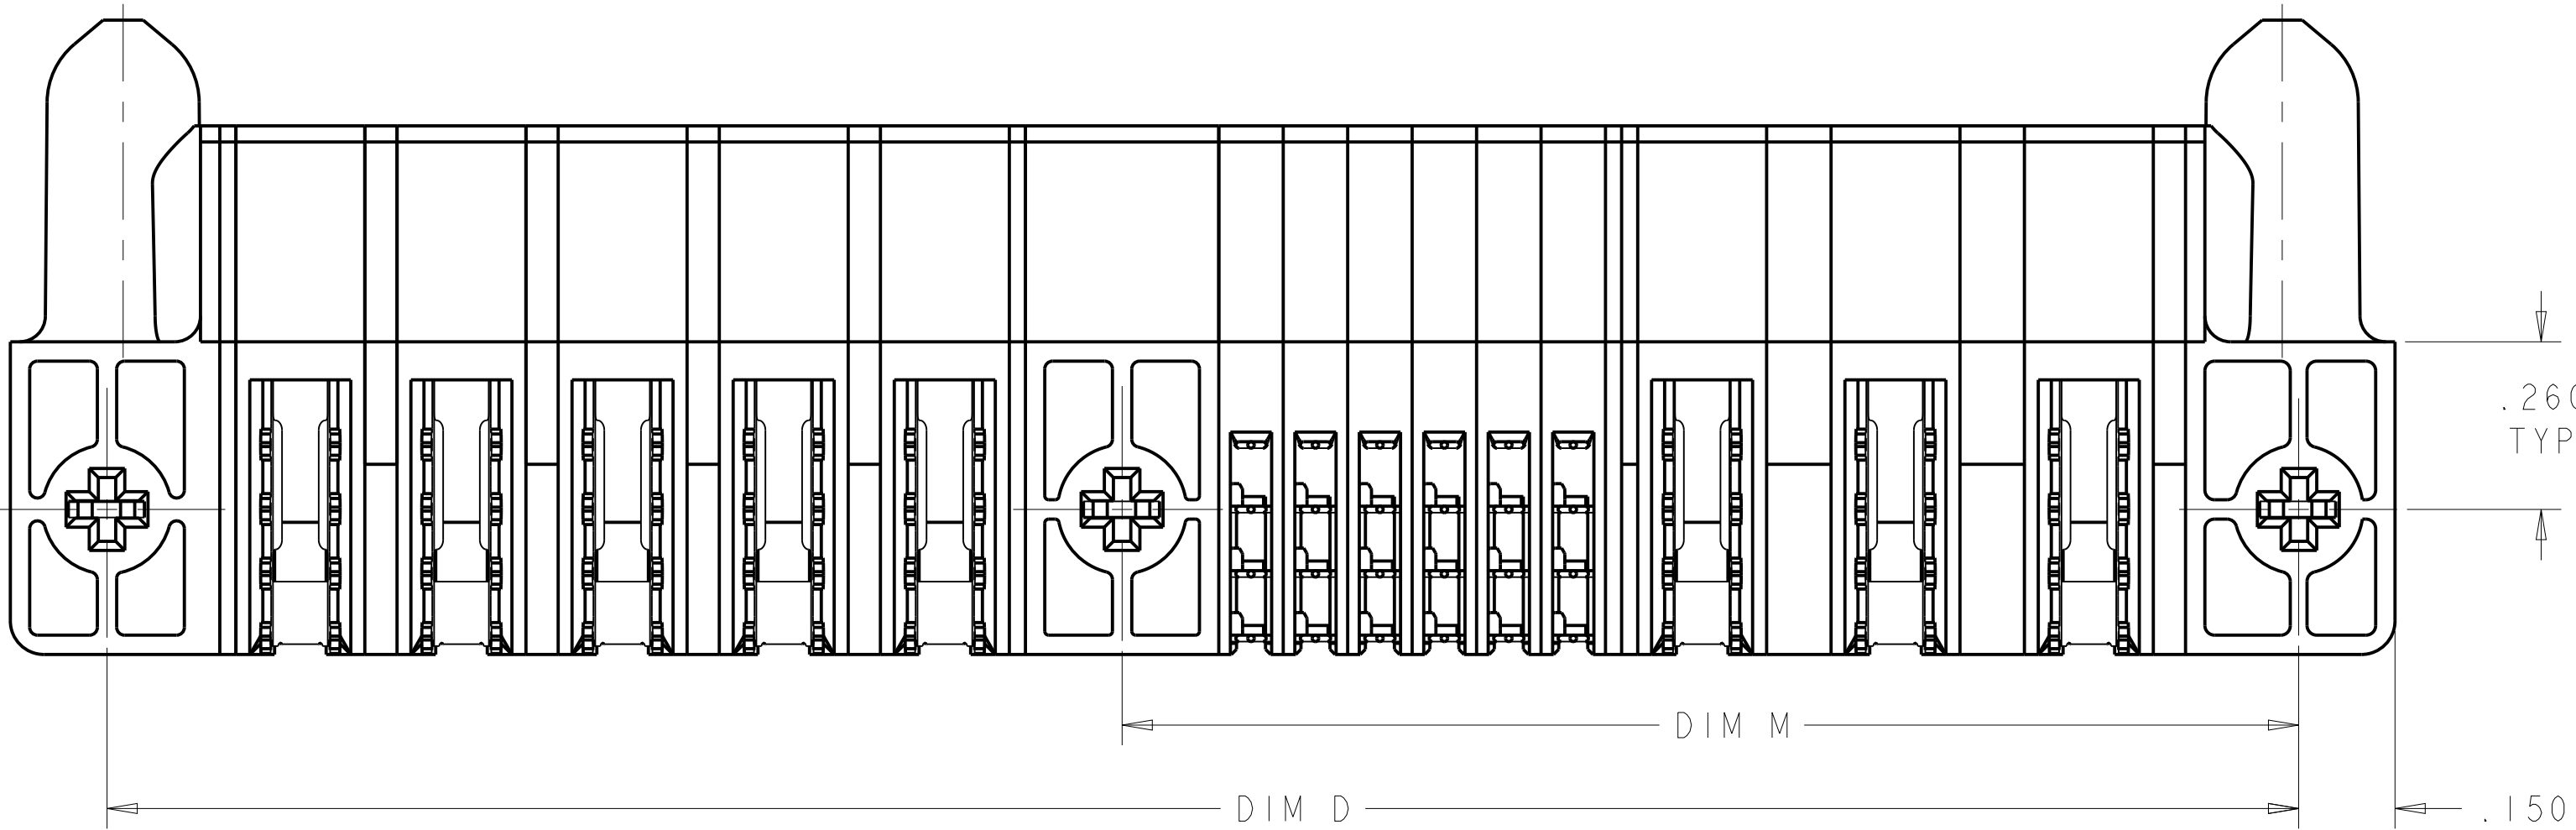


LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			D5	RELEASE 1-7	21OCT2013	CZ	SZ
			D6	RELEASE 1-8 AND 1-9	21JAN2014	AL	SZ

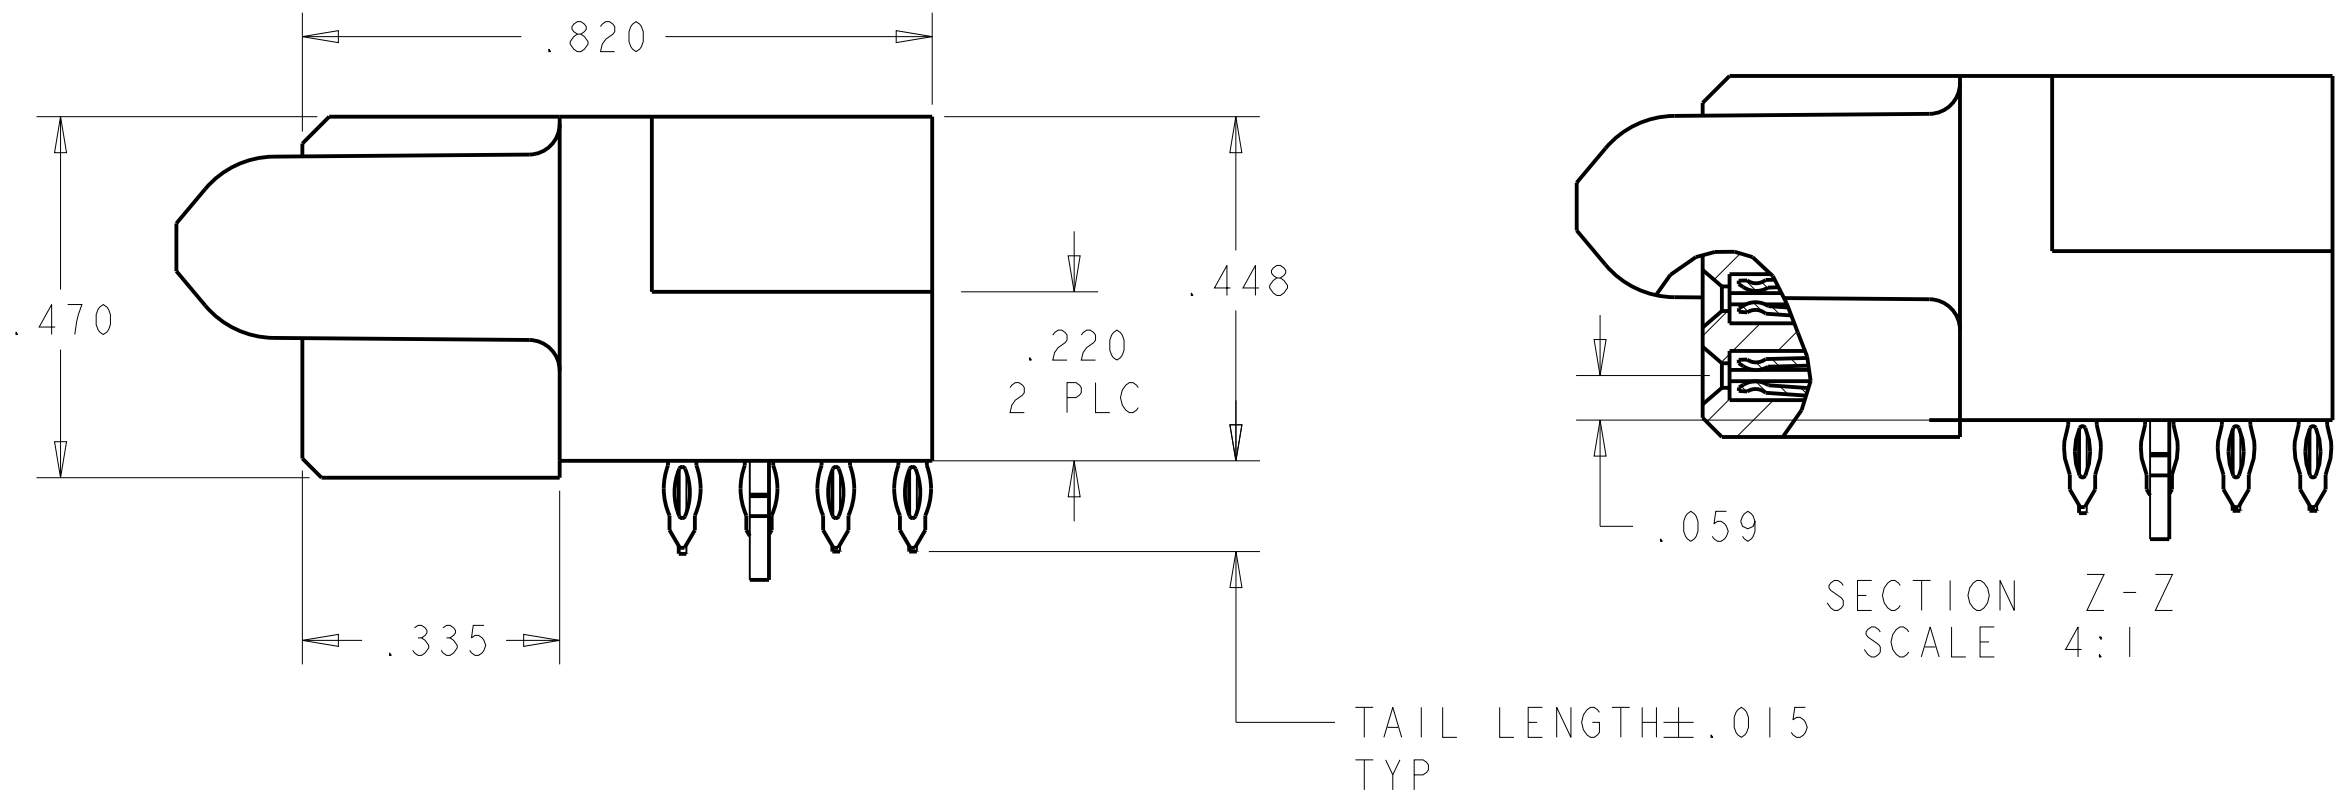

- 1 OPTIONAL CENTER MODULE, WITH Ø.150 THRU HOLE OR HOLD DOWN FEATURE.
- 2 "AMP", PART NUMBER, AND DATE CODE TO BE MARKED IN AREA SHOWN.
- 3 MATERIAL: HOUSING - GLASS FILLED HIGH TEMP THERMO PLASTIC, UL94 V-O.
SIGNAL CONTACT - HIGH CONDUCTIVITY COPPER ALLOY
POWER CONTACT - HIGH CONDUCTIVITY COPPER ALLOY
- 4 CONTACT PLATING:NOBLE METAL PLATING ON CONTACT FUNCTIONAL AREA OF POWER AND SIGNAL CONTACTS
- 5 MECHANICAL CONNECTOR KEEP OUT ZONE.
- 6 DATUM AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
- 7 PCB- ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES.
- 8 PCB- Ø.0453 +/- .0010 DRILLED HOLES PLATED WITH .0003 MIN Sn OVER .001-.003 PLATING TO ACHIEVE .040 DIA HOLE.
- 9 1450570-1 HOLD DOWN SEATING DEPTH = .185

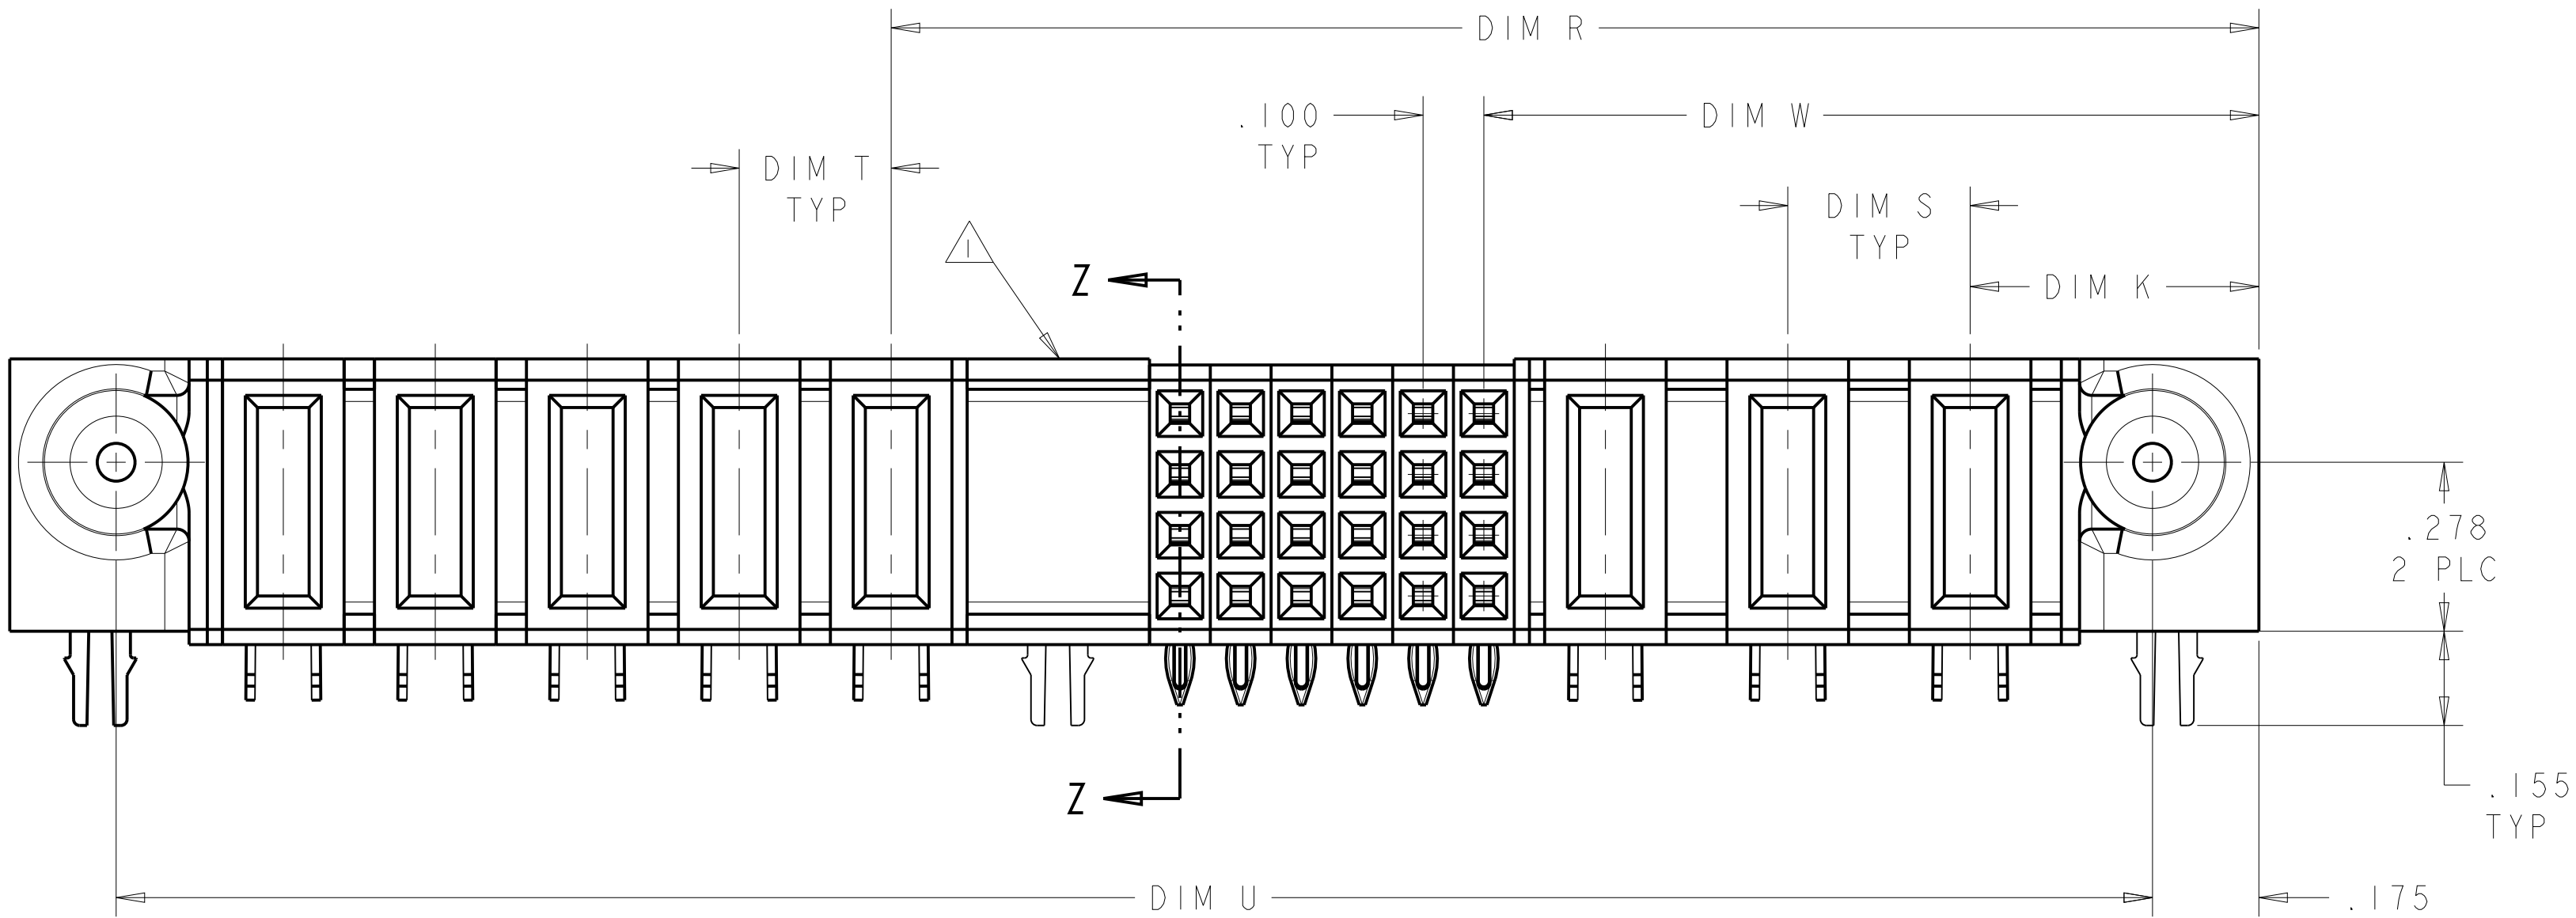

D6	N/A	3.250	.300	.250	1.650	1.375	3.300	-	3.600	.450	4P + 8S + 6P	1-6450570-9
	N/A	3.150	.300	.250	1.850	1.375	3.200	-	3.500	.450	4P + 16S + 5P	1-6450570-8
	N/A	1.700	.250	.250	1.350	.875	1.750	-	2.050	.450	2P + 16S + 2P	1-6450570-7
	N/A	3.100	.250	.250	2.250	1.875	3.150	-	3.450	.450	6P + 12S + 4P	1-6450570-6
	.150	1.400	.250	.250	1.300	.625	1.450	-	1.750	.450	1P + 24S + 1P	1-6450570-5
	N/A	1.700	.250	.250	1.350	.875	1.750	-	2.050	.450	2P + 16S + 2P	1-6450570-4
	N/A	1.300	-	-	1.200	.675	1.350	-	1.650	.450	1P + 16S + 1P	1-6450570-3
	N/A	3.000	.250	.250	2.150	1.425	3.050	-	3.350	.450	4P + 24S + 4P	1-6450570-2
	N/A	2.400	.250	.250	1.800	1.125	2.450	-	2.750	.450	3P + 24S + 3P	1-6450570-0
	.150	1.300	-	-	1.200	.675	1.350	-	1.650	.450	1P + 16S + 1P	6450570-9
	N/A	4.350	.250	.250	3.500	2.625	4.400	-	4.700	.450	9P + 32S + 4P	6450570-6
	.122	5.450	.250	.250	3.350	2.375	5.500	-	5.800	.450	8P + 36S + 9P	6450570-3
	N/A	2.400	.250	.250	1.800	1.125	2.450	-	2.750	.450	3P + 24S + 3P	6450570-2
	N/A	4.350	.250	.250	3.500	2.625	4.400	-	4.700	.450	9P + 32S + 4P	6450570-1
	MOUNTING HOLES	DIM U	DIM T	DIM S	DIM R	DIM W	DIM D	DIM M	DIM L	DIM K	DESCRIPTION	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
INCHES

MATERIAL

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±.01
1 PLC ±.01
2 PLC ±.01
3 PLC ±.005
4 PLC ±.002
ANGLES ±.020

FINISH

OWN: R. GRZYBOWSKI
CHK: M. PERCHERKE
APVD: M. PERCHERKE

DATE: 25MAY2005

NAME: M. PERCHERKE

PRODUCT SPEC: 108-1973

APPLICATION SPEC: 114-13038

WEIGHT: -

CUSTOMER DRAWING

TE Connectivity


RIGHT ANGLE RECEPTACLE ASSEMBLY WITH GUIDES MULTI-BEAM XL

SIZE: A1
CAGE CODE: 100779
DRAWING NO: 6450570

RESTRICTED TO: -

SCALE: 4:1
SHEET: 1 OF 7
REV: D6



PART NUMBER	ROWS		POWER			SIGNAL					POWER			
			P6	P5	P4	6	5	4	3	2	1	P3	P2	
6450570-2	D C B A				D	D	D	D	D	D				
					C	C	C	C	C	C				
					B	B	B	B	B	B				
					A	A	A	A	A	A				
3P + 24S + 3P														

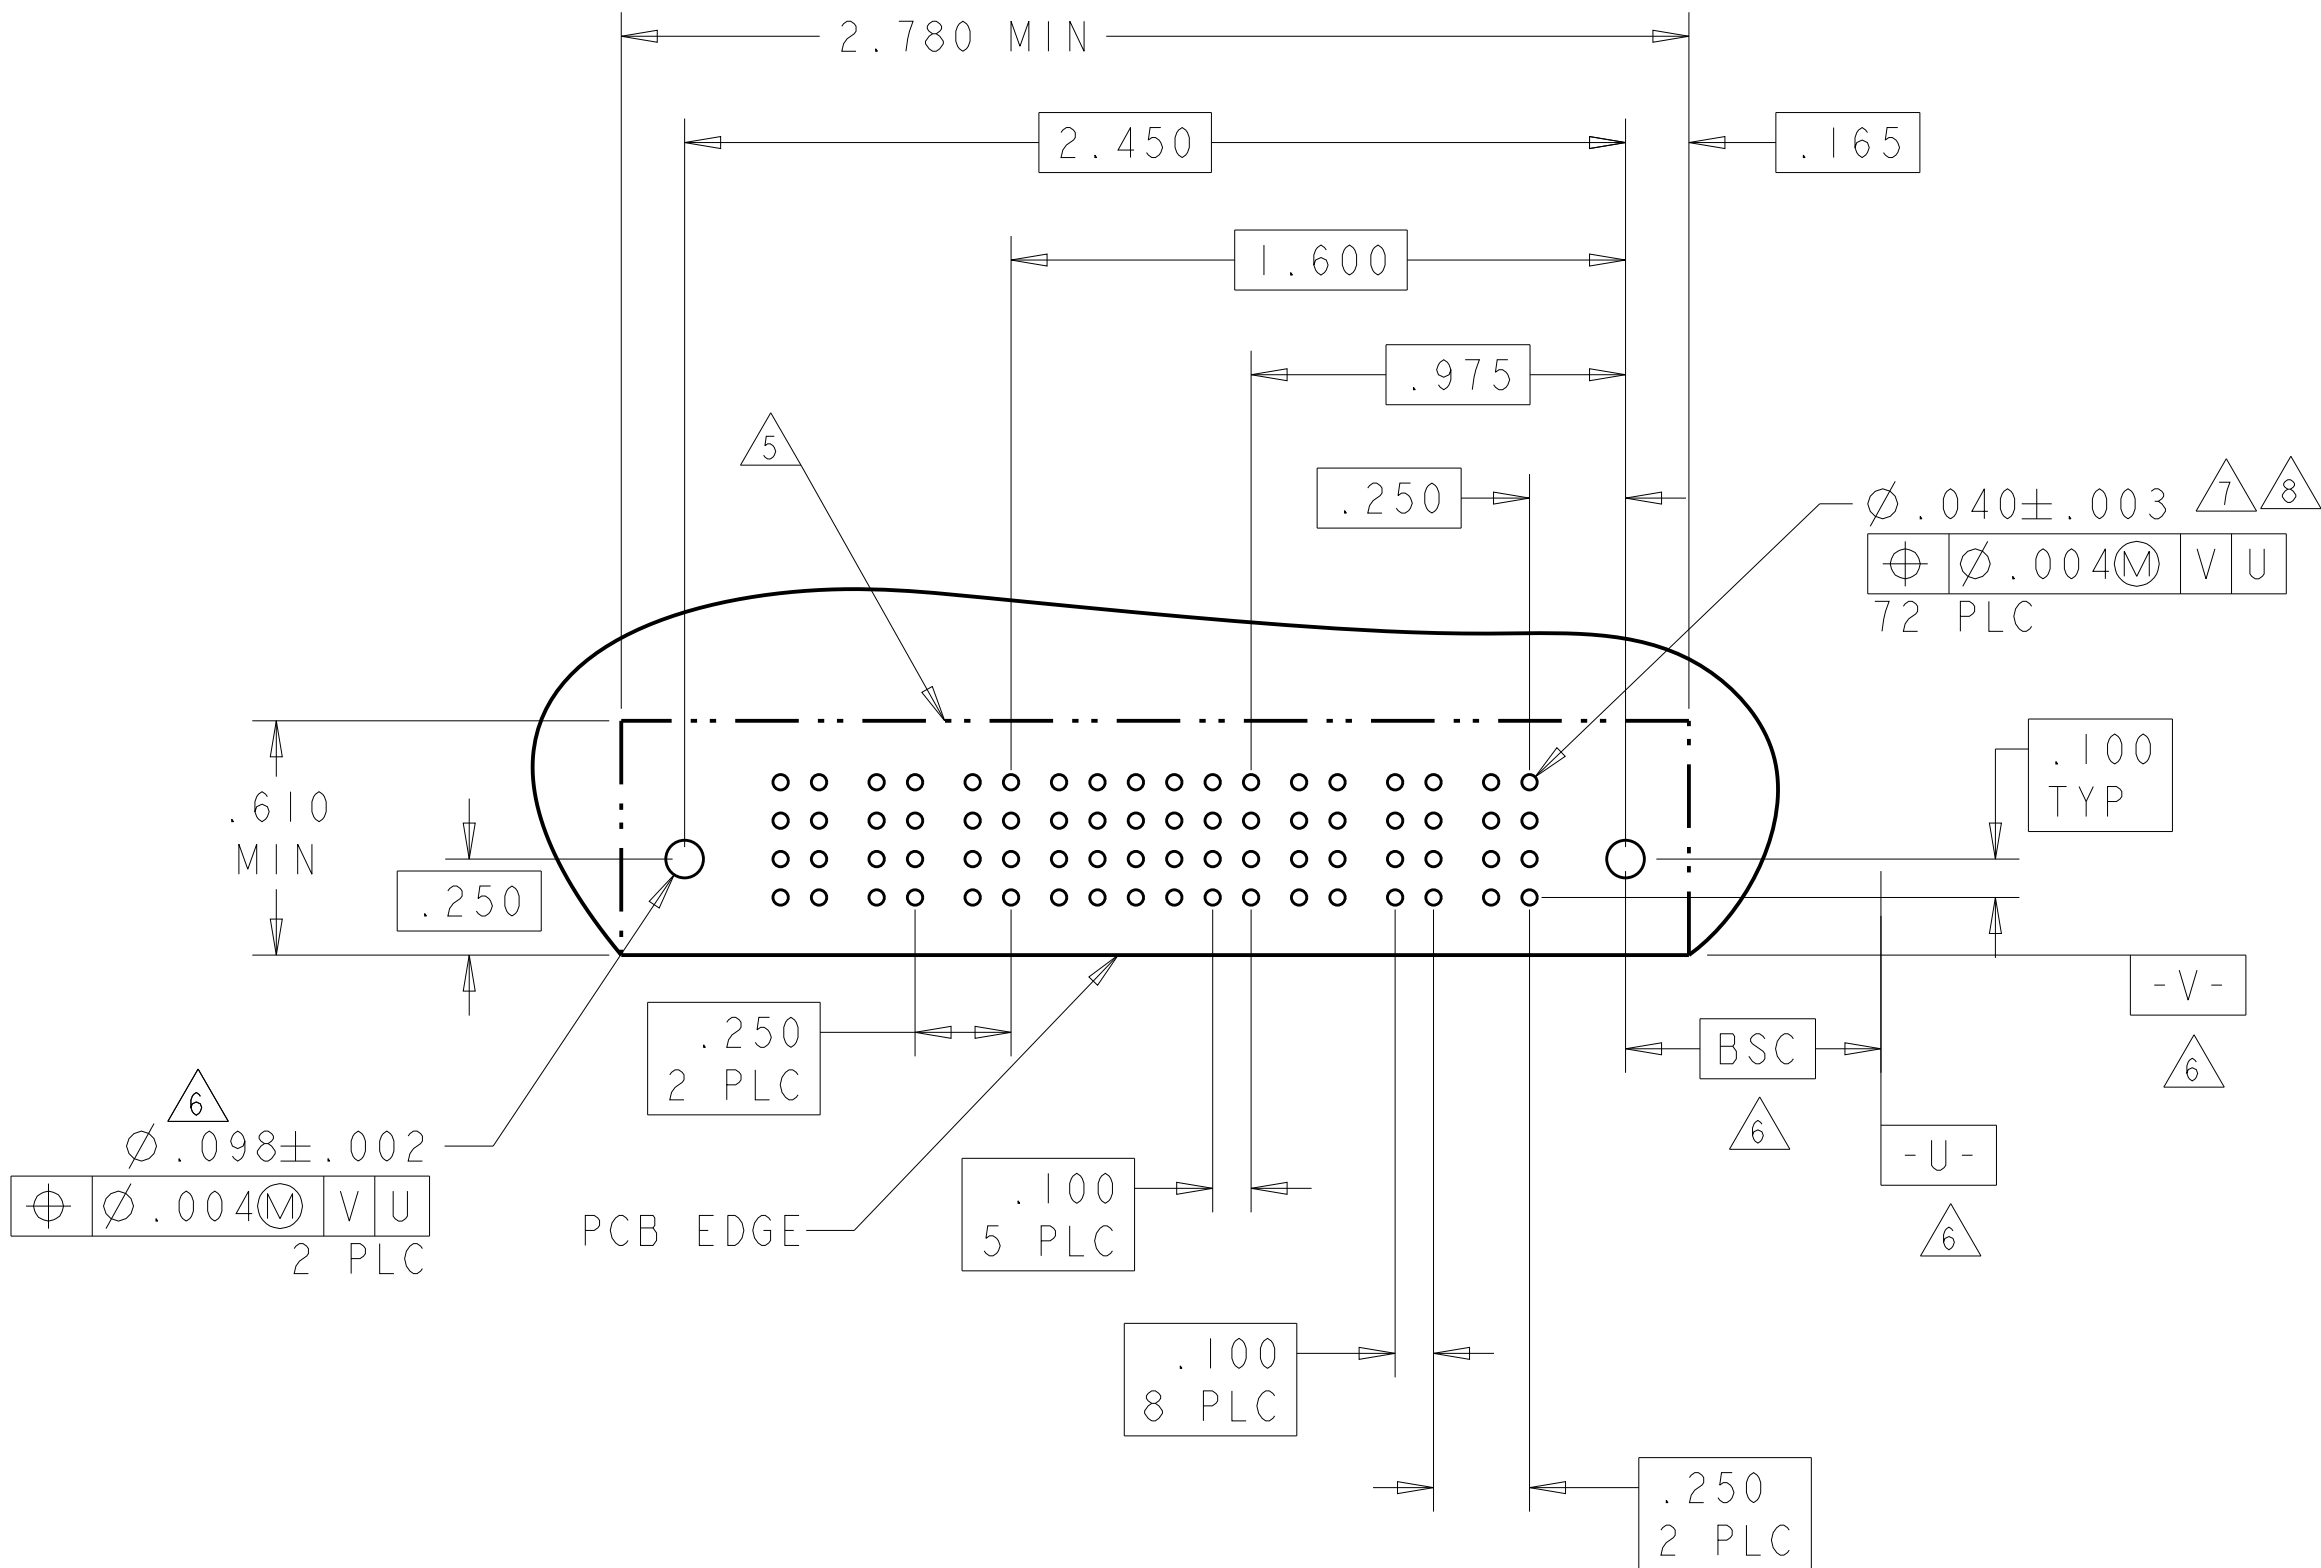


RL	.165 PRESS FIT	STD	D	.119-PRESS FIT	D
RK	.165 PRESS FIT	MFB	C	.119-PRESS FIT	C
RS	.119 PRESS FIT	STD	B	.119-PRESS FIT	B
RP	.119 PRESS FIT	MFB	A	.119-PRESS FIT	A
CODE	TAIL LENGTH	TYPE	CODE	TAIL LENGTH	ROW
POWER CONTACT			SIGNAL CONTACT		

RK	.165-PRESS FIT	MFBL	THIS DRAWING IS A CONTROLLED DOCUMENT.		CHG	M. GRZYBOWSKI	25MAR2003	 TE Connectivity	
RL	.165-PRESS FIT	STD	DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	M. PERCHERKE	NAME
RP	.119-PRESS FIT	MFBL	INCHES				PRODUCT SPEC		RIGHT ANGLE RECEPTACLE ASSEMBLY WITH GUIDES
RS	.119-PRESS FIT	STD			0 PLC ±. 1 PLC ±.01 2 PLC ±.005 4 PLC ±.0020		108-1973		MULTI-BEAM XL
CODE	TAIL LENGTH		DESCRIPTION		MATERIAL		APPLICATION SPEC		SIZE
					FINISH		114-13038		CAGE CODE
							WEIGHT		DRAWING NO
							CUSTOMER DRAWING		A100779
									SCALE 1:1
									SHEET 2 OF 7
									REV D6

PART NUMBER	ROWS		POWER				SIGNAL						POWER				
			P6	P5	P4	6	5	4	3	2	1	P3	P2	P1			
1-6450570-0	D C B A		RS	RS	RP	D	D							RS		RS	
3P + 24S + 3P						B	B										
						A	A										

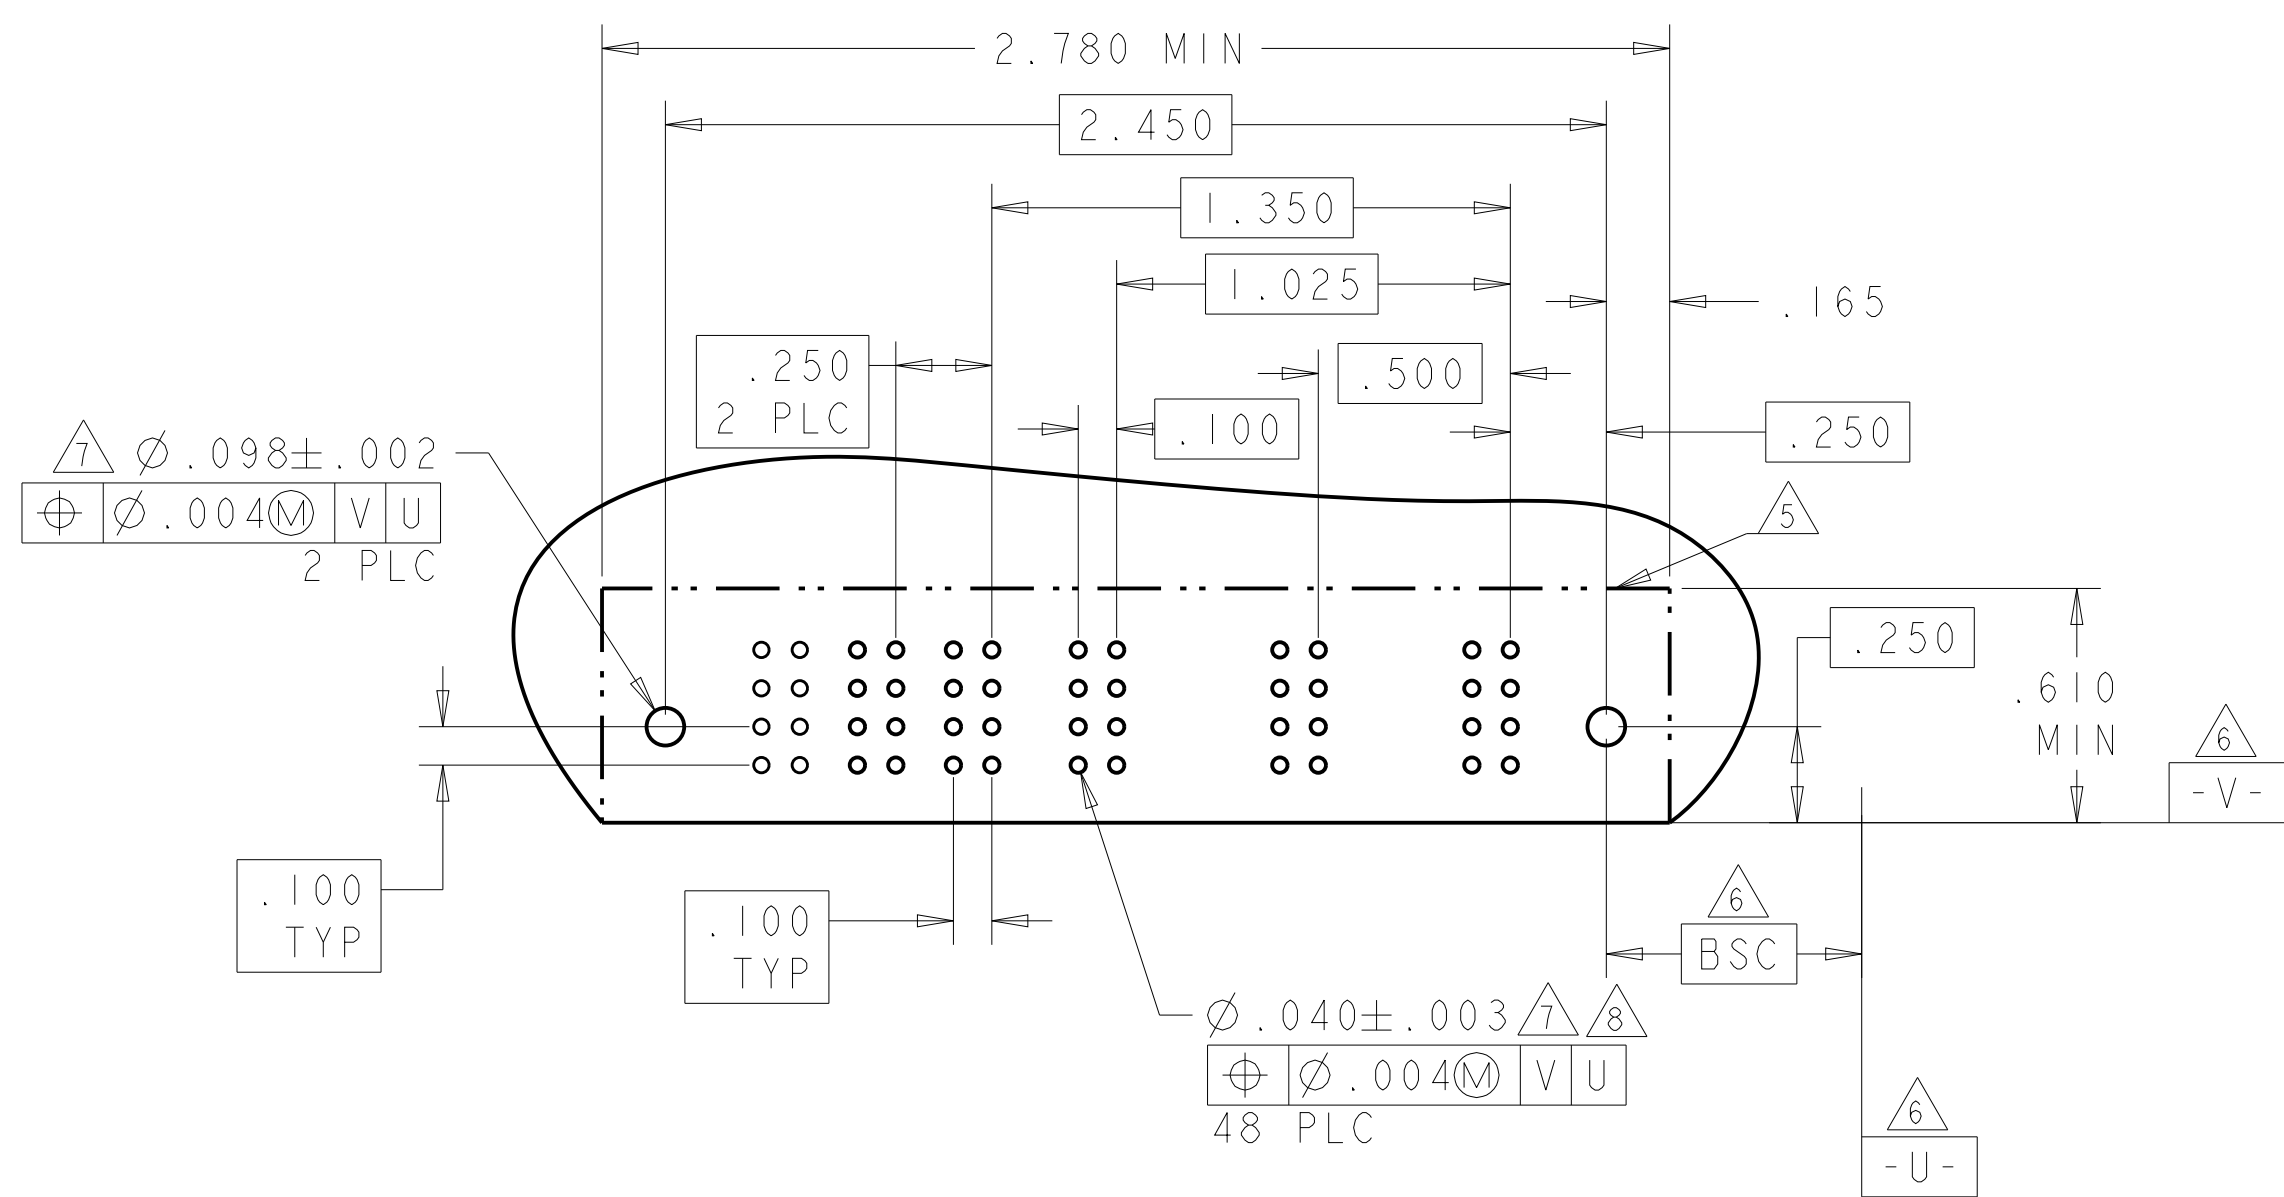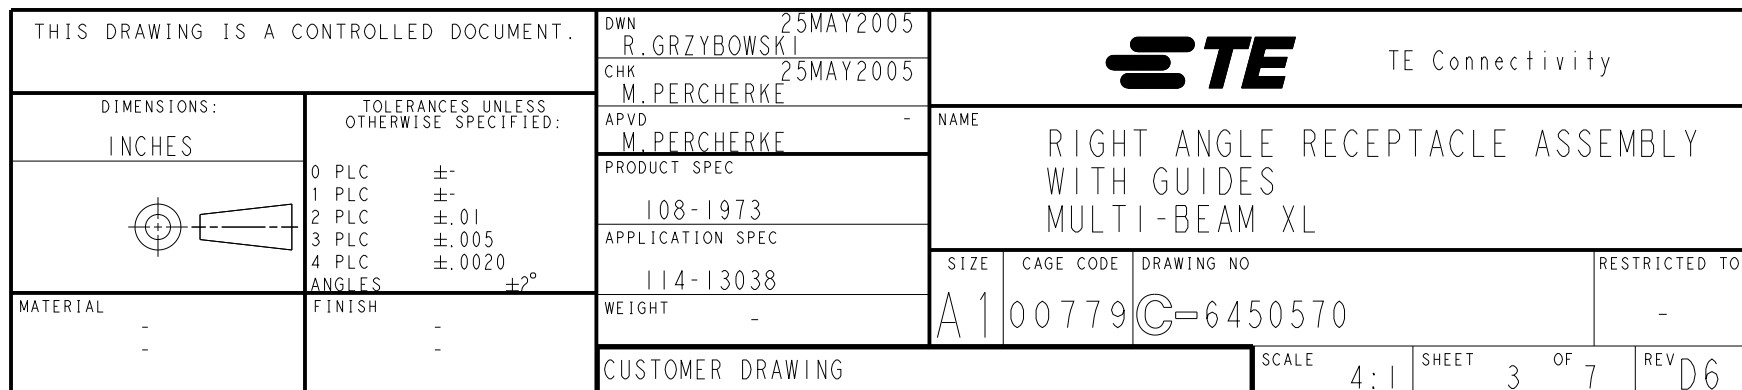-NO CONTACT LOADED


PART NUMBER	ROWS		POWER				SIGNAL					POWER				
			P8	P7	P6	P5	6	5	4	3	2	1	P4	P3	P2	
1-6450570-2	D C B A															

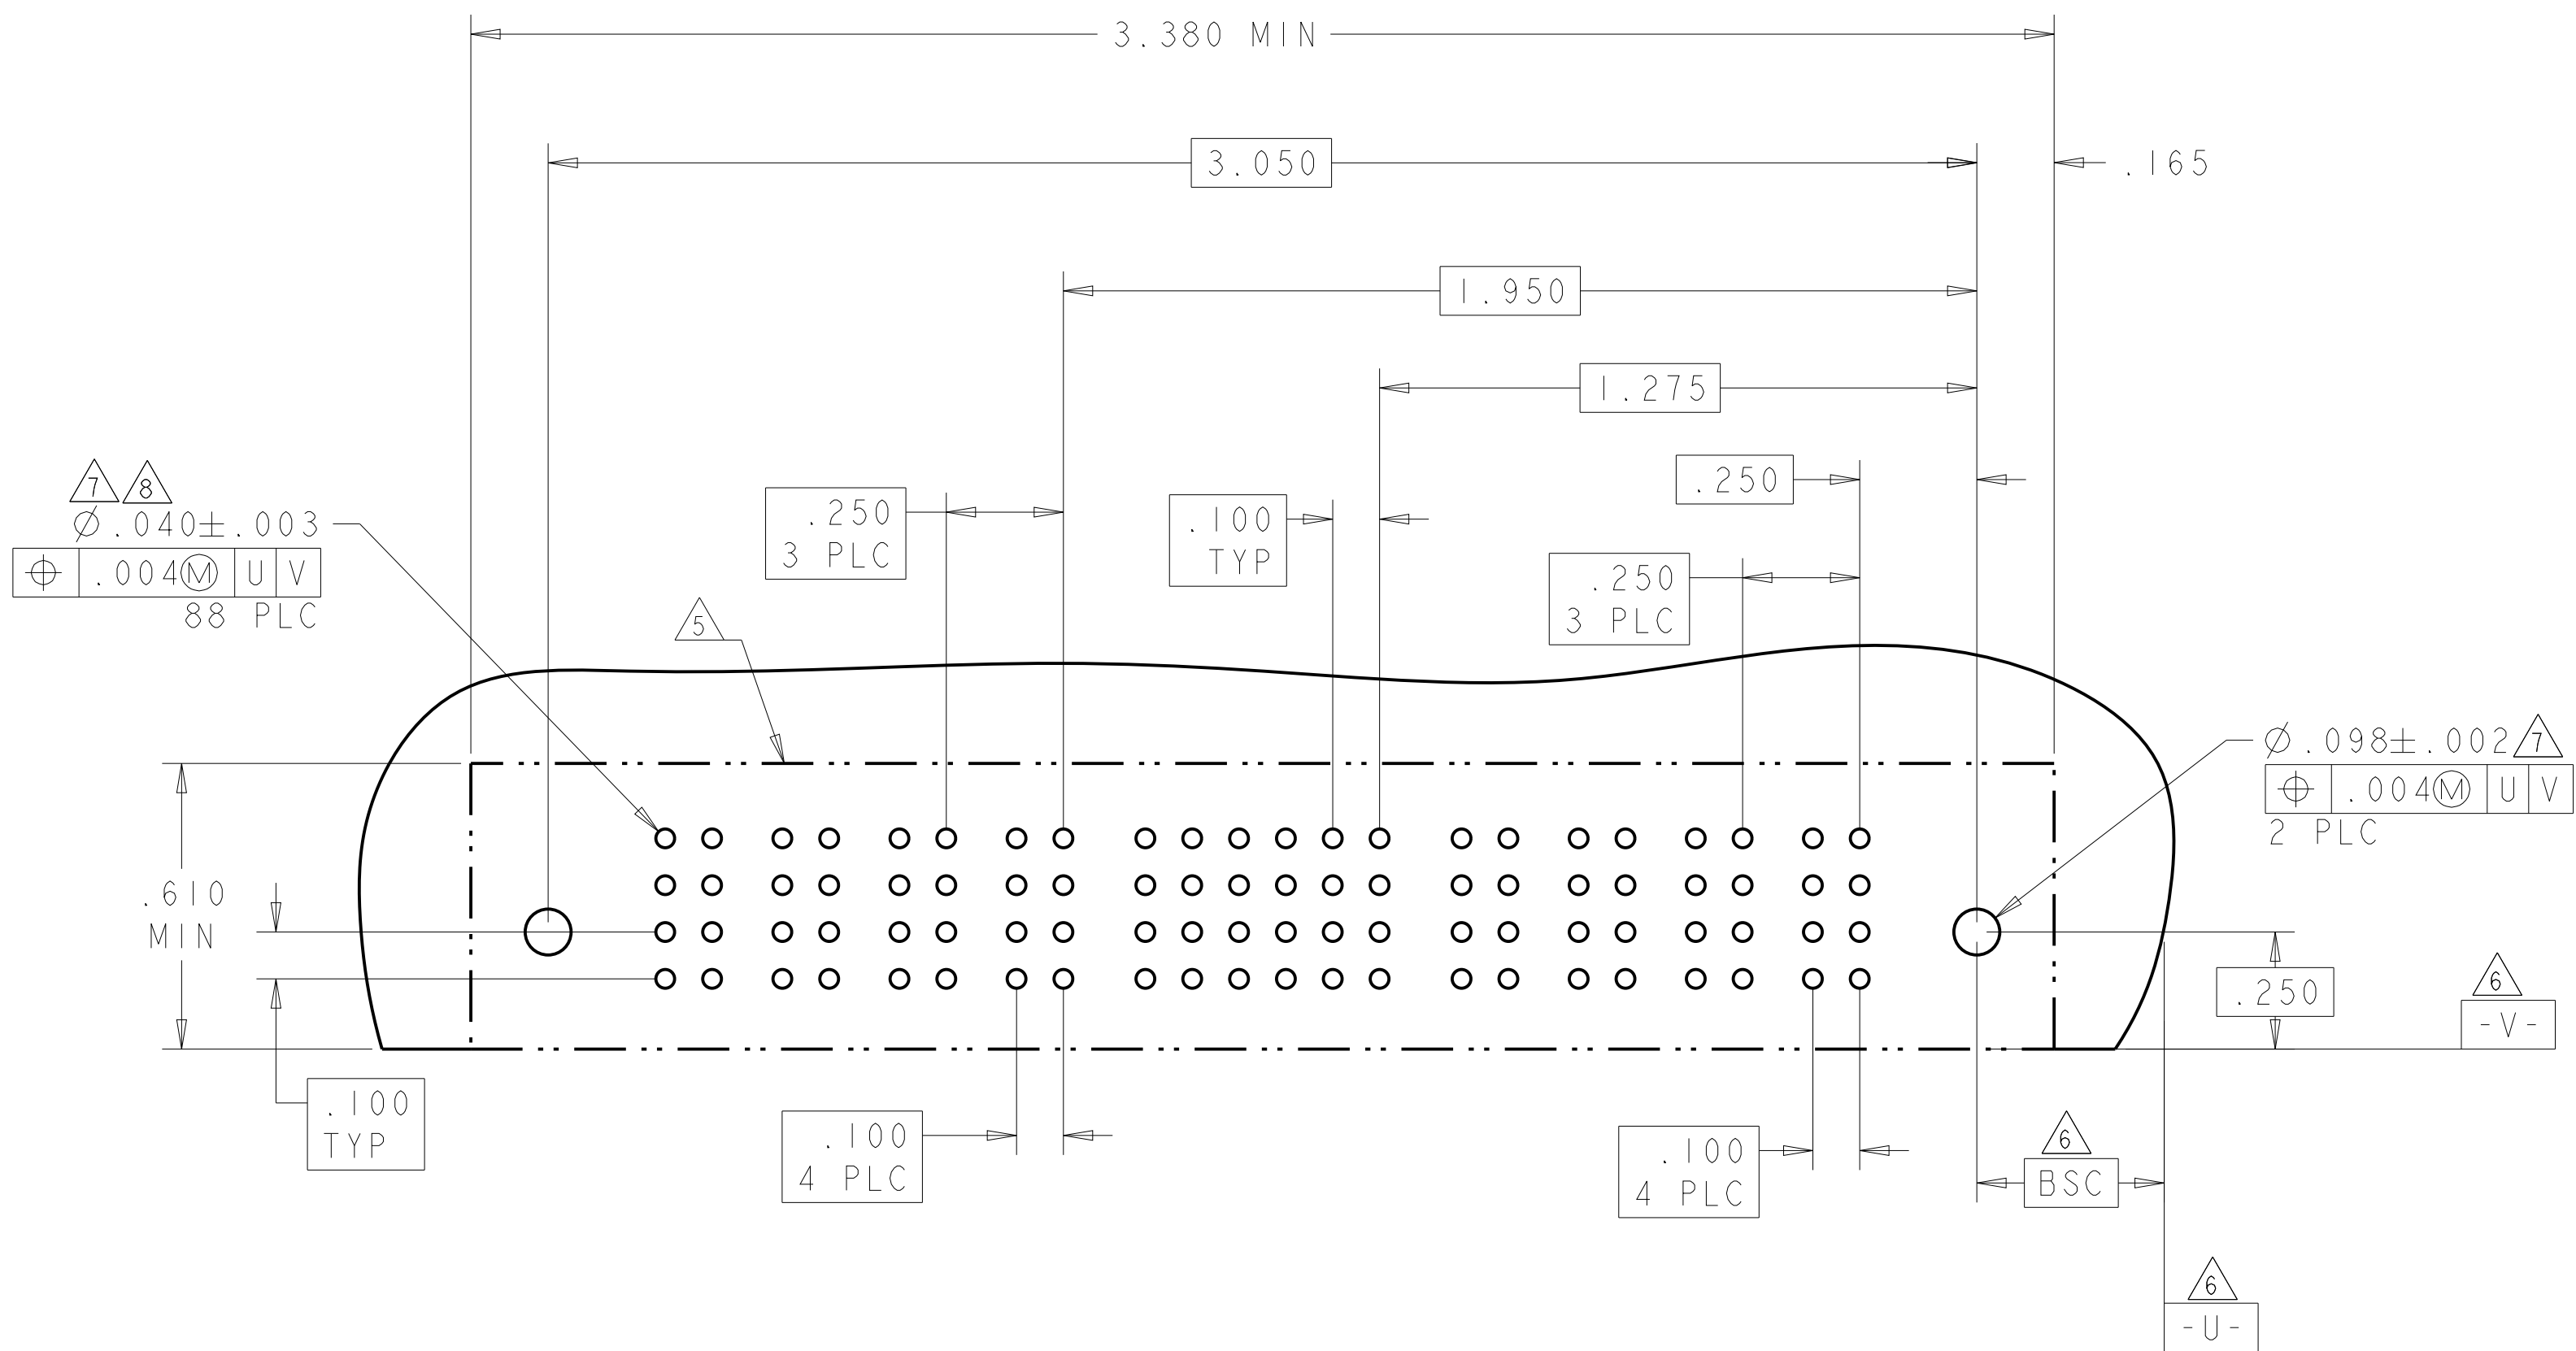


THIS DRAWING IS A CONTROLLED DOCUMENT		DWA 25MAY2005 R. GRZYBOWSKI		 TE Connectivity	
		CHP 25MAY2005 M. PERCHERKE			
DIMENSIONS: INCHES		TO DIMENSIONS, UNLESS OTHERWISE SPECIFIED:		NAME	
		0 PLOC ±0.1 1 PLOC ±0.1 2 PLOC ±0.05 4 PLOC ±0.020 ANGLES ±0.2°		RIGHT ANGLE RECEPTACLE ASSEMBLY WITH GUIDES MULTI-BEAM XL	
		PRODUCT SPEC		SIZE	
		108-1973		CASE CODE	
		APPLICATION SPEC		DRAWING NO	
MATERIAL		114-13038		RIGHT ANGLE RECEPTACLE ASSEMBLY WITH GUIDES MULTI-BEAM XL	
FINISH		WEIGHT		A1 00779 C-6450570	
		CUSTOMER DRAWING		SCALE 4:1 SHEET 4 OF 7 REV D6	


PART NUMBER	ROWS		POWER	SIGNAL							POWER	
			P 2	6	5	4	3	2	1	P 1		
1-6450570-5	D C B A		 RP								 RS	
				D	D	D	D	D	D			
				C	C	C	C	C	C			
				B	B	B	B	B	B			
				A	A	A	A	A	A			
1P + 24S + 1P												

DI

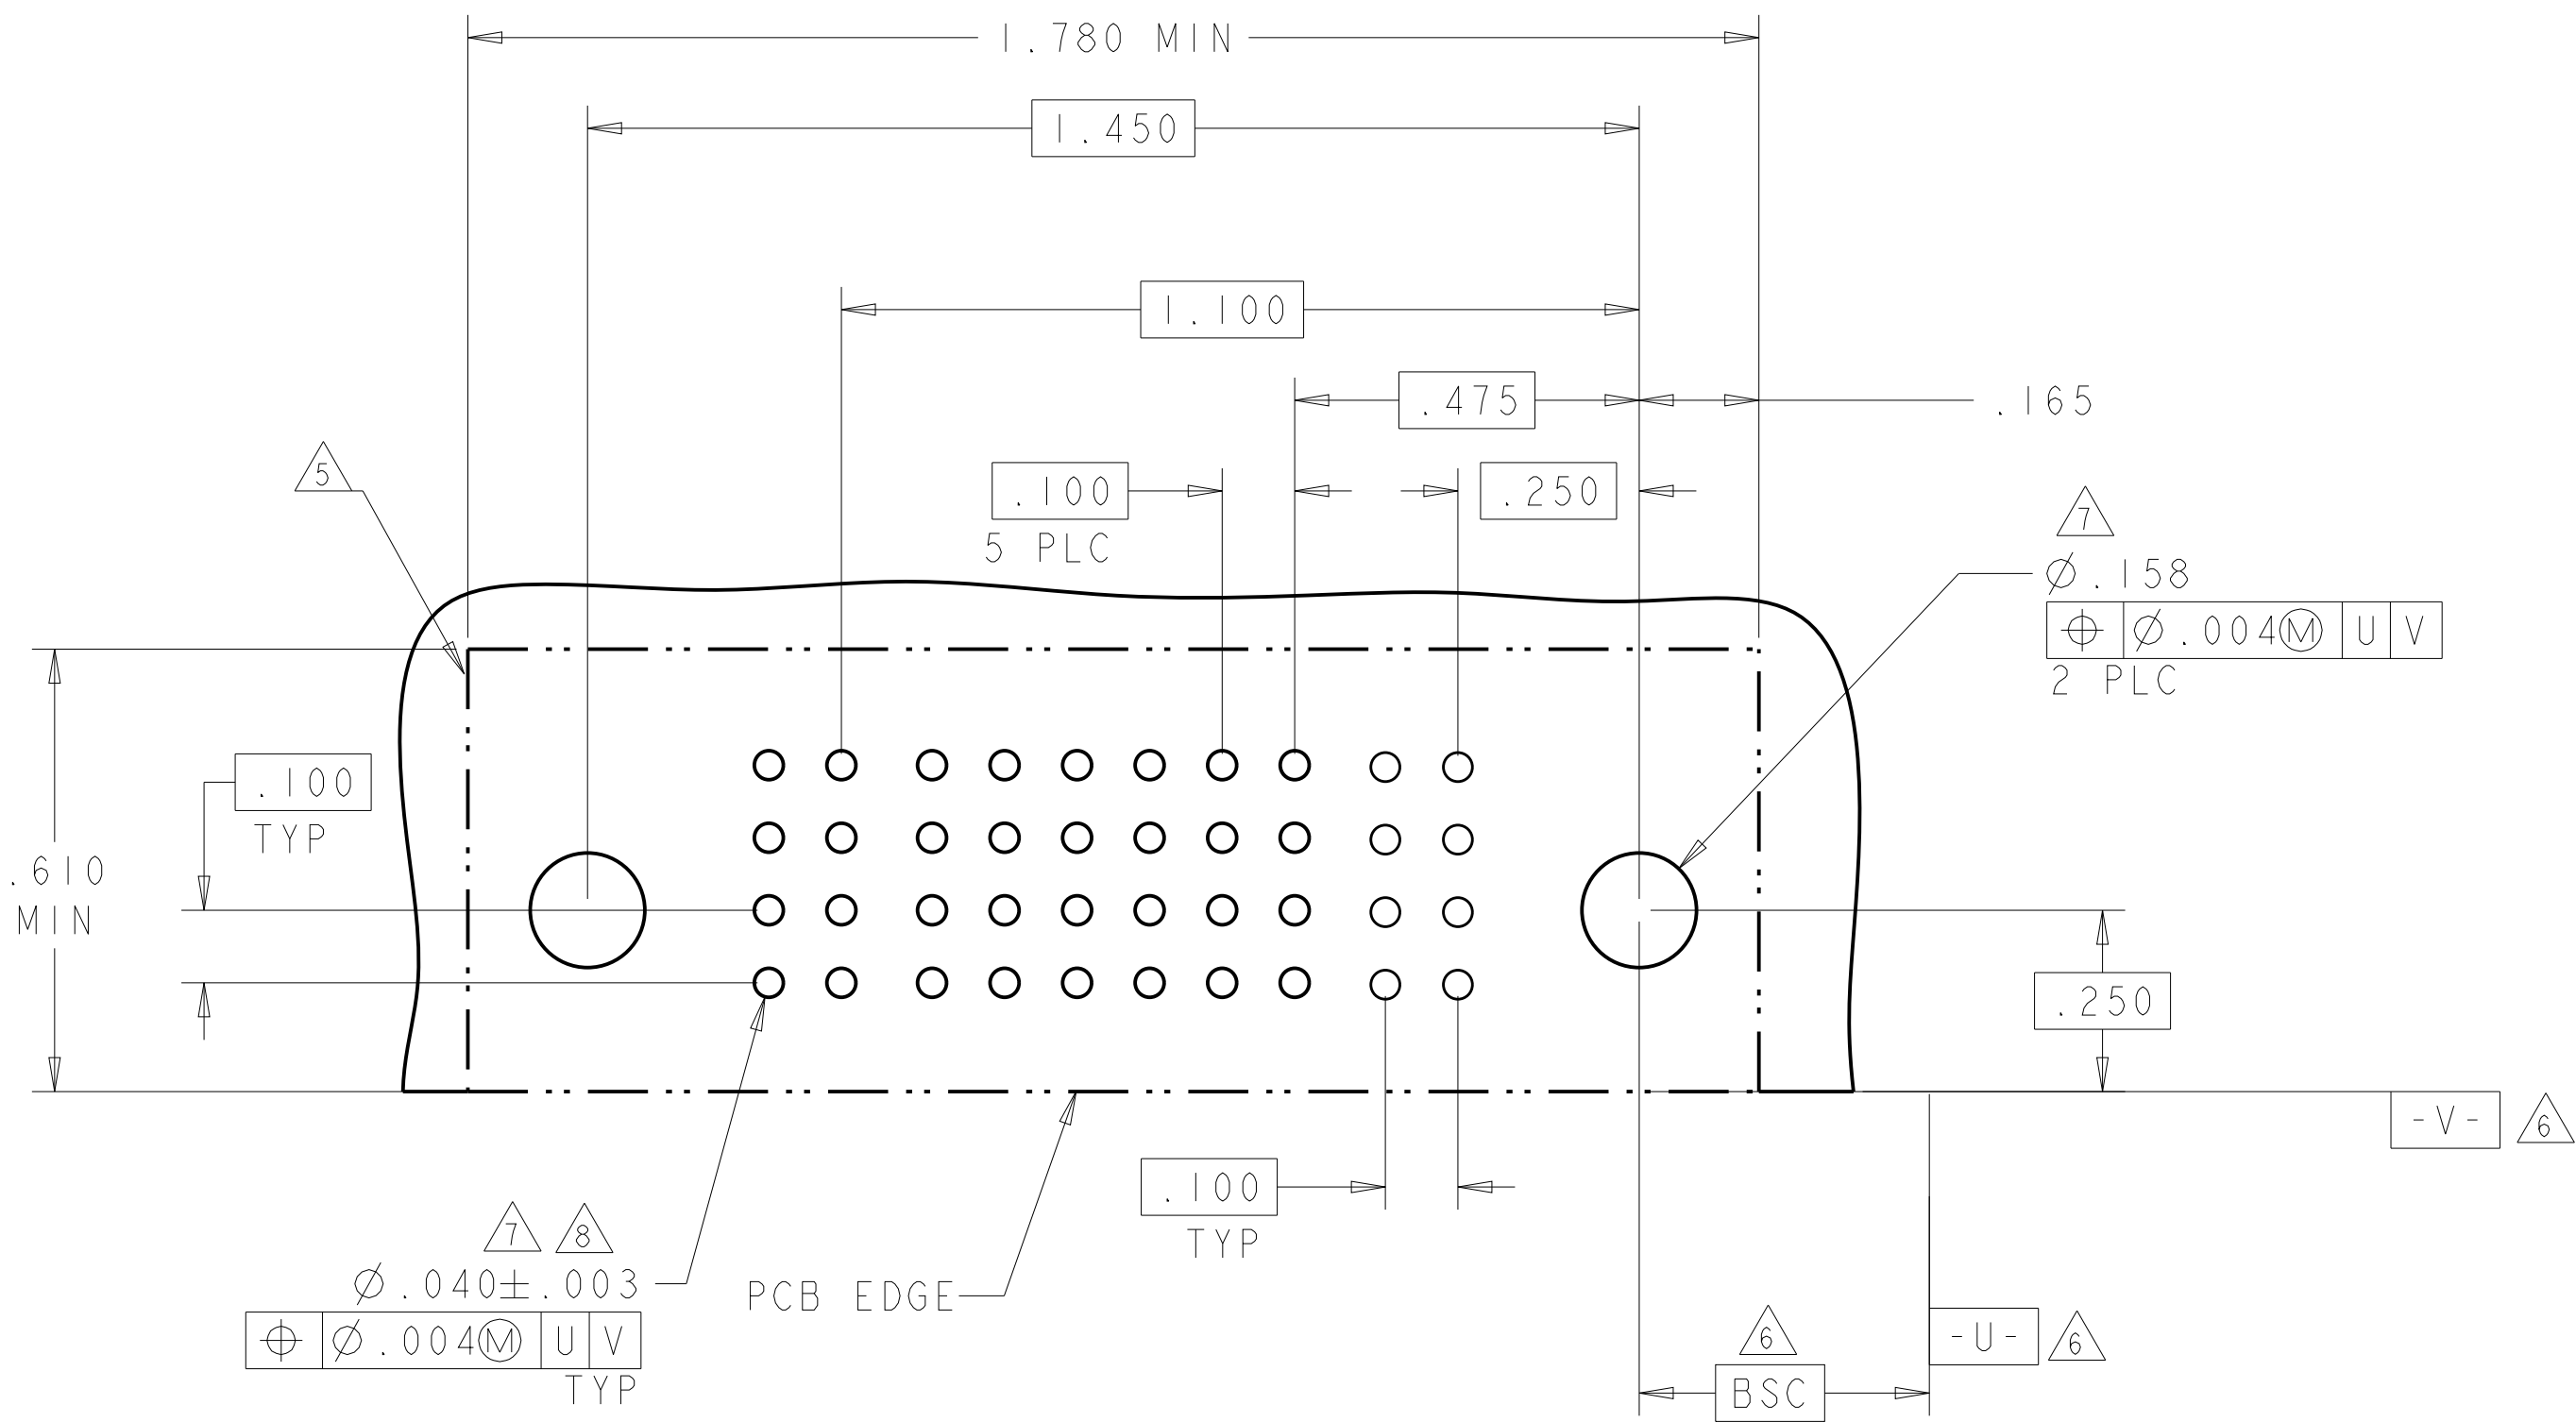

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN CHG DATE BY REASON 25MAY2005 M. PERCHERRE 25MAY2005		 TE Connectivity	
DIMENSIONS: INCHES 		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±. 1 PLC ±. 2 PLC ±.01 3 PLC ±.005 4 PLC ±.0020 ANGLES ±°		NAME RIGHT ANGLE RECEPTACLE ASSEMBLY WITH GUIDES MULTI-BEAM XL	
MATERIAL -		FINISH -		SIZE A100779	
WEIGHT -		APPLICATION SPEC 114-13038		CAGE CODE C6450570	
CUSTOMER DRAWING		SCALE 4:1		SHEET 5 of 7	
				REV D6	

PART NUMBER	ROWS		POWER					SIGNAL				POWER																
			P9	P8	P7	P6	P5	4	3	2	1	P4	P3	P2	P1													
I-6450570-8	D C B A																											
4P + 16S + 5P																												

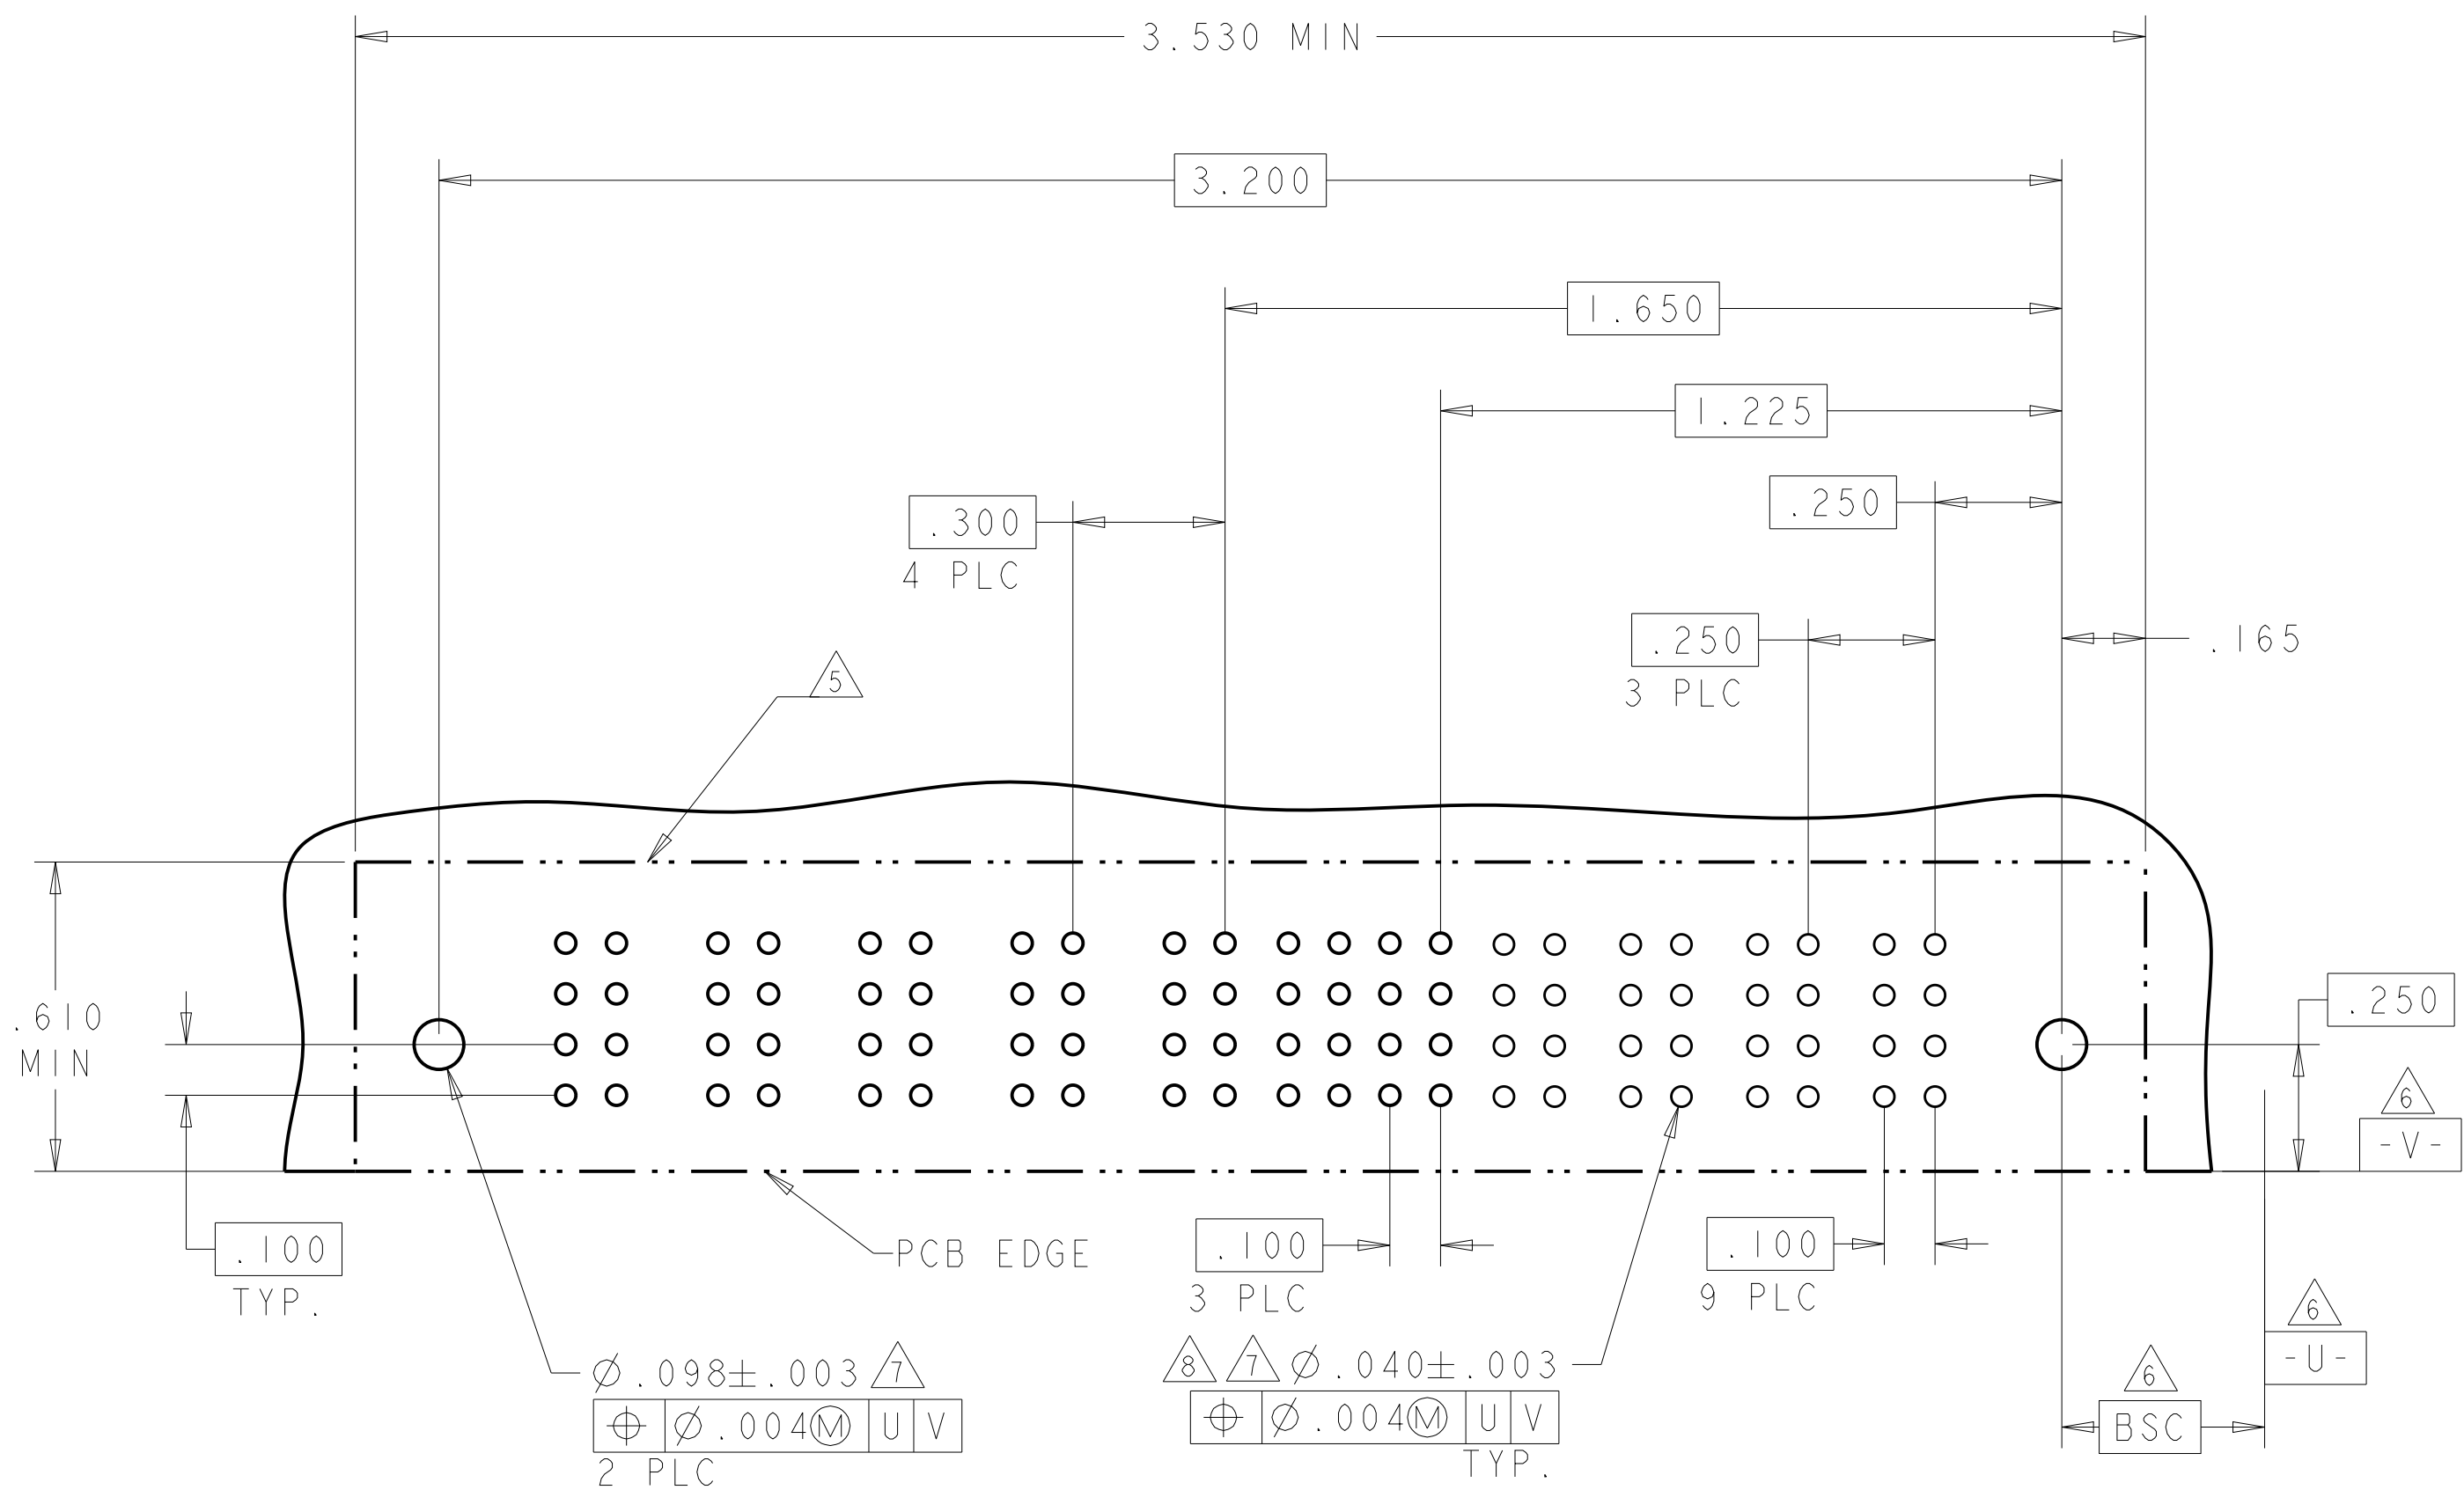4805 (3/11)

D6

4805 (3/11)



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.