

### Product Description

Qorvo's TGA2622-CP is a packaged high-power X-Band amplifier fabricated on Qorvo's QGaN25 0.25 um GaN on SiC process. Operating from 9 to 10 GHz, the TGA2622-CP achieves 35 W saturated output power, a power-added efficiency of greater than 43 %, and power gain of 27.5 dB.


The TGA2622-CP is packaged in a 10-lead 15x15 mm bolt-down package with a Cu base for superior thermal management. It can support a range of bias voltages and performs well under CW and pulsed conditions. Both RF ports are internally DC blocked and matched to 50 ohms allowing for simple system integration.

The TGA2622-CP is ideally suited for both commercial and defense applications.

Lead free and RoHS compliant.



### Functional Block Diagram

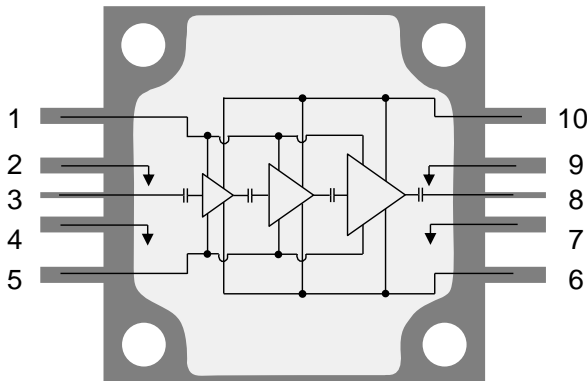

### Product Features

- Frequency Range: 9 – 10 GHz
- P<sub>SAT</sub>: 45.5 dBm @ P<sub>IN</sub> = 18 dBm
- PAE: > 43 % @ P<sub>IN</sub> = 18 dBm
- Power Gain: 27.5 dB @ P<sub>IN</sub> = 18 dBm
- Bias: V<sub>D</sub> = 28 V, I<sub>DQ</sub> = 290 mA, V<sub>G</sub> = -2.7 V typical, pulsed (PW = 100 μs, DC = 10 %)
- Package Dimensions: 15.2 x 15.2 x 3.5 mm
- Package base is pure Cu offering superior thermal management

*Performance is typical across frequency. Please reference electrical specification table and data plots for more details*

### Applications

- Weather and Marine Radar.

### Ordering Information

| Part No.   | Description                         |
|------------|-------------------------------------|
| TGA2622-CP | 9 – 10 GHz 35 W GaN Power Amplifier |
| 1113526    | TGA2622-CP Evaluation Board (EVB)   |

### Absolute Maximum Ratings

| Parameter  | Value / Range    |
|--|------------------|
| Drain Voltage ( $V_D$ )                                      | 40 V             |
| Gate Voltage Range ( $V_G$ )                                 | -8 to 0 V        |
| Drain Current ( $I_D$ )                                      | 4.3 A            |
| Gate Current ( $I_G$ )                                       | See plot page 11 |
| Power Dissipation ( $P_{DISS}$ ), 85 °C                      | 107 W            |
| Input Power, CW, 50 $\Omega$ , ( $P_{IN}$ )                  | 24 dBm           |
| Input Power, CW, VSWR 3:1, $V_D = 28$ V, 85 °C, ( $P_{IN}$ ) | 24 dBm           |
| Mounting Temperature (30 Seconds)                            | 260 °C           |
| Storage Temperature  | -55 to 150 °C    |

Operation of this device outside the parameter ranges given above may cause permanent damage. These are stress ratings only, and functional operation of the device at these conditions is not implied.

### Recommended Operating Conditions

| Parameter  | Value / Range |
|--|---------------|
| Drain Voltage ( $V_D$ ) pulsed:<br>PW = 100 $\mu$ s, DC = 10 % | 28 V          |
| Drain Current ( $I_{DQ}$ )                                     | 290 mA        |
| Gate Voltage ( $V_G$ )   | -2.7 V (Typ.) |
| Temperature ( $T_{BASE}$ )                                     | -40 to 85 °C  |

Electrical specifications are measured at specified test conditions. Specifications are not guaranteed over all recommended operating conditions.







### Electrical Specifications

| Parameter   | Min    | Typ    | Max | Units  |
|---|--------|--------|-----|--------|
| Operational Frequency Range                                   | 9      |        | 10  | GHz    |
| Small Signal Gain   |        | 30     |     | dB     |
| Input Return Loss   |        | > 11   |     | dB     |
| Output Return Loss  |        | > 8    |     | dB     |
| Output Power @ $P_{IN} = 18$ dBm                              |        | 45.5   |     | dBm    |
| Power Added Efficiency @ $P_{IN} = 18$ dBm                    |        | > 43   |     | %      |
| Power Gain @ $P_{IN} = 18$ dBm                                |        | 27.5   |     | dB     |
| Output Power Temperature Coefficient<br>(25 °C to 85 °C only) | Pulsed | -0.019 |     | dBm/°C |
|   | CW     | -0.023 |     |        |
| Recommended Operating Voltage                                 | 20     | 28     | 32  | V      |

Test conditions unless otherwise noted: 25 °C,  $V_D = 28$  V (PW = 100  $\mu$ s, DC = 10 %),  $I_{DQ} = 290$  mA,  $V_G = -2.7$  V typical.







### Typical Performance – Large Signal (Pulsed)

Conditions unless otherwise specified:  $V_D = 28\text{ V}$ ,  $I_{DQ} = 290\text{ mA}$ ,  $V_G = -2.7\text{ V}$  typical.

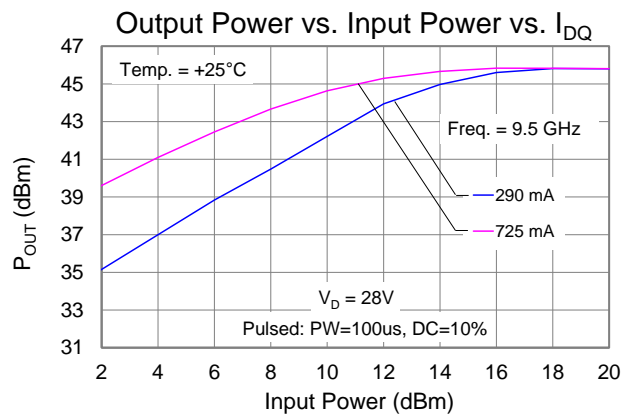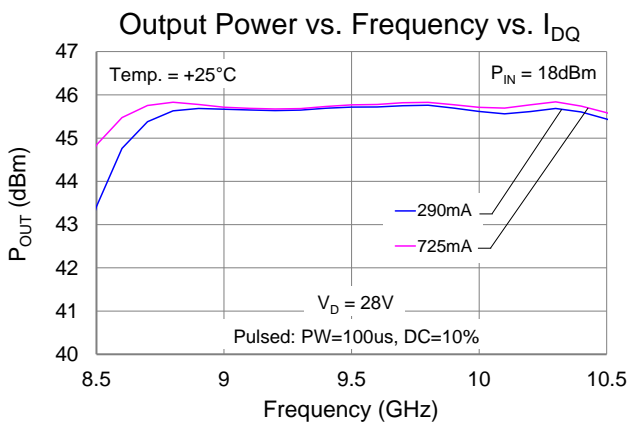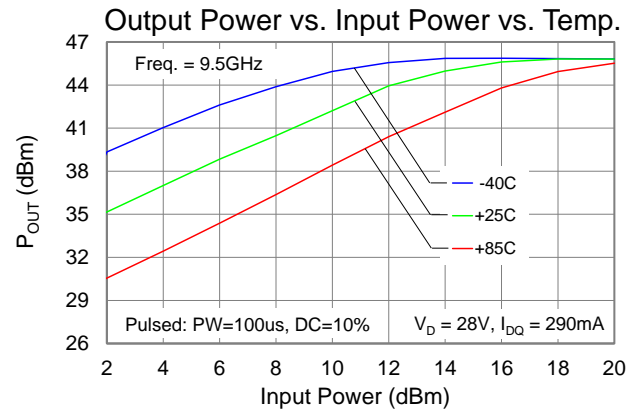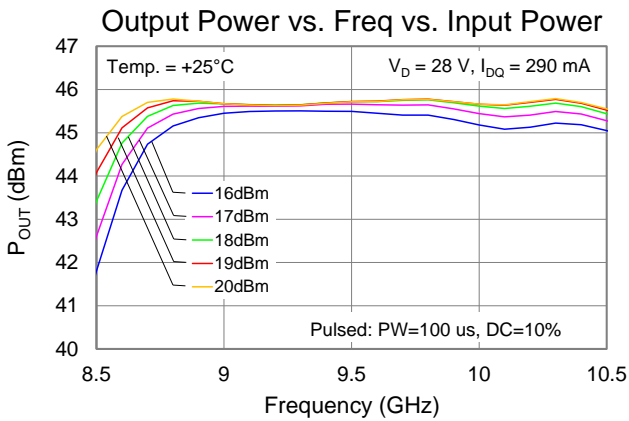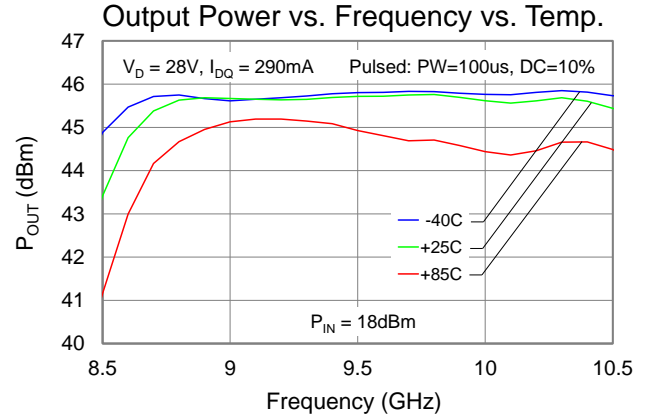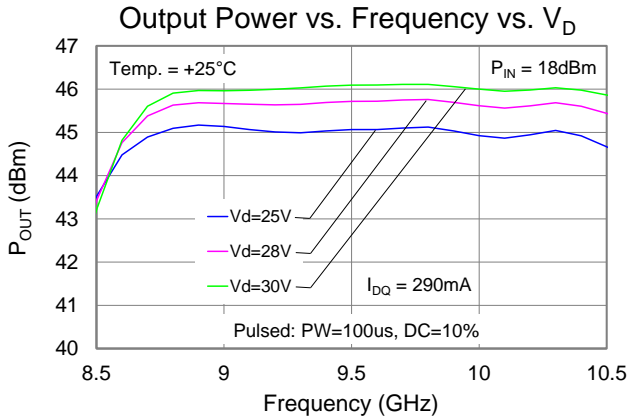







### Typical Performance – Large Signal (Pulsed)

Conditions unless otherwise specified:  $V_D = 28\text{ V}$ ,  $I_{DQ} = 290\text{ mA}$ ,  $V_G = -2.7\text{ V}$  typical.

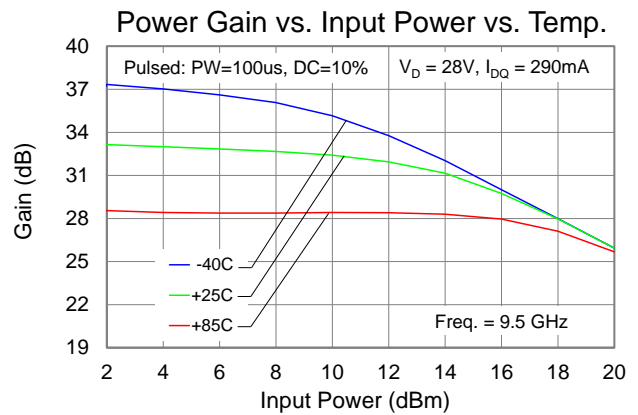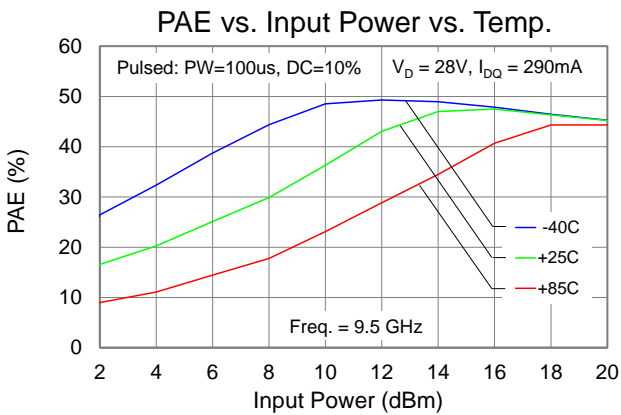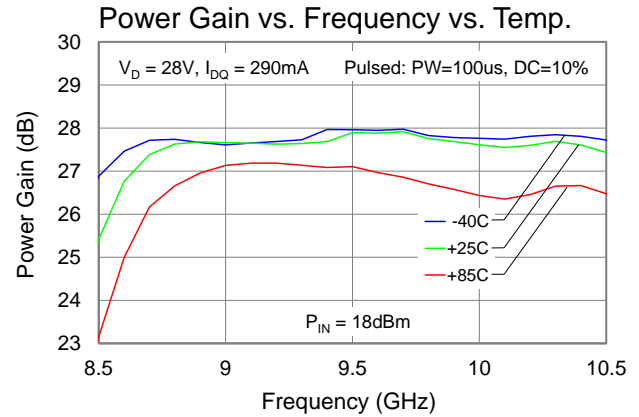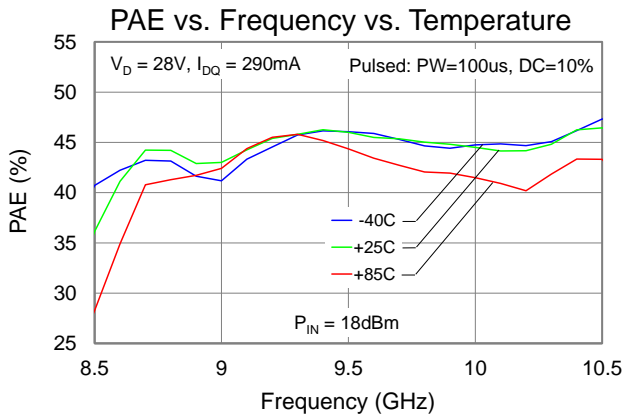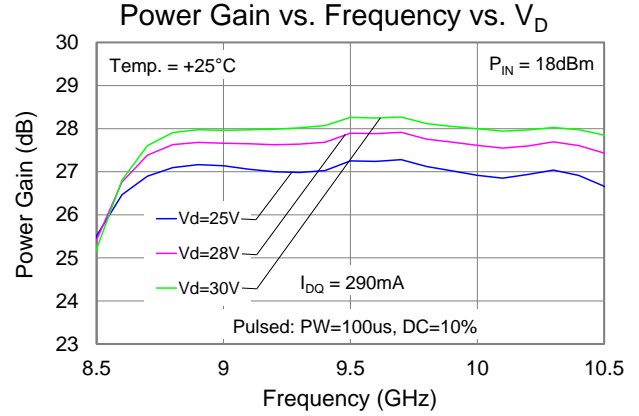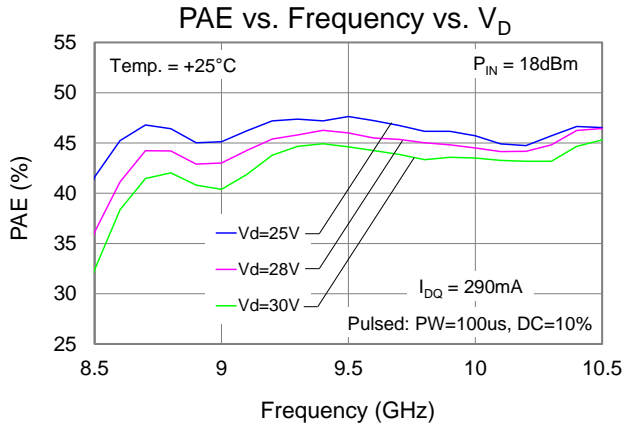







### Typical Performance – Large Signal (Pulsed)

Conditions unless otherwise specified:  $V_D = 28\text{ V}$ ,  $I_{DQ} = 290\text{ mA}$ ,  $V_G = -2.7\text{ V}$  typical.

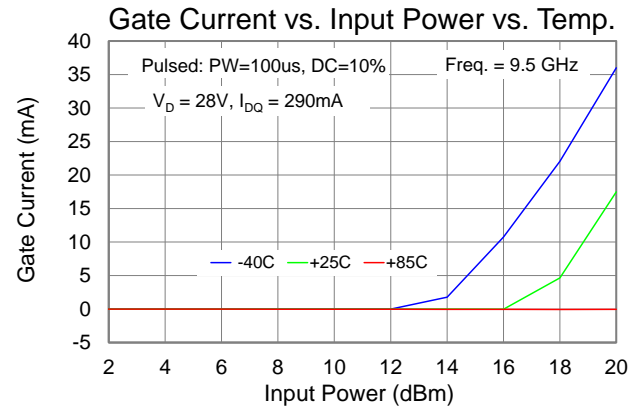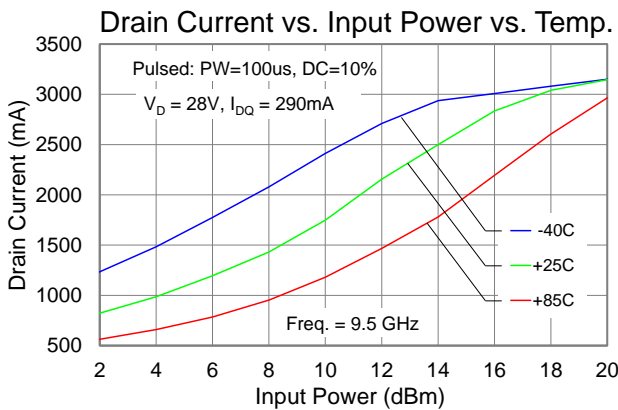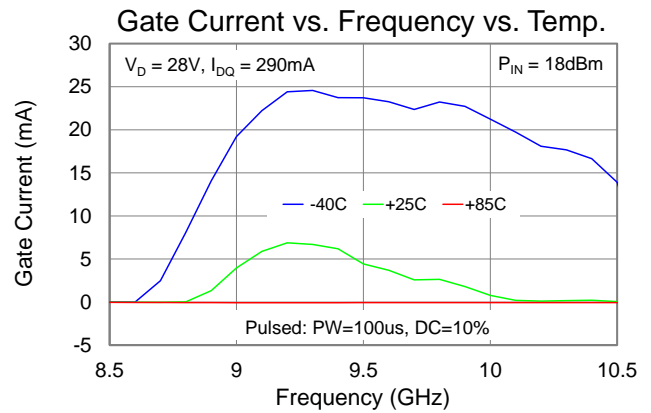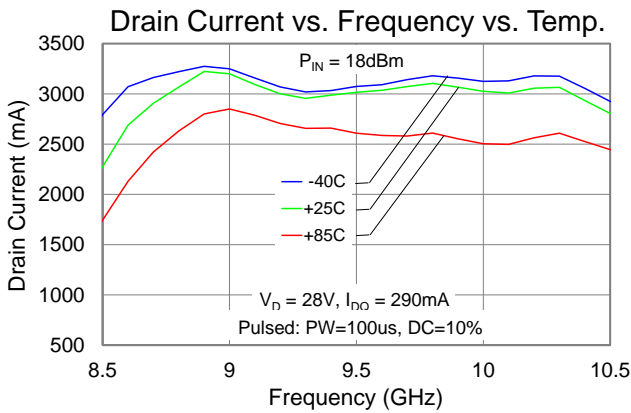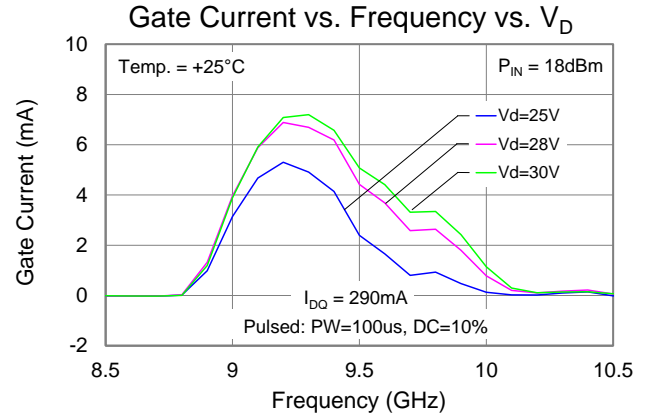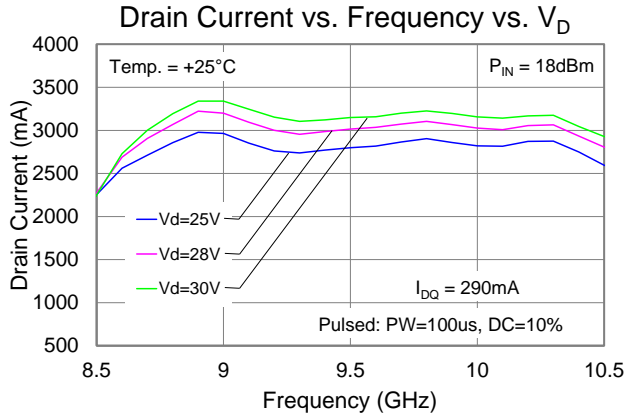







### Performance Plots – Large Signal (CW)

Conditions unless otherwise specified:  $V_D = 28\text{ V}$ ,  $I_{DQ} = 290\text{ mA}$ ,  $V_G = -2.7\text{ V}$  typical.

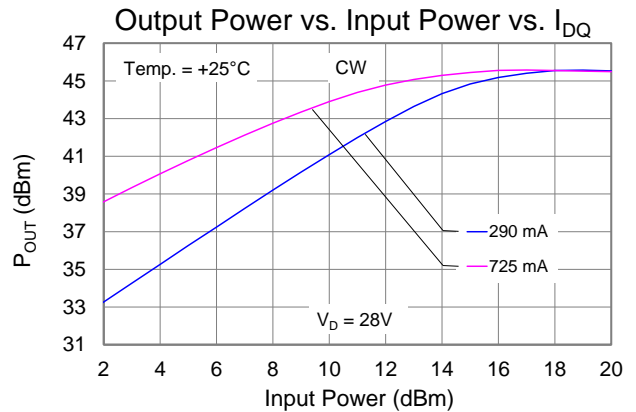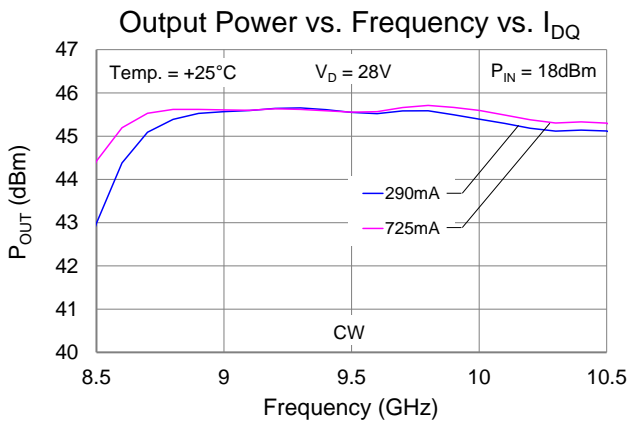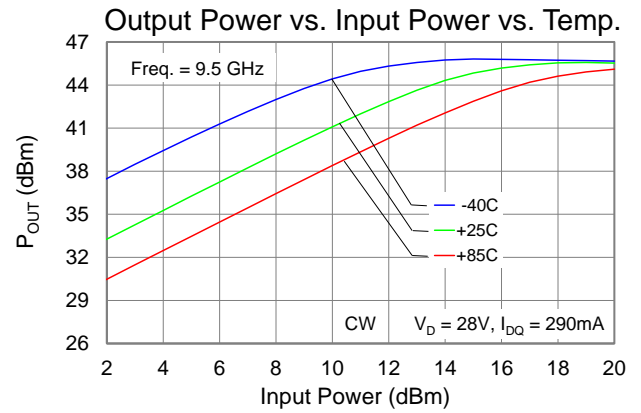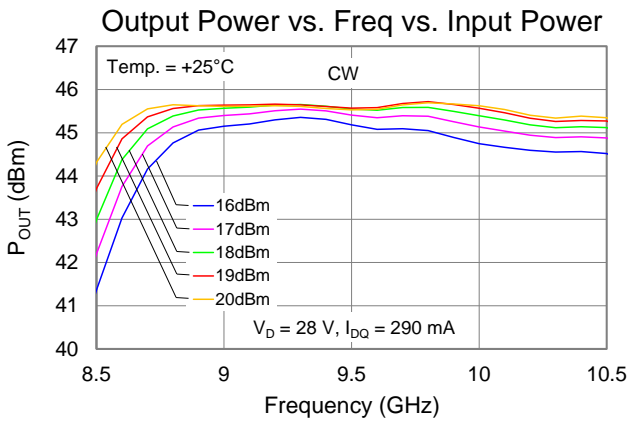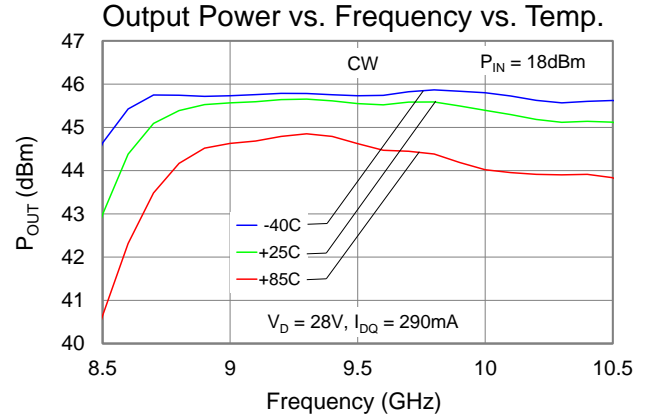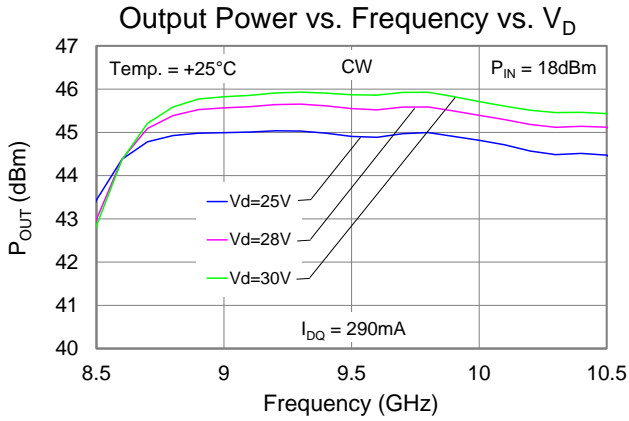







### Performance Plots – Large Signal (CW)

Conditions unless otherwise specified:  $V_D = 28\text{ V}$ ,  $I_{DQ} = 290\text{ mA}$ ,  $V_G = -2.7\text{ V}$  typical.

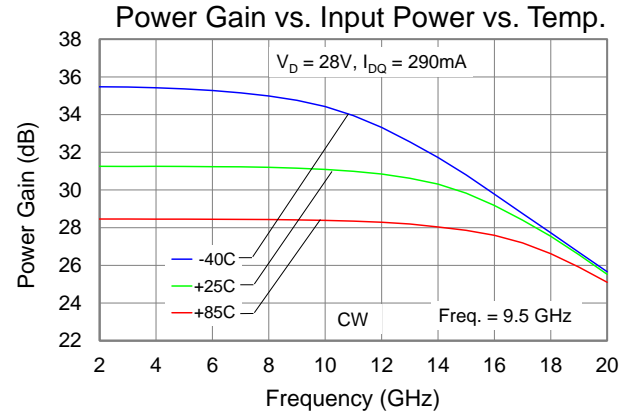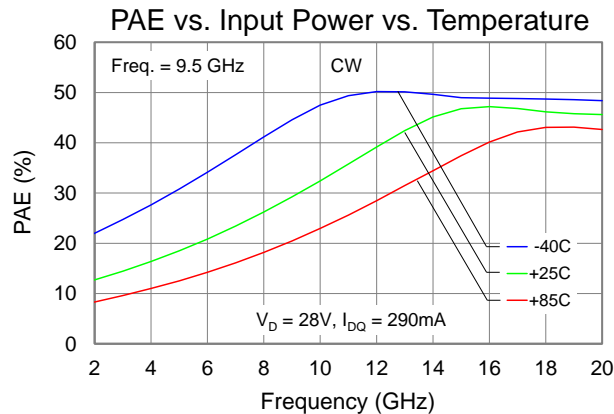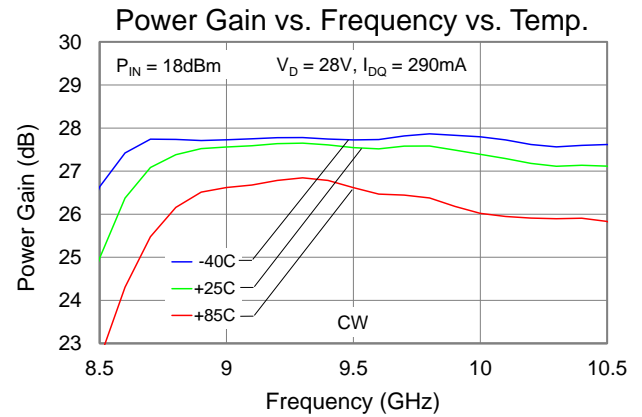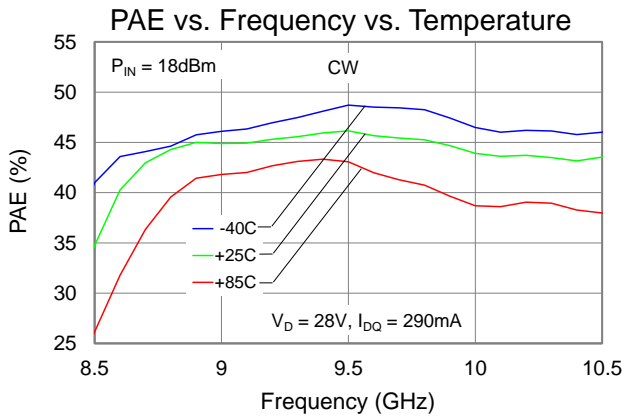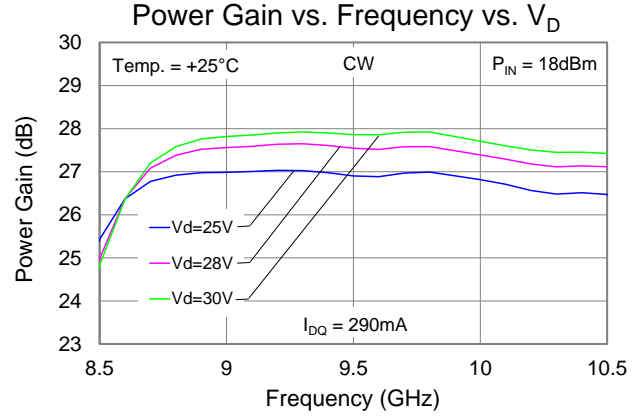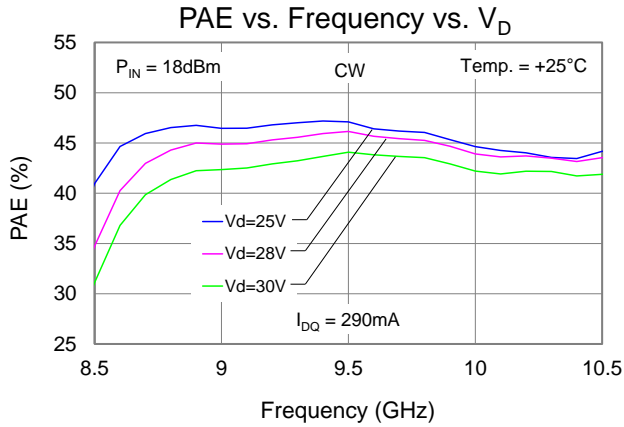

### Performance Plots – Large Signal (CW)







Conditions unless otherwise specified:  $V_D = 28\text{ V}$ ,  $I_{DQ} = 290\text{ mA}$ ,  $V_G = -2.7\text{ V}$  typical.

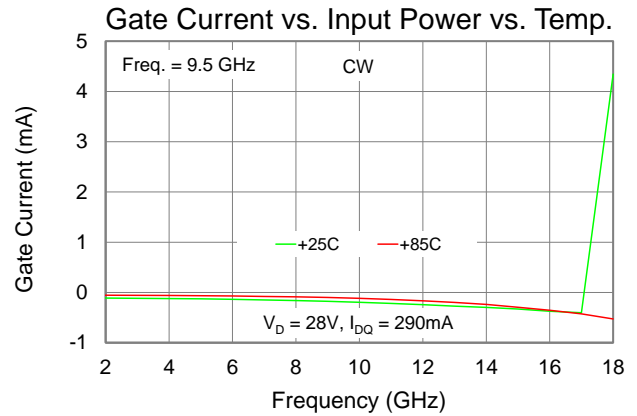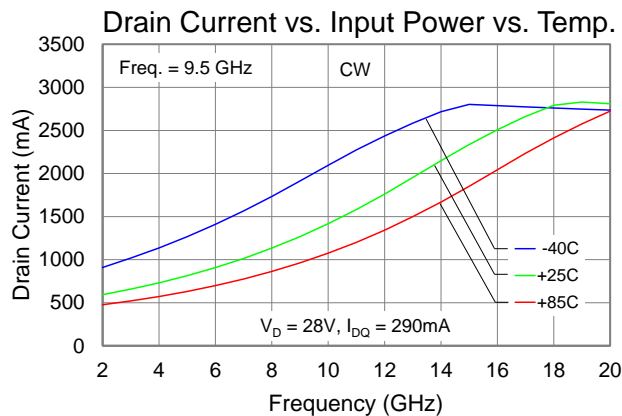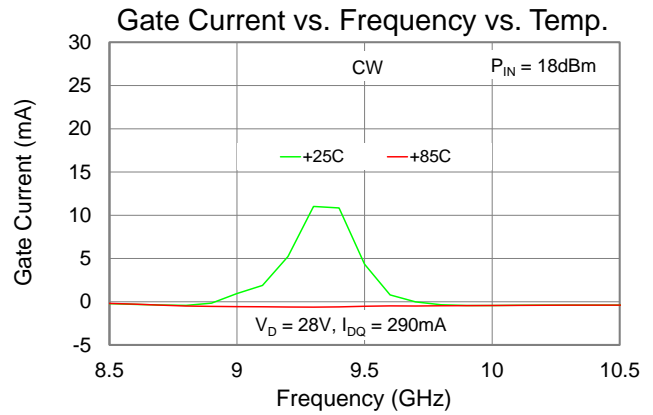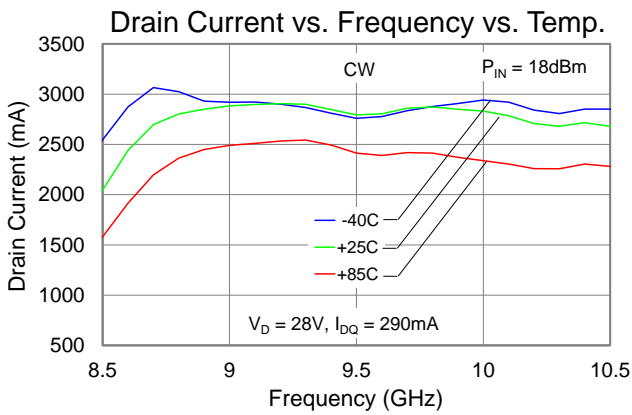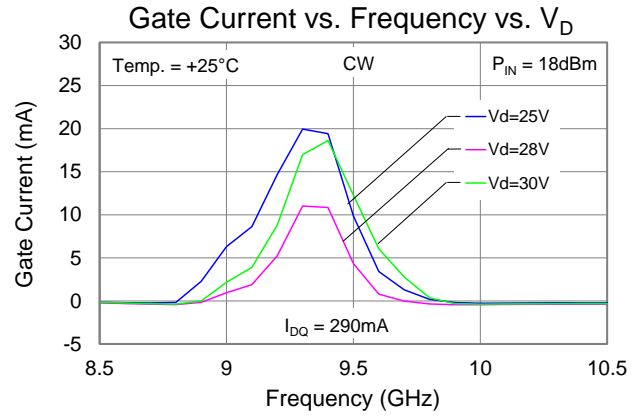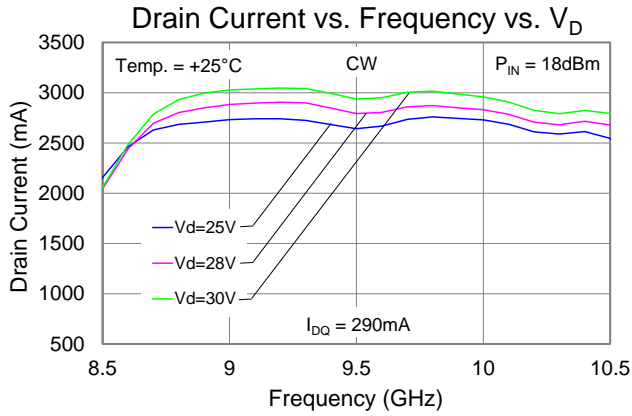









### Typical Performance – Linearity (CW)

Conditions unless otherwise specified:  $V_D = 28\text{ V}$ ,  $I_{DQ} = 290\text{ mA}$ ,  $V_G = -2.7\text{ V}$  typical.

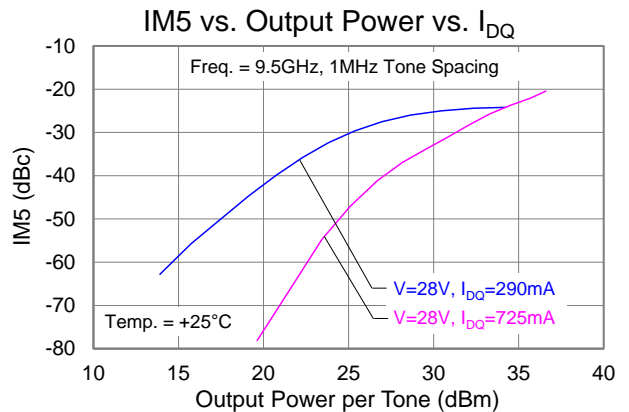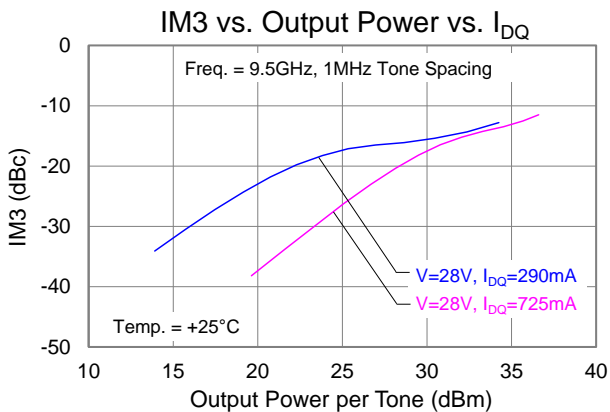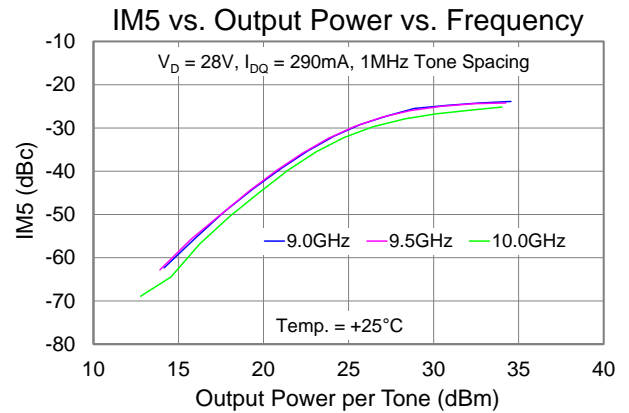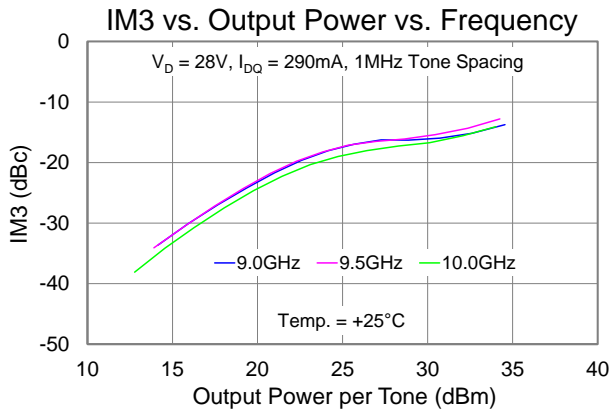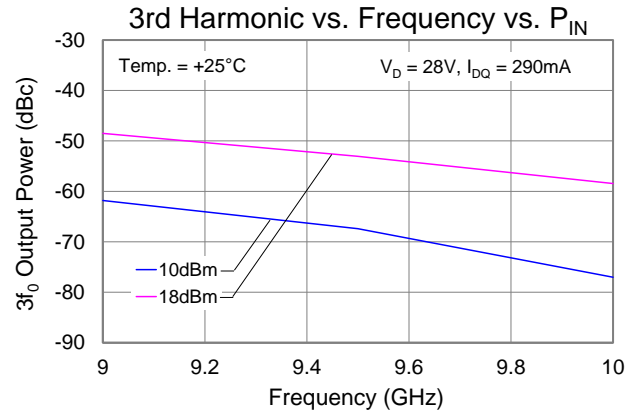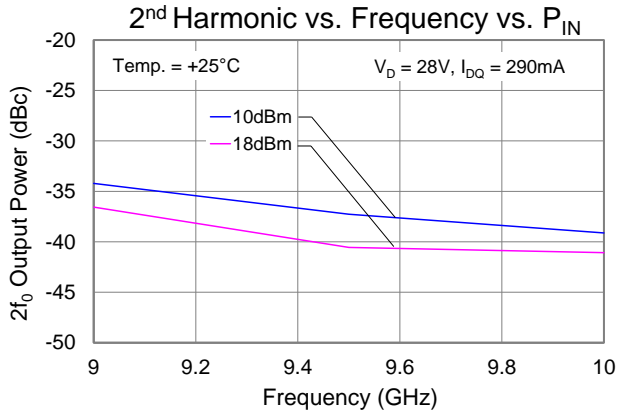

### Typical Performance – Small Signal (CW)

Conditions unless otherwise specified:  $V_D = 28\text{ V}$ ,  $I_{DQ} = 290\text{ mA}$ ,  $V_G = -2.7\text{ V}$  typical.

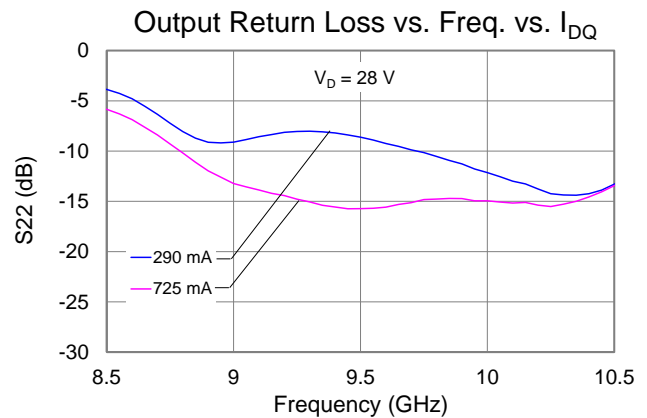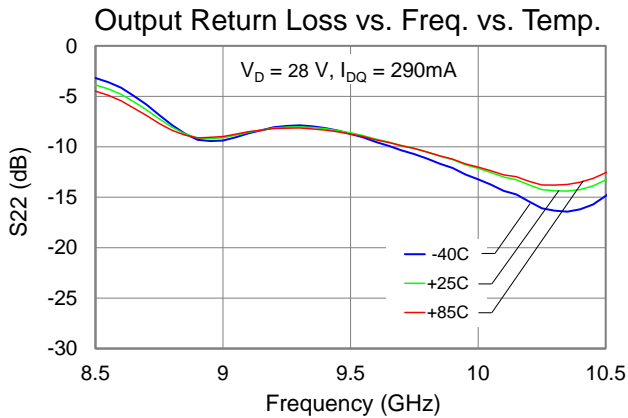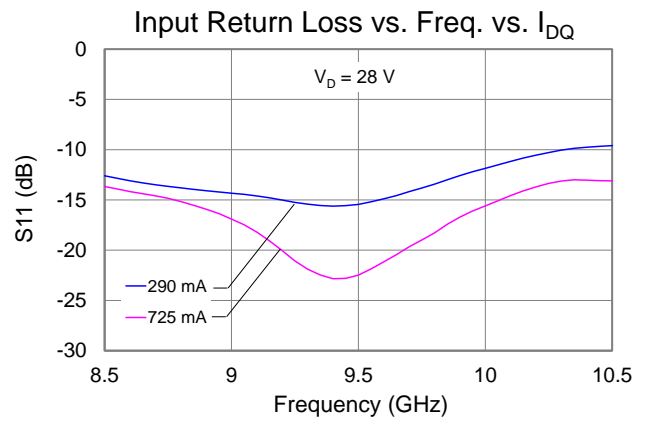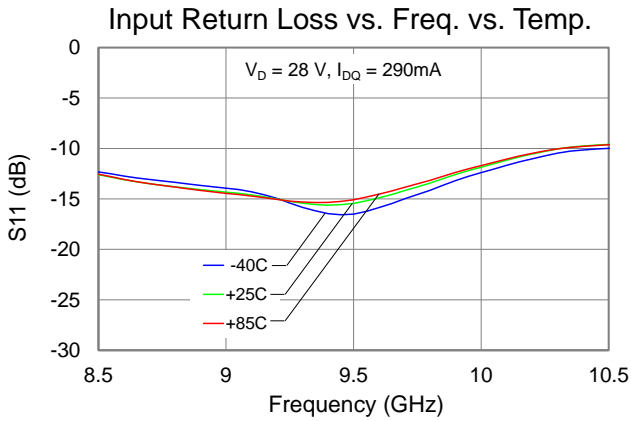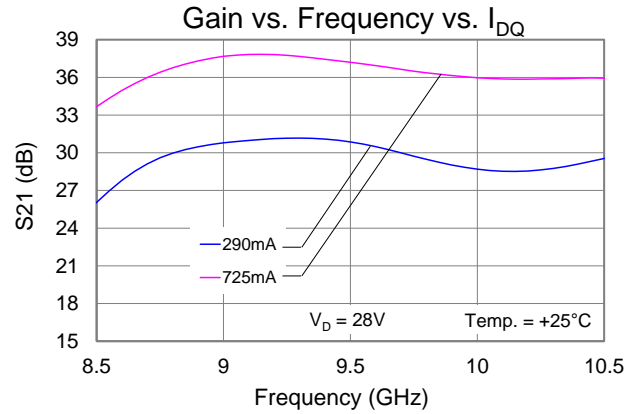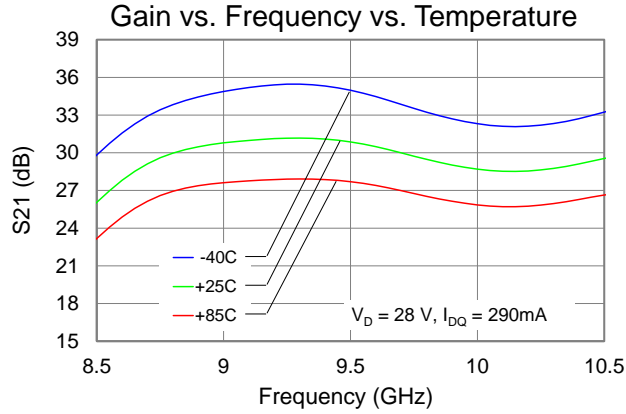




### Thermal and Reliability Information

| Parameter   | Test Conditions   | Value | Units                       |
|---|---|-------|-----------------------------|
| Thermal Resistance ( $\theta_{JC}$ ) <sup>(1)</sup> | CW, $V_D = 28\text{ V}$ , $I_{DQ} = 290\text{ mA}$ ,  | 1.222 | $^{\circ}\text{C}/\text{W}$ |
| Channel Temperature ( $T_{CH}$ ) (under RF drive)   | $T_{BASE} = 85^{\circ}\text{C}$ , $V_D = 28\text{ V}$ , $I_{D\_Drive} = 2.7\text{ A}$<br>$P_{IN} = 20\text{ dBm}$ , $P_{OUT} = 44.8\text{ dBm}$ , $P_{DISS} = 45\text{ W}$  | 140   | $^{\circ}\text{C}$          |
| Thermal Resistance ( $\theta_{JC}$ ) <sup>(1)</sup> | $V_D = 28\text{ V}$ , $I_{DQ} = 290\text{ mA}$ ,  | 0.788 | $^{\circ}\text{C}/\text{W}$ |
| Channel Temperature ( $T_{CH}$ ) (under RF drive)   | (Pulsed: $PW = 100\ \mu\text{s}$ , $DC = 10\%$ ),<br>$T_{BASE} = 85^{\circ}\text{C}$ , $V_D = 28\text{ V}$ , $I_{D\_Drive} = 3.2\text{ A}$<br>$P_{IN} = 20\text{ dBm}$ , $P_{OUT} = 45.6\text{ dBm}$ , $P_{DISS} = 52\text{ W}$ | 126   | $^{\circ}\text{C}$          |


Notes:

1. Thermal resistance measured to back of package.
2. Refer to the following document: [GaN Device Channel Temperature, Thermal Resistance, and Reliability Estimates](#)

### Power Dissipation and Maximum Gate Current

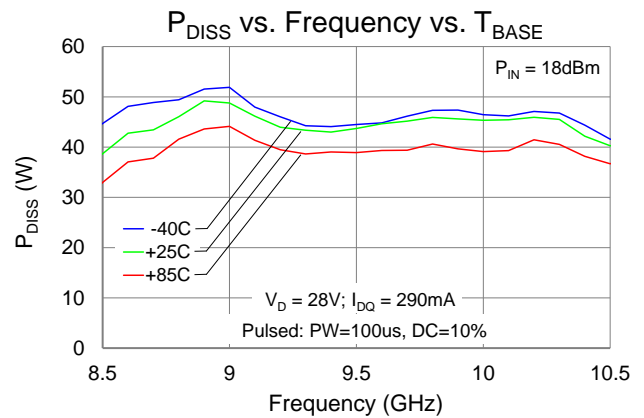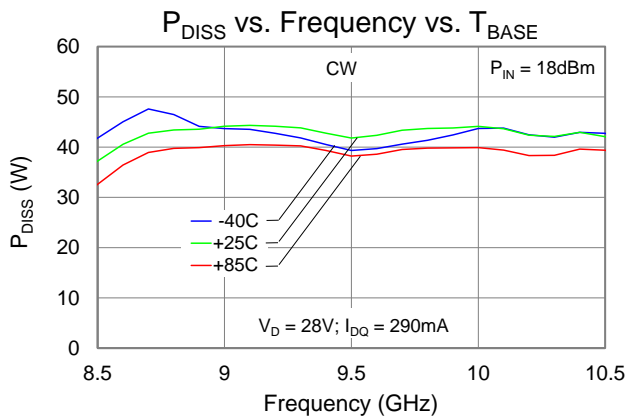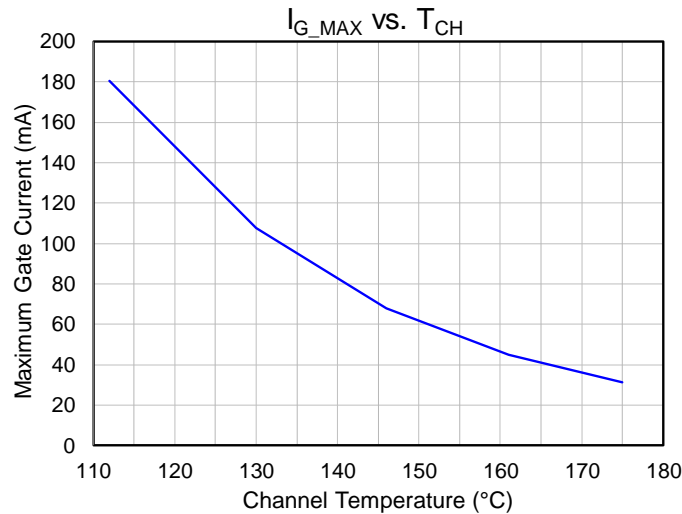

### Applications Information and Pin Layout

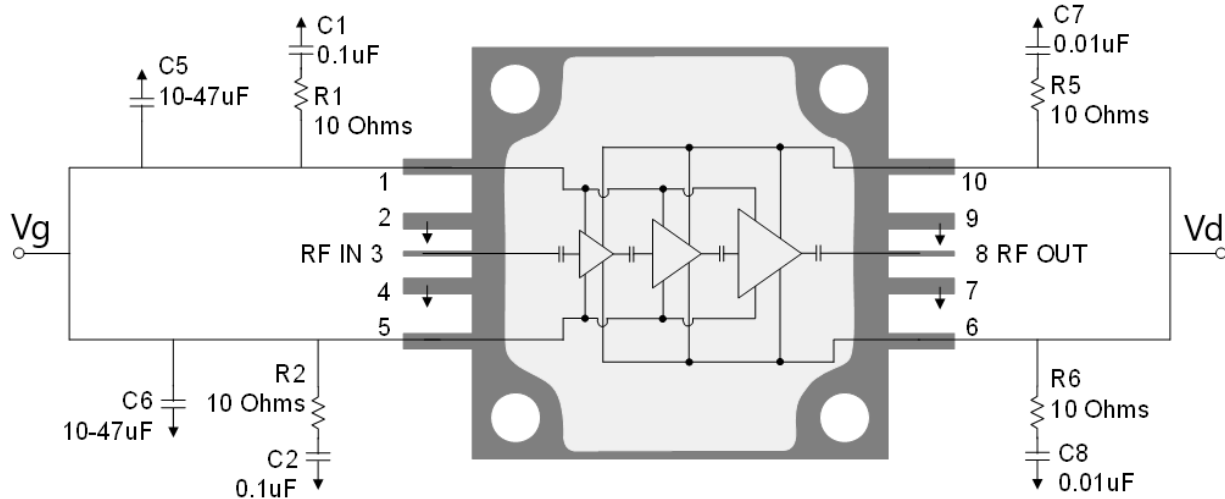

#### Bias Up Procedure

1. Set  $I_D$  limit to 3.5 A,  $I_G$  limit to 25 mA
2. Apply  $-5\text{ V}$  to  $V_G$
3. Apply  $+28\text{ V}$  to  $V_D$ ; ensure  $I_{DQ}$  is approx. 0 mA
4. Adjust  $V_G$  until  $I_{DQ} = 290\text{ mA}$  ( $V_G \sim -2.7\text{ V Typ.}$ ).
5. Turn on RF supply


#### Bias Down Procedure

1. Turn off RF supply
2. Reduce  $V_G$  to  $-5\text{ V}$ ; ensure  $I_{DQ}$  is approx. 0 mA
3. Set  $V_D$  to 0 V
4. Turn off  $V_D$  supply
5. Turn off  $V_G$  supply

#### Pin Description

| Pad No.    | Symbol     | Description   |
|------------|------------|---|
| 1, 5       | $V_G$      | Gate Voltage; Bias network is required; must be biased from both sides; see recommended Application Information above.  |
| 3          | $RF_{IN}$  | Output; matched to $50\ \Omega$ ; DC blocked  |
| 2, 4, 7, 9 | GND        | Must be grounded on the PCB.  |
| 6, 10      | $V_D$      | Drain voltage; Bias network is required; must be biased from both sides; see recommended Application Information above. |
| 8          | $RF_{OUT}$ | Input; matched to $50\ \Omega$ ; DC blocked   |

### Evaluation Board (EVB)

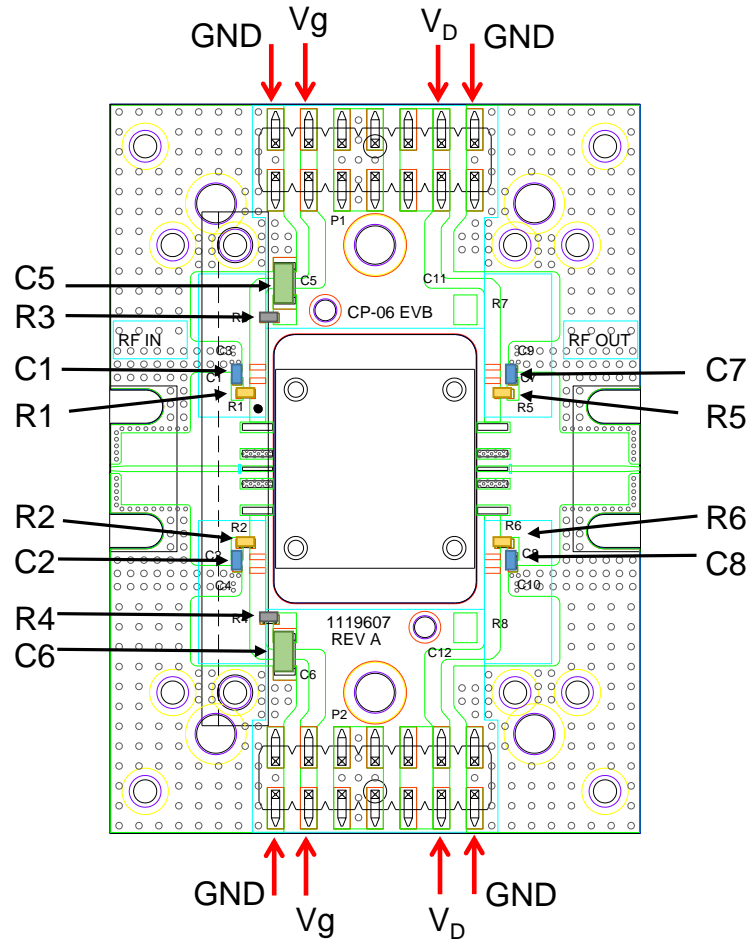

**NOTES:**

- (1) Both Top and Bottom  $V_d$  and  $V_g$  must be biased.
- (2) PCB is made from Rogers 4003C dielectric, 0.008 inch thick. 0.5 oz. copper both sides.


### Bill of Materials

| Reference Des. | Value       | Description   | Manuf.  | Part Number |
|----------------|-------------|---|---------|-------------|
| C1, C2         | 0.1 uF      | Cap, 0402, 50 V, 10%, X7R                           | Various |             |
| C5, C6         | 10-47 uF    | Cap, 1206, 50 V, 20%, X5R (10 V is OK)              | Various |             |
| C7, C8         | 0.01 uF     | Cap, 0402, 50V, 10%, X7R                            | Various |             |
| R1, R2, R5, R6 | 10 $\Omega$ | Res, 0402, 50V, 5%                                  | Various |             |
| R3, R4         | 0 $\Omega$  | Res, 0402, jumper required for the above EVB design | Various |             |

### Assembly Notes


---

1. Carefully clean the PC board and package leads with alcohol. Allow it to dry fully.
2. To improve the thermal and RF performance, Qorvo recommends attaching a heat sink to the bottom of the PCB and apply thermal compound (Arctic Silver 5 recommended) or 4 mil indium shim between the heat sink and the package.
3. (The following is for *information only*. There are many variables in a second level assembly that Qorvo does not control, so Qorvo does not recommend an absolute torque value.) Use screws to attach the component to the heat sink. A suggested torque value is 16 in-oz. for a 0-80 screw. Start with screws finger tight, then torque to 8 in-oz., then torque to final value. Use the following tightening pattern:

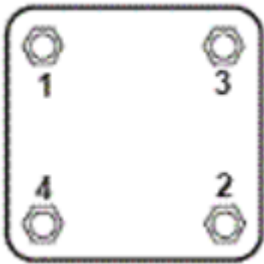

4. Apply no-flux solder to each pin of the TGA2622-CP. The component leads should be manually soldered, and the package cannot be subjected to conventional reflow processes. The use of no-clean solder to avoid washing after soldering is recommended.

### Mechanical Information

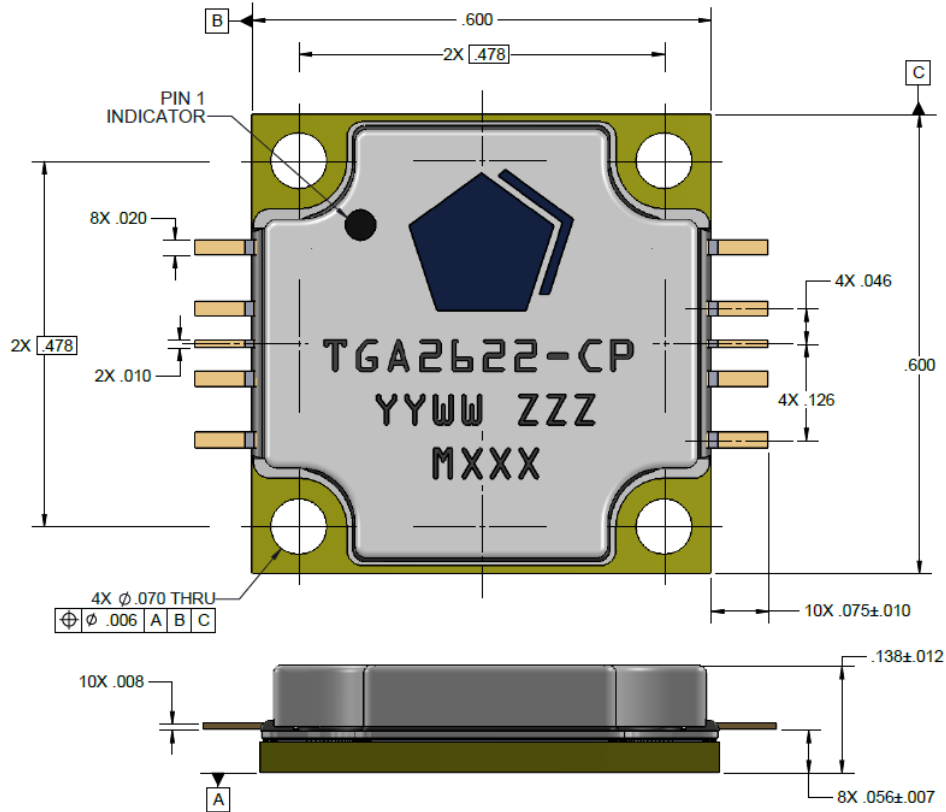

Units: inches

Tolerances: unless specified

x.xx = ± 0.01

x.xxx = ± 0.005

Materials:

Base: Copper

Lid: Plastic

All metalized features are gold plated

Part is epoxy sealed

Marking:

2622: Part number

YY: Part Assembly year

WW: Part Assembly week

ZZZ: Serial Number

MXXX: Batch ID

## Handling Precautions

| Parameter                        | Rating | Standard                 |
|----------------------------------|--------|--------------------------|
| ESD – Human Body Model (HBM)     | 1B     | ESDA / JEDEC JS-001-2014 |
| ESD – Charged Device Model (CDM) | C1     | ESDA / JEDEC JS-002-2014 |
| MSL – Moisture Sensitivity Level | N/A    |                          |



Caution!  
ESD-Sensitive Device

## Solderability

The component leads should be manually soldered, and the package cannot be subjected to conventional reflow processes. Soldering of the component leads is compatible with the latest version of J-STD-020, lead-free solder, 260 °C. The use of no-clean solder to avoid washing after soldering is recommended.

## RoHS Compliance

This product is compliant with the 2011/65/EU RoHS directive (Restrictions on the Use of Certain Hazardous Substances in Electrical and Electronic Equipment), as amended by Directive 2015/863/EU. This product also has the following attributes:

- Lead Free
- Halogen Free (Chlorine, Bromine)
- Antimony Free
- TBBP-A (C<sub>15</sub>H<sub>12</sub>Br<sub>4</sub>O<sub>2</sub>) Free
- PFOS Free
- SVHC Free

## Contact Information

For the latest specifications, additional product information, worldwide sales and distribution locations:

**Web:** [www.qorvo.com](http://www.qorvo.com)  
**Tel:** 1-844-890-8163  
**Email:** [customer.support@qorvo.com](mailto:customer.support@qorvo.com)

## Important Notice

The information contained herein is believed to be reliable; however, Qorvo makes no warranties regarding the information contained herein and assumes no responsibility or liability whatsoever for the use of the information contained herein. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for Qorvo products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information. **THIS INFORMATION DOES NOT CONSTITUTE A WARRANTY WITH RESPECT TO THE PRODUCTS DESCRIBED HEREIN, AND QORVO HEREBY DISCLAIMS ANY AND ALL WARRANTIES WITH RESPECT TO SUCH PRODUCTS WHETHER EXPRESS OR IMPLIED BY LAW, COURSE OF DEALING, COURSE OF PERFORMANCE, USAGE OF TRADE OR OTHERWISE, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.**

Without limiting the generality of the foregoing, Qorvo products are not warranted or authorized for use as critical components in medical, life-saving, or life-sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.

Copyright 2019 © Qorvo, Inc. | Qorvo is a registered trademark of Qorvo, Inc.





Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.