

# 2N3055(NPN), MJ2955(PNP)

Preferred Device

## Complementary Silicon Power Transistors

Complementary silicon power transistors are designed for general-purpose switching and amplifier applications.

### Features

- DC Current Gain –  $h_{FE} = 20-70$  @  $I_C = 4$  Adc
- Collector-Emitter Saturation Voltage –  
 $V_{CE(sat)} = 1.1$  Vdc (Max) @  $I_C = 4$  Adc
- Excellent Safe Operating Area
- Pb-Free Packages are Available\*

### MAXIMUM RATINGS

| Rating                                                                                | Symbol         | Value        | Unit                     |
|---------------------------------------------------------------------------------------|----------------|--------------|--------------------------|
| Collector-Emitter Voltage                                                             | $V_{CEO}$      | 60           | Vdc                      |
| Collector-Emitter Voltage                                                             | $V_{CER}$      | 70           | Vdc                      |
| Collector-Base Voltage                                                                | $V_{CB}$       | 100          | Vdc                      |
| Emitter-Base Voltage                                                                  | $V_{EB}$       | 7            | Vdc                      |
| Collector Current – Continuous                                                        | $I_C$          | 15           | Adc                      |
| Base Current                                                                          | $I_B$          | 7            | Adc                      |
| Total Power Dissipation @ $T_C = 25^\circ\text{C}$<br>Derate Above $25^\circ\text{C}$ | $P_D$          | 115<br>0.657 | W<br>W/ $^\circ\text{C}$ |
| Operating and Storage Junction<br>Temperature Range                                   | $T_J, T_{stg}$ | -65 to +200  | $^\circ\text{C}$         |

Maximum ratings are those values beyond which device damage can occur. Maximum ratings applied to the device are individual stress limit values (not normal operating conditions) and are not valid simultaneously. If these limits are exceeded, device functional operation is not implied, damage may occur and reliability may be affected.

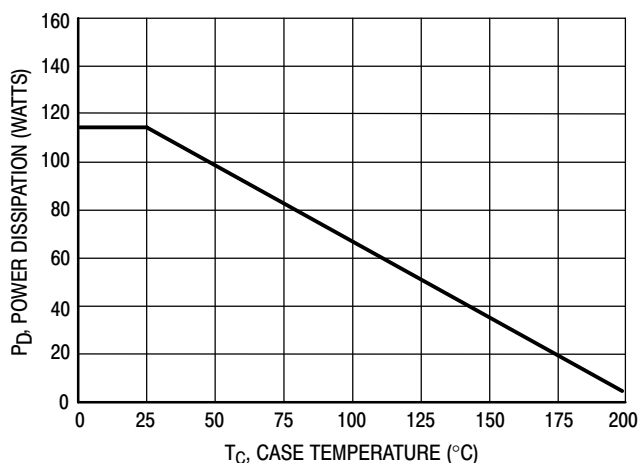


Figure 1. Power Derating


\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.



ON Semiconductor®

<http://onsemi.com>

## 15 AMPERE POWER TRANSISTORS COMPLEMENTARY SILICON 60 VOLTS, 115 WATTS



TO-204AA (TO-3)  
CASE 1-07  
STYLE 1

### MARKING DIAGRAM



xxxx55 = Device Code  
xxxx = 2N30 or MJ20  
G = Pb-Free Package  
A = Location Code  
YY = Year  
WW = Work Week  
MEX = Country of Origin

### ORDERING INFORMATION

| Device  | Package               | Shipping         |
|---------|-----------------------|------------------|
| 2N3055  | TO-204AA              | 100 Units / Tray |
| 2N3055G | TO-204AA<br>(Pb-Free) | 100 Units / Tray |
| MJ2955  | TO-204AA              | 100 Units / Tray |
| MJ2955G | TO-204AA<br>(Pb-Free) | 100 Units / Tray |

Preferred devices are recommended choices for future use and best overall value.

## 2N3055(NPN), MJ2955(PNP)

### THERMAL CHARACTERISTICS

| Characteristic                       | Symbol          | Max  | Unit                 |
|--------------------------------------|-----------------|------|----------------------|
| Thermal Resistance, Junction-to-Case | $R_{\theta JC}$ | 1.52 | $^{\circ}\text{C/W}$ |

### ELECTRICAL CHARACTERISTICS ( $T_C = 25^{\circ}\text{C}$ unless otherwise noted)

| Characteristic | Symbol | Min | Max | Unit |
|----------------|--------|-----|-----|------|
|----------------|--------|-----|-----|------|

#### OFF CHARACTERISTICS\*

|                                                                                                                                                                                            |                |    |            |      |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|----|------------|------|
| Collector-Emitter Sustaining Voltage (Note 1) ( $I_C = 200\text{ mAdc}$ , $I_B = 0$ )                                                                                                      | $V_{CEO(sus)}$ | 60 | –          | Vdc  |
| Collector-Emitter Sustaining Voltage (Note 1) ( $I_C = 200\text{ mAdc}$ , $R_{BE} = 100\ \Omega$ )                                                                                         | $V_{CER(sus)}$ | 70 | –          | Vdc  |
| Collector Cutoff Current ( $V_{CE} = 30\text{ Vdc}$ , $I_B = 0$ )                                                                                                                          | $I_{CEO}$      | –  | 0.7        | mAdc |
| Collector Cutoff Current<br>( $V_{CE} = 100\text{ Vdc}$ , $V_{BE(off)} = 1.5\text{ Vdc}$ )<br>( $V_{CE} = 100\text{ Vdc}$ , $V_{BE(off)} = 1.5\text{ Vdc}$ , $T_C = 150^{\circ}\text{C}$ ) | $I_{CEX}$      | –  | 1.0<br>5.0 | mAdc |
| Emitter Cutoff Current ( $V_{BE} = 7.0\text{ Vdc}$ , $I_C = 0$ )                                                                                                                           | $I_{EBO}$      | –  | 5.0        | mAdc |

#### ON CHARACTERISTICS\* (Note 1)

|                                                                                                                                                    |               |           |            |     |
|----------------------------------------------------------------------------------------------------------------------------------------------------|---------------|-----------|------------|-----|
| DC Current Gain<br>( $I_C = 4.0\text{ Adc}$ , $V_{CE} = 4.0\text{ Vdc}$ )<br>( $I_C = 10\text{ Adc}$ , $V_{CE} = 4.0\text{ Vdc}$ )                 | $h_{FE}$      | 20<br>5.0 | 70<br>–    | –   |
| Collector-Emitter Saturation Voltage<br>( $I_C = 4.0\text{ Adc}$ , $I_B = 400\text{ mAdc}$ )<br>( $I_C = 10\text{ Adc}$ , $I_B = 3.3\text{ Adc}$ ) | $V_{CE(sat)}$ | –         | 1.1<br>3.0 | Vdc |
| Base-Emitter On Voltage ( $I_C = 4.0\text{ Adc}$ , $V_{CE} = 4.0\text{ Vdc}$ )                                                                     | $V_{BE(on)}$  | –         | 1.5        | Vdc |

#### SECOND BREAKDOWN

|                                                                                                                                 |           |      |   |     |
|---------------------------------------------------------------------------------------------------------------------------------|-----------|------|---|-----|
| Second Breakdown Collector Current with Base Forward Biased<br>( $V_{CE} = 40\text{ Vdc}$ , $t = 1.0\text{ s}$ , Nonrepetitive) | $I_{S/b}$ | 2.87 | – | Adc |
|---------------------------------------------------------------------------------------------------------------------------------|-----------|------|---|-----|

#### DYNAMIC CHARACTERISTICS

|                                                                                                                           |           |     |     |     |
|---------------------------------------------------------------------------------------------------------------------------|-----------|-----|-----|-----|
| Current Gain – Bandwidth Product ( $I_C = 0.5\text{ Adc}$ , $V_{CE} = 10\text{ Vdc}$ , $f = 1.0\text{ MHz}$ )             | $f_T$     | 2.5 | –   | MHz |
| *Small-Signal Current Gain ( $I_C = 1.0\text{ Adc}$ , $V_{CE} = 4.0\text{ Vdc}$ , $f = 1.0\text{ kHz}$ )                  | $h_{fe}$  | 15  | 120 | –   |
| *Small-Signal Current Gain Cutoff Frequency ( $V_{CE} = 4.0\text{ Vdc}$ , $I_C = 1.0\text{ Adc}$ , $f = 1.0\text{ kHz}$ ) | $f_{hfe}$ | 10  | –   | kHz |

\*Indicates Within JEDEC Registration. (2N3055)

1. Pulse Test: Pulse Width  $\leq 300\ \mu\text{s}$ , Duty Cycle  $\leq 2.0\%$ .

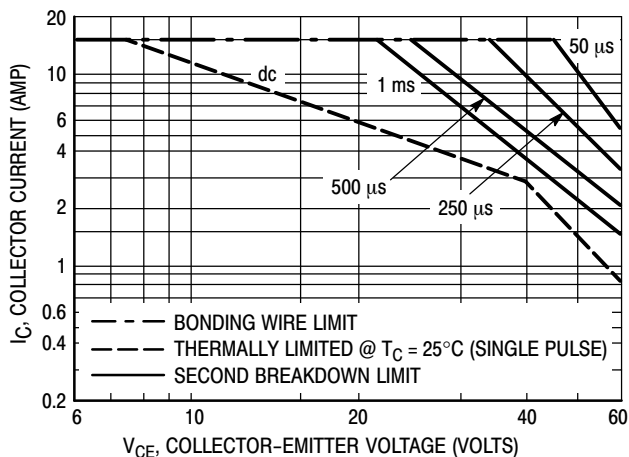


Figure 2. Active Region Safe Operating Area

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate  $I_C - V_{CE}$  limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 2 is based on  $T_C = 25^{\circ}\text{C}$ ;  $T_{J(pk)}$  is variable depending on power level. Second breakdown pulse limits are valid for duty cycles to 10% but must be derated for temperature according to Figure 1.

## 2N3055(NPN), MJ2955(PNP)

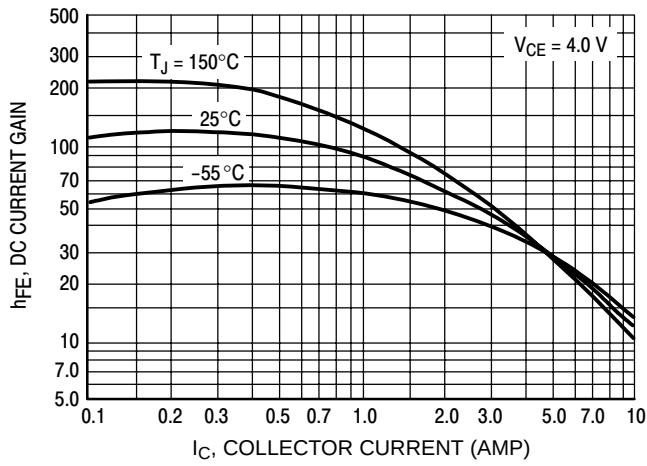


Figure 3. DC Current Gain, 2N3055 (NPN)

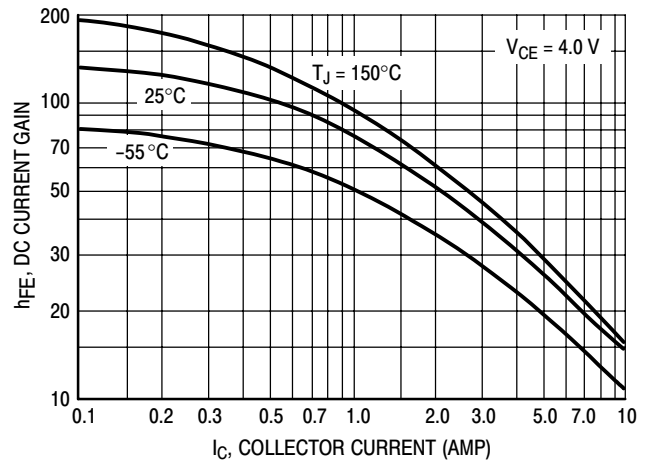


Figure 4. DC Current Gain, MJ2955 (PNP)

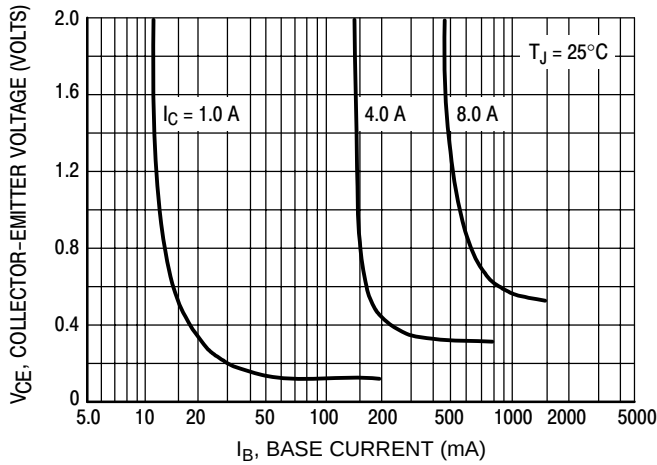


Figure 5. Collector Saturation Region, 2N3055 (NPN)

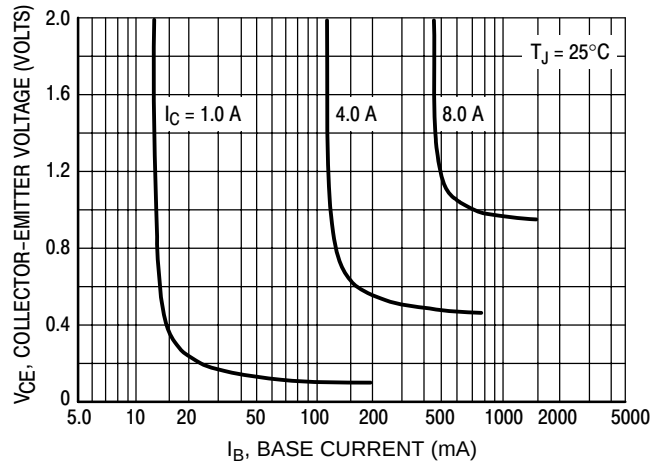


Figure 6. Collector Saturation Region, MJ2955 (PNP)

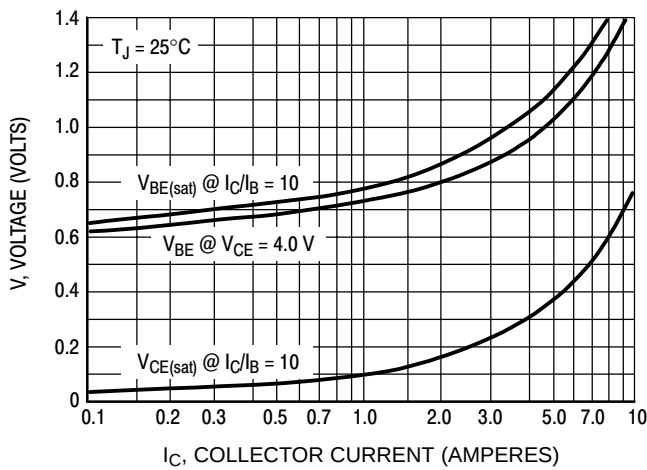


Figure 7. "On" Voltages, 2N3055 (NPN)


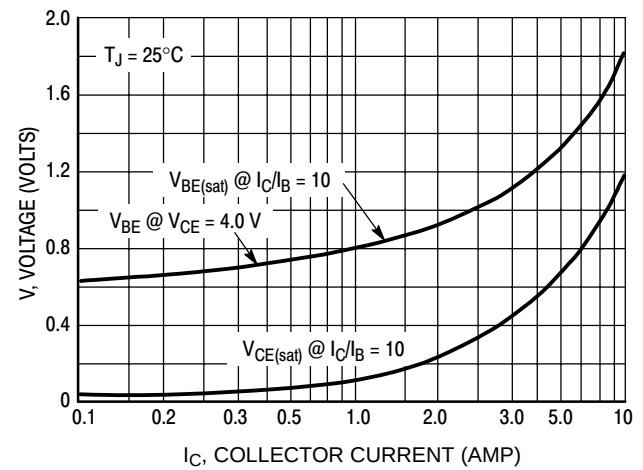


Figure 8. "On" Voltages, MJ2955 (PNP)

# 2N3055(NPN), MJ2955(PNP)

## PACKAGE DIMENSIONS

TO-204 (TO-3)  
CASE 1-07  
ISSUE Z

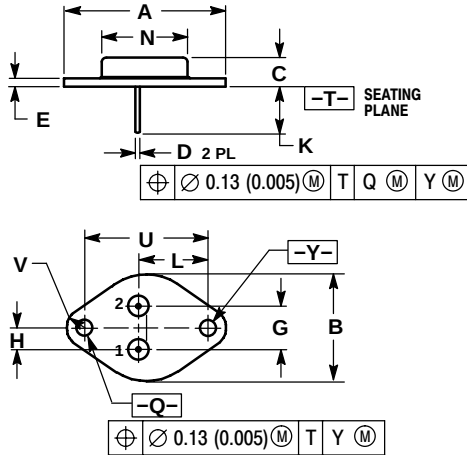

### NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. ALL RULES AND NOTES ASSOCIATED WITH REFERENCED TO-204AA OUTLINE SHALL APPLY.

| DIM | INCHES    |       | MILLIMETERS |       |
|-----|-----------|-------|-------------|-------|
|     | MIN       | MAX   | MIN         | MAX   |
| A   | 1.550 REF |       | 39.37 REF   |       |
| B   | ---       | 1.050 | ---         | 26.67 |
| C   | 0.250     | 0.335 | 6.35        | 8.51  |
| D   | 0.038     | 0.043 | 0.97        | 1.09  |
| E   | 0.055     | 0.070 | 1.40        | 1.77  |
| G   | 0.430 BSC |       | 10.92 BSC   |       |
| H   | 0.215 BSC |       | 5.46 BSC    |       |
| K   | 0.440     | 0.480 | 11.18       | 12.19 |
| L   | 0.665 BSC |       | 16.89 BSC   |       |
| N   | ---       | 0.830 | ---         | 21.08 |
| Q   | 0.151     | 0.165 | 3.84        | 4.19  |
| U   | 1.187 BSC |       | 30.15 BSC   |       |
| V   | 0.131     | 0.188 | 3.33        | 4.77  |

### STYLE 1:

- PIN 1. BASE
- EMITTER
- COLLECTOR

ON Semiconductor and  are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

## PUBLICATION ORDERING INFORMATION

### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor  
P.O. Box 61312, Phoenix, Arizona 85082-1312 USA  
Phone: 480-829-7710 or 800-344-3860 Toll Free USA/Canada  
Fax: 480-829-7709 or 800-344-3867 Toll Free USA/Canada  
Email: [orderlit@onsemi.com](mailto:orderlit@onsemi.com)

N. American Technical Support: 800-282-9855 Toll Free  
USA/Canada

Japan: ON Semiconductor, Japan Customer Focus Center  
2-9-1 Kamimeguro, Meguro-ku, Tokyo, Japan 153-0051  
Phone: 81-3-5773-3850

ON Semiconductor Website: <http://onsemi.com>

Order Literature: <http://www.onsemi.com/litorder>

For additional information, please contact your  
local Sales Representative.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.