
Piezoelectric Sound Components

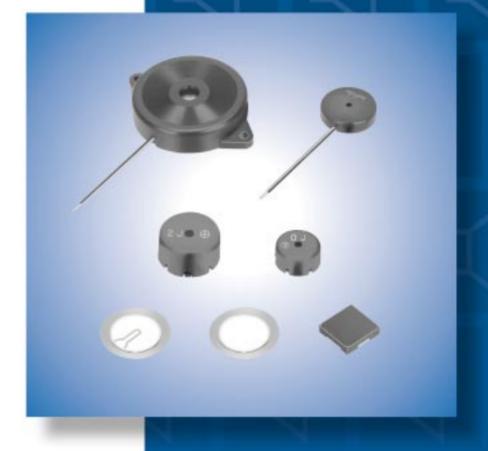

muRata

Innovator in Electronics

Murata Manufacturing Co., Ltd.

for EU RoHS Compliant

- · All the products in this catalog comply with EU RoHS.
- EU RoHS is "the European Directive 2002/95/EC on the Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment".
- · For more details, please refer to our website 'Murata's Approach for EU RoHS' (http://www.murata.com/info/rohs.html).



CONTENTS

 $\label{eq:piezoringer} {\sf PIEZORINGER}^{\circledR} \ \ {\sf and} \ \ "{\sf PIEZORINGER}" \ \ {\sf in} \ \ {\sf this} \ \ {\sf catalog} \ \ {\sf are} \\ \ \ {\sf the} \ \ {\sf trademarks} \ \ {\sf of} \ \ {\sf Murata} \ \ {\sf Manufacturing} \ \ {\sf Co., Ltd.}$

Part Numbering ————————————————————————————————————	
Application Matrix	
1 Piezoelectric Diaphragms	
External Drive Type	
Self Drive Type	
Piezoelectric Diaphragms Notice	
Piezoelectric Sounders External Drive Pin Type	
Piezoelectric Sounders (External Drive Pin Type) Circuit/Notice	
Piezoelectric Sounders External Drive Pin Type Taping	
Piezoelectric Sounders (External Drive Pin Type Taping) Circuit/Notice	
Piezoelectric Sounders External Drive Lead Wire Type	
Piezoelectric Sounders (External Drive Lead Wire Type) Circuit/Notice	
Piezoelectric Sounders External Drive SMD Type	
Piezoelectric Sounders (External Drive SMD Type) Circuit/Notice	
6 Piezoelectric Ringers (PIEZORINGER®)	
Pin Type ————————————————————————————————————	
Lead Wire Type	
Piezoelectric Ringers (PIEZORINGER®) Notice	
7 Piezoelectric Sounders Self Drive Pin Type ————————————————————————————————————	
Piezoelectric Sounders (Self Drive) Notice	
8 Piezoelectric Buzzers —	
Pin Type ————————————————————————————————————	
Lead Wire Type	
Piezoelectric Buzzers Notice	
Piezoelectric Sound Components Notice	
Package	

2

3

4

5

6

7

Part Numbering

Piezoelectric Diaphragms

7 N B -31R2 DM -1R5 (Part Number)

Product ID

Product ID	
7	Ceramic Material

2Material

Code	Metal Plate Material
В	Brass
N	Nickel Alloy
S	SUS

3Product

Code	Product
В	Piezoelectric Diaphragms

4Metal Plate Diameter

Code	Metal Plate Diameter
-31R2	A hyphen (-) plus four digits alphanumerics express metal plate outer dimensions. A decimal point is expressed by the capital letter "R".

If there is no decimal point, the decimal point code is omitted.

6Form of Piezoelectric Style

Code	Form of Piezoelectric Style
DM	Two digits express shape of ceramics.

For an Ag electrode, this digit remains blank, the corresponding code is omitted.

6Resonant Frequency Type

Code	Resonant Frequency (kHz)
-1R5	A hyphen (-) and three digits alphanumerics express resonant frequency. A decimal point is expressed by the capital letter "R".

If there is no decimal point, the decimal point is omitted.

With Feedback Electrode

Code	With Feedback Electrode
С	With Feedback Electrode
_	Without Feedback Electrode

8 Product Specification

Code	Product Specification
L	With lead (available for RoHS)
_	No lead (omitted)

9Individual Specification Code

Code	Individual Specification Code
10	These digits express a lead length, lead number, and presence/absence of a connector.

If the product has no individual specification, the corresponding code



Piezoelectric Sounders/Piezoelectric Buzzers/Piezoelectric Ringers (PIEZORINGER®)

PK M 13 E P YH 40 00 P -A0 (Part Number)

1 Product ID

Product ID	
PK	Piezoelectric Sound Components

2Product

Code	Product
М	Sounder, Ringer
В	Buzzer

3Outer Dimensions

Expressed by two figures in mm.

Ex.)	Code	Outer Dimensions
	13	ø12.6mm

4 Drive

01 -	Dutuu
Code	Drive
E	External-Drive
S	Self-Drive

5Outer Electrode Style

Code	Outer Electrode Style
Р	Pin Type
W	Lead Wire Type

6Structure

Code	Structure
T□	Standing Type
P□	Flat Type Auto-assemble
Y □	Flat Type/Available for Taping
C	Flat Type/Semi-auto-assemble
	Exclude above mentioned

[☐] means specification of outer electrode.

SMD Piezoelectric Sounder

(Part Number)	PK	LCS	1212	E	40	01	-R1	
	_	_	_	_	_	_	_	

●Product ID

Product ID	
PK	Piezoelectric Sound Components

2Product

Code	Product
LCS	SMD Sounder

3Dimensions

Code	Outer Dimensions
1212	□12mm

4 Drive

Code	Drive
E	External Drive

Oscillating Frequency Type

Code	Oscillating Frequency Type		
40	Expressed resonant frequency by two-digit alphanumerics. The unit is in 100 hertz (Hz). In case of 4kHz (4000Hz), expressed as "40".		

8 Individual Specification Code

Code	Individual Specification Code		
00	Two digits express custom specification in characteristics.		

Special Quality Guarantee

Code	Special Quality Guarantee		
Р	Post Plated Terminal		
_	Blank		

Packaging

Code	Packaging
-B0	Bulk
-A0	Radial Taping
-MO	Magazine

Radial taping or magazines are not available for all types. Please contact us.

Packaging Code is blank in the case of types for which radial taping or magazines are not available.

6Oscillating Frequency Type

Code	Oscillating Frequency Type					
40	Expressed resonant frequency by two-digit alphanumerics. The unit is in 100 hertz (Hz). In case of 4kHz (4000Hz), expressed as "40".					

6 Individual Specification Code

Code	Individual Specification Code					
01	Two digits express specific specification in characteristics.					

Packaging

Code	Packaging
-R1	Plastic taping

Application Matrix

		Application	Tele- phone	Watch	Clock	Medical Equip-	Fire/ Gas	Digital Camera	Toy	Bar Code	Printer	Note- PC	DVD- Player	Micro- wave	Air Condi-	Fan Heater	Instru- ment
		Part Number	•			ment	Alarm			Scanner		PDA		Oven	tioner		Cluster
		7BB-12-9		•	•	•		•	•			•				-	
		7BB-15-6			•	•		•	•		-	•		-			
	d)	7BB-20-3	•	•	•	•	•		•	•	-						
	External Drive Type	7BB-20-6			•	•		•	•			•					
	[e]	7BB-20-6L0			•	•			•			•					
	ļ _i	7BB-27-4	•		•	•			•	•				-			
٤	lal	7BB-27-4L0	•		•	•			•	•	-			-			
rag	teri	7BB-35-3	•		•				•	•							
hdr	ŭ	7BB-35-3L0	•		•		•		•	•							
ä		7BB-41-2	•								-			-			
ţi		7BB-41-2L0	•														
Sec		7NB-31R2-1	_			•	•					<u> </u>					
Piezoelectric Diaphragm		7BB-20-6C	•					•	•				<u> </u>	<u> </u>		<u> </u>	
Pie.		7BB-20-6CL0	•					•	•			<u> </u>					
	Self Drive Type	7BB-27-4C	•				•		•	•	<u> </u>						
	<u>–</u> '	7BB-27-4CL0	•				•		•	•							
	į	7BB-35-3C	•				•			•							
	<u> </u>	7BB-35-3CL0	•				•			•							
	Se	7BB-41-2C	•														
		7BB-41-2CL0	•														
		7SB-34R7-3C					•										
		PKM13EPYH4000-A0	•		•	•		•	•	•	•	•	•		•	•	•
		PKM13EPYH4002-B0	•		•	•		•	•	•	•	•	•	•	•	•	•
		PKM17EPP-2002-B0	•		•	•			•	•	•		•	•	•	•	•
		PKM17EPPH4001-B0	•		•	•			•	•	•		•	•	•	•	•
		PKM17EWH2001	•		•	•		•	•	•	•	•	•		•		
	/be	PKM22EPH2001							•		•		•	•	•	•	•
ē		PKM22EPPH2001-B0	•		•	•			•		•		•	•	•	•	•
Piezoelectric Sounder	External Drive Type	PKM22EPPH4001-B0	•		•	•			•		•		•	•	•	•	•
So		PKM22EPPH4005-B0	•		•	•			•		•		•	•	•	•	
ţi	j j	PKM22EPPH4007-B0	•		•	•	•		•		•		•	•	•	•	•
Sec	l Š	PKM22EPTH2001-B0							•		•		•	•	•	•	
zoe	_	PKM17EWH4000	•		•	•		•	•	•	•	•	•		•		
Pie		PKLCS1212E2000-R1	•			•		•	•	•	•	•			•		
		PKLCS1212E20A0-R1															•
		PKLCS1212E4001-R1	•			•		•	•	•	•	•			•		
		PKLCS1212E40A1-R1															•
	4:	PKM24SPH3805	•				•		•	1				•	•	•	
	Self Drive Type	PKM30SPTH2001-B0							•		•	•		•			
	ο, □ Ε,	PKM30SPTH2501-B0							•	1	•	•					
Pioz	oelectric	PKB24SPCH3601-B0				•			•		•	•	•		•	•	
	Buzzer	PKB24SWH3301	•		•				•	1	•	•	<u> </u>	•	•	•	
		PKM33EPH1201C	•							+	<u> </u>					<u> </u>	
D:	noloctri-	PKM34EWH1101C	•										_			<u> </u>	
	oelectric Ringer	PKM34EWH1201C	•							+							
901						-		+		+	+	-	+			+	+

There are various applications besides those listed in the above table, including:

Burglar Alarm, Laundry Machine, Bath, Interphone, Chime, Back Buzzer, ME Instruments, Measuring Instruments, Vending Machine, Calculator, Automobile, Communication Radio, Hemadynamometer, Thermometer, Running Meter, Facsimile, Audio Timer, Automatic Controlling Devices.



⚠Note
 This PDF catalog is downloaded from the website of Murata Manufacturing co., ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
 This PDF catalog has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.

Piezoelectric Sound Components




Piezoelectric Diaphragms

■ Features

- 1. Clear sound
- 2. Ultra thin and lightweight
- 3. No contacts: therefore, no noise and highly reliable
- 4. Low power consumption for voltage type


■ Applications

Clocks/Calculators/Digital camera/Various alarms (Burglar alarms, etc.)

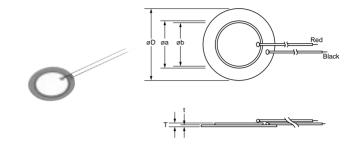

External Drive Type

Part Number	Resonant Frequency (kHz)	Resonant Impedance (ohm)	Capacitance (nF)	Plate Size dia. D (mm)	Element Size dia. a (mm)	Electrode Size dia. b (mm)	Thickness T (mm)	Plate Thickness t (mm)	Plate Material
7BB-12-9	9.0 ±1.0kHz	1000 max.	8.0 ±30% [1kHz]	12.0	9.0	8.0	0.22	0.10	Brass
7BB-15-6	6.0 ±1.0kHz	800 max.	10.0 ±30% [1kHz]	15.0	10.0	9.0	0.22	0.10	Brass
7BB-20-3	3.6 ±0.6kHz	500 max.	20.0 ±30% [1kHz]	20.0	14.0	12.8	0.22	0.10	Brass
7BB-20-6	6.3 ±0.6kHz	350 max.	10.0 ±30% [1kHz]	20.0	14.0	12.8	0.42	0.20	Brass
7BB-20-6L0	6.3 ±0.6kHz	1000 max.	10.0 ±30% [1kHz]	20.0	14.0	12.8	0.42	0.20	Brass (with Lead Wire: AWG32 Length 50mm)
7BB-27-4	4.6 ±0.5kHz	200 max.	20.0 ±30% [1kHz]	27.0	19.7	18.2	0.54	0.30	Brass
7BB-27-4L0	4.6 ±0.5kHz	300 max.	20.0 ±30% [1kHz]	27.0	19.7	18.2	0.54	0.30	Brass (with Lead Wire: AWG32 Length 50mm)
7BB-35-3	2.8 ±0.5kHz	200 max.	30.0 ±30% [1kHz]	35.0	25.0	23.0	0.53	0.30	Brass
7BB-35-3L0	2.8 ±0.5kHz	200 max.	30.0 ±30% [1kHz]	35.0	25.0	23.0	0.53	0.30	Brass (with Lead Wire: AWG32 Length 50mm)
7BB-41-2	2.2 ±0.3kHz	250 max.	30.0 ±30% [1kHz]	41.0	25.0	23.0	0.63	0.40	Brass
7BB-41-2L0	2.2 ±0.3kHz	300 max.	30.0 ±30% [1kHz]	41.0	25.0	23.0	0.63	0.40	Brass (with Lead Wire: AWG32 Length 50mm)
7NB-31R2-1	1.3 ±0.5kHz	300 max.	40.0 ±30% [120Hz]	31.2	19.7	18.2	0.22	0.10	Nickel Alloy



Self Drive Type

Part Number	Resonant Frequency (kHz)	Resonant Impedance (ohm)	Capacitance (nF)	Plate Size dia. D (mm)	Element Size dia. a (mm)	Electrode Size dia. b (mm)	Thickness T (mm)	Plate Thickness t (mm)	Plate Material
7BB-20-6C	6.3 ±0.6kHz	500 max.	8.5 ±30% [1kHz]	20.0	14.0	12.8	0.42	0.20	Brass
7BB-20-6CL0	6.3 ±0.6kHz	800 max.	8.5 ±30% [1kHz]	20.0	14.0	12.8	0.42	0.20	Brass (with Lead Wire: AWG32 Length 50mm)
7BB-27-4C	4.6 ±0.5kHz	200 max.	18.0 ±30% [1kHz]	27.0	19.7	18.2	0.54	0.30	Brass
7BB-27-4CL0	4.6 ±0.5kHz	350 max.	18.0 ±30% [1kHz]	27.0	19.7	18.2	0.54	0.30	Brass (with Lead Wire: AWG32 Length 50mm)
7BB-35-3C	2.8 ±0.5kHz	200 max.	26.0 ±30% [1kHz]	35.0	25.0	23.0	0.53	0.30	Brass
7BB-35-3CL0	2.8 ±0.5kHz	200 max.	26.0 ±30% [1kHz]	35.0	25.0	23.0	0.53	0.30	Brass (with Lead Wire: AWG32 Length 50mm)
7BB-41-2C	2.2 ±0.3kHz	250 max.	24.0 ±30% [1kHz]	41.0	25.0	23.0	0.63	0.40	Brass
7BB-41-2CL0	2.2 ±0.3kHz	350 max.	24.0 ±30% [1kHz]	41.0	25.0	23.0	0.63	0.40	Brass (with Lead Wire: AWG32 Length 50mm)
7SB-34R7-3C	3.1 ±0.3kHz	150 max.	24.0 ±30% [1kHz]	34.7	25.0	23.4	0.50	0.25	Stainless

■ Node Diameter

Part Number	Node Diameter (mm)
7BB-20-6C	ф13.5
7BB-27-4C	φ17.5
7BB-35-3C	ф22.5
7BB-41-2C	ф26.5

[•] Sound diaphragms without feedback electrode also have the same node diameters.


Piezoelectric Diaphragms Notice

■ Notice (Soldering and Mounting)

- 1. Applying load on the center area of the diaphragm may cause cracking in the ceramic element. When the diaphragm is supported by the edge, the load should be applied only around the edge.
- 2. Please consult with Murata or Murata representative if soldering of the component is needed.

■ Notice (Handling)

- 1. Please do not touch the component with bare hand because electrode may be corroded.
- 2. The component may be damaged if mechanical stress exceeding specifications is applied.
- 3. Take care to protect operating circuit from surge voltage resulting from excessive force, falling, shock or temperature change.
- 4. If DC voltage is applied to the component, silver migration may occur. Please pay full attention to avoid subjecting the component to DC voltage for long periods.
- 5. The resistor should be used as shown in Fig. A. A suitable resistance value should be chosen, preferably $1k\Omega$ to $2k\Omega$. Instead of this measure, a diode may also be applied as shown in Fig. B.

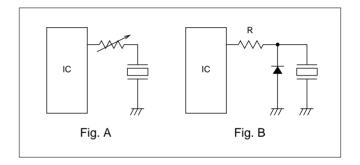

6. Avoid excessive pulling of lead wire because wire may break or soldering point may come off.



Piezoelectric Sound Components



Piezoelectric Sounders External Drive Pin Type

Microcomputers are widely used for microwave ovens, air conditioners, cars, toys, timers, and other alarm equipment. Externally driven piezoelectric sounders are used in digital watches, electronic calculators, telephones and other equipment. They are driven by a signal (ex.: 2048Hz or 4096Hz) from an LSI and provide melodious sound.

■ Features


- 1. Low power consumption
- 2. No contacts therefore, no noise and highly reliable

Applications

- 1. Various office equipment such as PPCs, printers and kevboards
- 2. Various home appliances such as microwave ovens
- 3. Confirmation sound of various audio equipment




PKM13EPYH4002-B0






PKM17EPP-2002-B0






PKM17EPPH4001-B0


PKM22EPPH2001-B0








PKM22EPH2001





PKM22EPPH4001-B0



Continued on the following page.






Continued from the preceding page.




PKM22EPPH4005-B0

R11.0





PKM22EPPH4007-B0







PKM22EPTH2001-B0


1.0 3.5 12.5 6.0 22.0 Sound	0.8*0.1 0.25 3.0 7.0 (in mm) Tol.:±0.5
Pressure Level (dB)	Level (Ref. (dB)


Part Number	Sound Pressure Level (dB)	Sound Pressure Level (Ref. only) (dB)	Operating Voltage Range	Capacitance (nF)	Operating Temp. Range (°C)	Storage Temp. Range (°C)
PKM13EPYH4002-B0	70 min. [3Vp-p,4kHz,square wave,10cm]	70 min. [1Vrms,4kHz,sine wave,10cm]	30.0 Vp-p max.	5.5 ±30% [1kHz]	-40 to +85	-40 to +85
PKM17EPP-2002-B0	70 min. [3Vo-p,2kHz,square wave,10cm]	70 min. [1Vrms,2kHz,sine wave,10cm]	25.0 Vo-p max. [with polarity]	34.0 ±30% [120Hz]	-20 to +70	-30 to +80
PKM17EPPH4001-B0	72 min. [3Vp-p,4kHz,square wave,10cm]	72 min. [1Vrms,4kHz,sine wave,10cm]	25.0 Vp-p max.	7.0 ±30% [1kHz]	-20 to +70	-30 to +80
PKM22EPH2001	75 min. [3Vp-p,2kHz,square wave,10cm]	75 min. [1Vrms,2kHz,sine wave,10cm]	25.0 Vp-p max.	17.0 ±30% [120Hz]	-20 to +70	-30 to +80
PKM22EPPH2001-B0	70 min. [3Vp-p,2kHz,square wave,10cm]	70 min. [1Vrms,2kHz,sine wave,10cm]	30.0 Vp-p max.	19.0 ±30% [120Hz]	-20 to +70	-30 to +80
PKM22EPPH4001-B0	75 min. [3Vp-p,4kHz,square wave,10cm]	75 min. [1Vrms,4kHz,sine wave,10cm]	30.0 Vp-p max.	12.0 ±30% [1kHz]	-20 to +70	-30 to +80
PKM22EPPH4005-B0	75 min. [3Vp-p,4kHz,square wave,10cm]	75 min. [1Vrms,4kHz,sine wave,10cm]	30.0 Vp-p max.	12.0 ±30% [1kHz]	-20 to +70	-30 to +80
PKM22EPPH4007-B0	85 min. [3Vp-p,4kHz,square wave,10cm]	85 min. [1Vrms,4kHz,sine wave,10cm]	30.0 Vp-p max.	12.0 ±30% [1kHz]	-20 to +70	-30 to +80
PKM22EPTH2001-B0	70 min. [3Vp-p,2kHz,square wave,10cm]	70 min. [1Vrms,2kHz,sine wave,10cm]	25.0 Vp-p max.	19.0 ±30% [120Hz]	-20 to +70	-30 to +80


■ Freq. Response (Square Wave 3Vp-p, 10cm)

























Continued from the preceding page.


■ Freq. Response (Square Wave 3Vp-p, 10cm)





■ Freq. Response (Sine Wave 1Vrms, 10cm)















muRata


Note • This PDF catalog is downloaded from the website of Murata Manufacturing co., ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.


• This PDF catalog has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.

Continued from the preceding page.

■ Freq. Response (Sine Wave 1Vrms, 10cm)








sales representatives or product engineers before ordering. • This PDF catalog has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.

Piezoelectric Sounders (External Drive Pin Type) Circuit/Notice

■ Circuit

The following are examples of externally driven circuits.

- (1) Unstable multi-vibrator using Tr.
- (2) Circuits using inverters or NAND gates.



■ Notice (Soldering and Mounting)


- 1. Notice (Soldering and Mounting)
 - (1) Soldering Iron
 - (a) Lead terminals are immersed up to 1.5mm from components body in soldering bath of +260+/-5 degrees C for 10+/-1.0 seconds, and then components shall be left in natural condition for 4 hours.
 - (b) Lead terminal is directly contacted with the tip of soldering iron of +350+/-0.5 seconds, and then components shall be left in natural condition for 4 hours.
 - (2) Reflow

The component cannot withstand reflow soldering.

■ Notice (Handling)

- 1. The component may be damaged if mechanical stress exceeding specifications is applied.
- Take care to protect operating circuit from surge voltage resulting from excessive force, falling, shock or temperature change.
- If DC voltage is applied to the component, silver migration may occur. Please pay full attention to avoid subjecting the component to DC voltage for long periods.
- 4. The resistor should be used as shown in Fig. A. A suitable resistance value should be chosen, preferably $1k\Omega$ to $2k\Omega$. Instead of this measure, a diode may also be applied as shown in Fig. B.

- Washing of the component is not acceptable. Because it is not sealed.
- 3. For Part Numbers mentioned below, please do not insert the component on double sided PCB with plated through hole. When melted solder touches to the base of lead terminal, a part of plastic case shall be melted and it may cause electrical failure.
 - Part Number
 PKM13EPYH4002-B0/PKM17EPP-2002-B0
 PKM17EPPH4001-B0/PKM22EPPH2001-B0
 PKM22EPPH4001-B0/PKM22EPPH4007-B0

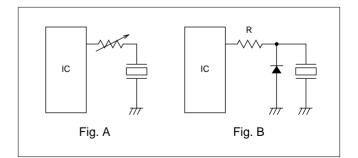

5. Avoid excessive pulling of lead wire because wire may break or soldering point may come off.


Piezoelectric Sound Components



Piezoelectric Sounders External Drive Pin Type Taping

Taking advantage of extensive automatic insertion design technology and materials experience, Murata has developed standard taping type piezoelectric

This Murata technology supports labor and cost saving activities.




■ Features


- 1. Lead dimension: Improved mouting reliability (cut & clinch) due to round terminal
- 2. High and stable mountability
- 3. Ammo packaging

Part Number	Sound Pressure Level (dB)	Sound Pressure Level (Ref. only) (dB)	Operating Voltage Range	Capacitance (nF)	Operating Temp. Range (°C)	Storage Temp. Range (°C)
PKM13EPYH4000-A0	70 min. [3Vp-p,4kHz,square wave,10cm]		30.0 Vp-p max.	5.5 ±30% [1kHz]	-40 to +85	-40 to +85

■ Freq. Response (Square Wave 3Vp-p, 10cm)



■ Freq. Response (Sine Wave 1Vrms, 10cm)



Continued on the following page.




Note • This PDF catalog is downloaded from the website of Murata Manufacturing co., ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

• This PDF catalog has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.

Continued from the preceding page.

■ Taping Dimension

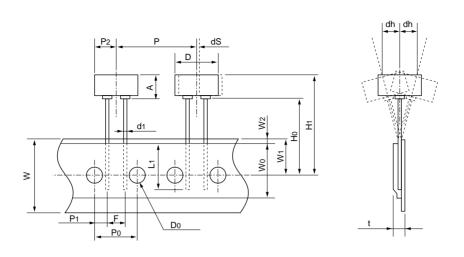


Item	Code	Nominal Value	Tol.	Remarks
Width of diameter	D	ø12.6	±0.5	
Height of component	Α	6.9	±0.5	
Dimensions of terminal	d1	ø0.5	±0.1	
Lead length under the hold down tape	L1	8.0 min.	_	
Pitch of component	Р	25.4	±0.5	
Pitch of sprocket	P0	12.7	±0.2	Tolerance for Pitches 10×P0=127±2mm
Length from hole center to lead	P1	3.85	±0.7	
Length from hole center to component center	P2	6.35	±0.7	
Lead spacing	F	5.0	±0.5	
Slant forward or backward	dh	0	±1.0	360°: 1mm max.
Width of carrier tape	W	18.0	±0.5	
Width of hold down tape	W0	12.5 min.	_	Hold down tape does not exceed the carrier tape.
Position of sprocket hole	W1	9.0	±0.5	
Gap of hold down tape and carrier tape	W2	2.0 max.	_	
Distance between the center of sprocket hole and lead stopper	Ho	18.0	±0.5	
Total height of component	H1	26.0 max.	_	
Diameter of sprocket hole	D0	ø4.0	±0.2	
Total thickness of tape	t	0.6	±0.2	
Body tilt	dS	0	±1.0	

(in mm)

Piezoelectric Sounders (External Drive Pin Type Taping) Circuit/Notice

The following are examples of externally driven circuits.

- (1) Unstable multi-vibrator using Tr.
- (2) Circuits using inverters or NAND gates.



■ Notice (Soldering and Mounting)


- 1. Notice (Soldering and Mounting)
 - (1) Soldering Iron
 - (a) Lead terminals are immersed up to 1.5mm from components body in soldering bath of +260+/-5 degrees C for 10+/-1.0 seconds, and then components shall be left in natural condition for 4 hours.
 - (b) Lead terminal is directly contacted with the tip of soldering iron of +350+/-0.5 seconds, and then components shall be left in natural condition for 4 hours.
 - (2) Reflow

The component cannot withstand reflow soldering.

■ Notice (Handling)

- 1. The component may be damaged if mechanical stress exceeding specifications is applied.
- Take care to protect operating circuit from surge voltage resulting from excessive force, falling, shock or temperature change.
- If DC voltage is applied to the component, silver migration may occur. Please pay full attention to avoid subjecting the component to DC voltage for long periods.
- 4. The resistor should be used as shown in Fig. A. A suitable resistance value should be chosen, preferably $1k\Omega$ to $2k\Omega$. Instead of this measure, a diode may also be applied as shown in Fig. B.

- Please do not insert the component on double sided PCB with plated through hole. When melted solder touches to the base of lead terminal, a part of plastic case shall be melted and it may cause electrical failure.
- Washing of the component is not acceptable. Because it is not sealed.

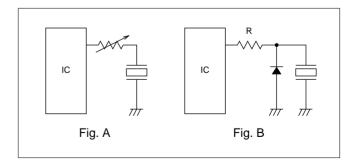

5. Avoid excessive pulling of lead wire because wire may break or soldering point may come off.

Piezoelectric Sound Components



Piezoelectric Sounders External Drive Lead Wire Type

Microcomputers are widely used for microwave ovens, air conditioners, cars, toys, timers, and other alarm equipment. Externally driven piezoelectric sounders are used in digital watches, electronic calculators, telephones and other equipment. They are driven by a signal (ex.: 2048Hz or 4096Hz) from an LSI and provide melodious sound.


■ Features

- 1. Low power consumption
- 2. No contacts therefore, no noise and highly reliable


Applications

- 1. Various office equipment such as PPCs, printers and kevboards
- 2. Various home appliances such as microwave ovens
- 3. Confirmation sound of various audio equipment











	Part Number	Sound Pressure Level (dB)	Sound Pressure Level (Ref. only) (dB)	Operating Voltage Range	Capacitance (nF)	Operating Temp. Range (°C)	Storage Temp. Range (°C)
F	PKM17EWH2001	72 min. [3Vp-p,2kHz,square wave,10cm]	70 min. [1Vrms,2kHz,sine wave,10cm]	7.0 Vp-p max.	40.0 ±30% [120Hz]	-20 to +70	-30 to +80
F	PKM17EWH4000	75 min. [3Vp-p,4kHz,square wave,10cm]	70 min. [1Vrms,4kHz,sine wave,10cm]	25.0 Vp-p max.	9.5 ±30% [1kHz]	-20 to +70	-30 to +80

■ Freq. Response (Square Wave 3Vp-p, 10cm)







Continued on the following page.





■ Freq. Response (Sine Wave 1Vrms, 10cm)





sales representatives or product engineers before ordering.


• This PDF catalog has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.

Piezoelectric Sounders (External Drive Lead Wire Type) Circuit/Notice

■ Circuit

The following are examples of externally driven circuits.

- (1) Unstable multi-vibrator using Tr.
- (2) Circuits using inverters or NAND gates.




■ Notice (Soldering and Mounting)

Washing of the component is not acceptable, because it is not sealed.

■ Notice (Handling)

- 1. The component may be damaged if mechanical stress exceeding specifications is applied.
- Take care to protect operating circuit from surge voltage resulting from excessive force, falling, shock or temperature change.
- 3. If DC voltage is applied to the component, silver migration may occur. Please pay full attention to avoid subjecting the component to DC voltage for long periods.
- 4. The resistor should be used as shown in Fig. A. A suitable resistance value should be chosen, preferably $1k\Omega$ to $2k\Omega$. Instead of this measure, a diode may also be applied as shown in Fig. B.

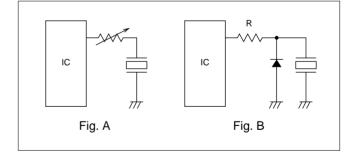

5. Avoid excessive pulling of lead wire because wire may break or soldering point may come off.

Piezoelectric Sound Components




Piezoelectric Sounders External Drive SMD Type


Taking advantage of extensive acoustic and mechanical design technology and high performance ceramics, Murata has developed SMD piezoelectric sounders that suit the thin, high-density design of electronic equipment.

■ Features

- 1. Small, thin and lightweight
- 2. High sound pressure level and clear sound
- 3. Reflowable
- 4. Tape & Reel supply











PKLCS1212E4001-R1



Part Number	Sound Pressure Level (dB)	Operating Voltage Range (Vp-p)	Operating Temp. Range (°C)	Storage Temp. Range (°C)	Use
PKLCS1212E2000-R1	70 min.[3Vp-p,2kHz,square wave,10cm]	25 max.	-20 to +70	-30 to +80	For consumer electronics
PKLCS1212E20A0-R1	70 min.[3Vp-p,2kHz,square wave,10cm]	25 max.	-40 to +85	-40 to +85	For automotive electronics
PKLCS1212E4001-R1	75 min.[3Vp-p,4kHz,square wave,10cm]	25 max.	-20 to +70	-30 to +80	For consumer electronics
PKLCS1212E40A1-R1	75 min.[3Vp-p,4kHz,square wave,10cm]	25 max.	-40 to +85	-40 to +85	For automotive electronics


■ Standard Land Pattern Dimensions




(in mm)




■ Freq. Response (Square Wave 3Vp-p, 10cm)





■ Taping Dimension

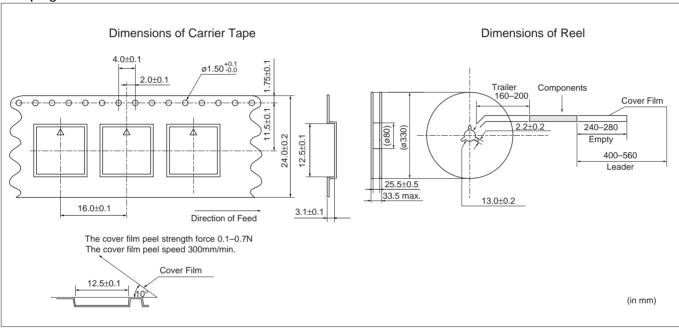


sales representatives or product engineers before ordering. • This PDF catalog has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.

Piezoelectric Sounders (External Drive SMD Type) Circuit/Notice

■ Circuit

The following are examples of externally driven circuits.

- (1) Unstable multi-vibrator using Tr.
- (2) Circuits using inverters or NAND gates.




■ Notice (Soldering and Mounting)

Washing of the component is not acceptable, because it is not sealed.

■ Notice (Handling)

- 1. The component may be damaged if mechanical stress exceeding specifications is applied.
- 2. Take care to protect operating circuit from surge voltage resulting from excessive force, falling, shock or temperature change.
- 3. If DC voltage is applied to the component, silver migration may occur. Please pay full attention to avoid subjecting the component to DC voltage for long periods.
- 4. The resistor should be used as shown in Fig. A. A suitable resistance value should be chosen, preferably $1k\Omega$ to $2k\Omega$. Instead of this measure, a diode may also be applied as shown in Fig. B.

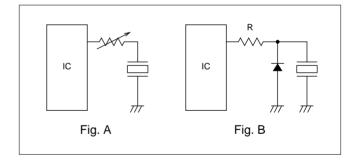

5. Avoid excessive pulling of lead wire because wire may break or soldering point may come off.

Piezoelectric Sound Components




Piezoelectric Ringers (PIEZORINGER®)


As the result of rapid development of ICs in telephones, demand for piezoelectric sounders as telephone ringers has also rapidly increased. To effectively satisfy this rising demand, Murata provides a suitable piezoelectric sounder called "PIEZORINGER" with the following features.

■ Features


- 1. Extremely clear sound
- 2. Since it is voltage driven, the power consumption is quite negligible.
- 3. It can be driven directly from ICs.
- 4. Thin and lightweight












Pin Type


Part Number	Sound Pressure Level (dB)	Sound Pressure Level (Ref. only) (dB)	Operating Voltage Range	Capacitance (nF)	Operating Temp. Range (°C)	Storage Temp. Range (°C)
PKM33EPH1201C	68 min. [30Vp-p,1.2kHz,square wave,1m]	65 min. [1Vrms,1.2kHz,sine wave,10cm]	40.0 Vp-p max.	40.0 ±30% [120Hz]	-20 to +70	-30 to +80


Lead Wire Type


Part Number	Sound Pressure Level (dB)	Sound Pressure Level (Ref. only) (dB)	Operating Voltage Range	Capacitance (nF)	Operating Temp. Range (°C)	Storage Temp. Range (°C)
PKM34EWH1101C	70 min. [30Vp-p,1.1kHz,square wave,1m]	60 min. [1Vrms,1.1kHz,sine wave,10cm]	40.0 Vp-p max.	40.0 ±30% [120Hz]	-20 to +70	-30 to +80
PKM34EWH1201C	70 min. [30Vp-p,1.2kHz,square wave,1m]	60 min. [1Vrms,1.2kHz,sine wave,10cm]	60.0 Vp-p max.	32.0 ±30% [120Hz]	-20 to +70	-30 to +80
PKM44EWH1001C	75 min. [30Vp-p,1kHz,square wave,1m]	70 min. [1Vrms,1kHz,sine wave,10cm]	30.0 Vp-p max.	68.0 ±30% [120Hz]	-20 to +70	-30 to +80












■ Freq. Response (Sine Wave 1Vrms, 10cm)


500


40 100




1k Frequency (Hz)

PKM33EPH1201C







■ Notice (Soldering and Mounting)


- 1. Notice (Soldering and Mounting)
 - (1) Soldering Iron
 - (a) Lead terminals are immersed up to 1.5mm from components body in soldering bath of +260+/-5 degrees C for 10+/-1.0 seconds, and then components shall be left in natural condition for 4 hours.
 - (b) Lead terminal is directly contacted with the tip of soldering iron of +350+/-0.5 seconds, and then components shall be left in natural condition for 4 hours.
 - (2) Reflow

The component cannot withstand reflow soldering.

2. Washing of the component is not acceptable. Because it is not sealed.

■ Notice (Handling)

- 1. The component may be damaged if mechanical stress exceeding specifications is applied.
- 2. Take care to protect operating circuit from surge voltage resulting from excessive force, falling, shock or temperature change.
- 3. If DC voltage is applied to the component, silver migration may occur. Please pay full attention to avoid subjecting the component to DC voltage for long periods.
- 4. The resistor should be used as shown in Fig. A. A suitable resistance value should be chosen, preferably $1k\Omega$ to $2k\Omega$. Instead of this measure, a diode may also be applied as shown in Fig. B.

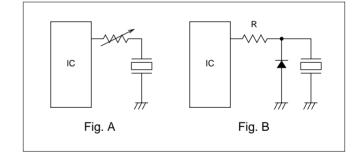

Piezoelectric Ringers (PIEZORINGER®) Notice

5. Avoid excessive pulling of lead wire because wire may break or soldering point may come off.

Piezoelectric Sound Components





Piezoelectric Sounders Self Drive Pin Type

Piezoelectric sounder self drive type requires only simple circuit and DC power supply. Since this type uses resonant system, it is also available for alarms which need large sound volume.

■ Applications


- 1. Gas alarms, burglar alarms, smoke detectors
- 2. Air conditioners, microwave ovens, washing machines and other home-electronic appliances controlled by microcomputers
- 3. Toys, game machines



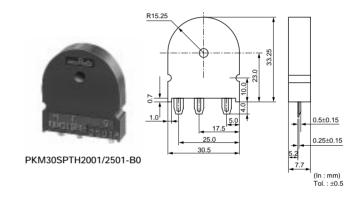


Part Number	Sound Pressure Level (dB)	Oscillating Frequency (kHz)	Current Consumption (mA)	Operating Voltage Range	Operating Temp. Range (°C)	Storage Temp. Range (°C)
PKM24SPH3805	90 min. [12Vdc,10cm]	3.8 ±0.4kHz [12Vdc]	12 max. [12Vdc]	3.0Vdc to 20.0 Vdc	-20 to +70	-30 to +80
PKM30SPTH2001-B0	75 min. [12Vdc,10cm]	2.0 ±0.3kHz [12Vdc]	20 max. [12Vdc]	3.0Vdc to 20.0 Vdc	-20 to +70	-30 to +80
PKM30SPTH2501-B0	75 min. [12Vdc,10cm]	2.5 ±0.3kHz [12Vdc]	20 max. [12Vdc]	3.0Vdc to 20.0 Vdc	-20 to +70	-30 to +80

■ Standard Circuit Examples



PKM30SPTH2001/2501-B0



Tr: 2SC1815Y or equivalent



Piezoelectric Sounders (Self Drive) Notice

■ Notice (Soldering and Mounting)

- 1. Notice (Soldering and Mounting)
 - (1) Soldering Iron
 - (a) Lead terminals are immersed up to 1.5mm from components body in soldering bath of +260+/-5 degrees C for 10+/-1.0 seconds, and then components shall be left in natural condition for 4 hours.
 - (b) Lead terminal is directly contacted with the tip of soldering iron of +350+/-0.5 seconds, and then components shall be left in natural condition for 4 hours.
 - (2) Reflow

The component cannot withstand reflow soldering.

- 2. Washing of the component is not acceptable. Because it is not sealed.
- Please do not cover the hole with tape or other obstacle as this will produce irregular oscillation.
- 4. There should not be any obstacle within 15mm from top of the component as this will produce irregular oscillation.

■ Notice (Handling)

- 1. The component may be damaged if mechanical stress exceeding specifications is applied.
- 2. Take care to protect operating circuit from surge voltage resulting from excessive force, falling, shock or temperature change.
- If DC voltage is applied to the component, silver migration may occur. Please pay full attention to avoid subjecting the component to DC voltage for long periods.
- 4. The standard self-driven circuits utilizes transistor switching. Since the circuit constants for hfe of the transistor are optimally chosen to maintain stable oscillation, please design a circuit following the standard.

Piezoelectric Buzzers


This is a unified piezoelectric sounder which has a piezoelectric diaphragm of 3 terminals connected to a self drive circuit, and it easily generates sound with only a DC power supply (DC3.0-20V). Using suitably designed resonant system, this type can be used where large sound volumes are needed.

Applications


- 1. Gas alarms, burglar alarms
- 2. Air conditioners, microwave ovens and various types of microcomputer controlled home-electronic appliances
- 3. Toys, games, and other simple electronic devices such as teaching aids



PKB24SPCH3601-B0








Pin Type


Part Number	Sound Pressure Level (dB)	Oscillating Frequency (kHz)	Current Consumption (mA)	Operating Voltage Range	Operating Temp. Range (°C)	Storage Temp. Range (°C)
PKB24SPCH3601-B0	90 min. [12Vdc,10cm]	3.6 ±0.5kHz [12Vdc]	16 max. [12Vdc]	3.0Vdc to 15.0 Vdc	-20 to +70	-30 to +80

Lead Wire Type

Part Number	Sound Pressure Level (dB)	Oscillating Frequency (kHz)	Current Consumption (mA)	Operating Voltage Range	Operating Temp. Range (°C)	Storage Temp. Range (°C)
PKB24SWH3301	80 min. [12Vdc,10cm]	3.3 ±0.5kHz [12Vdc]	12 max. [12Vdc]	3.0Vdc to 20.0 Vdc	-20 to +70	-30 to +80

■ Voltage-Sound Pressure Level/Voltage-Consumption Current







Piezoelectric Buzzers Notice

■ Notice (Soldering and Mounting)


- 1. Notice (Soldering and Mounting)
 - (1) Soldering Iron
 - (a) Lead terminals are immersed up to 1.5mm from components body in soldering bath of +260+/-5 degrees C for 10+/-1.0 seconds, and then components shall be left in natural condition for 4 hours.
 - (b) Lead terminal is directly contacted with the tip of soldering iron of +350+/-0.5 seconds, and then components shall be left in natural condition for 4 hours.
 - (2) Reflow

The component cannot withstand reflow soldering.

■ Notice (Handling)

- 1. The component may be damaged if mechanical stress over this specification is applied.
- Resistors should not be connected in series to the power supply as this will produce irregular oscillation. When resistor is necessary to control sound volume, use capacitor (1µF) parallel with the buzzer together.

- 2. Washing of the component is not acceptable. Because it is not sealed.
- Please do not cover the hole with tape or other obstacle as this will produce irregular oscillation.
- 4. There should not be any obstacle within 15mm from top of the component as this will produce irregular oscillation.

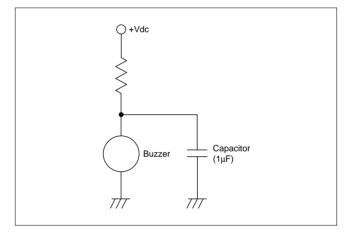

Please pay enough attention not to pull lead wire too much because wire may be broken or soldering point may come off.



Piezoelectric Sound Components Notice

■ Notice (Storage and Operating Condition)

Product Storage Condition
 Please store the products in room where the temperature/humidity is stable. And avoid such places where there are large temperature changes. Please store the products under the following conditions:

Temperature: -10 to + 40 degree C Humidity: 15 to 85% R.H.

2. Expiration Date on Storage Expire date (Shelf life) of the products is six months after delivery under the conditions of a sealed and an unopened package. Please use the products within six months after delivery. If you store the products for a long time (more than six months), use carefully because the products may be degraded in solderability due to storage under poor conditions.

Please confirm solderability and characteristics for the products regularly.

- 3. Notice on Product Storage
 - (1) Please do not store the products in a chemical atmosphere (Acids, Alkali, Bases, Organic gas, Sulfides and so on), because the characteristics may be reduced in quality, may be degraded in solderability due to the storage in a chemical atmosphere.

- (2) Please do not put the products directly on the floor without anything under them to avoid damp places and/or dusty places.
- (3) Please do not store the products in the places such as: in a damp heated place, in any place exposed to direct sunlight or excessive vibration.
- (4) Please use the products immediately after the package is opened, because the characteristics may be reduced in quality, and/or be degraded in the solderability due to storage under the poor condition.
- (5) Please do not drop the products to avoid cracking of ceramic element.
- 4. Others

Please be sure to consult with our sales representative or engineer whenever the products are to be used in conditions not listed above.



Package

Minimum Quantity (ncs.)

Product Names	Part Number		Minimun	n Quantity	
Floduct Names	Part Number	Ø330mm Reel	Bulk (Box)	Ammo Pack	Magazine
Piezoelectric Diaphragms*					
External Drive Types	7BB-12-9		5120		
	7BB-15-6		8000		
	7BB-20-3		3000		
	7BB-20-6		1800		
	7BB-20-6L0		600		
	7BB-27-4		1500		
	7BB-27-4L0		600		
	7BB-35-3		800		
	7BB-35-3L0		400		
	7BB-41-2		400		
	7BB-41-2L0		250		
	7NB-31R2-1		3000		
Self Drive Types	7BB-20-6C		1800		
	7BB-20-6CL0		600		
	7BB-27-4C		1500		
	7BB-27-4CL0		600		
	7BB-35-3C		800		
	7BB-35-3CL0		400		
	7BB-41-2C		600		
	7BB-41-2CL0		250		
	7SB-34R7-3C		1600		
Piezoelectric Sounders*					
External Drive Types	PKLCS1212E2000-R1	1000			
3.	PKLCS1212E20A0-R1	1000			
	PKLCS1212E4001-R1	1000			
	PKLCS1212E40A1-R1	1000			
	PKM13EPYH4000-A0			500	
	PKM13EPYH4002-B0		330		
	PKM17EPP-2002-B0		200		
	PKM17EPPH4001-B0		200		
	PKM17EPPH4002-B0		200		
	PKM17EWH2001		250		
	PKM17EWH4000		500		
	PKM22EPH2001		360		
	PKM22EPH2002		270		
	PKM22EPH2003		270		
	PKM22EPPH2001-B0		750		
	PKM22EPPH2002-B0		750		
	PKM22EPPH4001-B0		900		
	PKM22EPPH4002-B0		900		
	PKM22EPPH4005-B0		750		
	PKM22EPPH4007-B0		750		
	PKM22EPPH4012-B0		750		
	PKM22EPTH2001-B0		300		75 ¹⁾

The last two digits are changed to M0.

Continued on the following page.

"Minimum Quantity" means the number of units of each delivery or order. The quantity should be an integral multiple of the "Minimum Quantity". (As for products series with *mark, bulk (bag) quantities shown here differ from actual delivery quantities in a package.) Please contact nearest sales office for details and for any other products not listed above.



Package

Continued from the preceding page.

Product Names	Dort Number	Minimum Quantity				
Product Names	Part Number	Ø330mm Reel	Bulk (Box)	Ammo Pack	Magazine	
Self Drive Types	PKM24SPH3801		270			
	PKM24SPH3805		360			
	PKM24SPH3807		270			
	PKM24SPH3810		270			
	PKM30SPTH2001-B0		70			
	PKM30SPTH2501-B0		70			
● Piezoelectric Buzzers*	PKB24SPCH3601-B0		650			
	PKB24SWH3301		200			
Piezoelectric Ringers (PIEZORINGER®)*	PKM33EPH1201C		300			
	PKM33EPH1202C		60			
	PKM34EWH1101C		25			
	PKM34EWH1201C		25			
	PKM44EWH1001C		25			



P37E.pdf 10.1.28

sales representatives or product engineers before ordering.

• This PDF catalog has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.

⚠ Note:

1. Export Control

<For customers outside Japan>

No Murata products should be used or sold, through any channels, for use in the design, development, production, utilization, maintenance or operation of, or otherwise contribution to (1) any weapons (Weapons of Mass Destruction [nuclear, chemical or biological weapons or missiles] or conventional weapons) or (2) goods or systems specially designed or intended for military end-use or utilization by military end-users.

<For customers in Japan>

For products which are controlled items subject to the "Foreign Exchange and Foreign Trade Law" of Japan, the export license specified by the law is required for export.

- 2. Please contact our sales representatives or product engineers before using the products in this catalog for the applications listed below, which require especially high reliability for the prevention of defects which might directly damage a third party's life, body or property, or when one of our products is intended for use in applications other than those specified in this catalog.
 - 1 Aircraft equipment
- 2 Aerospace equipment
- 3 Undersea equipment
- 4 Power plant equipment
- (5) Medical equipment
- (6) Transportation equipment (vehicles, trains, ships, etc.) (8) Disaster prevention / crime prevention equipment
- (7) Traffic signal equipment
- Data-processing equipment
- (f) Application of similar complexity and/or reliability requirements to the applications listed above

International Division

- 3. Product specifications in this catalog are as of November 2009. They are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering. If there are any questions, please contact our sales representatives or
- 4. Please read rating and 🗘 CAUTION (for storage, operating, rating, soldering, mounting and handling) in this catalog to prevent smoking and/or burning, etc.
- 5. This catalog has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.
- 6. Please note that unless otherwise specified, we shall assume no responsibility whatsoever for any conflict or dispute that may occur in connection with the effect of our and/or a third party's intellectual property rights and other related rights in consideration of your use of our products and/or information described or contained in our catalogs. In this connection, no representation shall be made to the effect that any third parties are authorized to use the rights mentioned above under licenses without our consent
- 7. No ozone depleting substances (ODS) under the Montreal Protocol are used in our manufacturing process.



http://www.murata.com/



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов:
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001:
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина,

дом 2, корпус 4, литера А.