

# NHD-24064WG-ATFH-VZ#

## Graphic Liquid Crystal Display Module

|        |  |
|--------|--|
| NHD-   | Newhaven Display   |
| 24064- | 240 x 64 pixels  |
| WG-    | Display Type: Graphic                                      |
| A-     | Model  |
| T-     | White LED Backlight  |
| F-     | FSTN (+)   |
| H-     | Transflective, 6:00 view, Wide Temperature (-20°C ~ +70°C) |
| VZ#-   | With Built-in Negative Voltage Supply                      |
|        | <b>RoHS Compliant</b>                                      |

**Newhaven Display International, Inc.**

2511 Technology Drive, Suite 101

Elgin IL, 60124

Ph: 847-844-8795

Fax: 847-844-8796

[www.newhavendisplay.com](http://www.newhavendisplay.com)

[nhtech@newhavendisplay.com](mailto:nhtech@newhavendisplay.com)

[nhsales@newhavendisplay.com](mailto:nhsales@newhavendisplay.com)


## Document Revision History

| Revision | Date       | Description                                  | Changed by |
|----------|------------|--|------------|
| 0        | 2/28/2008  | Initial Release                              | -          |
| 1        | 4/19/2010  | User guide reformat                          | BE         |
| 2        | 5/13/2010  | Updated Backlight Supply Voltage and Current | MC         |
| 3        | 11/16/2010 | Pin description update                       | AK         |
| 4        | 5/4/2012   | Optical characteristics updated              | AK         |



## Functions and Features

- 240 x 64 pixels
- Built-in RA6963 controller
- +5.0V Power Supply
- 1/64 duty
- RoHS Compliant

# Mechanical Drawing

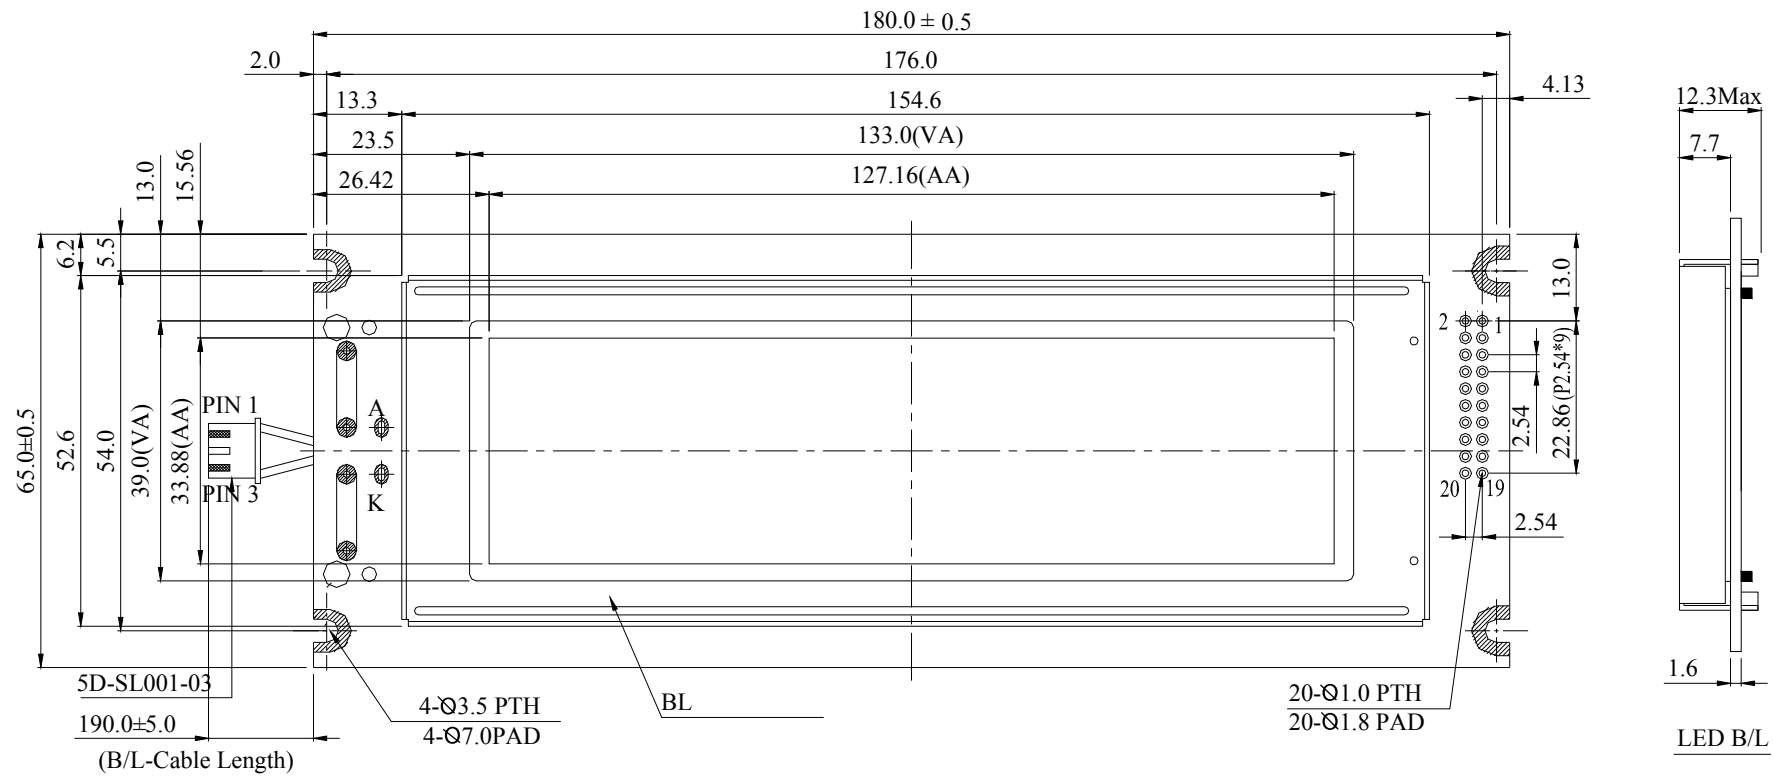

| PIN NO. | SYMBOL |
|---------|--------|
| 1       | FGND   |
| 2       | Vss    |
| 3       | Vdd    |
| 4       | Vo     |
| 5       | WR     |
| 6       | RD     |
| 7       | CE     |
| 8       | C/D    |
| 9       | Vee    |
| 10      | RESET  |
| 11      | DB0    |
| 12      | DB1    |
| 13      | DB2    |
| 14      | DB3    |
| 15      | DB4    |
| 16      | DB5    |
| 17      | DB6    |
| 18      | DB7    |
| 19      | FS     |
| 20      | NC     |

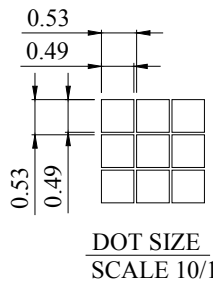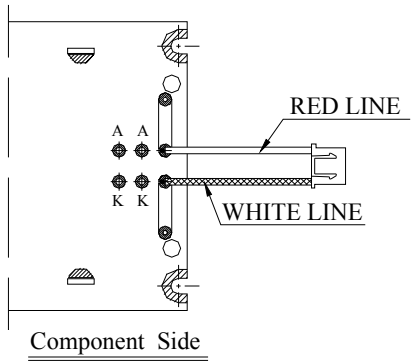

The non-specified tolerance of dimension is  $\pm 0.3$  mm .

|         |     |       |     |
|---------|-----|-------|-----|
| SCALE:  | 1/1 | UNIT: | mm  |
| REV:    | 0   | PAGE: | 1/1 |
| APPROVE |     |       |     |
| CHECK   |     |       |     |
| DRAW    |     |       |     |

**NEWHAVEN DISPLAY**  
INTERNATIONAL

MODEL  
**NHD-24064WG-ATFH-VZ#**

TITLE

DWG NO.

## Pin Description and Wiring Diagram

| Pin No. | Symbol  | External Connection | Function Description                              |
|---------|---------|---------------------|---|
| 1       | FGND    | Power Supply        | Frame Ground                                      |
| 2       | VSS     | Power Supply        | Ground  |
| 3       | VDD     | Power Supply        | Power supply for logic (+5.0V)                    |
| 4       | VO      | Adj. Power Supply   | Power supply for contrast (approx. -7V)           |
| 5       | /WR     | MPU                 | Active LOW Write signal                           |
| 6       | /RD     | MPU                 | Active LOW Read signal                            |
| 7       | /CE     | MPU                 | Active LOW chip enable                            |
| 8       | C/D     | MPU                 | Register select signal C/D=0: DATA C/D=1: COMMAND |
| 9       | VEE     | Power Supply        | Negative voltage output (-10V)                    |
| 10      | RESET   | MPU                 | Active LOW reset signal                           |
| 11~18   | DB0~DB7 | MPU                 | 8-bit Bi-directional data bus                     |
| 19      | FS      | MPU                 | Font Select: 1=6x8 fonts, 0=8x8 fonts             |
| 20      | NC      | -                   | No Connect  |
| A       | LED+    | Power Supply        | Power supply for LED Backlight (+3.5V)            |
| K       | LED-    | Power Supply        | Ground for Backlight                              |

**Recommended LCD connector:** 2.54mm pitch pins

**Backlight connector:** JST-XHP-3 **Mates with:** B 3B-XH-A



## Electrical Characteristics

| Item                        | Symbol | Condition    | Min. | Typ.   | Max. | Unit |
|-----------------------------|--------|--------------|------|--------|------|------|
| Operating Temperature Range | Top    | Absolute Max | -20  | -      | +70  | °C   |
| Storage Temperature Range   | Tst    | Absolute Max | -30  | -      | +80  | °C   |
| Supply Voltage              | VDD    |              | 4.75 | 5.0    | 5.25 | V    |
| Supply Current              | IDD    | VDD=5.0V     | -    | 16     | -    | mA   |
| Supply for LCD (contrast)   | VDD-V0 | Ta=25°       | -    | 12.0   | -    | V    |
| "H" Level input             | VIH    |              | 2.2  | -      | VDD  | V    |
| "L" Level input             | VIL    |              | 0    | -      | 0.8  | V    |
| "H" Level output            | VOH    |              | 2.4  | -      | VDD  | V    |
| "L" Level output            | VOL    |              | 0    | -      | 0.4  | V    |
|                             |        |              |      |        |      |      |
| Backlight Supply Voltage    | Vled   | -            | -    | 3.5    | 3.6  | V    |
| Backlight Supply Current    | Iled   | Vled=3.5     | 80   | 100    | 125  | mA   |
| Backlight Lifetime          | -      | Iled=100mA   | -    | 50,000 | -    | Hrs. |

## Optical Characteristics

| Item                               | Symbol | Condition | Min. | Typ. | Max. | Unit |
|------------------------------------|--------|-----------|------|------|------|------|
| Viewing Angle - Vertical (top)     | AH     | Cr ≥ 2    | -    | 30   | -    | °    |
| Viewing Angle- Vertical (bottom)   | AH     | Cr ≥ 2    | -    | 60   | -    | °    |
| Viewing Angle- Horizontal (left)   | AV     | Cr ≥ 2    | -    | 45   | -    | °    |
| Viewing Angle - Horizontal (right) | AV     | Cr ≥ 2    | -    | 45   | -    | °    |
| Contrast Ratio                     | Cr     |           | -    | 5    | -    |      |
| Response Time (rise)               | Tr     | -         | -    | 200  | 300  | ms   |
| Response Time (fall)               | Tf     | -         | -    | 200  | 300  | ms   |


## Controller Information

Built-in RA6963. Download specification at [http://www.newhavendisplay.com/app\\_notes/RA6963.pdf](http://www.newhavendisplay.com/app_notes/RA6963.pdf)

## Table of Commands

| Command                      | Code     | D1          | D2           | Function                        |
|------------------------------|----------|-------------|--------------|---------------------------------|
| <b>Registers Setting</b>     | 00100001 | X address   | Y address    | Set cursor pointer              |
|                              | 00100010 | Data        | 00h          | Set Offset Register             |
|                              | 00100100 | Low address | High address | Set Address pointer             |
| <b>Set Control Word</b>      | 01000000 | Low address | High address | Set Text Home Address           |
|                              | 01000001 | Columns     | 00h          | Set Text Area                   |
|                              | 01000010 | Low address | High address | Set Graphic Home Address        |
|                              | 01000011 | Columns     | 00h          | Set Graphic Area                |
| <b>Mode Set</b>              | 1000X000 | --          | --           | OR mode                         |
|                              | 1000X001 | --          | --           | EXOR mode                       |
|                              | 1000X011 | --          | --           | AND mode                        |
|                              | 1000X100 | --          | --           | Text Attribute mode             |
|                              | 10000XXX | --          | --           | Internal CG ROM mode            |
|                              | 10001XXX | --          | --           | External CG RAM mode            |
| <b>Display Mode</b>          | 10010000 | --          | --           | Display off                     |
|                              | 1001XX10 | --          | --           | Cursor on, blink off            |
|                              | 1001XX11 | --          | --           | Cursor on, blink on             |
|                              | 100101XX | --          | --           | Text on, graphic off            |
|                              | 100110XX | --          | --           | Text off, graphic on            |
|                              | 100111XX | --          | --           | Text on, graphic on             |
| <b>Cursor Pattern Select</b> | 10100000 | --          | --           | 1-line cursor                   |
|                              | 10100001 | --          | --           | 2-line cursor                   |
|                              | 10100010 | --          | --           | 3-line cursor                   |
|                              | 10100011 | --          | --           | 4-line cursor                   |
|                              | 10100100 | --          | --           | 5-line cursor                   |
|                              | 10100101 | --          | --           | 6-line cursor                   |
|                              | 10100110 | --          | --           | 7-line cursor                   |
|                              | 10100111 | --          | --           | 8-line cursor                   |
| <b>Data Read/Write</b>       | 11000000 | Data        | --           | Data Write and Increment ADP    |
|                              | 11000001 | --          | --           | Data Read and Increment ADP     |
|                              | 11000010 | Data        | --           | Data Write and Decrement ADP    |
|                              | 11000011 | --          | --           | Data Read and Decrement ADP     |
|                              | 11000100 | Data        | --           | Data Write and Non-variable ADP |
|                              | 11000101 | --          | --           | Data Read and Non-variable ADP  |
| <b>Data auto Read/Write</b>  | 10110000 | --          | --           | Set Data Auto Write             |
|                              | 10110001 | --          | --           | Set Data Auto Read              |
|                              | 10110010 | --          | --           | Auto Reset                      |
| <b>Screen Peek</b>           | 11100000 | --          | --           | Screen Peek                     |
| <b>Screen Copy</b>           | 11101000 |             |              | Screen Copy                     |
| <b>Bit Set/Reset</b>         | 11110XXX | --          | --           | Bit Reset                       |
|                              | 11111XXX | --          | --           | Bit Set                         |
|                              | 1111X000 | --          | --           | Bit 0 (LSB)                     |
|                              | 1111X001 | --          | --           | Bit 1                           |
|                              | 1111X010 | --          | --           | Bit 2                           |
|                              | 1111X011 | --          | --           | Bit 3                           |
|                              | 1111X100 | --          | --           | Bit 4                           |
|                              | 1111X101 | --          | --           | Bit 5                           |
|                              | 1111X110 | --          | --           | Bit 6                           |
|                              | 1111X111 | --          | --           | Bit 7 (MSB)                     |
| <b>Screen Reverse</b>        | 11010000 | Data        | --           | Whole screen reverse            |

# Timing Characteristics

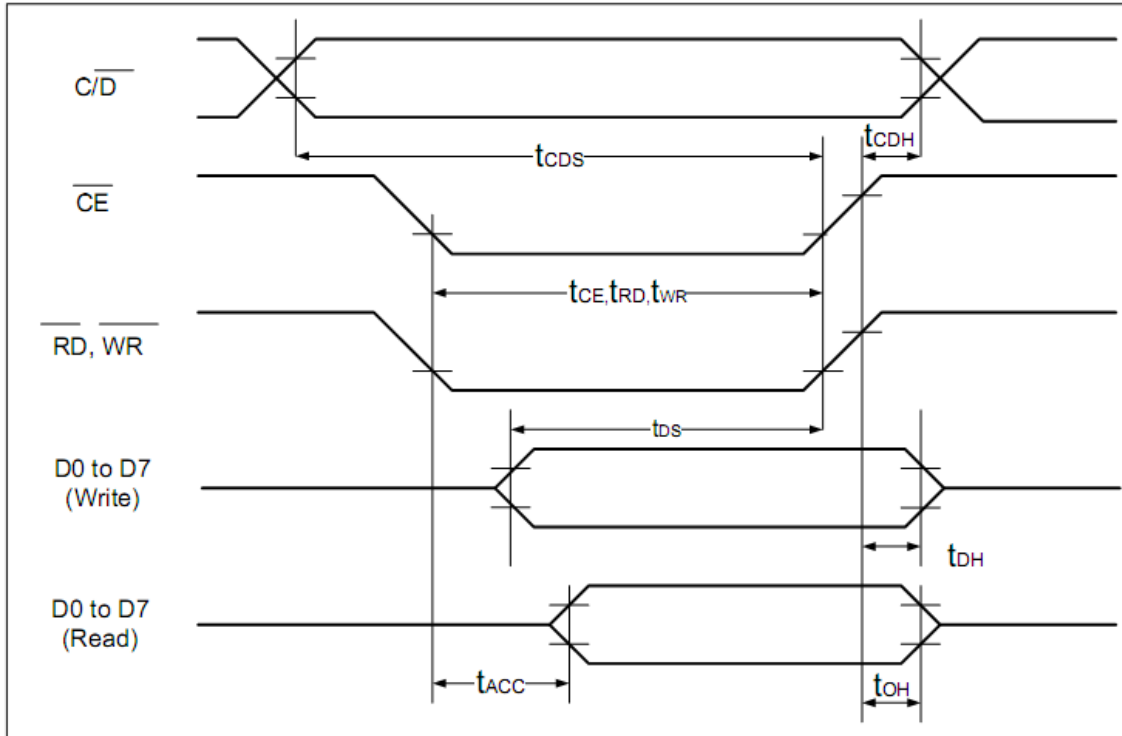

(  $V_{DD}=+5V\pm 5\%$ ,  $GND=0V$ ,  $T_a= -20$  to  $+70^{\circ}C$  )

| Item  | Symbol                         | Test Conditions | Min. | Max. | Unit |
|---|--------------------------------|-----------------|------|------|------|
| $\overline{C/D}$ Set Up Time                                    | $t_{CDS}$                      | --              | 100  | --   | ns   |
| $\overline{C/D}$ Hold Time                                      | $t_{CDH}$                      | --              | 10   | --   | ns   |
| $\overline{CE}$ , $\overline{RD}$ , $\overline{WR}$ Pulse Width | $t_{CE}$ , $t_{RD}$ , $t_{WR}$ | --              | 80   | --   | ns   |
| Data Set Up Time  | $t_{DS}$                       | --              | 80   | --   | ns   |
| Data Hold Time  | $t_{DH}$                       | --              | 40   | --   | ns   |
| Access Time   | $t_{ACC}$                      | --              | --   | 150  | ns   |
| Output Hold Time  | $t_{OH}$                       | --              | 10   | 50   | ns   |

## Example Initialization Program

```
void command(int A)
{
    P1 = A;
    ID = 1;           //Command
    CE = 0;
    WRT = 0;
    WRT = 1;
    CE = 1;
}

void data(int A)
{
    P1 = A;
    ID = 0;           //Data
    CE = 0;
    WRT = 0;
    WRT = 1;
    CE = 1;
}

void init()
{
    RST = 1;
    RDD = 1;
    F_S = 1;
    data(0x00);
    data(0x00);
    commnd(0x40);     //Set Text Home Address
    data(0x00);       //Low Address Columns
    data(0x40);       //High Address
    command(0x42);    //Set Graphic Home Address
    data(0x1E);       //Low Address Columns
    data(0x00);       //High Address
    command(0x41);    //Set Text Area
    data(0x1E);       //Low Address Columns
    data(0x00);       //High Address
    command(0x43);    //Set Graphic Areaa
    command(0x80);    //Mode Set to 'OR' mode
}
```



## Quality Information

| Test Item                             | Content of Test   | Test Condition  | Note |
|---------------------------------------|---|---|------|
| High Temperature storage              | Endurance test applying the high storage temperature for a long time.   | +80°C , 200hrs  | 2    |
| Low Temperature storage               | Endurance test applying the low storage temperature for a long time.  | -30°C , 200hrs  | 1,2  |
| High Temperature Operation            | Endurance test applying the electric stress (voltage & current) and the high thermal stress for a long time.                    | +70°C 200hrs  | 2    |
| Low Temperature Operation             | Endurance test applying the electric stress (voltage & current) and the low thermal stress for a long time.                     | -20°C , 200hrs  | 1,2  |
| High Temperature / Humidity Operation | Endurance test applying the electric stress (voltage & current) and the high thermal with high humidity stress for a long time. | +60°C , 90% RH , 96hrs  | 1,2  |
| Thermal Shock resistance              | Endurance test applying the electric stress (voltage & current) during a cycle of low and high thermal stress.                  | -20°C,30min -> 25°C,5min -> 70°C,30min = 1 cycle<br>10 cycles                       |      |
| Vibration test                        | Endurance test applying vibration to simulate transportation and use.   | 10-55Hz , 15mm amplitude.<br>60 sec in each of 3 directions X,Y,Z<br>For 15 minutes | 3    |
| Static electricity test               | Endurance test applying electric static discharge.  | VS=800V, RS=1.5kΩ, CS=100pF<br>One time   |      |

**Note 1:** No condensation to be observed.

**Note 2:** Conducted after 4 hours of storage at 25°C, 0%RH.

**Note 3:** Test performed on product itself, not inside a container.

## Precautions for using LCDs/LCMs

See Precautions at [www.newhavendisplay.com/specs/precautions.pdf](http://www.newhavendisplay.com/specs/precautions.pdf)

## Warranty Information and Terms & Conditions

[http://www.newhavendisplay.com/index.php?main\\_page=terms](http://www.newhavendisplay.com/index.php?main_page=terms)



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.