



### Low VF Schottky Diode Array

- Reverse voltage: 30 V
- Forward current: 0.9 A
- Small diode quad array for polarity independence, reverse polarity protection and low loss bridge rectification
- Very low forward voltage:  
0.5 V typ. @ 0.7 A (per diode)
- Fast switching
- Pb-free (ROHS compliant) package<sup>1)</sup>
- Qualified according AEC Q101

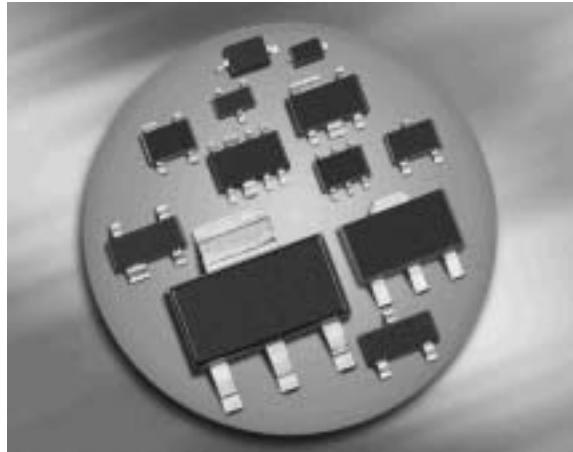

### BAS3007A-RPP



Type	Package	Configuration	Marking
BAS3007A-RPP	SOT143	bridge	E1s

**Maximum Ratings** at  $T_A = 25^\circ\text{C}$ , unless otherwise specified

Parameter	Symbol	Value	Unit
Diode reverse voltage <sup>2)</sup>	$V_R$	30	V
Peak reverse voltage <sup>2)</sup>	$V_{RM}$	30	
RMS reverse voltage <sup>2)</sup>	$V_{R(RMS)}$	21	
Forward current <sup>2)</sup> $T_S \leq 46^\circ\text{C}$	$I_F$	900	mA
$T_S \leq 82^\circ\text{C}$		700	
Non-repetitive peak surge forward current ( $t \leq 10 \text{ ms}$ )	$I_{FSM}$	5	A
Junction temperature	$T_j$	150	$^\circ\text{C}$
Storage temperature	$T_{stg}$	-65 ... 150	

<sup>1</sup>Pb-containing package may be available upon special request

<sup>2</sup>For  $T_A > 25^\circ\text{C}$  the derating of  $V_R$  and  $I_F$  has to be considered. Please refer to the attached curves.

**Thermal Resistance**

Parameter	Symbol	Value	Unit
Junction - soldering point <sup>1)</sup>	$R_{thJS}$	$\leq 95$	K/W

**Electrical Characteristics at  $T_A = 25^\circ\text{C}$ , unless otherwise specified**

Parameter	Symbol	Values			Unit
		min.	typ.	max.	

**DC Characteristics**

Reverse current (per diode) <sup>2)</sup> $V_R = 12 \text{ V}$ $V_R = 30 \text{ V}$	$I_R$	-	-	30 350	$\mu\text{A}$
Forward voltage (per diode) <sup>2)3)</sup> $I_F = 100 \text{ mA}$ $I_F = 350 \text{ mA}$ $I_F = 500 \text{ mA}$ $I_F = 700 \text{ mA}$ $I_F = 900 \text{ mA}$	$V_F$	-	0.35 0.4 0.45 0.5 0.6	0.4 0.5 0.55 0.6 0.7	V
		-	0.35 0.4 0.45 0.5 0.6	0.4 0.5 0.55 0.6 0.7	
		-	0.4 0.45 0.5 0.6	0.5 0.55 0.6 0.7	

**AC Characteristics**


Diode capacitance (per diode) $V_R = 5 \text{ V}, f = 1 \text{ MHz}$	$C_T$	-	9	15	$\text{pF}$
---	-------	---	---	----	-------------

<sup>1</sup>For calculation of  $R_{thJA}$  please refer to Application Note Thermal Resistance


<sup>2</sup>Pulsed test,  $t_p = 300 \mu\text{s}$ ;  $D = 0.01$

<sup>3</sup>When used as shown for Reverse Polarity Protection (RPP, see page 4), the voltage available to the circuit being protected will be two diode drops below the power supply voltage. In other words, the supply current will pass through two diodes.


**Diode capacitance  $C_T = f(V_R)$**   
 $f = 1\text{MHz}$  (per diode)

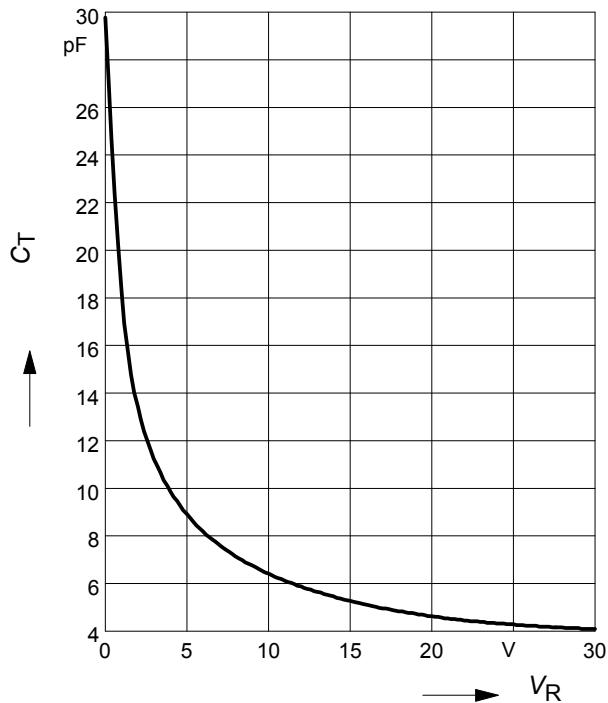

**Forward Voltage  $V_F = f(T_A)$**   
 $I_F$  = Parameter (per diode)

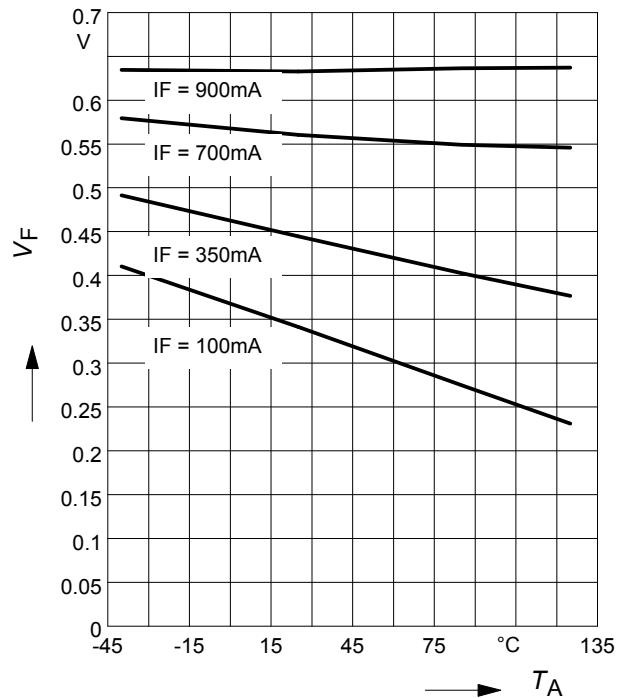


**Forward current  $I_F = f(V_F)$**   
 $T_A$  = Parameter (per diode)

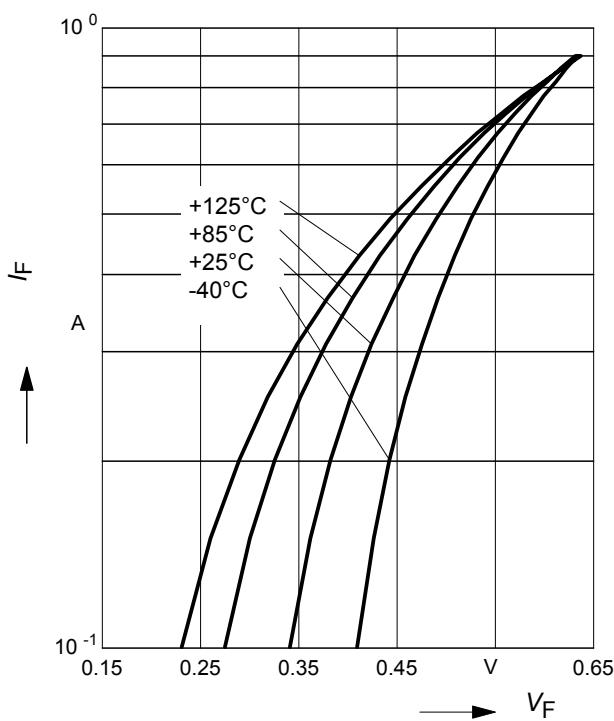

**Permissible Reverse voltage  $V_R = f(T_A)$**   
 $t_p$  = Parameter, Duty cycle < 0.01


Device mounted on PCB with  $R_{th} = 160\text{ K/W}$

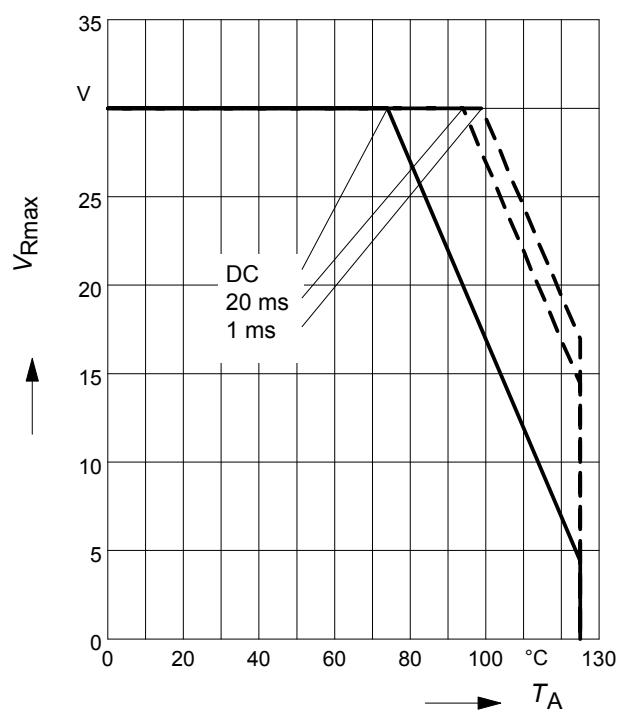

### Forward current $I_F = f(T_S)$


Current flows through two chips

per package at the same time (per array)

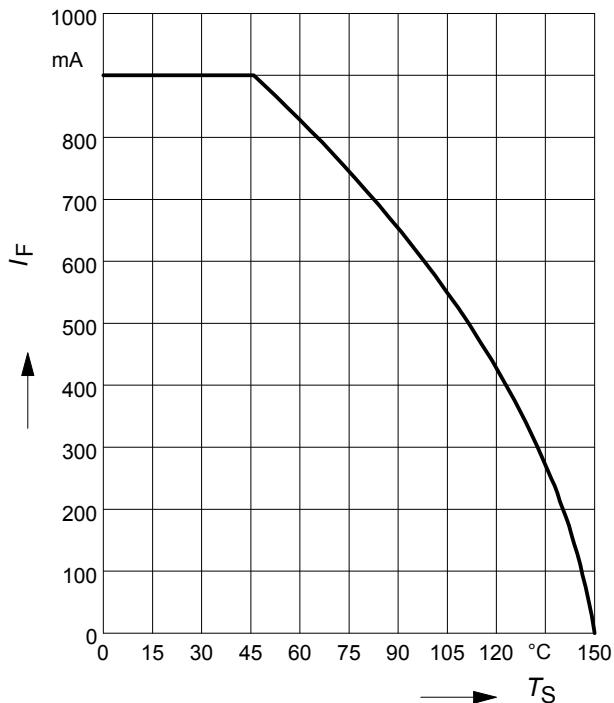


### Application example BAS3007A-RPP


Advanced Reverse Polarity Protection(RPP): due to diode orientation, circuit at the right will be protected from damage and will also function normally in the event reverse polarity is applied to pins 2 and 3 of the BAS3007A-RPP.

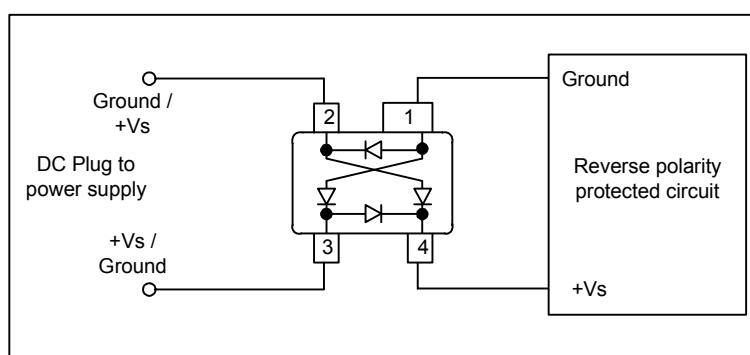


## Package Outline

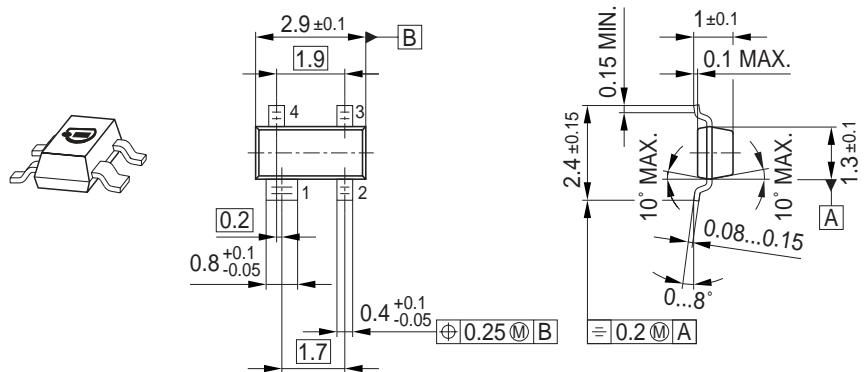

## Foot Print




## Marking Layout (Example)

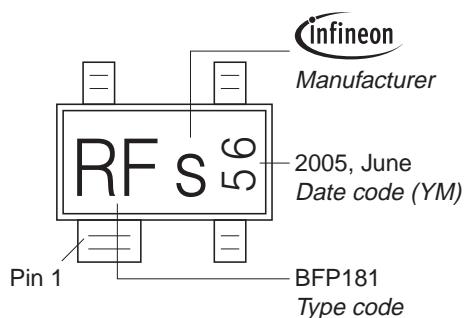

## Standard Packing

Reel ø180 mm = 3.000 Pieces/Reel  
 Reel ø330 mm = 10.000 Pieces/Reel

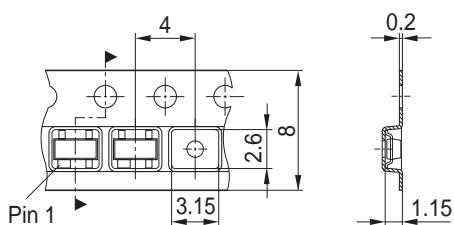

---

Edition 2006-02-01  
Published by  
Infineon Technologies AG  
81726 München, Germany  
© Infineon Technologies AG 2007.  
All Rights Reserved.

### **Attention please!**

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics ("Beschaffenheitsgarantie"). With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

### **Information**

For further information on technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies Office ([www.infineon.com](http://www.infineon.com)).

### **Warnings**

Due to technical requirements components may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies Office.

Infineon Technologies Components may only be used in life-support devices or systems with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system, or to affect the safety or effectiveness of that device or system.

Life support devices or systems are intended to be implanted in the human body, or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

#### Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помошь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помошь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: [org@eplast1.ru](mailto:org@eplast1.ru)

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.