

# 74AUP1Z125

Low-power X-tal driver with enable and internal resistor

Rev. 01 — 3 August 2006

Product data sheet

## 1. General description

The 74AUP1Z125 is a high-performance, low-power, low-voltage, Si-gate CMOS device, superior to most advanced CMOS compatible TTL families.

When not in use the  $\overline{\text{EN}}$  input can be driven HIGH, pulling up the X1 input and putting the device in a low power disable mode. Schmitt-trigger action at the  $\overline{\text{EN}}$  input makes the circuit tolerant to slower input rise and fall times across the entire  $V_{\text{CC}}$  range from 0.8 V to 3.6 V.

This device ensures a very low static and dynamic power consumption across the entire  $V_{\text{CC}}$  range from 0.8 V to 3.6 V.

This device is fully specified for partial Power-down applications using  $I_{\text{OFF}}$  at output Y. The  $I_{\text{OFF}}$  circuitry disables the output Y, preventing the damaging backflow current through the device when it is powered down.

The 74AUP1Z125 combines the functions of the 74AUP1GU04 and 74AUP1G125 to provide a device optimized for use in crystal oscillator applications.

The integration of the two devices into the 74AUP1Z125 produces the benefits of a compact footprint, lower power dissipation and stable operation over a wide range of frequency and temperature.

## 2. Features

- Wide supply voltage range from 0.8 V to 3.6 V
- High noise immunity
- ESD protection:
  - ◆ HBM JESD22-A114-C Class 3A. Exceeds 5000 V
  - ◆ MM JESD22-A115-A exceeds 200 V
  - ◆ CDM JESD22-C101-C exceeds 1000 V
- Low static power consumption;  $I_{\text{CC}} = 0.9 \mu\text{A}$  (maximum)
- Latch-up performance exceeds 100 mA per JESD 78 Class II
- Inputs accept voltages up to 3.6 V
- Low noise overshoot and undershoot  $< 10\%$  of  $V_{\text{CC}}$
- $I_{\text{OFF}}$  circuitry provides partial Power-down mode operation at output Y
- Multiple package options
- Specified from  $-40\text{ }^{\circ}\text{C}$  to  $+85\text{ }^{\circ}\text{C}$  and  $-40\text{ }^{\circ}\text{C}$  to  $+125\text{ }^{\circ}\text{C}$

**PHILIPS**

3. Ordering information

Table 1. Ordering information

| Type number  | Package           |       |                                                                                             |         |
|--------------|-------------------|-------|---------------------------------------------------------------------------------------------|---------|
|              | Temperature range | Name  | Description                                                                                 | Version |
| 74AUP1Z125GW | −40 °C to +125 °C | SC-88 | plastic surface-mounted package; 6 leads                                                    | SOT363  |
| 74AUP1Z125GM | −40 °C to +125 °C | XSON6 | plastic extremely thin small outline package; no leads; 6 terminals; body 1 × 1.45 × 0.5 mm | SOT886  |
| 74AUP1Z125GF | −40 °C to +125 °C | XSON6 | plastic extremely thin small outline package; no leads; 6 terminals; body 1 × 1 × 0.5 mm    | SOT891  |

4. Marking

Table 2. Marking

| Type number  | Marking code |
|--------------|--------------|
| 74AUP1Z125GW | 55           |
| 74AUP1Z125GM | 55           |
| 74AUP1Z125GF | 55           |

5. Functional diagram

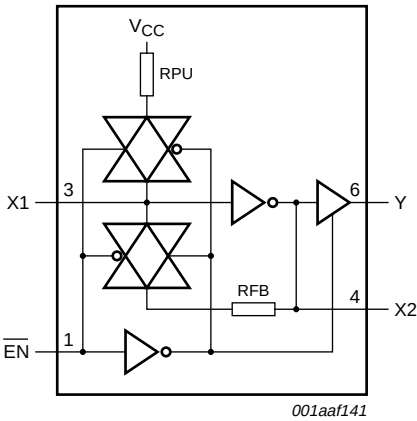


Fig 1. Logic symbol

6. Pinning information

6.1 Pinning

Fig 2. Pin configuration SOT363 (SC-88)

Fig 3. Pin configuration SOT886 (XSON6)

Fig 4. Pin configuration SOT891 (XSON6)

6.2 Pin description

Table 3. Pin description

| Symbol                 | Pin | Description               |
|------------------------|-----|---------------------------|
| $\overline{\text{EN}}$ | 1   | enable input (active LOW) |
| GND                    | 2   | ground (0 V)              |
| X1                     | 3   | data input                |
| X2                     | 4   | unbuffered output         |
| V <sub>CC</sub>        | 5   | supply voltage            |
| Y                      | 6   | data output               |

7. Functional description

Table 4. Function table<sup>[1]</sup>

| Input                  |    | Output |   |
|------------------------|----|--------|---|
| $\overline{\text{EN}}$ | X1 | X2     | Y |
| L                      | L  | H      | H |
| L                      | H  | L      | L |
| H                      | L  | H      | Z |
| H                      | H  | L      | Z |

[1] H = HIGH voltage level;  
L = LOW voltage level;  
Z = high-impedance OFF-state.

## 8. Limiting values

**Table 5. Limiting values**

In accordance with the Absolute Maximum Rating System (IEC 60134). Voltages are referenced to GND (ground = 0 V).

| Symbol    | Parameter               | Conditions                    | Min      | Max            | Unit |
|-----------|-------------------------|-------------------------------|----------|----------------|------|
| $V_{CC}$  | supply voltage          |                               | -0.5     | +4.6           | V    |
| $I_{IK}$  | input clamping current  | $V_I < 0$ V                   | -        | -50            | mA   |
| $V_I$     | input voltage           |                               | [1] -0.5 | +4.6           | V    |
| $I_{OK}$  | output clamping current | $V_O < 0$ V                   | -        | -50            | mA   |
| $V_O$     | output voltage          |                               | [1] -0.5 | $V_{CC} + 0.5$ | V    |
| $I_O$     | output current          | $V_O = 0$ V to $V_{CC}$       | -        | $\pm 20$       | mA   |
| $I_{CC}$  | supply current          |                               | -        | +50            | mA   |
| $I_{GND}$ | ground current          |                               | -        | -50            | mA   |
| $T_{stg}$ | storage temperature     |                               | -65      | +150           | °C   |
| $P_{tot}$ | total power dissipation | $T_{amb} = -40$ °C to +125 °C | [2] -    | 250            | mW   |

[1] The input and output voltage ratings may be exceeded if the input and output current ratings are observed.

[2] For SC-88 packages: above 87.5 °C the value of  $P_{tot}$  derates linearly with 4.0 mW/K.  
For XSON6 packages: above 45 °C the value of  $P_{tot}$  derates linearly with 2.4 mW/K.

## 9. Recommended operating conditions

**Table 6. Recommended operating conditions**

| Symbol              | Parameter                           | Conditions                | Min | Max      | Unit |
|---------------------|-------------------------------------|---------------------------|-----|----------|------|
| $V_{CC}$            | supply voltage                      |                           | 0.8 | 3.6      | V    |
| $V_I$               | input voltage                       |                           | 0   | 3.6      | V    |
| $V_O$               | output voltage                      |                           | 0   | $V_{CC}$ | V    |
| $T_{amb}$           | ambient temperature                 |                           | -40 | +125     | °C   |
| $\Delta t/\Delta V$ | input transition rise and fall rate | $V_{CC} = 0.8$ V to 3.6 V | 0   | 200      | ns/V |

## 10. Static characteristics

**Table 7. Static characteristics**

At recommended operating conditions; voltages are referenced to GND (ground = 0 V).

| Symbol                         | Parameter                 | Conditions                                                    | Min                    | Typ | Max                    | Unit |
|--------------------------------|---------------------------|---------------------------------------------------------------|------------------------|-----|------------------------|------|
| <b>T<sub>amb</sub> = 25 °C</b> |                           |                                                               |                        |     |                        |      |
| V <sub>IH</sub>                | HIGH-level input voltage  | X1 input                                                      |                        |     |                        |      |
|                                |                           | V <sub>CC</sub> = 0.8 V to 3.6 V                              | 0.75 × V <sub>CC</sub> | -   | -                      | V    |
|                                |                           | EN input                                                      |                        |     |                        |      |
|                                |                           | V <sub>CC</sub> = 0.8 V                                       | 0.70 × V <sub>CC</sub> | -   | -                      | V    |
|                                |                           | V <sub>CC</sub> = 0.9 V to 1.95 V                             | 0.65 × V <sub>CC</sub> | -   | -                      | V    |
|                                |                           | V <sub>CC</sub> = 2.3 V to 2.7 V                              | 1.6                    | -   | -                      | V    |
| V <sub>IL</sub>                | LOW-level input voltage   | X1 input                                                      |                        |     |                        |      |
|                                |                           | V <sub>CC</sub> = 0.8 V to 3.6 V                              | -                      | -   | 0.25 × V <sub>CC</sub> | V    |
|                                |                           | EN input                                                      |                        |     |                        |      |
|                                |                           | V <sub>CC</sub> = 0.8 V                                       | -                      | -   | 0.30 × V <sub>CC</sub> | V    |
|                                |                           | V <sub>CC</sub> = 0.9 V to 1.95 V                             | -                      | -   | 0.35 × V <sub>CC</sub> | V    |
|                                |                           | V <sub>CC</sub> = 2.3 V to 2.7 V                              | -                      | -   | 0.7                    | V    |
| V <sub>OH</sub>                | HIGH-level output voltage | Y output; V <sub>I</sub> = V <sub>IH</sub> or V <sub>IL</sub> |                        |     |                        |      |
|                                |                           | I <sub>O</sub> = -20 µA; V <sub>CC</sub> = 0.8 V to 3.6 V     | V <sub>CC</sub> - 0.1  | -   | -                      | V    |
|                                |                           | I <sub>O</sub> = -1.1 mA; V <sub>CC</sub> = 1.1 V             | 0.75 × V <sub>CC</sub> | -   | -                      | V    |
|                                |                           | I <sub>O</sub> = -1.7 mA; V <sub>CC</sub> = 1.4 V             | 1.11                   | -   | -                      | V    |
|                                |                           | I <sub>O</sub> = -1.9 mA; V <sub>CC</sub> = 1.65 V            | 1.32                   | -   | -                      | V    |
|                                |                           | I <sub>O</sub> = -2.3 mA; V <sub>CC</sub> = 2.3 V             | 2.05                   | -   | -                      | V    |
|                                |                           | I <sub>O</sub> = -3.1 mA; V <sub>CC</sub> = 2.3 V             | 1.9                    | -   | -                      | V    |
|                                |                           | I <sub>O</sub> = -2.7 mA; V <sub>CC</sub> = 3.0 V             | 2.72                   | -   | -                      | V    |
|                                |                           | I <sub>O</sub> = -4.0 mA; V <sub>CC</sub> = 3.0 V             | 2.6                    | -   | -                      | V    |
|                                |                           | X2 output; V <sub>I</sub> = GND or V <sub>CC</sub>            |                        |     |                        |      |
|                                |                           | I <sub>O</sub> = -20 µA; V <sub>CC</sub> = 0.8 V to 3.6 V     | V <sub>CC</sub> - 0.1  | -   | -                      | V    |
|                                |                           | I <sub>O</sub> = -1.1 mA; V <sub>CC</sub> = 1.1 V             | 0.75 × V <sub>CC</sub> | -   | -                      | V    |
|                                |                           | I <sub>O</sub> = -1.7 mA; V <sub>CC</sub> = 1.4 V             | 1.11                   | -   | -                      | V    |
|                                |                           | I <sub>O</sub> = -1.9 mA; V <sub>CC</sub> = 1.65 V            | 1.32                   | -   | -                      | V    |
|                                |                           | I <sub>O</sub> = -2.3 mA; V <sub>CC</sub> = 2.3 V             | 2.05                   | -   | -                      | V    |
|                                |                           | I <sub>O</sub> = -3.1 mA; V <sub>CC</sub> = 2.3 V             | 1.9                    | -   | -                      | V    |
|                                |                           | I <sub>O</sub> = -2.7 mA; V <sub>CC</sub> = 3.0 V             | 2.72                   | -   | -                      | V    |
|                                |                           | I <sub>O</sub> = -4.0 mA; V <sub>CC</sub> = 3.0 V             | 2.6                    | -   | -                      | V    |

**Table 7.** Static characteristics ...continued

At recommended operating conditions; voltages are referenced to GND (ground = 0 V).

| Symbol           | Parameter                            | Conditions                                                                                                                                           | Min                 | Typ | Max                 | Unit          |
|------------------|--------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|-----|---------------------|---------------|
| $V_{OL}$         | LOW-level output voltage             | Y output; $V_I = V_{IH}$ or $V_{IL}$                                                                                                                 |                     |     |                     |               |
|                  |                                      | $I_O = 20\ \mu\text{A}$ ; $V_{CC} = 0.8\ \text{V}$ to $3.6\ \text{V}$                                                                                | -                   | -   | 0.1                 | V             |
|                  |                                      | $I_O = 1.1\ \text{mA}$ ; $V_{CC} = 1.1\ \text{V}$                                                                                                    | -                   | -   | $0.3 \times V_{CC}$ | V             |
|                  |                                      | $I_O = 1.7\ \text{mA}$ ; $V_{CC} = 1.4\ \text{V}$                                                                                                    | -                   | -   | 0.31                | V             |
|                  |                                      | $I_O = 1.9\ \text{mA}$ ; $V_{CC} = 1.65\ \text{V}$                                                                                                   | -                   | -   | 0.31                | V             |
|                  |                                      | $I_O = 2.3\ \text{mA}$ ; $V_{CC} = 2.3\ \text{V}$                                                                                                    | -                   | -   | 0.31                | V             |
|                  |                                      | $I_O = 3.1\ \text{mA}$ ; $V_{CC} = 2.3\ \text{V}$                                                                                                    | -                   | -   | 0.44                | V             |
|                  |                                      | $I_O = 2.7\ \text{mA}$ ; $V_{CC} = 3.0\ \text{V}$                                                                                                    | -                   | -   | 0.31                | V             |
|                  |                                      | $I_O = 4.0\ \text{mA}$ ; $V_{CC} = 3.0\ \text{V}$                                                                                                    | -                   | -   | 0.44                | V             |
|                  |                                      | X2 output; $V_I = \text{GND}$ or $V_{CC}$                                                                                                            |                     |     |                     |               |
|                  |                                      | $I_O = 20\ \mu\text{A}$ ; $V_{CC} = 0.8\ \text{V}$ to $3.6\ \text{V}$                                                                                | -                   | -   | 0.1                 | V             |
|                  |                                      | $I_O = 1.1\ \text{mA}$ ; $V_{CC} = 1.1\ \text{V}$                                                                                                    | -                   | -   | $0.3 \times V_{CC}$ | V             |
|                  |                                      | $I_O = 1.7\ \text{mA}$ ; $V_{CC} = 1.4\ \text{V}$                                                                                                    | -                   | -   | 0.31                | V             |
|                  |                                      | $I_O = 1.9\ \text{mA}$ ; $V_{CC} = 1.65\ \text{V}$                                                                                                   | -                   | -   | 0.31                | V             |
|                  |                                      | $I_O = 2.3\ \text{mA}$ ; $V_{CC} = 2.3\ \text{V}$                                                                                                    | -                   | -   | 0.31                | V             |
|                  |                                      | $I_O = 3.1\ \text{mA}$ ; $V_{CC} = 2.3\ \text{V}$                                                                                                    | -                   | -   | 0.44                | V             |
|                  |                                      | $I_O = 2.7\ \text{mA}$ ; $V_{CC} = 3.0\ \text{V}$                                                                                                    | -                   | -   | 0.31                | V             |
|                  |                                      | $I_O = 4.0\ \text{mA}$ ; $V_{CC} = 3.0\ \text{V}$                                                                                                    | -                   | -   | 0.44                | V             |
| $I_I$            | input leakage current                | X1 input                                                                                                                                             |                     |     |                     |               |
|                  |                                      | $V_I = \overline{\text{EN}} = V_{CC}$ ; $V_{CC} = 0\ \text{V}$ to $3.6\ \text{V}$                                                                    | -                   | -   | $\pm 10$            | $\mu\text{A}$ |
|                  |                                      | $\overline{\text{EN}}$ input                                                                                                                         |                     |     |                     |               |
| $I_{pu}$         | pull-up current                      | $V_I = \text{GND}$ to $3.6\ \text{V}$ ;<br>$V_{CC} = 0\ \text{V}$ to $3.6\ \text{V}$                                                                 | -                   | -   | $\pm 0.1$           | $\mu\text{A}$ |
|                  |                                      | X1 input; $\overline{\text{EN}} = V_{CC}$                                                                                                            |                     |     |                     |               |
| $I_{fbck}$       | feedback current                     | $V_I = \text{GND}$ ; $V_{CC} = 0.8\ \text{V}$ to $3.6\ \text{V}$                                                                                     | -                   | -   | -15                 | $\mu\text{A}$ |
|                  |                                      | X1 input                                                                                                                                             |                     |     |                     |               |
| $I_{OZ}$         | OFF-state output current             | $V_I = \text{GND}$ or $V_{CC}$ ; $\overline{\text{EN}} = \text{GND}$ ;<br>$V_{CC} = 0.8\ \text{V}$ to $3.6\ \text{V}$                                | -                   | -   | $\pm 7.5$           | $\mu\text{A}$ |
|                  |                                      | $V_I = V_{IH}$ or $V_{IL}$ ; $V_O = 0\ \text{V}$ to $3.6\ \text{V}$ ;<br>$V_{CC} = 0\ \text{V}$ to $3.6\ \text{V}$ ; $\overline{\text{EN}} = V_{CC}$ | -                   | -   | $\pm 0.1$           | $\mu\text{A}$ |
| $I_{OFF}$        | power-off leakage current            | $V_I$ or $V_O = 0\ \text{V}$ to $3.6\ \text{V}$ ; $V_{CC} = 0\ \text{V}$                                                                             | <a href="#">[1]</a> | -   | $\pm 0.2$           | $\mu\text{A}$ |
| $\Delta I_{OFF}$ | additional power-off leakage current | $V_I$ or $V_O = 0\ \text{V}$ to $3.6\ \text{V}$ ;<br>$V_{CC} = 0\ \text{V}$ to $0.2\ \text{V}$                                                       | <a href="#">[1]</a> | -   | $\pm 0.2$           | $\mu\text{A}$ |
| $I_{CC}$         | supply current                       | $V_I = \text{GND}$ or $V_{CC}$ ; $I_O = 0\ \text{A}$ ;<br>$V_{CC} = 0.8\ \text{V}$ to $3.6\ \text{V}$                                                | -                   | -   | 10                  | $\mu\text{A}$ |
| $\Delta I_{CC}$  | additional supply current            | $\overline{\text{EN}}$ input                                                                                                                         |                     |     |                     |               |
|                  |                                      | $V_I = V_{CC} - 0.6\ \text{V}$ ; $I_O = 0\ \text{A}$ ;<br>$V_{CC} = 3.3\ \text{V}$                                                                   | -                   | -   | 40                  | $\mu\text{A}$ |

**Table 7.** Static characteristics ...continued

At recommended operating conditions; voltages are referenced to GND (ground = 0 V).

| Symbol                              | Parameter                | Conditions                                                                 | Min                    | Typ | Max                    | Unit |
|-------------------------------------|--------------------------|----------------------------------------------------------------------------|------------------------|-----|------------------------|------|
| C <sub>I</sub>                      | input capacitance        | X1 input                                                                   |                        |     |                        |      |
|                                     |                          | V <sub>CC</sub> = 0 V to 3.6 V;<br>V <sub>I</sub> = GND or V <sub>CC</sub> | -                      | 1.5 | -                      | pF   |
|                                     |                          | $\overline{\text{EN}}$ input                                               |                        |     |                        |      |
|                                     |                          | V <sub>CC</sub> = 0 V to 3.6 V;<br>V <sub>I</sub> = GND or V <sub>CC</sub> | -                      | 0.8 | -                      | pF   |
| C <sub>O</sub>                      | output capacitance       | X2 output                                                                  |                        |     |                        |      |
|                                     |                          | V <sub>O</sub> = GND; V <sub>CC</sub> = 0 V                                | -                      | 1.8 | -                      | pF   |
|                                     |                          | Y output                                                                   |                        |     |                        |      |
|                                     |                          | V <sub>O</sub> = GND; V <sub>CC</sub> = 0 V                                | -                      | 1.7 | -                      | pF   |
| T <sub>amb</sub> = −40 °C to +85 °C |                          |                                                                            |                        |     |                        |      |
| V <sub>IH</sub>                     | HIGH-level input voltage | X1 input                                                                   |                        |     |                        |      |
|                                     |                          | V <sub>CC</sub> = 0.8 V to 3.6 V                                           | 0.75 × V <sub>CC</sub> | -   | -                      | V    |
|                                     |                          | $\overline{\text{EN}}$ input                                               |                        |     |                        |      |
|                                     |                          | V <sub>CC</sub> = 0.8 V                                                    | 0.70 × V <sub>CC</sub> | -   | -                      | V    |
|                                     |                          | V <sub>CC</sub> = 0.9 V to 1.95 V                                          | 0.65 × V <sub>CC</sub> | -   | -                      | V    |
|                                     |                          | V <sub>CC</sub> = 2.3 V to 2.7 V                                           | 1.6                    | -   | -                      | V    |
|                                     |                          | V <sub>CC</sub> = 3.0 V to 3.6 V                                           | 2.0                    | -   | -                      | V    |
| V <sub>IL</sub>                     | LOW-level input voltage  | X1 input                                                                   |                        |     |                        |      |
|                                     |                          | V <sub>CC</sub> = 0.8 V to 3.6 V                                           | -                      | -   | 0.25 × V <sub>CC</sub> | V    |
|                                     |                          | $\overline{\text{EN}}$ input                                               |                        |     |                        |      |
|                                     |                          | V <sub>CC</sub> = 0.8 V                                                    | -                      | -   | 0.30 × V <sub>CC</sub> | V    |
|                                     |                          | V <sub>CC</sub> = 0.9 V to 1.95 V                                          | -                      | -   | 0.35 × V <sub>CC</sub> | V    |
|                                     |                          | V <sub>CC</sub> = 2.3 V to 2.7 V                                           | -                      | -   | 0.7                    | V    |
|                                     |                          | V <sub>CC</sub> = 3.0 V to 3.6 V                                           | -                      | -   | 0.9                    | V    |

**Table 7.** Static characteristics ...continued

At recommended operating conditions; voltages are referenced to GND (ground = 0 V).

| Symbol          | Parameter                 | Conditions                                                    | Min                   | Typ | Max                   | Unit |
|-----------------|---------------------------|---------------------------------------------------------------|-----------------------|-----|-----------------------|------|
| V <sub>OH</sub> | HIGH-level output voltage | Y output; V <sub>I</sub> = V <sub>IH</sub> or V <sub>IL</sub> |                       |     |                       |      |
|                 |                           | I <sub>O</sub> = -20 µA; V <sub>CC</sub> = 0.8 V to 3.6 V     | V <sub>CC</sub> - 0.1 | -   | -                     | V    |
|                 |                           | I <sub>O</sub> = -1.1 mA; V <sub>CC</sub> = 1.1 V             | 0.7 × V <sub>CC</sub> | -   | -                     | V    |
|                 |                           | I <sub>O</sub> = -1.7 mA; V <sub>CC</sub> = 1.4 V             | 1.03                  | -   | -                     | V    |
|                 |                           | I <sub>O</sub> = -1.9 mA; V <sub>CC</sub> = 1.65 V            | 1.30                  | -   | -                     | V    |
|                 |                           | I <sub>O</sub> = -2.3 mA; V <sub>CC</sub> = 2.3 V             | 1.97                  | -   | -                     | V    |
|                 |                           | I <sub>O</sub> = -3.1 mA; V <sub>CC</sub> = 2.3 V             | 1.85                  | -   | -                     | V    |
|                 |                           | I <sub>O</sub> = -2.7 mA; V <sub>CC</sub> = 3.0 V             | 2.67                  | -   | -                     | V    |
|                 |                           | I <sub>O</sub> = -4.0 mA; V <sub>CC</sub> = 3.0 V             | 2.55                  | -   | -                     | V    |
|                 |                           | X2 output; V <sub>I</sub> = GND or V <sub>CC</sub>            |                       |     |                       |      |
|                 |                           | I <sub>O</sub> = -20 µA; V <sub>CC</sub> = 0.8 V to 3.6 V     | V <sub>CC</sub> - 0.1 | -   | -                     | V    |
|                 |                           | I <sub>O</sub> = -1.1 mA; V <sub>CC</sub> = 1.1 V             | 0.7 × V <sub>CC</sub> | -   | -                     | V    |
|                 |                           | I <sub>O</sub> = -1.7 mA; V <sub>CC</sub> = 1.4 V             | 1.03                  | -   | -                     | V    |
|                 |                           | I <sub>O</sub> = -1.9 mA; V <sub>CC</sub> = 1.65 V            | 1.30                  | -   | -                     | V    |
|                 |                           | I <sub>O</sub> = -2.3 mA; V <sub>CC</sub> = 2.3 V             | 1.97                  | -   | -                     | V    |
|                 |                           | I <sub>O</sub> = -3.1 mA; V <sub>CC</sub> = 2.3 V             | 1.85                  | -   | -                     | V    |
|                 |                           | I <sub>O</sub> = -2.7 mA; V <sub>CC</sub> = 3.0 V             | 2.67                  | -   | -                     | V    |
|                 |                           | I <sub>O</sub> = -4.0 mA; V <sub>CC</sub> = 3.0 V             | 2.55                  | -   | -                     | V    |
| V <sub>OL</sub> | LOW-level output voltage  | Y output; V <sub>I</sub> = V <sub>IH</sub> or V <sub>IL</sub> |                       |     |                       |      |
|                 |                           | I <sub>O</sub> = 20 µA; V <sub>CC</sub> = 0.8 V to 3.6 V      | -                     | -   | 0.1                   | V    |
|                 |                           | I <sub>O</sub> = 1.1 mA; V <sub>CC</sub> = 1.1 V              | -                     | -   | 0.3 × V <sub>CC</sub> | V    |
|                 |                           | I <sub>O</sub> = 1.7 mA; V <sub>CC</sub> = 1.4 V              | -                     | -   | 0.37                  | V    |
|                 |                           | I <sub>O</sub> = 1.9 mA; V <sub>CC</sub> = 1.65 V             | -                     | -   | 0.35                  | V    |
|                 |                           | I <sub>O</sub> = 2.3 mA; V <sub>CC</sub> = 2.3 V              | -                     | -   | 0.33                  | V    |
|                 |                           | I <sub>O</sub> = 3.1 mA; V <sub>CC</sub> = 2.3 V              | -                     | -   | 0.45                  | V    |
|                 |                           | I <sub>O</sub> = 2.7 mA; V <sub>CC</sub> = 3.0 V              | -                     | -   | 0.33                  | V    |
|                 |                           | I <sub>O</sub> = 4.0 mA; V <sub>CC</sub> = 3.0 V              | -                     | -   | 0.45                  | V    |
|                 |                           | X2 output; V <sub>I</sub> = GND or V <sub>CC</sub>            |                       |     |                       |      |
|                 |                           | I <sub>O</sub> = 20 µA; V <sub>CC</sub> = 0.8 V to 3.6 V      | -                     | -   | 0.1                   | V    |
|                 |                           | I <sub>O</sub> = 1.1 mA; V <sub>CC</sub> = 1.1 V              | -                     | -   | 0.3 × V <sub>CC</sub> | V    |
|                 |                           | I <sub>O</sub> = 1.7 mA; V <sub>CC</sub> = 1.4 V              | -                     | -   | 0.37                  | V    |
|                 |                           | I <sub>O</sub> = 1.9 mA; V <sub>CC</sub> = 1.65 V             | -                     | -   | 0.35                  | V    |
|                 |                           | I <sub>O</sub> = 2.3 mA; V <sub>CC</sub> = 2.3 V              | -                     | -   | 0.33                  | V    |
|                 |                           | I <sub>O</sub> = 3.1 mA; V <sub>CC</sub> = 2.3 V              | -                     | -   | 0.45                  | V    |
|                 |                           | I <sub>O</sub> = 2.7 mA; V <sub>CC</sub> = 3.0 V              | -                     | -   | 0.33                  | V    |
|                 |                           | I <sub>O</sub> = 4.0 mA; V <sub>CC</sub> = 3.0 V              | -                     | -   | 0.45                  | V    |



**Table 7.** Static characteristics ...continued

At recommended operating conditions; voltages are referenced to GND (ground = 0 V).

| Symbol                               | Parameter                            | Conditions                                                                                                                                                       | Min                    | Typ | Max                    | Unit |
|--------------------------------------|--------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------|-----|------------------------|------|
| I <sub>I</sub>                       | input leakage current                | X1 input                                                                                                                                                         |                        |     |                        |      |
|                                      |                                      | V <sub>I</sub> = $\overline{\text{EN}}$ = V <sub>CC</sub> ; V <sub>CC</sub> = 0 V to 3.6 V                                                                       | -                      | -   | ±15                    | μA   |
|                                      |                                      | $\overline{\text{EN}}$ input                                                                                                                                     |                        |     |                        |      |
|                                      |                                      | V <sub>I</sub> = GND to 3.6 V;<br>V <sub>CC</sub> = 0 V to 3.6 V                                                                                                 | -                      | -   | ±0.5                   | μA   |
| I <sub>pu</sub>                      | pull-up current                      | X1 input; $\overline{\text{EN}}$ = V <sub>CC</sub>                                                                                                               |                        |     |                        |      |
|                                      |                                      | V <sub>I</sub> = GND; V <sub>CC</sub> = 0.8 V to 3.6 V                                                                                                           | -                      | -   | −15                    | μA   |
| I <sub>fbck</sub>                    | feedback current                     | X1 input                                                                                                                                                         |                        |     |                        |      |
|                                      |                                      | V <sub>I</sub> = GND or V <sub>CC</sub> ; $\overline{\text{EN}}$ = GND;<br>V <sub>CC</sub> = 0.8 V to 3.6 V                                                      | -                      | -   | ±7.5                   | μA   |
| I <sub>OZ</sub>                      | OFF-state output current             | V <sub>I</sub> = V <sub>IH</sub> or V <sub>IL</sub> ; V <sub>O</sub> = 0 V to 3.6 V;<br>V <sub>CC</sub> = 0 V to 3.6 V; $\overline{\text{EN}}$ = V <sub>CC</sub> | -                      | -   | ±0.5                   | μA   |
| I <sub>OFF</sub>                     | power-off leakage current            | V <sub>I</sub> or V <sub>O</sub> = 0 V to 3.6 V; V <sub>CC</sub> = 0 V                                                                                           | <a href="#">[1]</a> -  | -   | ±0.5                   | μA   |
| ΔI <sub>OFF</sub>                    | additional power-off leakage current | V <sub>I</sub> or V <sub>O</sub> = 0 V to 3.6 V;<br>V <sub>CC</sub> = 0 V to 0.2 V                                                                               | <a href="#">[1]</a> -  | -   | ±0.6                   | μA   |
| I <sub>CC</sub>                      | supply current                       | V <sub>I</sub> = GND or V <sub>CC</sub> ; I <sub>O</sub> = 0 A;<br>V <sub>CC</sub> = 0.8 V to 3.6 V                                                              | -                      | -   | 0.9                    | μA   |
| ΔI <sub>CC</sub>                     | additional supply current            | $\overline{\text{EN}}$ input                                                                                                                                     |                        |     |                        |      |
|                                      |                                      | V <sub>I</sub> = V <sub>CC</sub> − 0.6 V; I <sub>O</sub> = 0 A;<br>V <sub>CC</sub> = 3.3 V                                                                       | -                      | -   | 50                     | μA   |
| T <sub>amb</sub> = −40 °C to +125 °C |                                      |                                                                                                                                                                  |                        |     |                        |      |
| V <sub>IH</sub>                      | HIGH-level input voltage             | X1 input                                                                                                                                                         |                        |     |                        |      |
|                                      |                                      | V <sub>CC</sub> = 0.8 V to 3.6 V                                                                                                                                 | 0.75 × V <sub>CC</sub> | -   | -                      | V    |
|                                      |                                      | $\overline{\text{EN}}$ input                                                                                                                                     |                        |     |                        |      |
|                                      |                                      | V <sub>CC</sub> = 0.8 V                                                                                                                                          | 0.75 × V <sub>CC</sub> | -   | -                      | V    |
|                                      |                                      | V <sub>CC</sub> = 0.9 V to 1.95 V                                                                                                                                | 0.70 × V <sub>CC</sub> | -   | -                      | V    |
|                                      |                                      | V <sub>CC</sub> = 2.3 V to 2.7 V                                                                                                                                 | 1.6                    | -   | -                      | V    |
|                                      |                                      | V <sub>CC</sub> = 3.0 V to 3.6 V                                                                                                                                 | 2.0                    | -   | -                      | V    |
| V <sub>IL</sub>                      | LOW-level input voltage              | X1 input                                                                                                                                                         |                        |     |                        |      |
|                                      |                                      | V <sub>CC</sub> = 0.8 V to 3.6 V                                                                                                                                 | -                      | -   | 0.25 × V <sub>CC</sub> | V    |
|                                      |                                      | $\overline{\text{EN}}$ input                                                                                                                                     |                        |     |                        |      |
|                                      |                                      | V <sub>CC</sub> = 0.8 V                                                                                                                                          | -                      | -   | 0.25 × V <sub>CC</sub> | V    |
|                                      |                                      | V <sub>CC</sub> = 0.9 V to 1.95 V                                                                                                                                | -                      | -   | 0.30 × V <sub>CC</sub> | V    |
|                                      |                                      | V <sub>CC</sub> = 2.3 V to 2.7 V                                                                                                                                 | -                      | -   | 0.7                    | V    |
|                                      |                                      | V <sub>CC</sub> = 3.0 V to 3.6 V                                                                                                                                 | -                      | -   | 0.9                    | V    |

**Table 7.** Static characteristics ...continued

At recommended operating conditions; voltages are referenced to GND (ground = 0 V).

| Symbol   | Parameter                 | Conditions                                                             | Min                 | Typ | Max                  | Unit |
|----------|---------------------------|------------------------------------------------------------------------|---------------------|-----|----------------------|------|
| $V_{OH}$ | HIGH-level output voltage | Y output; $V_I = V_{IH}$ or $V_{IL}$                                   |                     |     |                      |      |
|          |                           | $I_O = -20\ \mu\text{A}$ ; $V_{CC} = 0.8\ \text{V}$ to $3.6\ \text{V}$ | $V_{CC} - 0.11$     | -   | -                    | V    |
|          |                           | $I_O = -1.1\ \text{mA}$ ; $V_{CC} = 1.1\ \text{V}$                     | $0.6 \times V_{CC}$ | -   | -                    | V    |
|          |                           | $I_O = -1.7\ \text{mA}$ ; $V_{CC} = 1.4\ \text{V}$                     | 0.93                | -   | -                    | V    |
|          |                           | $I_O = -1.9\ \text{mA}$ ; $V_{CC} = 1.65\ \text{V}$                    | 1.17                | -   | -                    | V    |
|          |                           | $I_O = -2.3\ \text{mA}$ ; $V_{CC} = 2.3\ \text{V}$                     | 1.77                | -   | -                    | V    |
|          |                           | $I_O = -3.1\ \text{mA}$ ; $V_{CC} = 2.3\ \text{V}$                     | 1.67                | -   | -                    | V    |
|          |                           | $I_O = -2.7\ \text{mA}$ ; $V_{CC} = 3.0\ \text{V}$                     | 2.40                | -   | -                    | V    |
|          |                           | $I_O = -4.0\ \text{mA}$ ; $V_{CC} = 3.0\ \text{V}$                     | 2.30                | -   | -                    | V    |
|          |                           | X2 output; $V_I = \text{GND}$ or $V_{CC}$                              |                     |     |                      |      |
|          |                           | $I_O = -20\ \mu\text{A}$ ; $V_{CC} = 0.8\ \text{V}$ to $3.6\ \text{V}$ | $V_{CC} - 0.11$     | -   | -                    | V    |
|          |                           | $I_O = -1.1\ \text{mA}$ ; $V_{CC} = 1.1\ \text{V}$                     | $0.6 \times V_{CC}$ | -   | -                    | V    |
|          |                           | $I_O = -1.7\ \text{mA}$ ; $V_{CC} = 1.4\ \text{V}$                     | 0.93                | -   | -                    | V    |
|          |                           | $I_O = -1.9\ \text{mA}$ ; $V_{CC} = 1.65\ \text{V}$                    | 1.17                | -   | -                    | V    |
|          |                           | $I_O = -2.3\ \text{mA}$ ; $V_{CC} = 2.3\ \text{V}$                     | 1.77                | -   | -                    | V    |
|          |                           | $I_O = -3.1\ \text{mA}$ ; $V_{CC} = 2.3\ \text{V}$                     | 1.67                | -   | -                    | V    |
|          |                           | $I_O = -2.7\ \text{mA}$ ; $V_{CC} = 3.0\ \text{V}$                     | 2.40                | -   | -                    | V    |
|          |                           | $I_O = -4.0\ \text{mA}$ ; $V_{CC} = 3.0\ \text{V}$                     | 2.30                | -   | -                    | V    |
| $V_{OL}$ | LOW-level output voltage  | Y output; $V_I = V_{IH}$ or $V_{IL}$                                   |                     |     |                      |      |
|          |                           | $I_O = 20\ \mu\text{A}$ ; $V_{CC} = 0.8\ \text{V}$ to $3.6\ \text{V}$  | -                   | -   | 0.11                 | V    |
|          |                           | $I_O = 1.1\ \text{mA}$ ; $V_{CC} = 1.1\ \text{V}$                      | -                   | -   | $0.33 \times V_{CC}$ | V    |
|          |                           | $I_O = 1.7\ \text{mA}$ ; $V_{CC} = 1.4\ \text{V}$                      | -                   | -   | 0.41                 | V    |
|          |                           | $I_O = 1.9\ \text{mA}$ ; $V_{CC} = 1.65\ \text{V}$                     | -                   | -   | 0.39                 | V    |
|          |                           | $I_O = 2.3\ \text{mA}$ ; $V_{CC} = 2.3\ \text{V}$                      | -                   | -   | 0.36                 | V    |
|          |                           | $I_O = 3.1\ \text{mA}$ ; $V_{CC} = 2.3\ \text{V}$                      | -                   | -   | 0.50                 | V    |
|          |                           | $I_O = 2.7\ \text{mA}$ ; $V_{CC} = 3.0\ \text{V}$                      | -                   | -   | 0.36                 | V    |
|          |                           | $I_O = 4.0\ \text{mA}$ ; $V_{CC} = 3.0\ \text{V}$                      | -                   | -   | 0.50                 | V    |
|          |                           | X2 output; $V_I = \text{GND}$ or $V_{CC}$                              |                     |     |                      |      |
|          |                           | $I_O = 20\ \mu\text{A}$ ; $V_{CC} = 0.8\ \text{V}$ to $3.6\ \text{V}$  | -                   | -   | 0.11                 | V    |
|          |                           | $I_O = 1.1\ \text{mA}$ ; $V_{CC} = 1.1\ \text{V}$                      | -                   | -   | $0.33 \times V_{CC}$ | V    |
|          |                           | $I_O = 1.7\ \text{mA}$ ; $V_{CC} = 1.4\ \text{V}$                      | -                   | -   | 0.41                 | V    |
|          |                           | $I_O = 1.9\ \text{mA}$ ; $V_{CC} = 1.65\ \text{V}$                     | -                   | -   | 0.39                 | V    |
|          |                           | $I_O = 2.3\ \text{mA}$ ; $V_{CC} = 2.3\ \text{V}$                      | -                   | -   | 0.36                 | V    |
|          |                           | $I_O = 3.1\ \text{mA}$ ; $V_{CC} = 2.3\ \text{V}$                      | -                   | -   | 0.50                 | V    |
|          |                           | $I_O = 2.7\ \text{mA}$ ; $V_{CC} = 3.0\ \text{V}$                      | -                   | -   | 0.36                 | V    |
|          |                           | $I_O = 4.0\ \text{mA}$ ; $V_{CC} = 3.0\ \text{V}$                      | -                   | -   | 0.50                 | V    |

**Table 7.** Static characteristics ...continued

At recommended operating conditions; voltages are referenced to GND (ground = 0 V).

| Symbol           | Parameter                            | Conditions                                                                                                                     | Min | Typ | Max        | Unit          |
|------------------|--------------------------------------|--------------------------------------------------------------------------------------------------------------------------------|-----|-----|------------|---------------|
| $I_I$            | input leakage current                | X1 input                                                                                                                       |     |     |            |               |
|                  |                                      | $V_I = \overline{EN} = V_{CC}; V_{CC} = 0\text{ V to }3.6\text{ V}$                                                            | -   | -   | $\pm 20$   | $\mu\text{A}$ |
|                  |                                      | $\overline{EN}$ input                                                                                                          |     |     |            |               |
|                  |                                      | $V_I = \text{GND to }3.6\text{ V}; V_{CC} = 0\text{ V to }3.6\text{ V}$                                                        | -   | -   | $\pm 0.75$ | $\mu\text{A}$ |
| $I_{pu}$         | pull-up current                      | X1 input; $\overline{EN} = V_{CC}$                                                                                             |     |     |            |               |
|                  |                                      | $V_I = \text{GND}; V_{CC} = 0.8\text{ V to }3.6\text{ V}$                                                                      | -   | -   | -15        | $\mu\text{A}$ |
| $I_{fbck}$       | feedback current                     | X1 input                                                                                                                       |     |     |            |               |
|                  |                                      | $V_I = \text{GND or }V_{CC}; \overline{EN} = \text{GND}; V_{CC} = 0.8\text{ V to }3.6\text{ V}$                                | -   | -   | $\pm 7.5$  | $\mu\text{A}$ |
| $I_{OZ}$         | OFF-state output current             | $V_I = V_{IH}\text{ or }V_{IL}; V_O = 0\text{ V to }3.6\text{ V}; V_{CC} = 0\text{ V to }3.6\text{ V}; \overline{EN} = V_{CC}$ | -   | -   | $\pm 0.75$ | $\mu\text{A}$ |
| $I_{OFF}$        | power-off leakage current            | $V_I\text{ or }V_O = 0\text{ V to }3.6\text{ V}; V_{CC} = 0\text{ V}$                                                          | [1] | -   | $\pm 0.75$ | $\mu\text{A}$ |
| $\Delta I_{OFF}$ | additional power-off leakage current | $V_I\text{ or }V_O = 0\text{ V to }3.6\text{ V}; V_{CC} = 0\text{ V to }0.2\text{ V}$                                          | [1] | -   | $\pm 0.75$ | $\mu\text{A}$ |
| $I_{CC}$         | supply current                       | $V_I = \text{GND or }V_{CC}; I_O = 0\text{ A}; V_{CC} = 0.8\text{ V to }3.6\text{ V}$                                          | -   | -   | 1.4        | $\mu\text{A}$ |
| $\Delta I_{CC}$  | additional supply current            | $\overline{EN}$ input                                                                                                          |     |     |            |               |
|                  |                                      | $V_I = V_{CC} - 0.6\text{ V}; I_O = 0\text{ A}; V_{CC} = 3.3\text{ V}$                                                         | -   | -   | 75         | $\mu\text{A}$ |

[1] Only for output Y.

## 11. Dynamic characteristics

**Table 8. Dynamic characteristics**

Voltages are referenced to GND (ground = 0 V); for test circuit see [Figure 7](#).

| Symbol                | Parameter         | Conditions                                                | 25 °C |                     |      | –40 °C to +125 °C |                |                 | Unit |
|-----------------------|-------------------|-----------------------------------------------------------|-------|---------------------|------|-------------------|----------------|-----------------|------|
|                       |                   |                                                           | Min   | Typ <sup>[1]</sup>  | Max  | Min               | Max<br>(85 °C) | Max<br>(125 °C) |      |
| C <sub>L</sub> = 5 pF |                   |                                                           |       |                     |      |                   |                |                 |      |
| t <sub>pd</sub>       | propagation delay | X1 to X2; see <a href="#">Figure 5</a>                    |       | <a href="#">[2]</a> |      |                   |                |                 |      |
|                       |                   | V <sub>CC</sub> = 0.8 V                                   | -     | 6.2                 | -    | -                 | -              | -               | ns   |
|                       |                   | V <sub>CC</sub> = 1.1 V to 1.3 V                          | 0.9   | 2.3                 | 4.4  | 0.9               | 4.8            | 5.3             | ns   |
|                       |                   | V <sub>CC</sub> = 1.4 V to 1.6 V                          | 0.7   | 1.7                 | 3.1  | 0.6               | 3.4            | 3.8             | ns   |
|                       |                   | V <sub>CC</sub> = 1.65 V to 1.95 V                        | 0.5   | 1.4                 | 2.6  | 0.5               | 2.9            | 3.2             | ns   |
|                       |                   | V <sub>CC</sub> = 2.3 V to 2.7 V                          | 0.4   | 1.1                 | 2.0  | 0.4               | 2.3            | 2.6             | ns   |
|                       |                   | V <sub>CC</sub> = 3.0 V to 3.6 V                          | 0.3   | 1.0                 | 1.8  | 0.3               | 2.1            | 2.4             | ns   |
|                       |                   | X1 to Y; see <a href="#">Figure 5</a>                     |       | <a href="#">[2]</a> |      |                   |                |                 |      |
|                       |                   | V <sub>CC</sub> = 0.8 V                                   | -     | 18.5                | -    | -                 | -              | -               | ns   |
|                       |                   | V <sub>CC</sub> = 1.1 V to 1.3 V                          | 2.8   | 5.9                 | 12.5 | 3.2               | 14.8           | 16.3            | ns   |
|                       |                   | V <sub>CC</sub> = 1.4 V to 1.6 V                          | 2.2   | 4.2                 | 7.7  | 2.6               | 9.1            | 10.1            | ns   |
|                       |                   | V <sub>CC</sub> = 1.65 V to 1.95 V                        | 1.9   | 3.5                 | 6.2  | 2.2               | 7.8            | 8.6             | ns   |
|                       |                   | V <sub>CC</sub> = 2.3 V to 2.7 V                          | 1.6   | 2.9                 | 4.8  | 1.9               | 6.2            | 6.9             | ns   |
|                       |                   | V <sub>CC</sub> = 3.0 V to 3.6 V                          | 1.4   | 2.6                 | 4.1  | 1.7               | 4.7            | 5.2             | ns   |
| t <sub>en</sub>       | enable time       | $\overline{\text{EN}}$ to Y; see <a href="#">Figure 6</a> |       | <a href="#">[3]</a> |      |                   |                |                 |      |
|                       |                   | V <sub>CC</sub> = 0.8 V                                   | -     | 31.2                | -    | -                 | -              | -               | ns   |
|                       |                   | V <sub>CC</sub> = 1.1 V to 1.3 V                          | 3.1   | 6.1                 | 13.8 | 2.9               | 16.3           | 18.0            | ns   |
|                       |                   | V <sub>CC</sub> = 1.4 V to 1.6 V                          | 2.5   | 4.3                 | 8.2  | 2.3               | 9.7            | 10.7            | ns   |
|                       |                   | V <sub>CC</sub> = 1.65 V to 1.95 V                        | 2.1   | 3.6                 | 6.5  | 2.0               | 7.6            | 8.4             | ns   |
|                       |                   | V <sub>CC</sub> = 2.3 V to 2.7 V                          | 1.8   | 2.9                 | 4.8  | 1.7               | 5.8            | 6.4             | ns   |
|                       |                   | V <sub>CC</sub> = 3.0 V to 3.6 V                          | 1.7   | 2.6                 | 4.1  | 1.7               | 4.7            | 5.2             | ns   |
| t <sub>dis</sub>      | disable time      | $\overline{\text{EN}}$ to Y; see <a href="#">Figure 6</a> |       | <a href="#">[4]</a> |      |                   |                |                 |      |
|                       |                   | V <sub>CC</sub> = 0.8 V                                   | -     | 11.1                | -    | -                 | -              | -               | ns   |
|                       |                   | V <sub>CC</sub> = 1.1 V to 1.3 V                          | 2.5   | 4.5                 | 9.0  | 2.9               | 9.4            | 10.4            | ns   |
|                       |                   | V <sub>CC</sub> = 1.4 V to 1.6 V                          | 2.0   | 3.3                 | 6.4  | 2.3               | 6.7            | 7.4             | ns   |
|                       |                   | V <sub>CC</sub> = 1.65 V to 1.95 V                        | 1.9   | 3.2                 | 6.0  | 2.0               | 6.4            | 7.1             | ns   |
|                       |                   | V <sub>CC</sub> = 2.3 V to 2.7 V                          | 1.4   | 2.3                 | 4.4  | 1.7               | 4.7            | 5.2             | ns   |
|                       |                   | V <sub>CC</sub> = 3.0 V to 3.6 V                          | 1.7   | 2.6                 | 4.4  | 1.7               | 4.9            | 5.4             | ns   |

**Table 8. Dynamic characteristics ...continued**Voltages are referenced to GND (ground = 0 V); for test circuit see [Figure 7](#).

| Symbol                 | Parameter         | Conditions                                                | 25 °C               |                    |      | –40 °C to +125 °C |                |                 | Unit |
|------------------------|-------------------|-----------------------------------------------------------|---------------------|--------------------|------|-------------------|----------------|-----------------|------|
|                        |                   |                                                           | Min                 | Typ <sup>[1]</sup> | Max  | Min               | Max<br>(85 °C) | Max<br>(125 °C) |      |
| C <sub>L</sub> = 10 pF |                   |                                                           |                     |                    |      |                   |                |                 |      |
| t <sub>pd</sub>        | propagation delay | X1 to X2; see <a href="#">Figure 5</a>                    | <a href="#">[2]</a> |                    |      |                   |                |                 |      |
|                        |                   | V <sub>CC</sub> = 0.8 V                                   | -                   | 9.6                | -    | -                 | -              | -               | ns   |
|                        |                   | V <sub>CC</sub> = 1.1 V to 1.3 V                          | 1.2                 | 3.1                | 6.1  | 1.2               | 6.8            | 7.5             | ns   |
|                        |                   | V <sub>CC</sub> = 1.4 V to 1.6 V                          | 1.0                 | 2.3                | 4.0  | 0.9               | 4.6            | 5.1             | ns   |
|                        |                   | V <sub>CC</sub> = 1.65 V to 1.95 V                        | 0.8                 | 1.9                | 3.3  | 0.7               | 3.8            | 4.2             | ns   |
|                        |                   | V <sub>CC</sub> = 2.3 V to 2.7 V                          | 0.6                 | 1.5                | 2.7  | 0.6               | 3.1            | 3.5             | ns   |
|                        |                   | V <sub>CC</sub> = 3.0 V to 3.6 V                          | 0.5                 | 1.3                | 2.4  | 0.5               | 2.7            | 3.0             | ns   |
|                        |                   | X1 to Y; see <a href="#">Figure 5</a>                     | <a href="#">[2]</a> |                    |      |                   |                |                 |      |
|                        |                   | V <sub>CC</sub> = 0.8 V                                   | -                   | 21.4               | -    | -                 | -              | -               | ns   |
|                        |                   | V <sub>CC</sub> = 1.1 V to 1.3 V                          | 3.2                 | 6.7                | 14.3 | 3.6               | 16.2           | 17.9            | ns   |
|                        |                   | V <sub>CC</sub> = 1.4 V to 1.6 V                          | 2.1                 | 4.9                | 8.9  | 3.0               | 10.1           | 11.2            | ns   |
|                        |                   | V <sub>CC</sub> = 1.65 V to 1.95 V                        | 1.9                 | 4.1                | 6.9  | 2.6               | 8.0            | 8.8             | ns   |
|                        |                   | V <sub>CC</sub> = 2.3 V to 2.7 V                          | 2.1                 | 3.4                | 5.4  | 2.3               | 6.6            | 7.3             | ns   |
|                        |                   | V <sub>CC</sub> = 3.0 V to 3.6 V                          | 1.8                 | 3.1                | 4.8  | 3.0               | 5.6            | 6.2             | ns   |
| t <sub>en</sub>        | enable time       | $\overline{\text{EN}}$ to Y; see <a href="#">Figure 6</a> | <a href="#">[3]</a> |                    |      |                   |                |                 |      |
|                        |                   | V <sub>CC</sub> = 0.8 V                                   | -                   | 34.4               | -    | -                 | -              | -               | ns   |
|                        |                   | V <sub>CC</sub> = 1.1 V to 1.3 V                          | 3.6                 | 6.9                | 15.5 | 3.4               | 16.0           | 17.6            | ns   |
|                        |                   | V <sub>CC</sub> = 1.4 V to 1.6 V                          | 2.3                 | 5.0                | 9.3  | 2.2               | 9.6            | 10.6            | ns   |
|                        |                   | V <sub>CC</sub> = 1.65 V to 1.95 V                        | 2.0                 | 4.2                | 7.2  | 1.9               | 7.9            | 8.7             | ns   |
|                        |                   | V <sub>CC</sub> = 2.3 V to 2.7 V                          | 1.8                 | 3.4                | 5.5  | 1.7               | 6.4            | 7.1             | ns   |
|                        |                   | V <sub>CC</sub> = 3.0 V to 3.6 V                          | 1.7                 | 3.2                | 4.9  | 1.7               | 5.5            | 6.1             | ns   |
| t <sub>dis</sub>       | disable time      | $\overline{\text{EN}}$ to Y; see <a href="#">Figure 6</a> | <a href="#">[4]</a> |                    |      |                   |                |                 |      |
|                        |                   | V <sub>CC</sub> = 0.8 V                                   | -                   | 13.0               | -    | -                 | -              | -               | ns   |
|                        |                   | V <sub>CC</sub> = 1.1 V to 1.3 V                          | 3.4                 | 5.7                | 10.4 | 3.4               | 10.8           | 11.9            | ns   |
|                        |                   | V <sub>CC</sub> = 1.4 V to 1.6 V                          | 2.1                 | 4.2                | 7.6  | 2.2               | 8.0            | 8.8             | ns   |
|                        |                   | V <sub>CC</sub> = 1.65 V to 1.95 V                        | 2.2                 | 4.3                | 7.3  | 1.9               | 7.6            | 8.4             | ns   |
|                        |                   | V <sub>CC</sub> = 2.3 V to 2.7 V                          | 1.6                 | 3.1                | 5.3  | 1.7               | 5.5            | 6.1             | ns   |
|                        |                   | V <sub>CC</sub> = 3.0 V to 3.6 V                          | 2.1                 | 3.8                | 6.0  | 1.7               | 6.5            | 7.2             | ns   |

**Table 8. Dynamic characteristics ...continued**Voltages are referenced to GND (ground = 0 V); for test circuit see [Figure 7](#).

| Symbol                             | Parameter         | Conditions                                                | 25 °C          |                                                           |                | −40 °C to +125 °C |                |                 | Unit |
|------------------------------------|-------------------|-----------------------------------------------------------|----------------|-----------------------------------------------------------|----------------|-------------------|----------------|-----------------|------|
|                                    |                   |                                                           | Min            | Typ <sup>[1]</sup>                                        | Max            | Min               | Max<br>(85 °C) | Max<br>(125 °C) |      |
| C <sub>L</sub> = 15 pF             |                   |                                                           |                |                                                           |                |                   |                |                 |      |
| t <sub>pd</sub>                    | propagation delay | X1 to X2; see <a href="#">Figure 5</a>                    | <sup>[2]</sup> |                                                           |                |                   |                |                 |      |
|                                    |                   | V <sub>CC</sub> = 0.8 V                                   | -              | 13.0                                                      | -              | -                 | -              | -               | ns   |
|                                    |                   | V <sub>CC</sub> = 1.1 V to 1.3 V                          | 1.6            | 3.8                                                       | 7.9            | 1.4               | 8.8            | 9.7             | ns   |
|                                    |                   | V <sub>CC</sub> = 1.4 V to 1.6 V                          | 1.3            | 2.8                                                       | 4.9            | 1.1               | 5.7            | 6.3             | ns   |
|                                    |                   | V <sub>CC</sub> = 1.65 V to 1.95 V                        | 1.0            | 2.3                                                       | 4.0            | 0.9               | 4.7            | 5.2             | ns   |
|                                    |                   | V <sub>CC</sub> = 2.3 V to 2.7 V                          | 0.8            | 1.9                                                       | 3.2            | 0.8               | 3.7            | 4.1             | ns   |
|                                    |                   | V <sub>CC</sub> = 3.0 V to 3.6 V                          | 0.7            | 1.6                                                       | 2.9            | 0.7               | 3.3            | 3.7             | ns   |
|                                    |                   | X1 to Y; see <a href="#">Figure 5</a>                     | <sup>[2]</sup> |                                                           |                |                   |                |                 |      |
|                                    |                   | V <sub>CC</sub> = 0.8 V                                   | -              | 24.2                                                      | -              | -                 | -              | -               | ns   |
|                                    |                   | V <sub>CC</sub> = 1.1 V to 1.3 V                          | 3.6            | 7.5                                                       | 16.1           | 4.0               | 17.6           | 19.4            | ns   |
|                                    |                   | V <sub>CC</sub> = 1.4 V to 1.6 V                          | 3.0            | 5.4                                                       | 9.7            | 3.3               | 10.6           | 11.7            | ns   |
|                                    |                   | V <sub>CC</sub> = 1.65 V to 1.95 V                        | 2.2            | 4.6                                                       | 7.7            | 2.9               | 9.0            | 9.9             | ns   |
|                                    |                   | V <sub>CC</sub> = 2.3 V to 2.7 V                          | 2.0            | 3.9                                                       | 6.1            | 2.6               | 7.3            | 8.1             | ns   |
|                                    |                   | V <sub>CC</sub> = 3.0 V to 3.6 V                          | 2.0            | 3.6                                                       | 5.4            | 2.3               | 5.9            | 6.5             | ns   |
| t <sub>en</sub>                    | enable time       | $\overline{\text{EN}}$ to Y; see <a href="#">Figure 6</a> | <sup>[3]</sup> |                                                           |                |                   |                |                 |      |
|                                    |                   | V <sub>CC</sub> = 0.8 V                                   | -              | 37.5                                                      | -              | -                 | -              | -               | ns   |
|                                    |                   | V <sub>CC</sub> = 1.1 V to 1.3 V                          | 4.0            | 7.7                                                       | 17.2           | 3.7               | 17.5           | 19.3            | ns   |
|                                    |                   | V <sub>CC</sub> = 1.4 V to 1.6 V                          | 3.0            | 5.5                                                       | 10.0           | 2.5               | 10.2           | 11.3            | ns   |
|                                    |                   | V <sub>CC</sub> = 1.65 V to 1.95 V                        | 2.3            | 4.7                                                       | 7.9            | 2.1               | 9.2            | 10.2            | ns   |
|                                    |                   | V <sub>CC</sub> = 2.3 V to 2.7 V                          | 2.0            | 3.9                                                       | 6.2            | 2.0               | 7.4            | 8.2             | ns   |
|                                    |                   | V <sub>CC</sub> = 3.0 V to 3.6 V                          | 2.0            | 3.6                                                       | 5.5            | 1.9               | 6.0            | 6.6             | ns   |
|                                    |                   | t <sub>dis</sub>                                          | disable time   | $\overline{\text{EN}}$ to Y; see <a href="#">Figure 6</a> | <sup>[4]</sup> |                   |                |                 |      |
| V <sub>CC</sub> = 0.8 V            | -                 |                                                           |                | 14.8                                                      | -              | -                 | -              | -               | ns   |
| V <sub>CC</sub> = 1.1 V to 1.3 V   | 4.3               |                                                           |                | 6.8                                                       | 11.2           | 3.7               | 12.4           | 13.7            | ns   |
| V <sub>CC</sub> = 1.4 V to 1.6 V   | 3.0               |                                                           |                | 5.1                                                       | 8.1            | 2.5               | 8.9            | 9.8             | ns   |
| V <sub>CC</sub> = 1.65 V to 1.95 V | 3.0               |                                                           |                | 5.4                                                       | 8.0            | 2.1               | 9.3            | 10.3            | ns   |
| V <sub>CC</sub> = 2.3 V to 2.7 V   | 2.1               |                                                           |                | 3.9                                                       | 6.1            | 2.0               | 7.3            | 8.1             | ns   |
| V <sub>CC</sub> = 3.0 V to 3.6 V   | 2.9               |                                                           |                | 5.1                                                       | 7.2            | 1.9               | 7.9            | 8.7             | ns   |

**Table 8. Dynamic characteristics ...continued**Voltages are referenced to GND (ground = 0 V); for test circuit see [Figure 7](#).

| Symbol                 | Parameter         | Conditions                                                | 25 °C               |                    |      | –40 °C to +125 °C |             |              | Unit |
|------------------------|-------------------|-----------------------------------------------------------|---------------------|--------------------|------|-------------------|-------------|--------------|------|
|                        |                   |                                                           | Min                 | Typ <sup>[1]</sup> | Max  | Min               | Max (85 °C) | Max (125 °C) |      |
| C <sub>L</sub> = 30 pF |                   |                                                           |                     |                    |      |                   |             |              |      |
| t <sub>pd</sub>        | propagation delay | X1 to X2; see <a href="#">Figure 5</a>                    | <a href="#">[2]</a> |                    |      |                   |             |              |      |
|                        |                   | V <sub>CC</sub> = 0.8 V                                   | -                   | 23.2               | -    | -                 | -           | -            | ns   |
|                        |                   | V <sub>CC</sub> = 1.1 V to 1.3 V                          | 2.4                 | 6.0                | 13.1 | 2.2               | 14.8        | 16.3         | ns   |
|                        |                   | V <sub>CC</sub> = 1.4 V to 1.6 V                          | 2.0                 | 4.2                | 7.6  | 1.8               | 9.0         | 9.9          | ns   |
|                        |                   | V <sub>CC</sub> = 1.65 V to 1.95 V                        | 1.7                 | 3.6                | 6.1  | 1.5               | 7.2         | 8.0          | ns   |
|                        |                   | V <sub>CC</sub> = 2.3 V to 2.7 V                          | 1.4                 | 2.9                | 4.8  | 1.3               | 5.7         | 6.3          | ns   |
|                        |                   | V <sub>CC</sub> = 3.0 V to 3.6 V                          | 1.2                 | 2.5                | 4.3  | 1.1               | 5.1         | 5.7          | ns   |
|                        |                   | X1 to Y; see <a href="#">Figure 5</a>                     | <a href="#">[2]</a> |                    |      |                   |             |              |      |
|                        |                   | V <sub>CC</sub> = 0.8 V                                   | -                   | 32.6               | -    | -                 | -           | -            | ns   |
|                        |                   | V <sub>CC</sub> = 1.1 V to 1.3 V                          | 4.8                 | 9.6                | 21.0 | 5.0               | 21.7        | 23.9         | ns   |
|                        |                   | V <sub>CC</sub> = 1.4 V to 1.6 V                          | 4.0                 | 6.9                | 12.4 | 4.3               | 13.5        | 14.9         | ns   |
|                        |                   | V <sub>CC</sub> = 1.65 V to 1.95 V                        | 2.9                 | 5.9                | 9.8  | 3.8               | 10.7        | 11.8         | ns   |
|                        |                   | V <sub>CC</sub> = 2.3 V to 2.7 V                          | 2.7                 | 5.0                | 7.5  | 3.3               | 8.2         | 9.1          | ns   |
|                        |                   | V <sub>CC</sub> = 3.0 V to 3.6 V                          | 2.7                 | 4.7                | 6.8  | 3.1               | 7.7         | 8.5          | ns   |
| t <sub>en</sub>        | enable time       | $\overline{\text{EN}}$ to Y; see <a href="#">Figure 6</a> | <a href="#">[3]</a> |                    |      |                   |             |              |      |
|                        |                   | V <sub>CC</sub> = 0.8 V                                   | -                   | 47.1               | -    | -                 | -           | -            | ns   |
|                        |                   | V <sub>CC</sub> = 1.1 V to 1.3 V                          | 5.2                 | 9.9                | 21.0 | 4.8               | 21.7        | 23.9         | ns   |
|                        |                   | V <sub>CC</sub> = 1.4 V to 1.6 V                          | 4.0                 | 7.1                | 12.4 | 3.1               | 13.5        | 14.9         | ns   |
|                        |                   | V <sub>CC</sub> = 1.65 V to 1.95 V                        | 3.0                 | 6.0                | 9.9  | 2.8               | 10.7        | 11.8         | ns   |
|                        |                   | V <sub>CC</sub> = 2.3 V to 2.7 V                          | 2.7                 | 5.0                | 7.7  | 2.6               | 8.1         | 9.0          | ns   |
|                        |                   | V <sub>CC</sub> = 3.0 V to 3.6 V                          | 2.7                 | 4.8                | 6.8  | 2.6               | 7.7         | 8.5          | ns   |
| t <sub>dis</sub>       | disable time      | $\overline{\text{EN}}$ to Y; see <a href="#">Figure 6</a> | <a href="#">[4]</a> |                    |      |                   |             |              |      |
|                        |                   | V <sub>CC</sub> = 0.8 V                                   | -                   | 20.3               | -    | -                 | -           | -            | ns   |
|                        |                   | V <sub>CC</sub> = 1.1 V to 1.3 V                          | 6.0                 | 10.2               | 15.3 | 4.8               | 16.5        | 18.2         | ns   |
|                        |                   | V <sub>CC</sub> = 1.4 V to 1.6 V                          | 4.4                 | 7.8                | 11.2 | 3.1               | 12.3        | 13.6         | ns   |
|                        |                   | V <sub>CC</sub> = 1.65 V to 1.95 V                        | 5.1                 | 8.8                | 12.5 | 2.8               | 13.3        | 14.7         | ns   |
|                        |                   | V <sub>CC</sub> = 2.3 V to 2.7 V                          | 3.6                 | 6.3                | 8.6  | 2.6               | 9.5         | 10.5         | ns   |
|                        |                   | V <sub>CC</sub> = 3.0 V to 3.6 V                          | 5.2                 | 8.8                | 11.5 | 2.6               | 13.0        | 14.3         | ns   |

**Table 8. Dynamic characteristics ...continued**Voltages are referenced to GND (ground = 0 V); for test circuit see [Figure 7](#).

| Symbol                                        | Parameter                     | Conditions                                                                                         | 25 °C |                    |     | –40 °C to +125 °C |             |              | Unit |
|-----------------------------------------------|-------------------------------|----------------------------------------------------------------------------------------------------|-------|--------------------|-----|-------------------|-------------|--------------|------|
|                                               |                               |                                                                                                    | Min   | Typ <sup>[1]</sup> | Max | Min               | Max (85 °C) | Max (125 °C) |      |
| C <sub>L</sub> = 5 pF, 10 pF, 15 pF and 30 pF |                               |                                                                                                    |       |                    |     |                   |             |              |      |
| C <sub>PD</sub>                               | power dissipation capacitance | f = 1 MHz; $\overline{\text{EN}}$ = GND; V <sub>I</sub> = GND to V <sub>CC</sub> <sup>[5][6]</sup> |       |                    |     |                   |             |              |      |
|                                               |                               | V <sub>CC</sub> = 0.8 V                                                                            | -     | 5.8                | -   | -                 | -           | -            | pF   |
|                                               |                               | V <sub>CC</sub> = 1.1 V to 1.3 V                                                                   | -     | 6.0                | -   | -                 | -           | -            | pF   |
|                                               |                               | V <sub>CC</sub> = 1.4 V to 1.6 V                                                                   | -     | 6.2                | -   | -                 | -           | -            | pF   |
|                                               |                               | V <sub>CC</sub> = 1.65 V to 1.95 V                                                                 | -     | 6.8                | -   | -                 | -           | -            | pF   |
|                                               |                               | V <sub>CC</sub> = 2.3 V to 2.7 V                                                                   | -     | 9.7                | -   | -                 | -           | -            | pF   |
|                                               |                               | V <sub>CC</sub> = 3.0 V to 3.6 V                                                                   | -     | 12.6               | -   | -                 | -           | -            | pF   |
|                                               |                               |                                                                                                    |       |                    |     |                   |             |              |      |

[1] All typical values are measured at nominal  $V_{CC}$ .[2]  $t_{pd}$  is the same as  $t_{PLH}$  and  $t_{PHL}$ .[3]  $t_{en}$  is the same as  $t_{PZH}$  and  $t_{PZL}$ .[4]  $t_{dis}$  is the same as  $t_{PHZ}$  and  $t_{PLZ}$ .[5]  $C_{PD}$  is used to determine the dynamic power dissipation ( $P_D$  in  $\mu\text{W}$ ). $P_D = C_{PD} \times V_{CC}^2 \times f_i \times N + \Sigma(C_L \times V_{CC}^2 \times f_o)$  where: $f_i$  = input frequency in MHz; $f_o$  = output frequency in MHz; $C_L$  = output load capacitance in pF; $V_{CC}$  = supply voltage in V; $N$  = number of inputs switching; $\Sigma(C_L \times V_{CC}^2 \times f_o)$  = sum of the outputs.[6] Feedback current is included in  $C_{PD}$ .

## 12. Waveforms


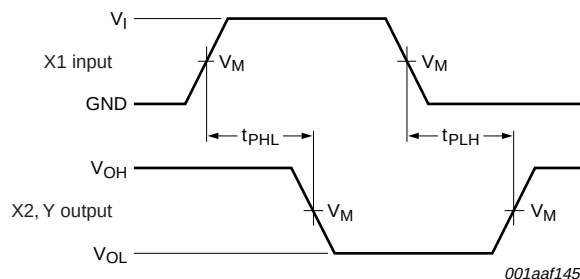
Measurement points are given in [Table 9](#).Logic levels:  $V_{OL}$  and  $V_{OH}$  are typical output voltage drop that occur with the output load.**Fig 5. The input (X1) to output (X2, Y) propagation delays**



Table 9. Measurement points

| Supply voltage | Output              | Input               |          |               |
|----------------|---------------------|---------------------|----------|---------------|
| $V_{CC}$       | $V_M$               | $V_M$               | $V_I$    | $t_r = t_f$   |
| 0.8 V to 3.6 V | $0.5 \times V_{CC}$ | $0.5 \times V_{CC}$ | $V_{CC}$ | $\leq 3.0$ ns |

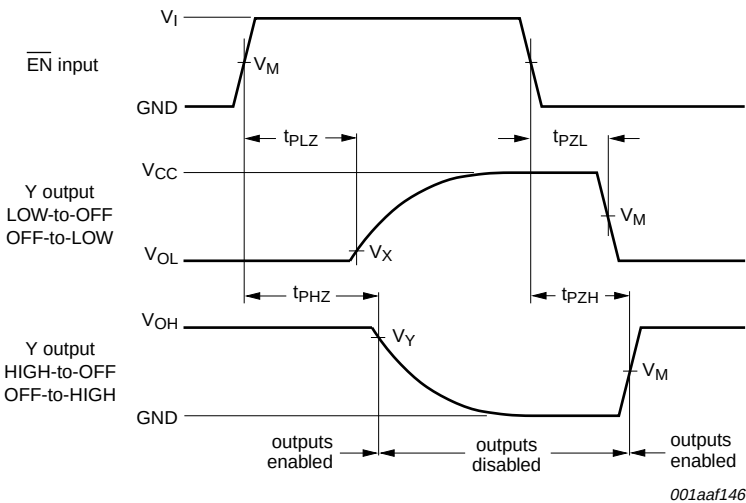


Measurement points are given in [Table 10](#).  
Logic levels:  $V_{OL}$  and  $V_{OH}$  are typical output voltage drop that occur with the output load.

Fig 6. Enable and disable times

Table 10. Measurement points

| Supply voltage  | Input               | Output              |                   |                   |
|-----------------|---------------------|---------------------|-------------------|-------------------|
| $V_{CC}$        | $V_M$               | $V_M$               | $V_X$             | $V_Y$             |
| 0.8 V to 1.6 V  | $0.5 \times V_{CC}$ | $0.5 \times V_{CC}$ | $V_{OL} + 0.1$ V  | $V_{OH} - 0.1$ V  |
| 1.65 V to 2.7 V | $0.5 \times V_{CC}$ | $0.5 \times V_{CC}$ | $V_{OL} + 0.15$ V | $V_{OH} - 0.15$ V |
| 3.0 V to 3.6 V  | $0.5 \times V_{CC}$ | $0.5 \times V_{CC}$ | $V_{OL} + 0.3$ V  | $V_{OH} - 0.3$ V  |

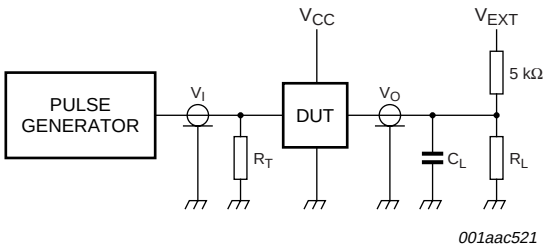

Test data is given in [Table 11](#).  
Definitions for test circuit:  
 $R_L$  = Load resistance.  
 $C_L$  = Load capacitance including jig and probe capacitance.  
 $R_T$  = Termination resistance should be equal to the output impedance  $Z_o$  of the pulse generator.  
 $V_{EXT}$  = External voltage for measuring switching times.

Fig 7. Load circuitry for switching times

Table 11. Test data

| Supply voltage | Load                         |              | $V_{EXT}$             |                       |                       |
|----------------|------------------------------|--------------|-----------------------|-----------------------|-----------------------|
| $V_{CC}$       | $C_L$                        | $R_L$ [1]    | $t_{PLH}$ , $t_{PHL}$ | $t_{PZH}$ , $t_{PHZ}$ | $t_{PZL}$ , $t_{PLZ}$ |
| 0.8 V to 3.6 V | 5 pF, 10 pF, 15 pF and 30 pF | 5 kΩ or 1 MΩ | open                  | GND                   | $2 \times V_{CC}$     |

[1] For measuring enable and disable times  $R_L = 5\text{ k}\Omega$ , for measuring propagation delays, setup and hold times and pulse width  $R_L = 1\text{ M}\Omega$ .

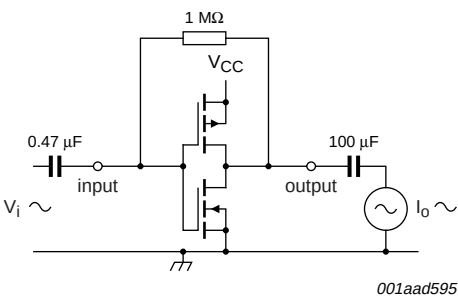


Fig 8. Test set-up for measuring forward transconductance

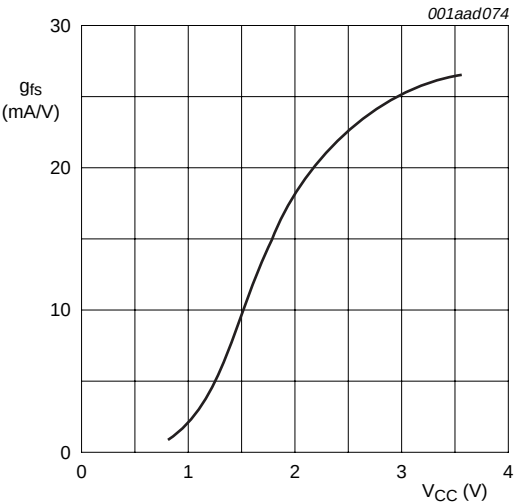


Fig 9. Typical forward transconductance as a function of supply voltage

## 13. Application information

Crystal controlled oscillator circuits are widely used in clock pulse generators because of their excellent frequency stability and wide operating frequency range. The use of the 74AUP1Z125 provides the additional advantages of low power dissipation, stable operation over a wide range of frequency and temperature and a very small footprint. This application information describes crystal characteristics, design and testing of crystal oscillator circuits based on the 74AUP1Z125.

### 13.1 Crystal characteristics

[Figure 10](#) is the equivalent circuit of a quartz crystal.

The reactive and resistive component of the impedance of the crystal alone and the crystal with a series and a parallel capacitance is shown in [Figure 11](#).





Fig 10. Equivalent circuit of a crystal

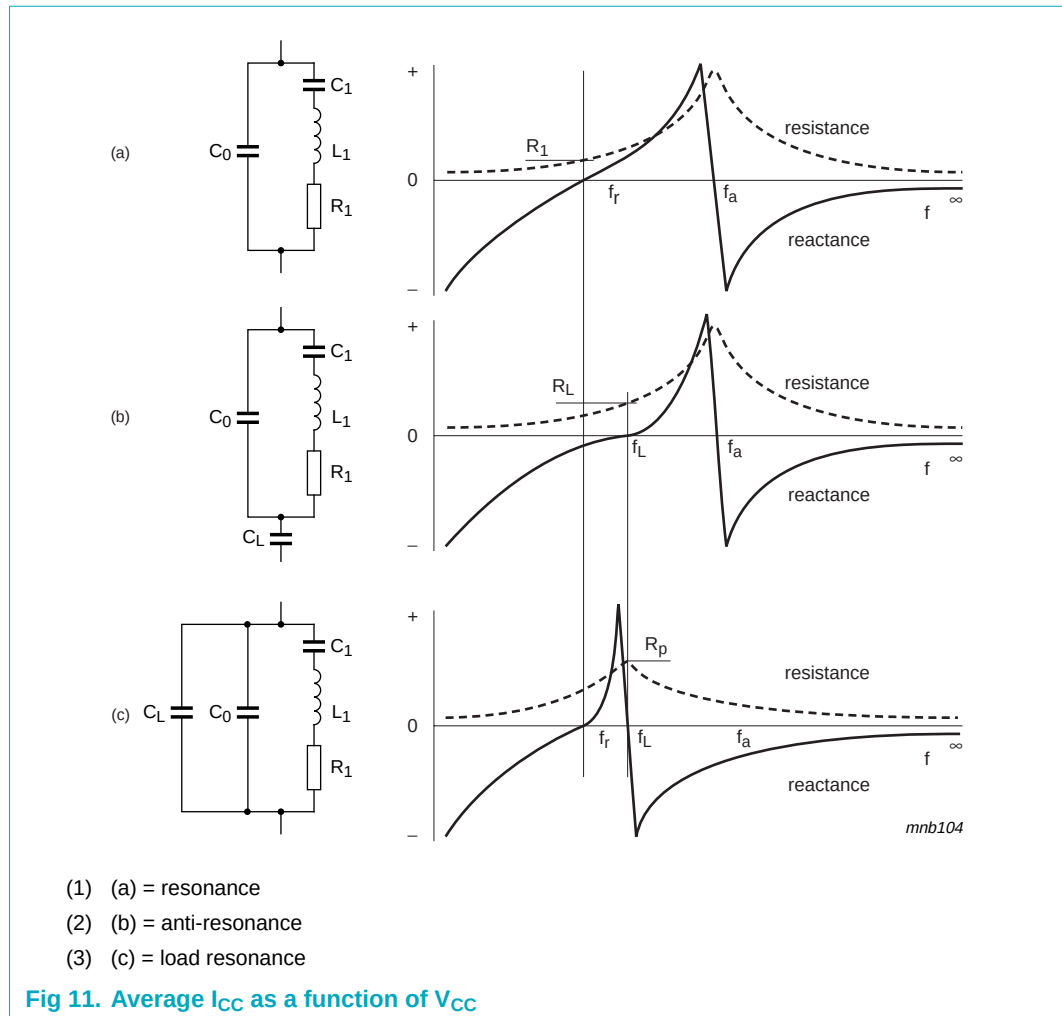

### 13.1.1 Design

Figure 12 shows the recommended way to connect a crystal to the 74AUP1Z125. This circuit is basically a Pierce oscillator circuit in which the crystal is operating at its fundamental frequency and is tuned by the parallel load capacitance of  $C_1$  and  $C_2$ .  $C_1$  and  $C_2$  are in series with the crystal. They should be approximately equal.  $R_1$  is the drive-limiting resistor and is set to approximately the same value as the reactance of  $C_1$  at the crystal frequency ( $R_1 = X_{C1}$ ). This will result in an input to the crystal of 50 % of the rail-to-rail output of X2. This keeps the drive level into the crystal within drive specifications (the designer should verify this). Overdriving the crystal can cause damage.

The internal 1 M $\Omega$  resistor provides negative feedback and sets a bias point of the inverter near mid-supply, operating the 74AUP1GU04 in the high gain linear region.

To calculate the values of  $C_1$  and  $C_2$ , the designer can use the formula:

$$C_L = \frac{C_1 \times C_2}{C_1 + C_2} + C_s$$

$C_L$  is the load capacitance as specified by the crystal manufacturer,  $C_s$  is the stray capacitance of the circuit (for the 74AUP1Z125 this is equal to an input capacitance of 5 pF).

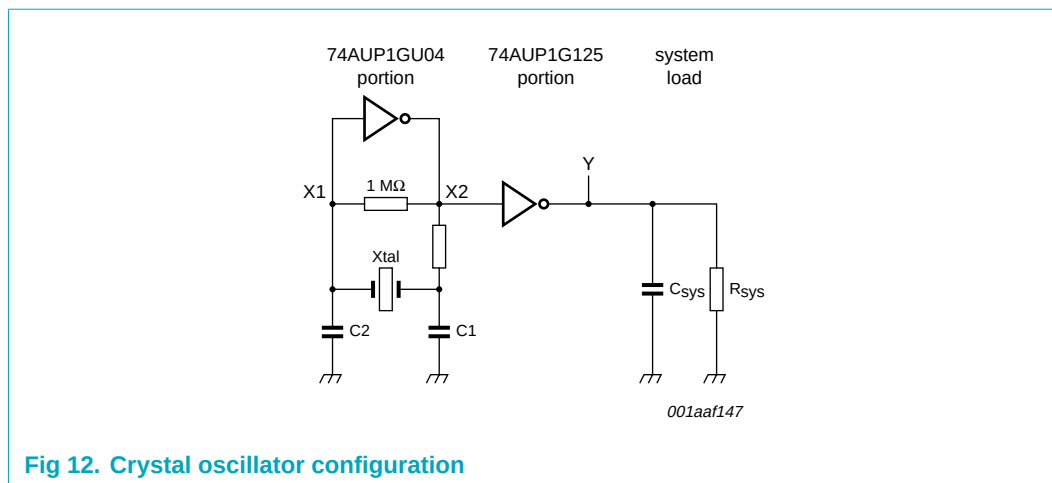


Fig 12. Crystal oscillator configuration

### 13.1.2 Testing

After the calculations are performed for a particular crystal, the oscillator circuit should be tested. The following simple checks will verify the prototype design of a crystal controlled oscillator circuit. Perform them after laying out the board:

- Test the oscillator over worst-case conditions (lowest supply voltage, worst-case crystal and highest operating temperature). Adding series and parallel resistors can simulate a worse case crystal.
- Insure that the circuit does not oscillate without the crystal.
- Check the frequency stability over a supply range greater than that which is likely to occur during normal operation.
- Check that the start-up time is within system requirements.

As the 74AUP1Z125 isolates the system loading, once the design is optimized, the single layout may work in multiple applications for any given crystal.

14. Package outline

Plastic surface-mounted package; 6 leads

SOT363

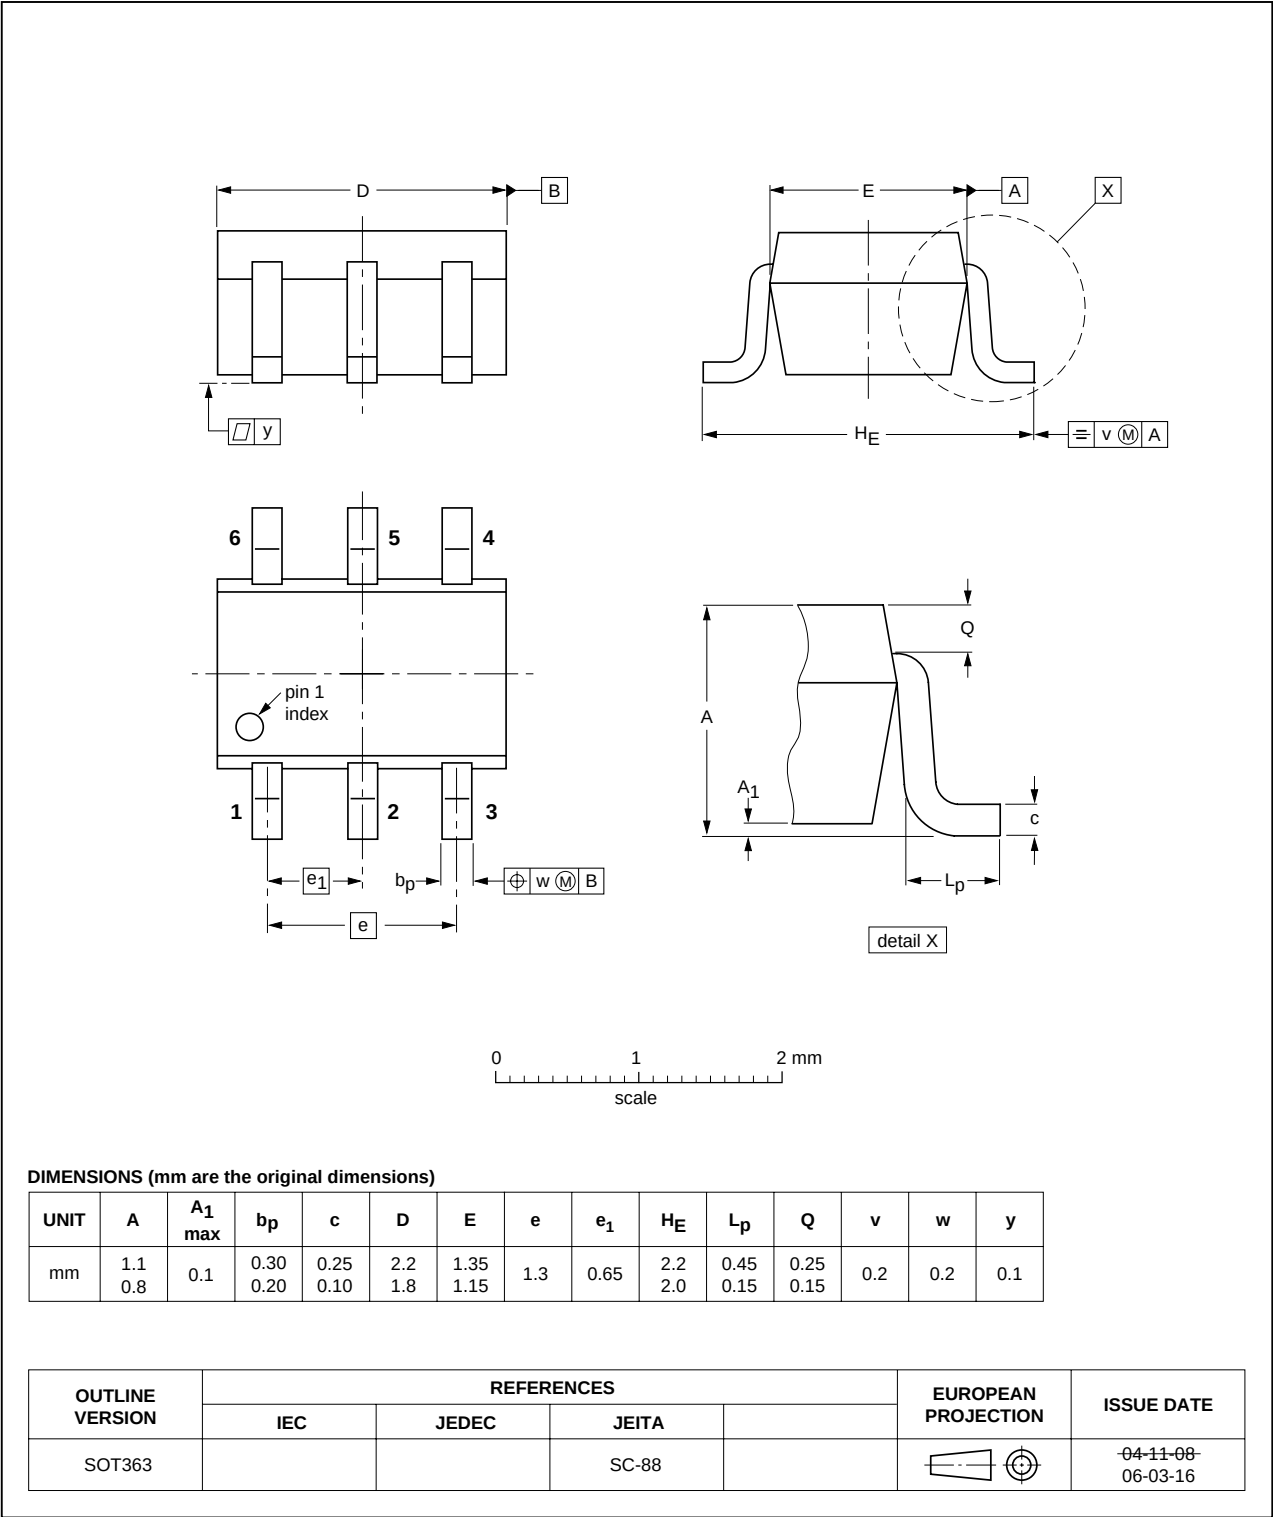


Fig 13. Package outline SOT363 (SC-88)

XSON6: plastic extremely thin small outline package; no leads; 6 terminals; body 1 x 1.45 x 0.5 mm SOT886

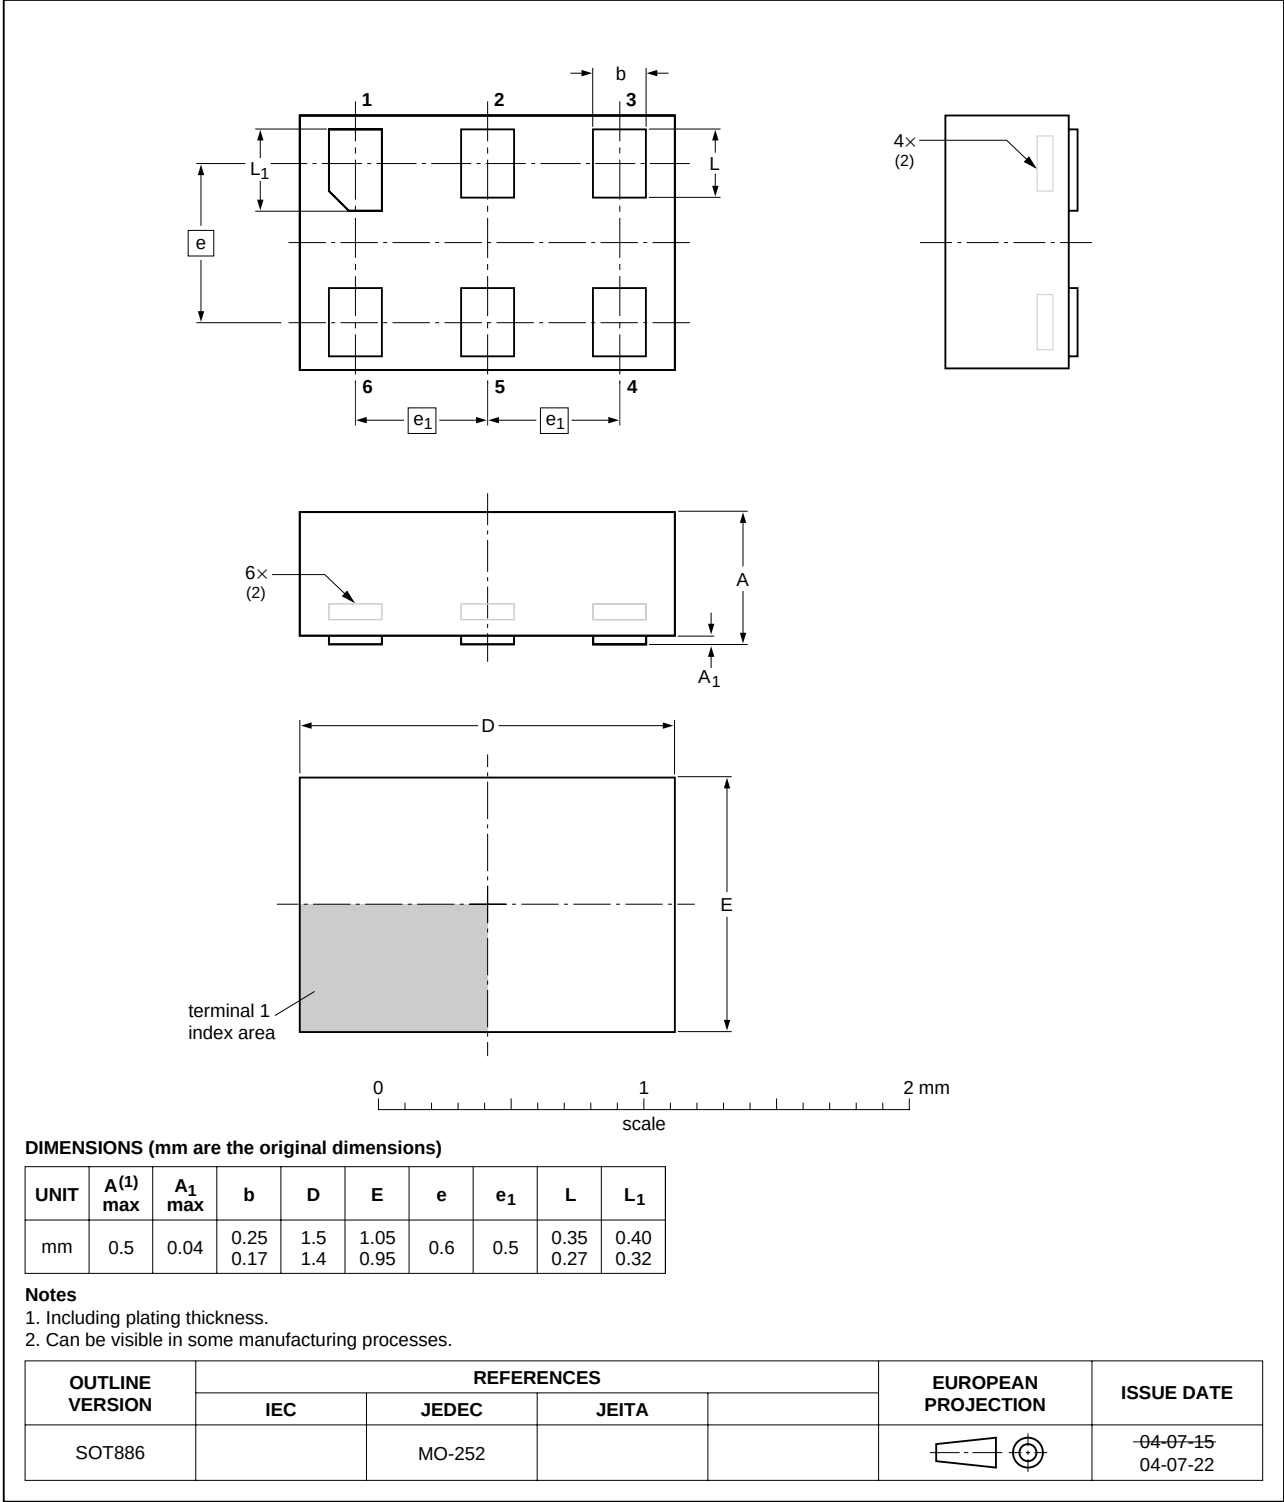


Fig 14. Package outline SOT886 (XSON6)

XSON6: plastic extremely thin small outline package; no leads; 6 terminals; body 1 x 1 x 0.5 mm

SOT891

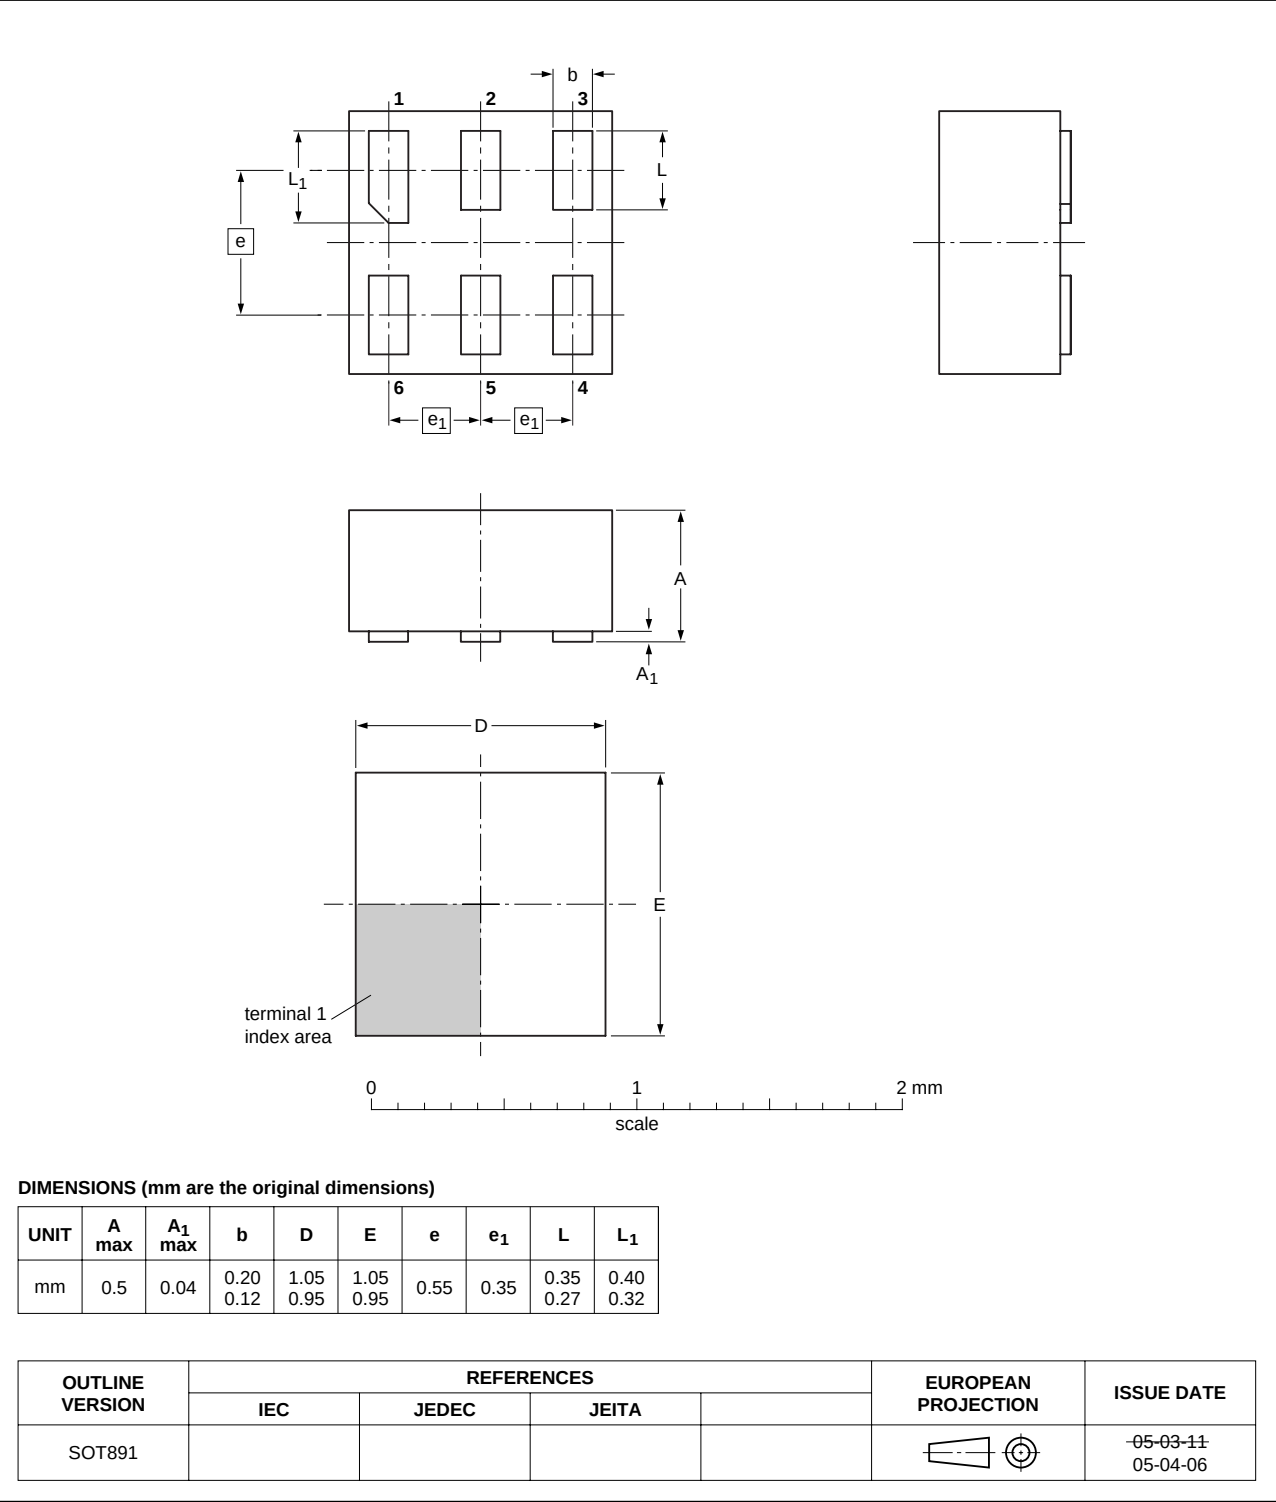


Fig 15. Package outline SOT891 (XSON6)



## 15. Abbreviations

Table 12. Abbreviations

| Acronym | Description                             |
|---------|-----------------------------------------|
| CDM     | Charged Device Model                    |
| CMOS    | Complementary Metal Oxide Semiconductor |
| DUT     | Device Under Test                       |
| ESD     | ElectroStatic Discharge                 |
| HBM     | Human Body Model                        |
| MM      | Machine Model                           |
| TTL     | Transistor-Transistor Logic             |

## 16. Revision history

Table 13. Revision history

| Document ID  | Release date | Data sheet status  | Change notice | Supersedes |
|--------------|--------------|--------------------|---------------|------------|
| 74AUP1Z125_1 | 20060803     | Product data sheet | -             | -          |

## 17. Legal information

### 17.1 Data sheet status

| Document status <sup>[1][2]</sup> | Product status <sup>[3]</sup> | Definition                                                                            |
|-----------------------------------|-------------------------------|---------------------------------------------------------------------------------------|
| Objective [short] data sheet      | Development                   | This document contains data from the objective specification for product development. |
| Preliminary [short] data sheet    | Qualification                 | This document contains data from the preliminary specification.                       |
| Product [short] data sheet        | Production                    | This document contains the product specification.                                     |

[1] Please consult the most recently issued document before initiating or completing a design.

[2] The term 'short data sheet' is explained in section "Definitions".

[3] The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the Internet at URL <http://www.semiconductors.philips.com>.

### 17.2 Definitions

**Draft** — The document is a draft version only. The content is still under internal review and subject to formal approval, which may result in modifications or additions. Philips Semiconductors does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

**Short data sheet** — A short data sheet is an extract from a full data sheet with the same product type number(s) and title. A short data sheet is intended for quick reference only and should not be relied upon to contain detailed and full information. For detailed and full information see the relevant full data sheet, which is available on request via the local Philips Semiconductors sales office. In case of any inconsistency or conflict with the short data sheet, the full data sheet shall prevail.

### 17.3 Disclaimers

**General** — Information in this document is believed to be accurate and reliable. However, Philips Semiconductors does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information.

**Right to make changes** — Philips Semiconductors reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

**Suitability for use** — Philips Semiconductors products are not designed, authorized or warranted to be suitable for use in medical, military, aircraft, space or life support equipment, nor in applications where failure or

malfunction of a Philips Semiconductors product can reasonably be expected to result in personal injury, death or severe property or environmental damage. Philips Semiconductors accepts no liability for inclusion and/or use of Philips Semiconductors products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

**Applications** — Applications that are described herein for any of these products are for illustrative purposes only. Philips Semiconductors makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

**Limiting values** — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) may cause permanent damage to the device. Limiting values are stress ratings only and operation of the device at these or any other conditions above those given in the Characteristics sections of this document is not implied. Exposure to limiting values for extended periods may affect device reliability.

**Terms and conditions of sale** — Philips Semiconductors products are sold subject to the general terms and conditions of commercial sale, as published at <http://www.semiconductors.philips.com/profile/terms>, including those pertaining to warranty, intellectual property rights infringement and limitation of liability, unless explicitly otherwise agreed to in writing by Philips Semiconductors. In case of any inconsistency or conflict between information in this document and such terms and conditions, the latter will prevail.

**No offer to sell or license** — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

### 17.4 Trademarks

Notice: All referenced brands, product names, service names and trademarks are the property of their respective owners.

## 18. Contact information

For additional information, please visit: <http://www.semiconductors.philips.com>

For sales office addresses, send an email to: [sales.addresses@www.semiconductors.philips.com](mailto:sales.addresses@www.semiconductors.philips.com)

## 19. Contents

|           |                                               |           |
|-----------|-----------------------------------------------|-----------|
| <b>1</b>  | <b>General description</b> .....              | <b>1</b>  |
| <b>2</b>  | <b>Features</b> .....                         | <b>1</b>  |
| <b>3</b>  | <b>Ordering information</b> .....             | <b>2</b>  |
| <b>4</b>  | <b>Marking</b> .....                          | <b>2</b>  |
| <b>5</b>  | <b>Functional diagram</b> .....               | <b>2</b>  |
| <b>6</b>  | <b>Pinning information</b> .....              | <b>3</b>  |
| 6.1       | Pinning .....                                 | 3         |
| 6.2       | Pin description .....                         | 3         |
| <b>7</b>  | <b>Functional description</b> .....           | <b>3</b>  |
| <b>8</b>  | <b>Limiting values</b> .....                  | <b>4</b>  |
| <b>9</b>  | <b>Recommended operating conditions</b> ..... | <b>4</b>  |
| <b>10</b> | <b>Static characteristics</b> .....           | <b>5</b>  |
| <b>11</b> | <b>Dynamic characteristics</b> .....          | <b>12</b> |
| <b>12</b> | <b>Waveforms</b> .....                        | <b>16</b> |
| <b>13</b> | <b>Application information</b> .....          | <b>19</b> |
| 13.1      | Crystal characteristics .....                 | 19        |
| 13.1.1    | Design .....                                  | 20        |
| 13.1.2    | Testing .....                                 | 21        |
| <b>14</b> | <b>Package outline</b> .....                  | <b>22</b> |
| <b>15</b> | <b>Abbreviations</b> .....                    | <b>25</b> |
| <b>16</b> | <b>Revision history</b> .....                 | <b>25</b> |
| <b>17</b> | <b>Legal information</b> .....                | <b>26</b> |
| 17.1      | Data sheet status .....                       | 26        |
| 17.2      | Definitions .....                             | 26        |
| 17.3      | Disclaimers .....                             | 26        |
| 17.4      | Trademarks .....                              | 26        |
| <b>18</b> | <b>Contact information</b> .....              | <b>26</b> |
| <b>19</b> | <b>Contents</b> .....                         | <b>27</b> |

Please be aware that important notices concerning this document and the product(s) described herein, have been included in section 'Legal information'.



© Koninklijke Philips Electronics N.V. 2006. All rights reserved.

For more information, please visit: <http://www.semiconductors.philips.com>.

For sales office addresses, email to: [sales.addresses@www.semiconductors.philips.com](mailto:sales.addresses@www.semiconductors.philips.com).

Date of release: 3 August 2006

Document identifier: 74AUP1Z125\_1



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.