

Features

- CMD5954 is a 4 channel driver for optical disc motor driver. Dual channel current feedback type drivers are built in, in addition to dual channel motor driver.
- Separating Vcc into Pre-power of sled motor, Power of loading motor and Power of actuator, can make better power efficiency, by low supply voltage drive.
- Stand-by mode built in.
- Thermal shutdown circuit on chip.


Description

The CMD5954 is a 4-channel BTL driver IC for driving the motors and actuators in products such as CD-ROM/DVD-ROM/DVD-Player drives. Two of the channels use current feedback to minimize the current phase shift caused by the influence of load inductance.

Applications

CD-ROM drives, DVD drives, DVD-ROM drives.

Block Diagram

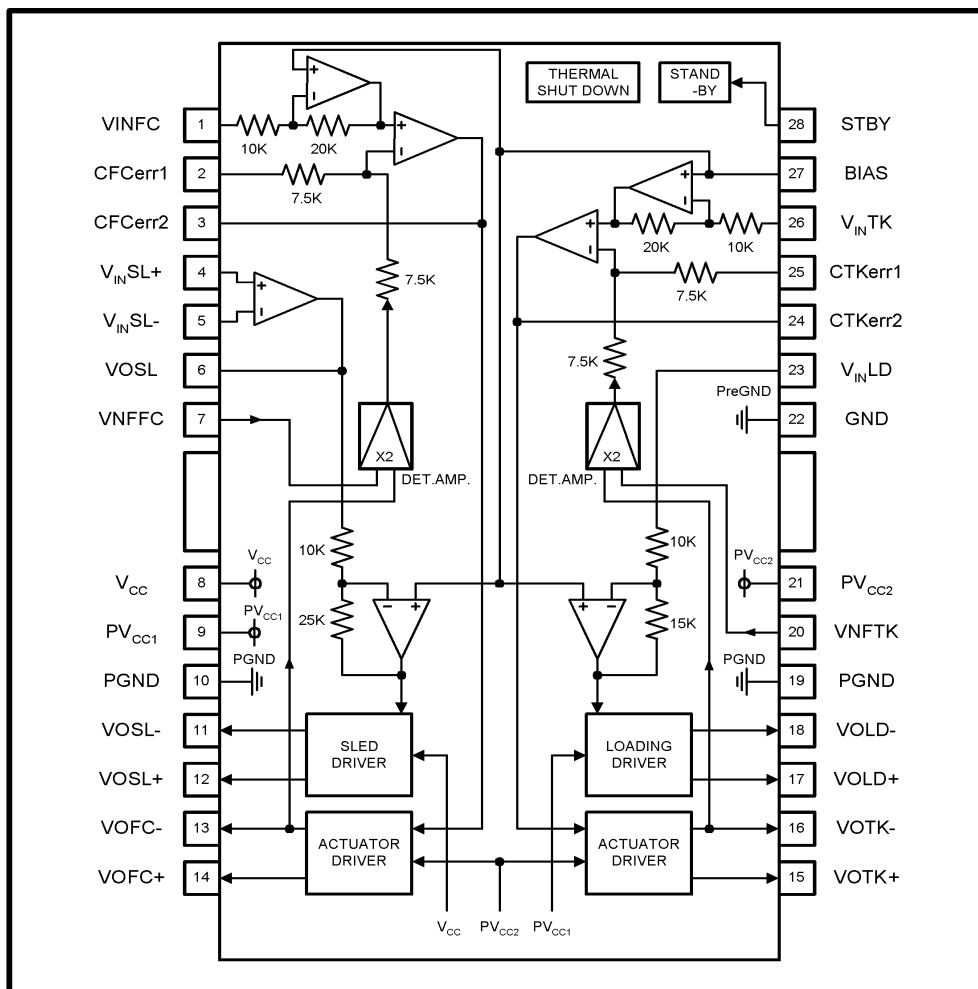

* All specs and applications shown above subject to change without prior notice.


Pin Descriptions

Pin No.	Pin name	Function
1	VINFC	Focus drive input
2	CFCerr1	For connection of capacitor for the error amp filter
3	CFCerr2	For connection of capacitor for the error amp filter
4	VINSL +	Op-amp input (+) for the sled driver
5	VINSL -	Op-amp input (-) for the sled driver
6	VOSL	Op-amp output for the sled driver
7	VNFFC	Focus driver feedback pin
8	Vcc	Vcc
9	PVcc1	Power Vcc for sled driver block
10	PGND	Ground for Sled driver block
11	VOSL -	sled driver output (-)
12	VOSL +	sled driver output (+)
13	VOFC -	Focus driver output (-)
14	VOFC +	Focus driver output (+)
15	VOTK +	Tracking driver output (+)
16	VOTK -	Tracking driver output (-)
17	VOLD +	Loading driver output (+)
18	VOLD -	Loading driver output (-)
19	PGND	Ground for Actuator driver block
20	VNFTK	Tracking driver feedback pin
21	PVcc2	Power Vcc for Actuator driver block
22	GND	Ground
23	VINTK	Loading driver input
24	CTKerr2	For connection of capacitor for the error amp filter
25	CTKerr1	For connection of capacitor for the error amp filter
26	VINTK	Tracking driver input
27	BIAS	Bias input
28	MUTE	Mute control

Notes: The indicated polarities for the output pins are for when all inputs are (+).

The output H bridge supply pins are PVcc1 for the loading channel, PVcc2 for the focus, tracking channels, and Vcc for the pre-block and sled channel. Always ensure that $V_{cc} \geq PV_{cc1,2}$.

PinOut

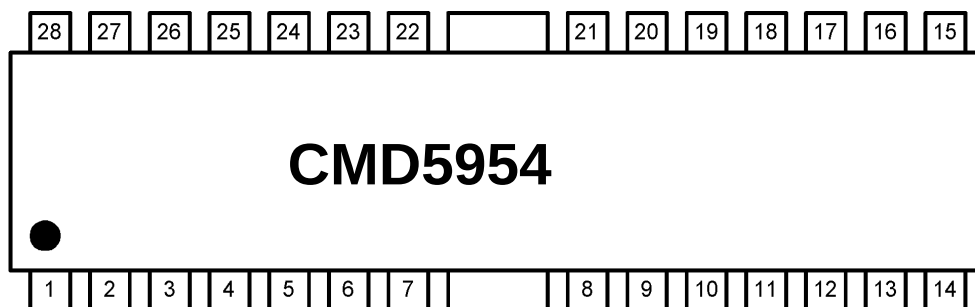

* All specs and applications shown above subject to change without prior notice.

Absolute maximum ratings (Ta = 25°C)

Parameter	Symbol	Limits	unit
Power supply voltage	V_{CC} 、 $PV_{CC1,2}$	13.5	V
Power dissipation	P_d	1.7*	W
Operating temperature	T_{opr}	-35~+85	°C
Storage temperature	T_{stg}	-55~+150	°C

* Reduce by 13.6 mW for each increase in T_a of 1°C over 25°C.

When mounted on a 70mm × 70mm × 1.6 mm glass epoxy board.

Recommended operating conditions (Ta = 25°C)

Parameter	Symbol	Limits	unit
Power supply voltage	V_{CC}	4.5~13.2	V
	PV_{CC1}	4.5~ V_{CC}	V
	PV_{CC2}	4.5~ V_{CC}	V

Electrical characteristics



(unless otherwise noted, $T_a = 25^\circ\text{C}$, $V_{CC} = PV_{CC1} = 12\text{V}$, $PV_{CC2} = 5\text{V}$, $V_{BIAS} = 2.5\text{V}$, $R_{L1} = R_{L2} = 8\Omega$, $R_{L3} = R_{L4} = 15\Omega$)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Quiescent current	I_{CC}	-	18	27	mA	
Stand-by quiescent current	I_{ST}	-	-	0.5	mA	
Voltage for Stand-by ON	V_{STON}	0	-	0.5	V	
Voltage for Stand-by OFF	V_{STOFF}	2.0	-	-	V	
<Actuator driver>						
Output offset current	I_{OL2}	-6	-	6	mA	
Maximum output amplitude	V_{OL2}	3.6	4.0	-	V	$V_{IN} = V_{BIAS} \pm 1.5\text{V}$
Trans conductance	G_m	1.3	1.5	1.7	A/V	$V_{IN} = V_{BIAS} \pm 0.2\text{V}$
<Sled motor driver/Pre OP-amp>						
Common mode input range	V_{ICM}	-0.3	-	11.0	V	$V_{BIAS} = 6\text{V}$
	V_{ICM}	-0.3	-	4.0	V	$V_{CC} = PV_{CC1} = 5\text{V}$
Input bias current	I_{BOP}	-	30	300	nA	
Low level output voltage	V_{OLOP}	-	0.1	0.3	V	
Output source current	I_{SO}	0.3	0.5	-	mA	
Output sink current	I_{SI}	1	-	-	mA	
<Sled motor driver>						
Output offset voltage	V_{OFFSL}	-100	0	100	mV	
Maximum output voltage	V_{O3}	7.5	9.0	-	V	$V_{IN} = V_{BIAS} \pm 1.5\text{V}$
Closed loop voltage gain	G_{VSL}	18.0	20.0	22.0	dB	$V_{IN} = V_{BIAS} \pm 0.2\text{V}$
<Loading motor driver>						
Output offset voltage	V_{OFFLD}	-50	0	50	mV	
Maximum output voltage	V_{O4-1}	7.5	9.0	-	V	$V_{IN} = V_{BIAS} \pm 1.5\text{V}$
Maximum output voltage	V_{O4-2}	3.6	4.0	-	V	$V_{IN} = V_{BIAS} \pm 1.5\text{V}$ $V_{CC} = PV_{CC1} = 5\text{V}$
Closed loop voltage gain	G_{VLD}	13.5	15.5	17.5	dB	$V_{IN} = BIAS \pm 0.2\text{V}$
Gain error by polarity	ΔG_{VLD}	0	1	2	dB	$V_{IN} = BIAS \pm 0.2\text{V}$



*This product is not designed for protection against radioactive rays.

* All specs and applications shown above subject to change without prior notice.



Typical Curve

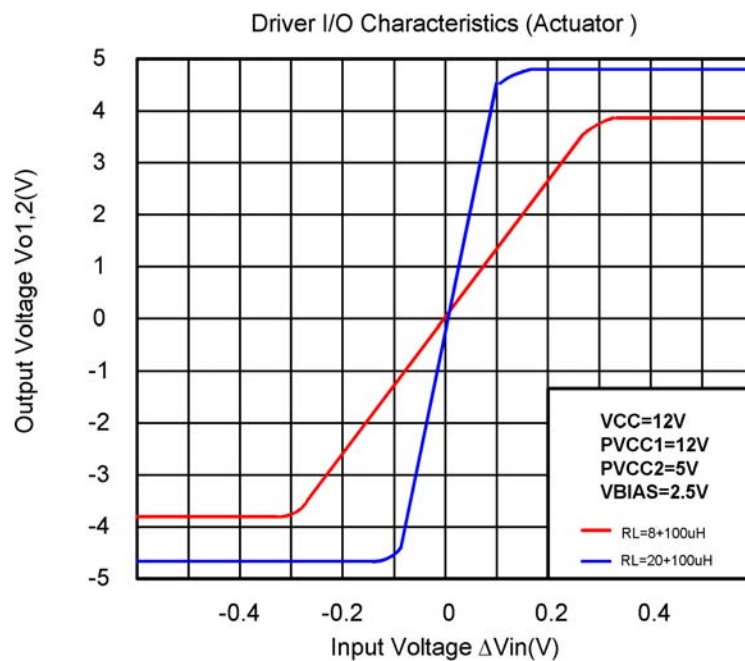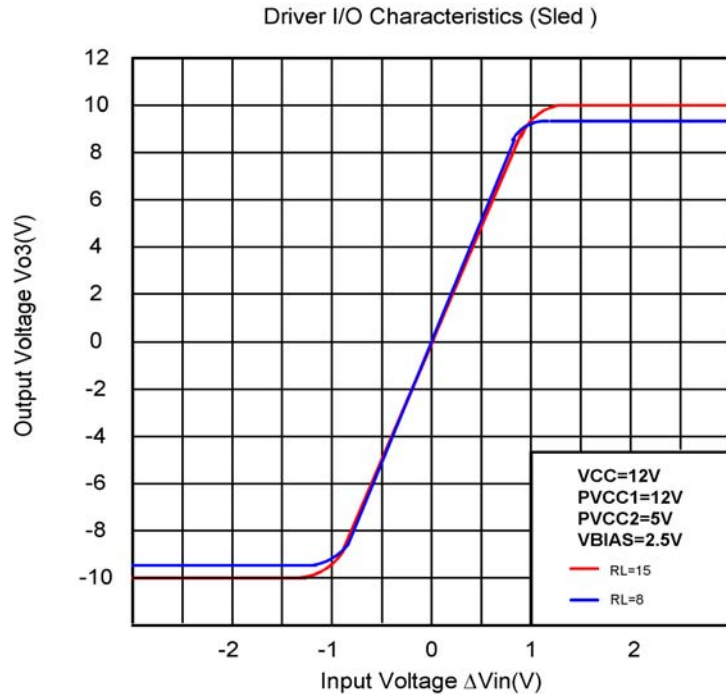

* All specs and applications shown above subject to change without prior notice.

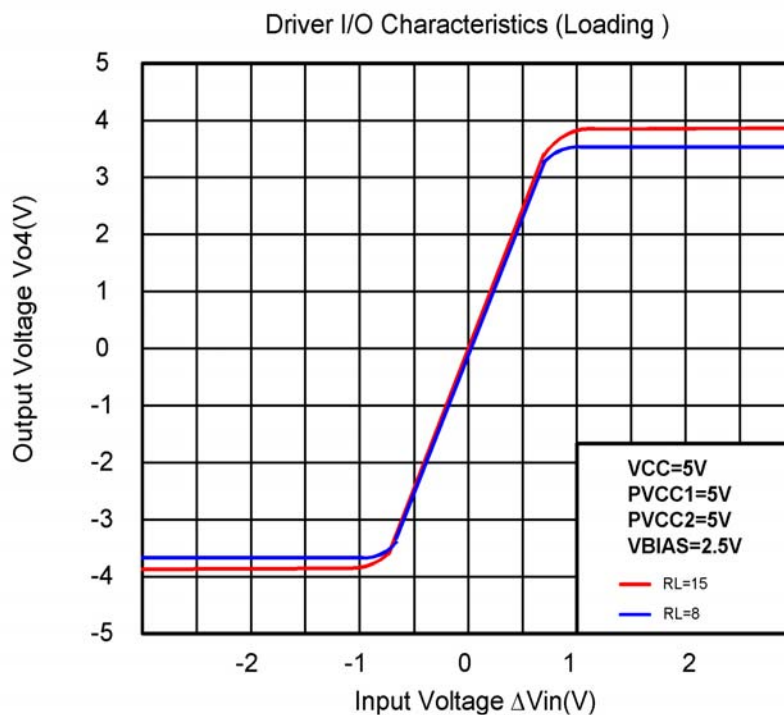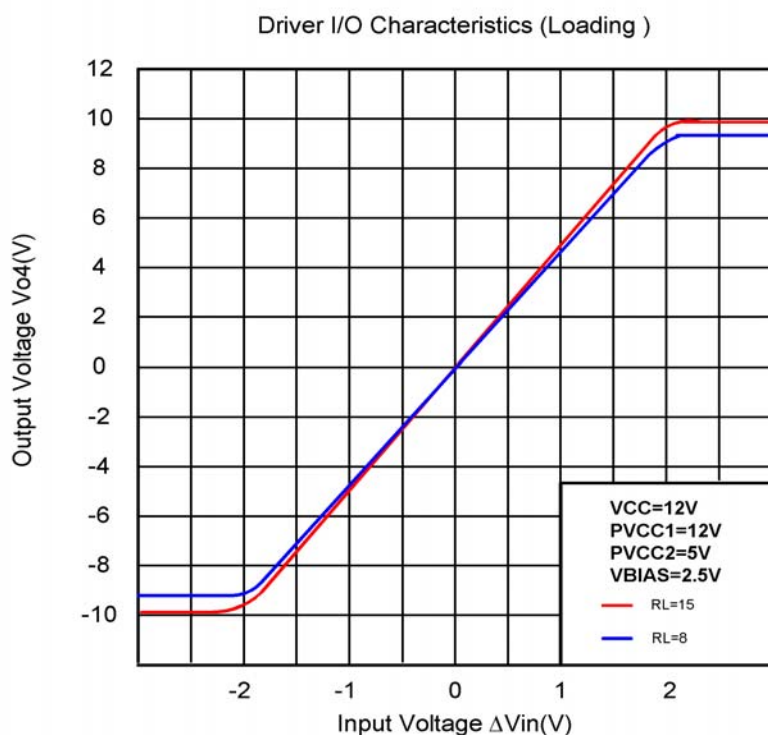


* All specs and applications shown above subject to change without prior notice.

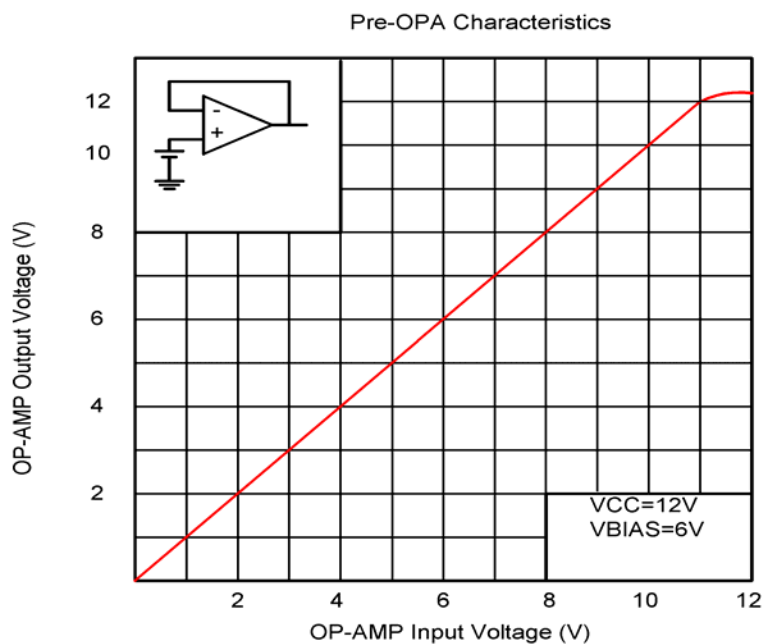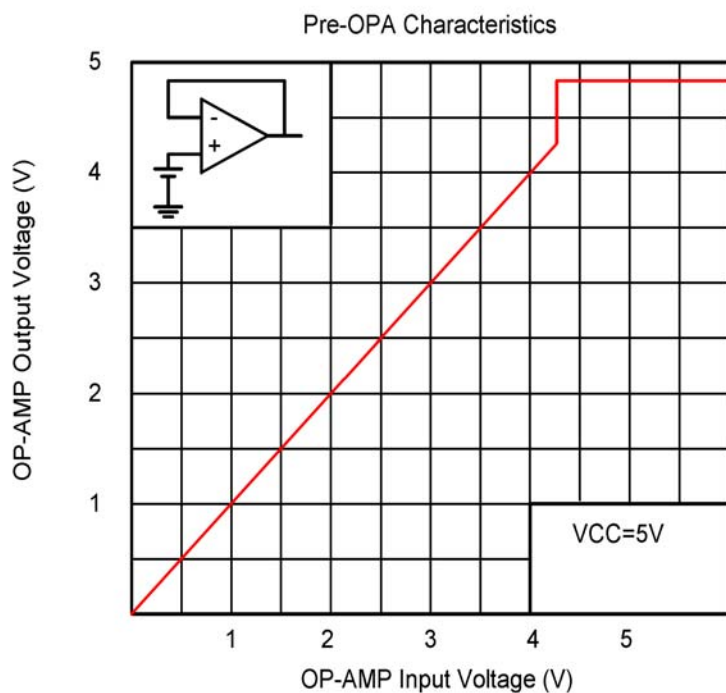


* All specs and applications shown above subject to change without prior notice.

Test Circuit

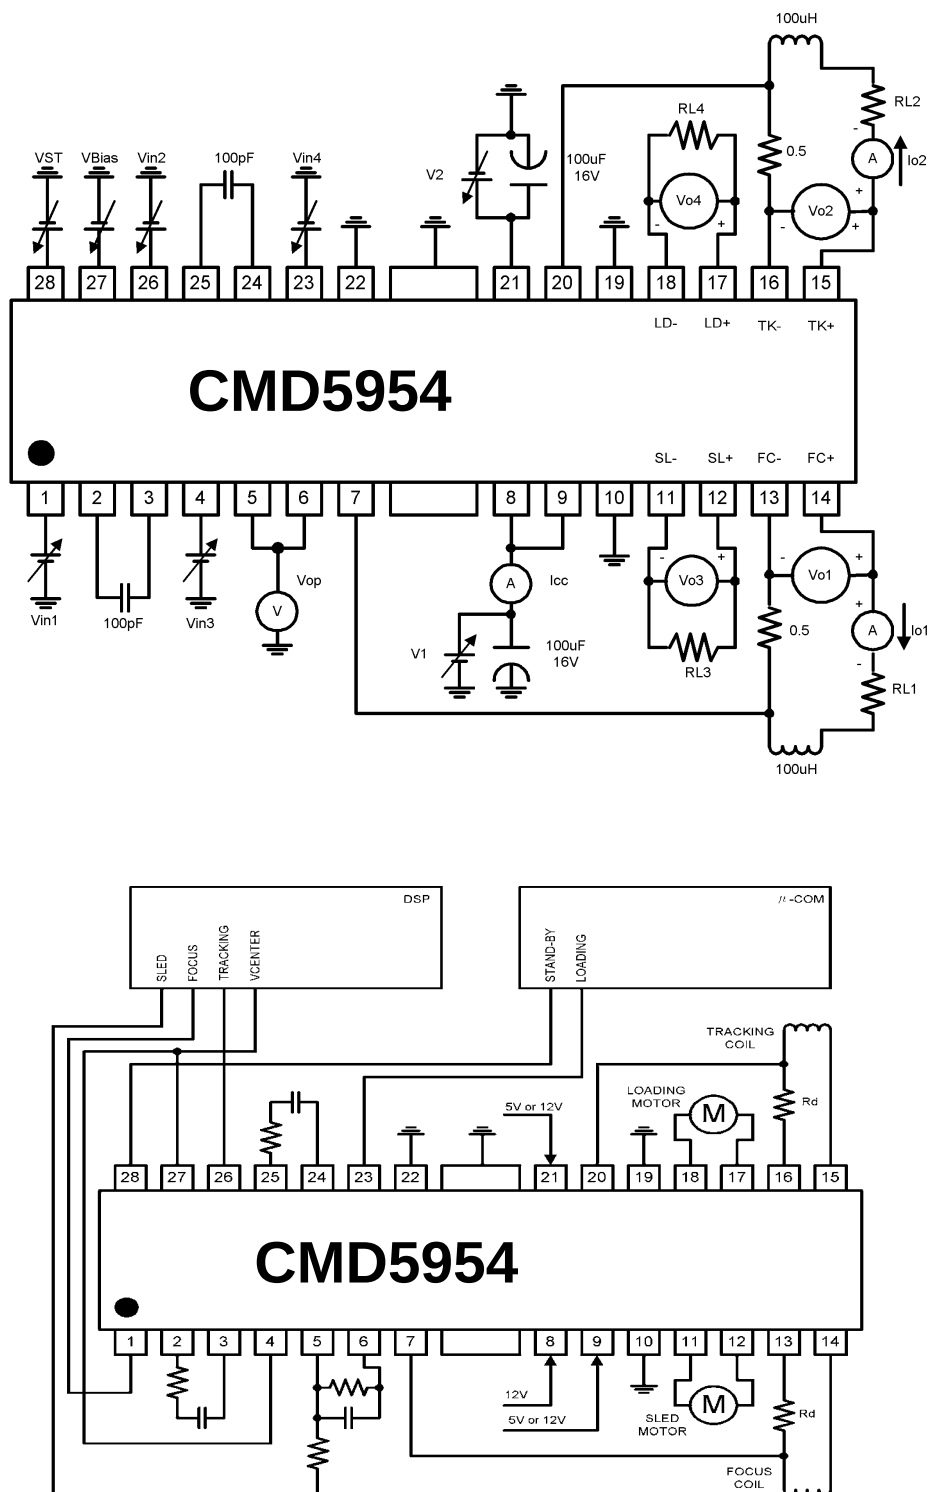


* All specs and applications shown above subject to change without prior notice.

Application example

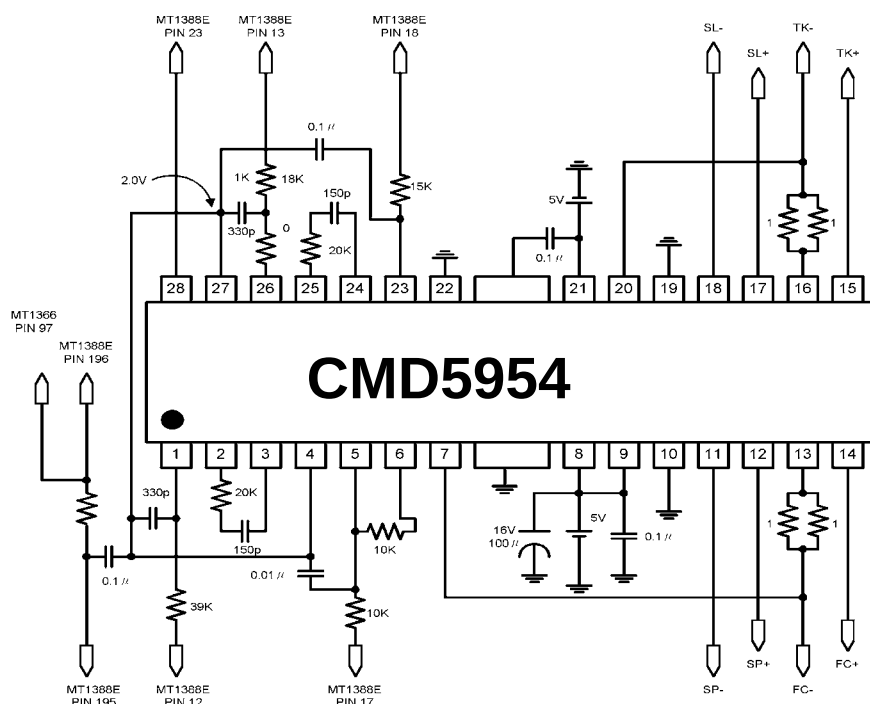

DVD-Player

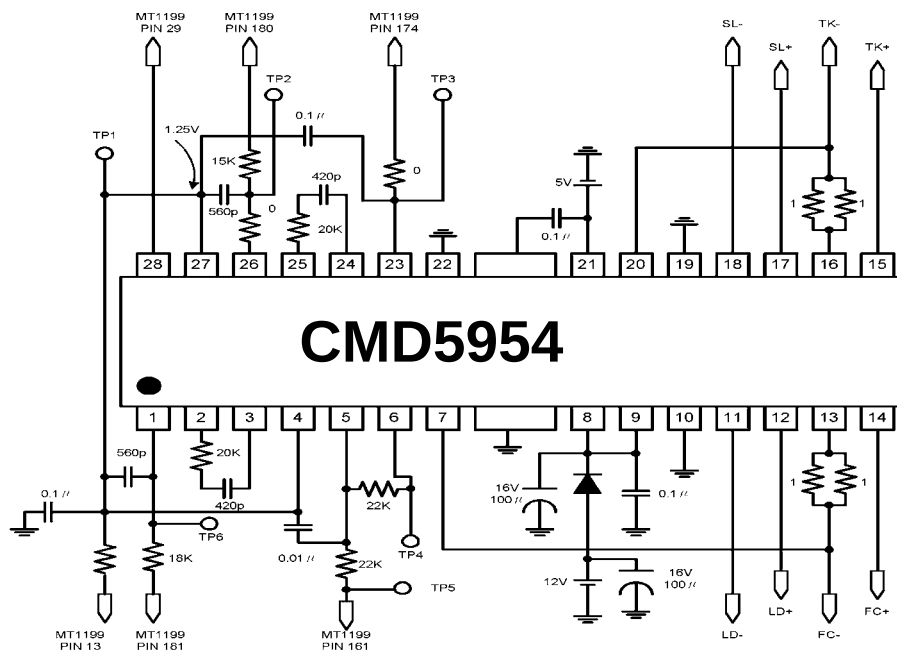

52X CD-ROM

* All specs and applications shown above subject to change without prior notice.

Operation notes

- (1) Thermal-shut-down circuit built in. In case IC chip temperature rise to 175 °C (typ.), thermal-shut-down circuit operates and output current muted. Next time IC chip temperature falls below 150 °C (typ.), the driver blocks start.
- (2) In case stand-by-pin voltage under 0.5V or opened, quiescent current is muted. stand-by-pin voltage should be over 2.0V for normal application.
- (3) Bias-pin (pin 27) should be pulled up more than 1.2V. In case bias-pin voltage is pulled down under 0.9V (typ.), output current is muted.
- (4) Insert the by-pass capacitor between Vcc-pin and GND-pin of IC as possible as near

(approximately 0.1 μ F).

- (5) Heat dissipation fins are attached to the GND on the inside of the package. Make sure to connect these to the external GND.

< Supplement >


Current-feedback driver

Trans conductance (output current/input voltage) is show as follows.

$$g_m = \frac{1}{R_d + R_{WIRE}} (A/V)$$

$$R_{WIRE} = 0.15 \Omega (\pm 0.05 \Omega) \quad \text{Au wire}$$

Package Outlines (units:mm): HSOP-28

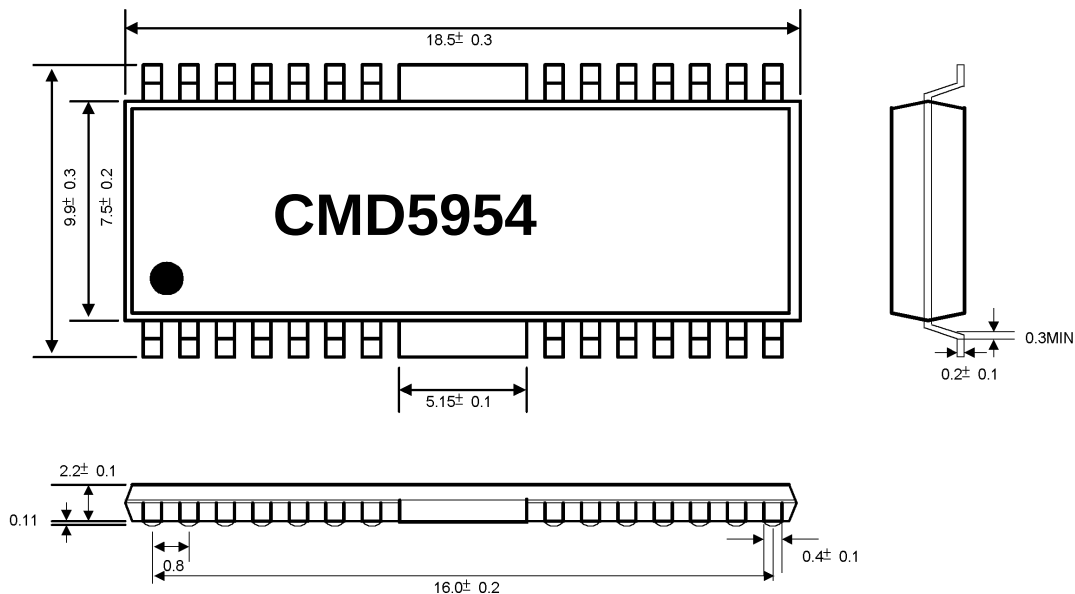

* All specs and applications shown above subject to change without prior notice.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.