

Specification

Part No.	: GWLA.05
Description	: GPS L1 & Bluetooth / 2.4GHz Wi-Fi Embedded 2in1 Ceramic Loop Antenna
Features	: 10 * 3.2 * 1.5mm GPS L1 and Wi-Fi 2.4GHz Applications Simplifies GPS/2.4GHz Circuits Two Separate Feeds on one Chip Antenna Low Profile, Small Footprint Antenna SMD Surface-mount RoHS & REACH Compliant



1. Introduction

The Taoglas GWLA.05, GPS L1 /2.4GHz embedded loop antenna is a high efficiency, miniature SMD, edge mounted ceramic antenna for GPS and 2.4GHz Wi-Fi, WLAN, Zigbee, Bluetooth, and 802.11 applications. Customers can use this antenna for GPS and 2.4GHz (Wi-Fi or Bluetooth) modules, rather than using two separate antennas. The GWLA.05 has two separate antenna feeds, making it the ideal choice for applications where there is limited PCB space. The GWLA.05 uses the main PCB as its ground plane, thereby maintaining good efficiency despite its small size. It can be tuned for different PCB sizes/environments by simply changing the values of the matching circuit. It is ideally mounted on the center edge of a ground-plane.

At 10*3.2*1.5mm, the GWLA.05 is one of the smallest combination embedded antennas available worldwide. This antenna is delivered on tape and reel.

Typical Applications – where both GPS and 2.4GHz are required:

- Navigation or Position Tracking Systems
- Tablet PCs
- Gateways and Routers
- UAV Communication Systems
- Handheld Devices
- OBD Devices
- Mobile Cameras

Many module manufacturers specify peak gain limits for any antennas that are to be connected to that module. Those peak gain limits are based on free-space conditions. In practice, the peak gain of an antenna tested in free-space can degrade by at least 1 or 2 dBi when put inside a device. So ideally you should go for a slightly higher peak gain antenna than mentioned on the module specification to compensate for this effect, giving you better performance.

Upon testing of any of our antennas with your device and a selection of appropriate layout, integration technique, or cable, Taoglas can make sure any of our antennas' peak gain will be below the peak gain limits. Taoglas can then issue a specification and/or report for the selected antenna in your device that will clearly show it complying with the peak gain limits, so you can be assured you are meeting regulatory requirements for that module.

For example, a module manufacturer may state that the antenna must have less than 2 dBi peak gain, but you don't need to select an embedded antenna that has a peak gain of less than 2 dBi in free-space. This will give you a less optimized solution. It is better to go for a slightly higher free-space peak gain of 3 dBi or more if available. Once that antenna gets integrated into your device, performance will degrade below this 2 dBi peak gain due to the effects of GND plane, surrounding components, and device housing. If you want to be absolutely sure, contact Taoglas and we will test. Choosing a Taoglas antenna with a higher peak gain than what is specified by the module manufacturer and enlisting our help will ensure you are getting the best performance possible without exceeding the peak gain limits.



2. Specification

ELECTRICAL						
Application Bands	GPS L1		Wi-Fi /Bluetooth			
Frequency (MHz)	1575.42		2400-2500			
Bandwidth (MHz)	20 (RL<-10dB)		100 (RL<-5dB)			
Ground plane size (mm)	80 x 40	30 x 15	80 x 40	30 x 15		
Peak Gain (dBi)	0.28	-2.17	-0.82	0.24		
Efficiency (%)	45.37	27	44.16	52		
Return Loss (dB)	< -10		< -5			
Isolation (dB)	< -20		< -6			
Impedance (Ω)	50					
Polarization	Linear					
Input Power	10W					
MECHANICAL						
Dimensions (mm)	10 x 3.2 x 1.5					
Ground plane (mm)	80 x 40 or 30 x 15					
Weight (g)	0.19					
ENVIRONMENTAL						
Operating Temperature	-40°C to 85°C					
Storage Temperature	-25°C to 85°C					
Relative Humidity	20% to 70%					

3. Antenna Characteristics

3.1 GPS Band

3.1.1 Return Loss

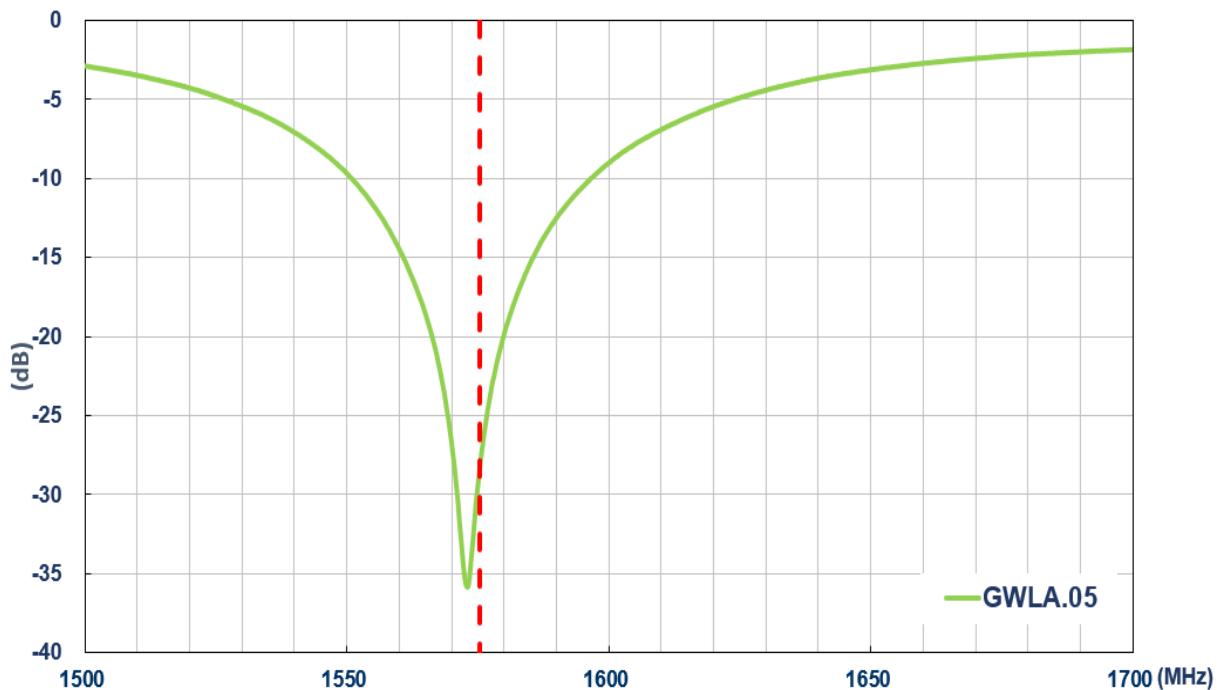


Figure 1 GPS Return Loss(dB) on 80x40mm ground plane

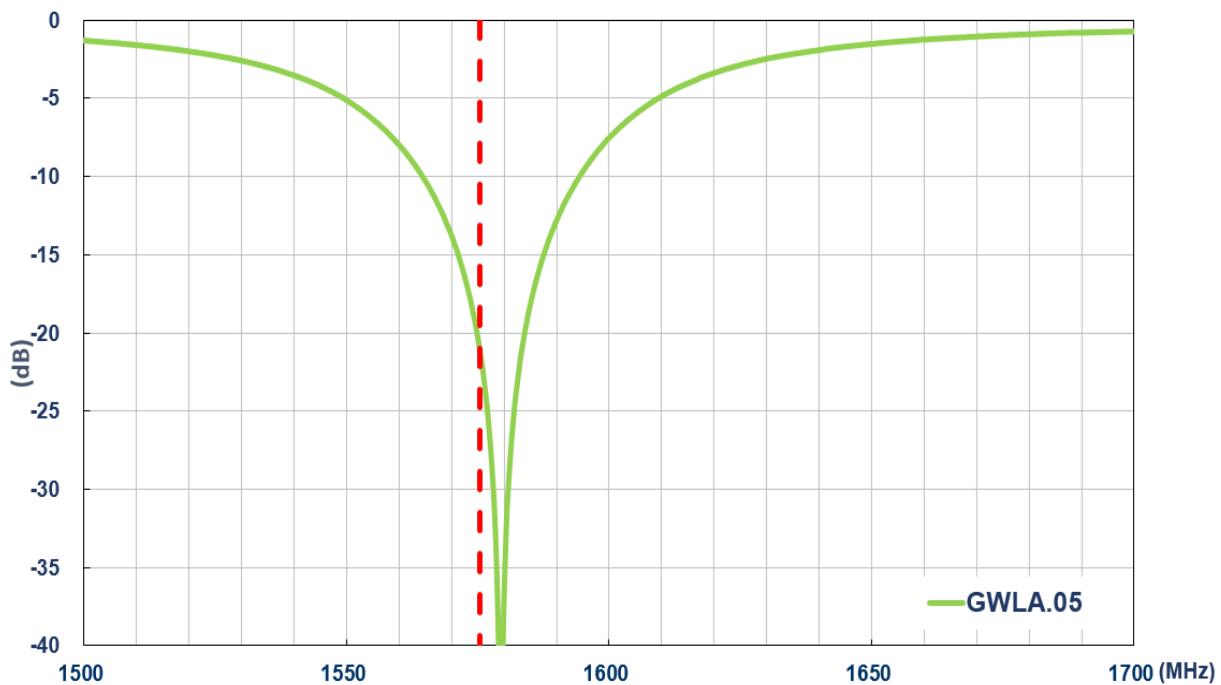


Figure 2 GPS Return Loss(dB) on 30x15mm ground plane

3.1.2 Efficiency

TAOGLAS.®

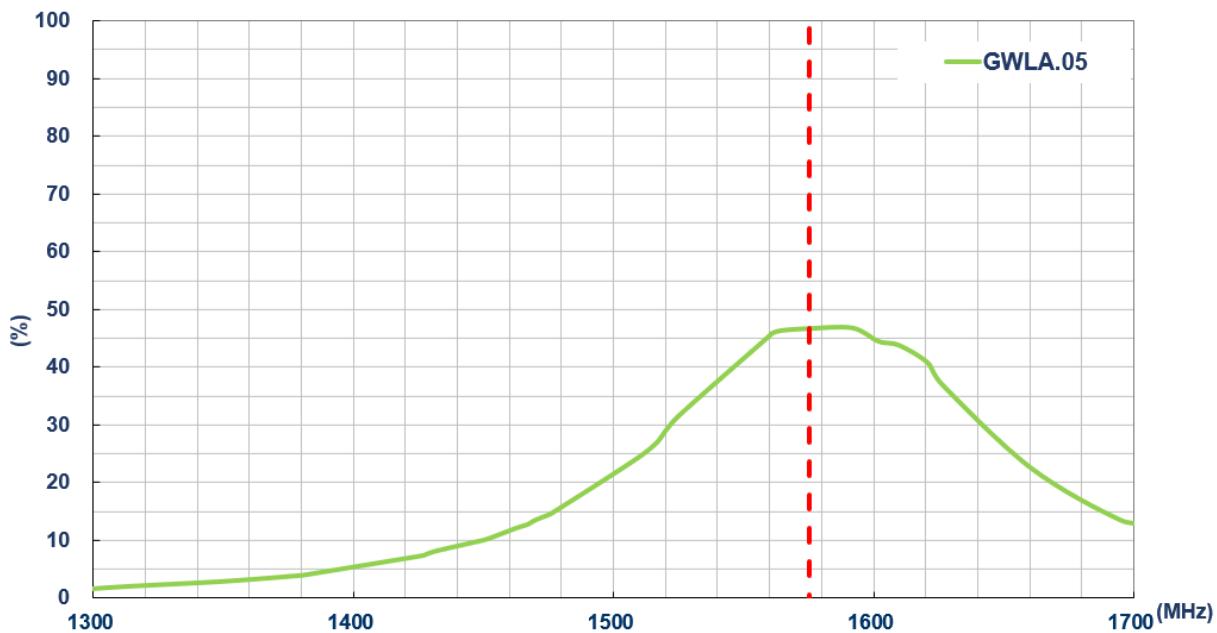


Figure 3 GPS Efficiency(%) on 80x40mm ground plane

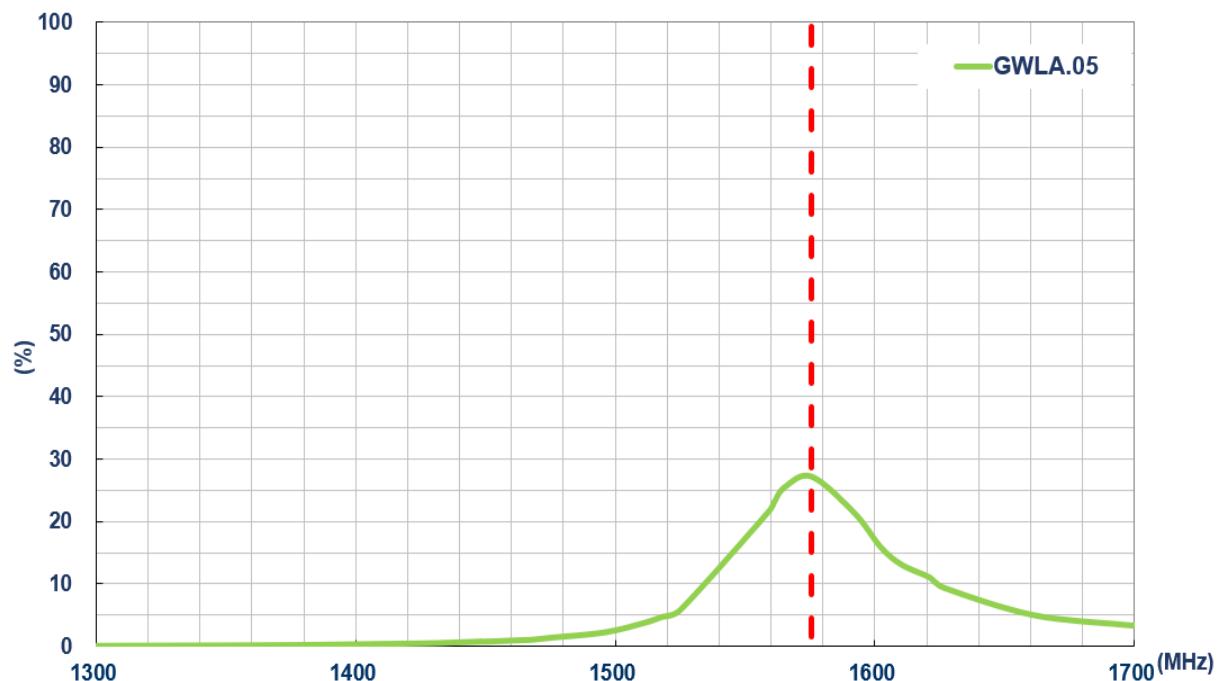


Figure 4 GPS Efficiency(%) on 30x15mm ground plane

3.1.3 Average Gain

TAOGLAS.®

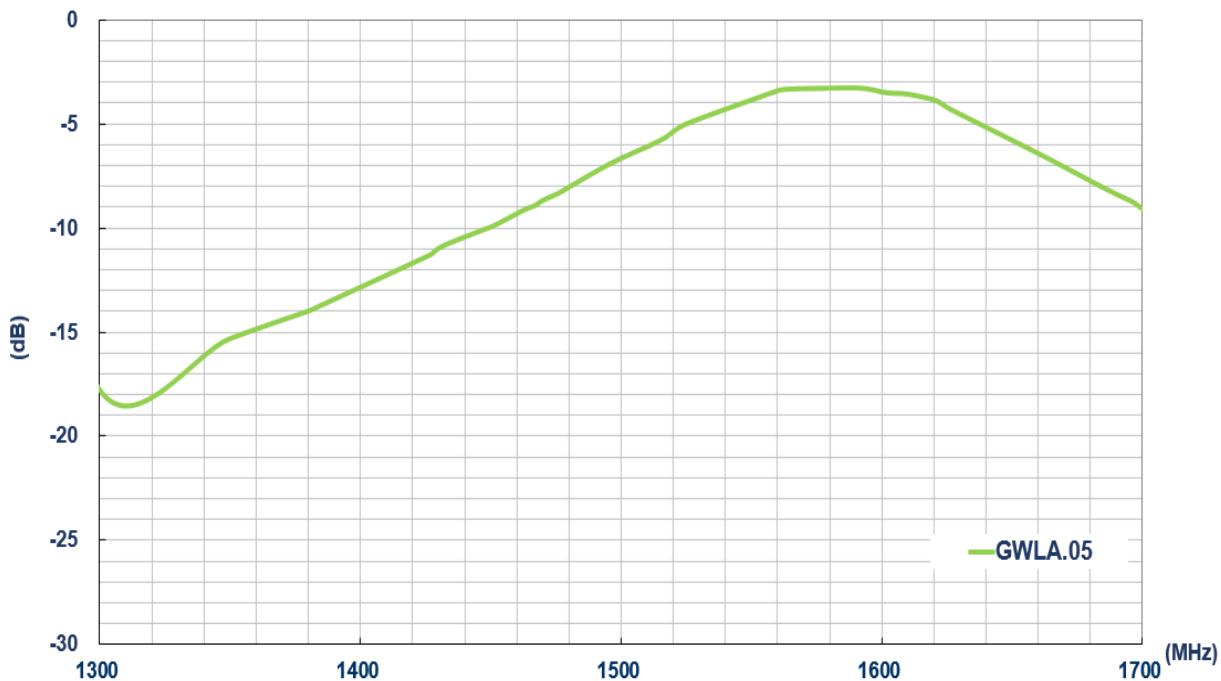


Figure 5 GPS Average Gain(dB) on 80x40mm ground plane

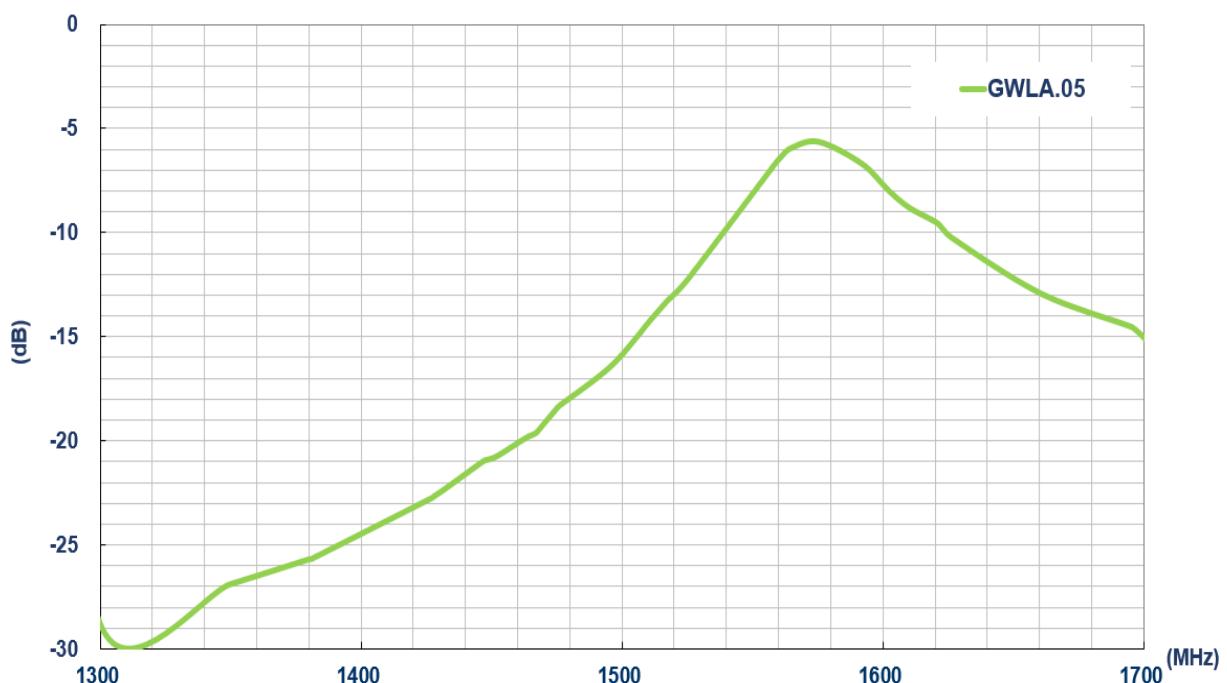


Figure 6 GPS Average Gain(dB) on 30x15mm ground plane



3.1.4 Peak Gain

TAOGLAS®

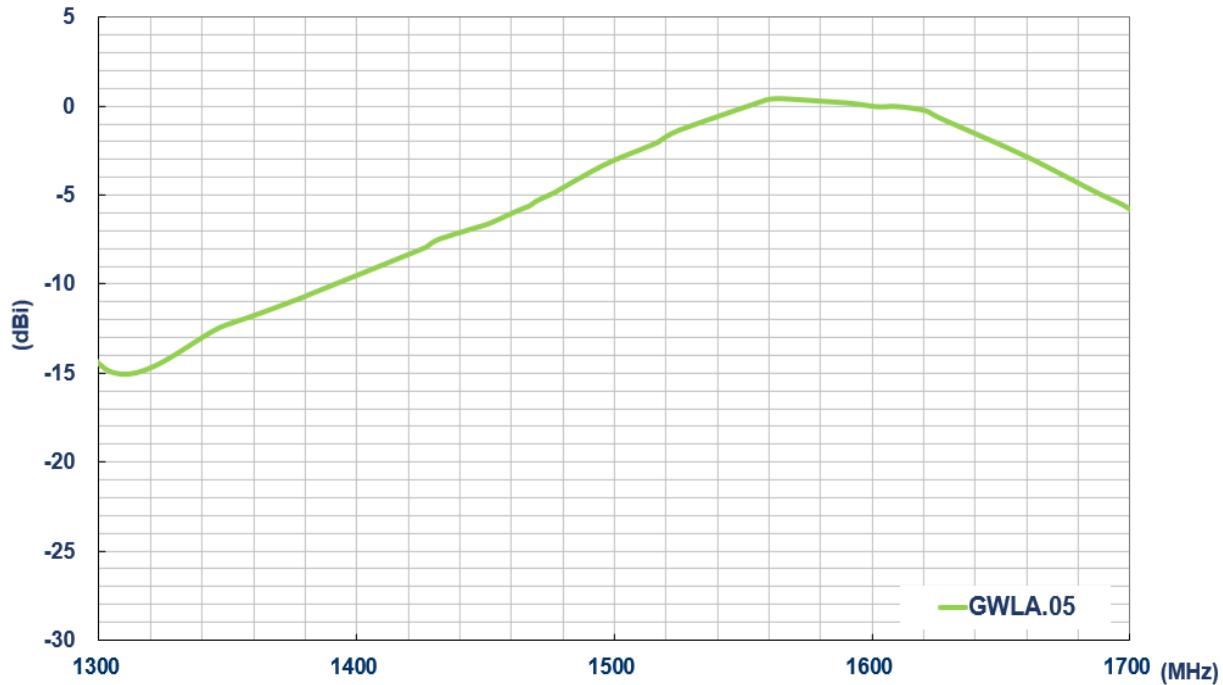


Figure 7 GPS Peak Gain(dBi) on 80x40mm ground plane

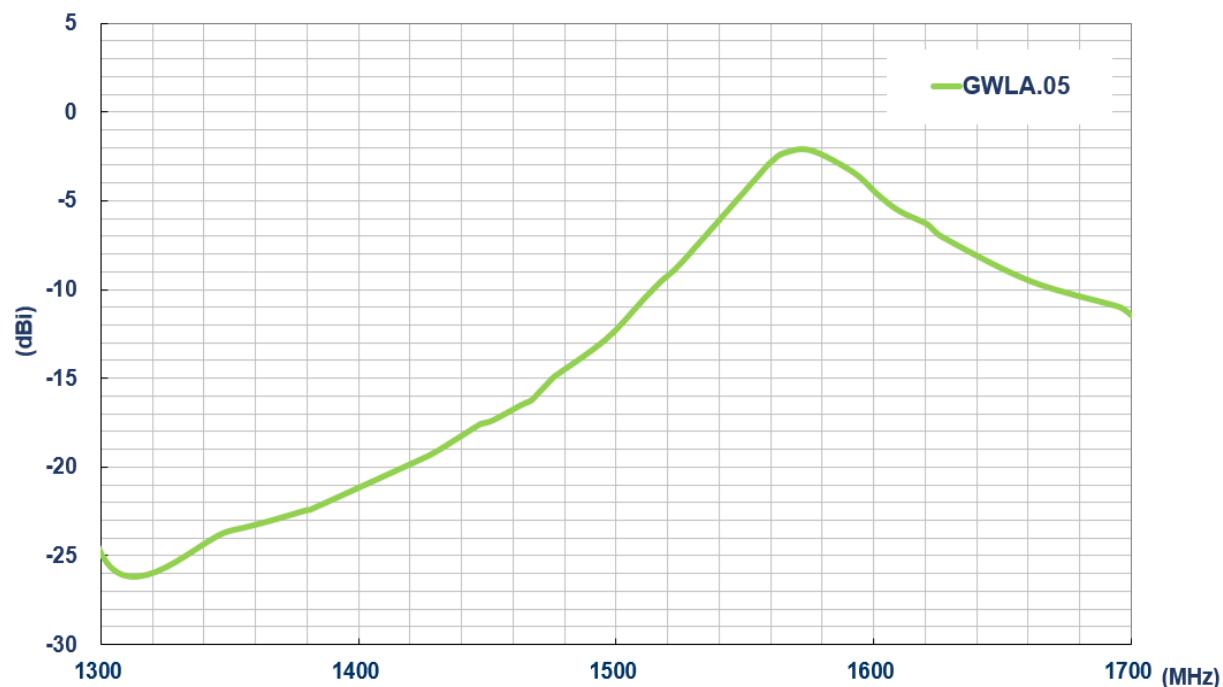


Figure 8 GPS Peak Gain(dBi) on 30x15mm ground plane



3.2 Wi-Fi 2.4GHz

3.2.1 Return Loss

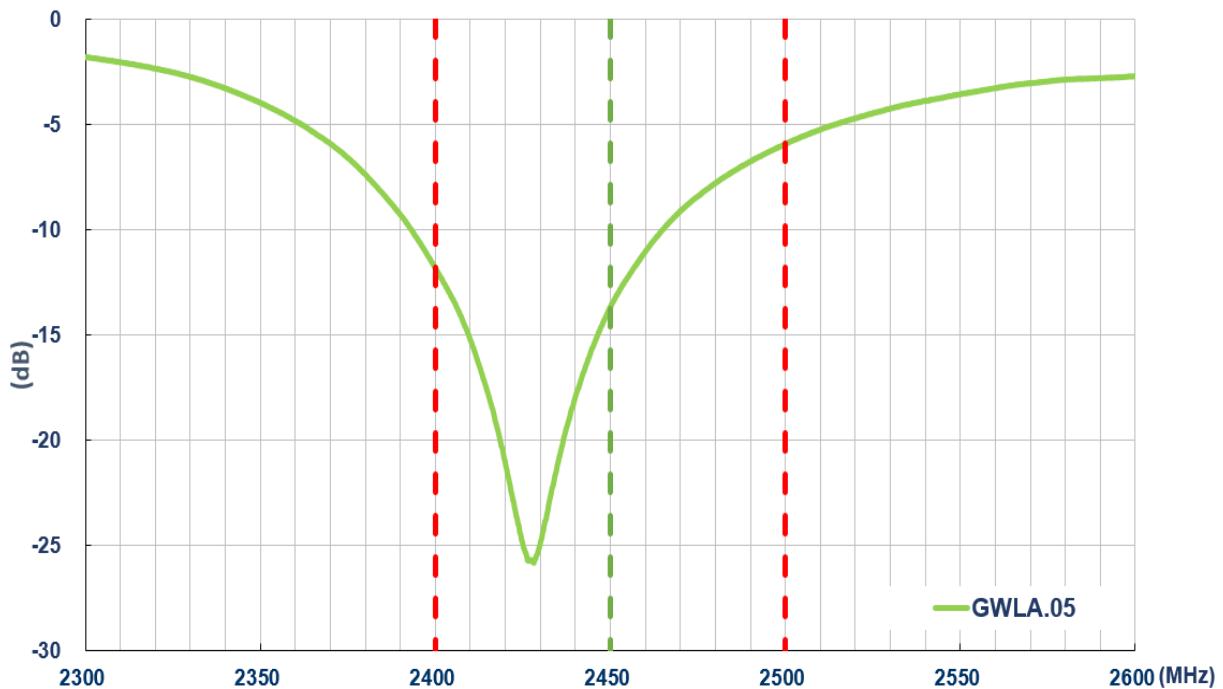


Figure 9 Wi-Fi Return Loss on 80x40mm ground plane

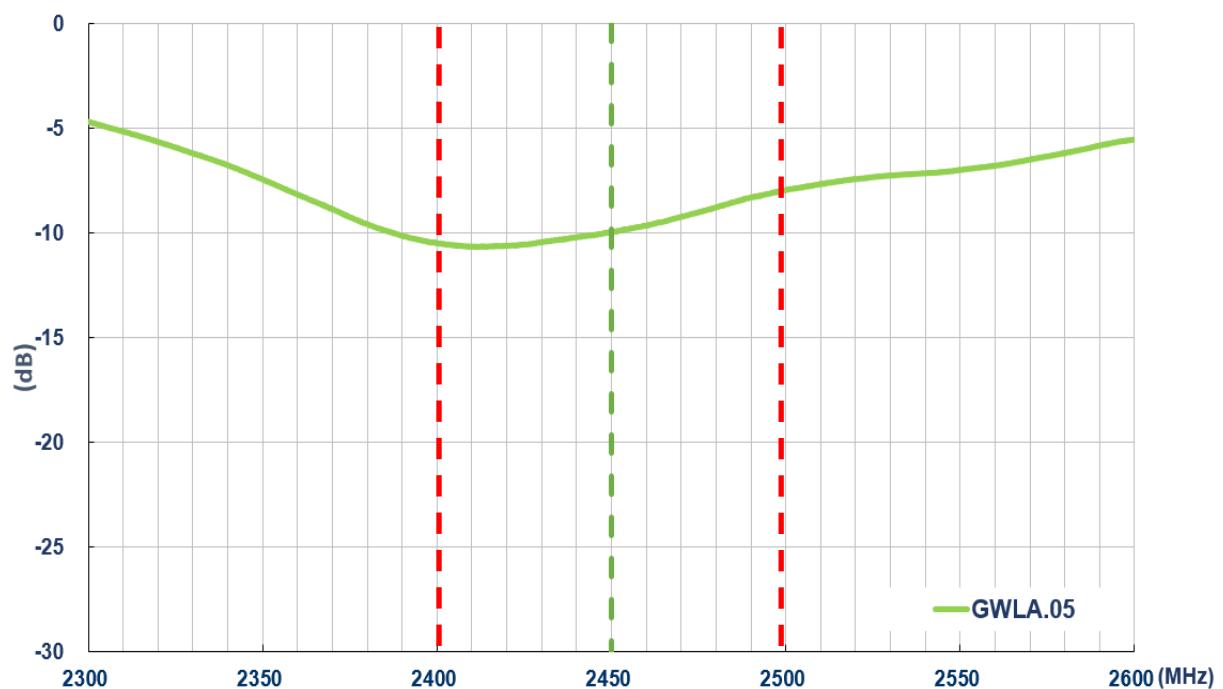


Figure 10 Wi-Fi Return Loss(dB) on 30x15mm ground plane

3.2.2 Efficiency

TAOGLAS.®

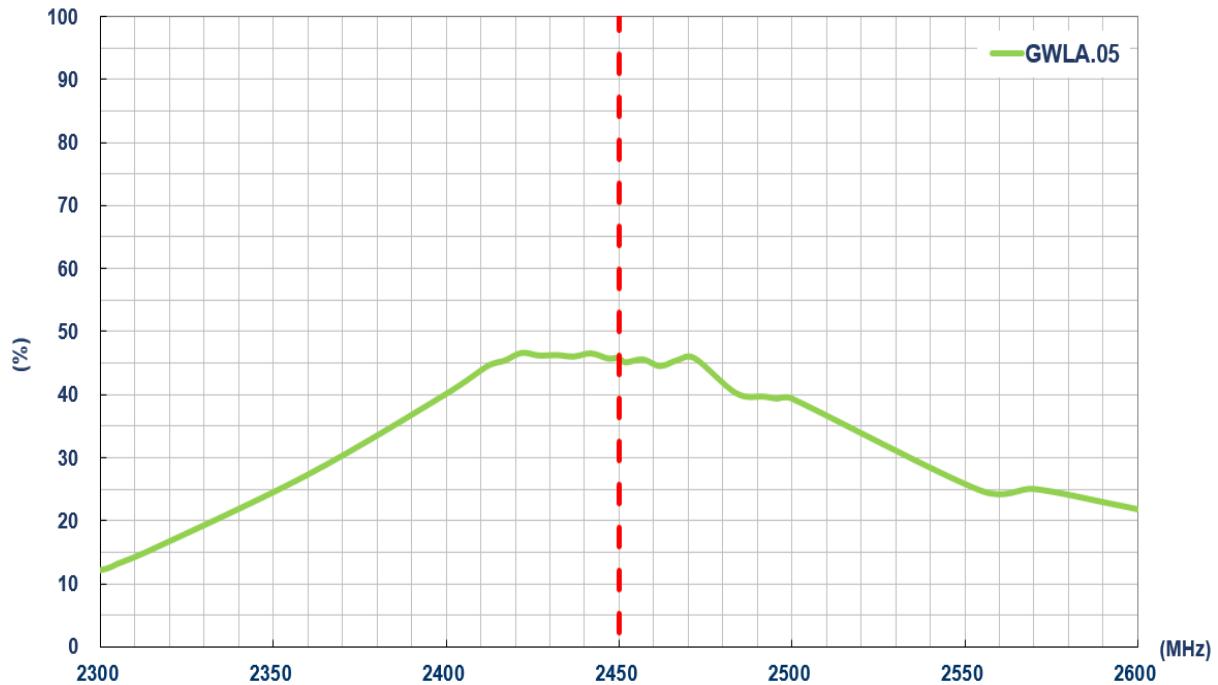


Figure 11 Wi-Fi Efficiency(%) on 80x40mm ground plane

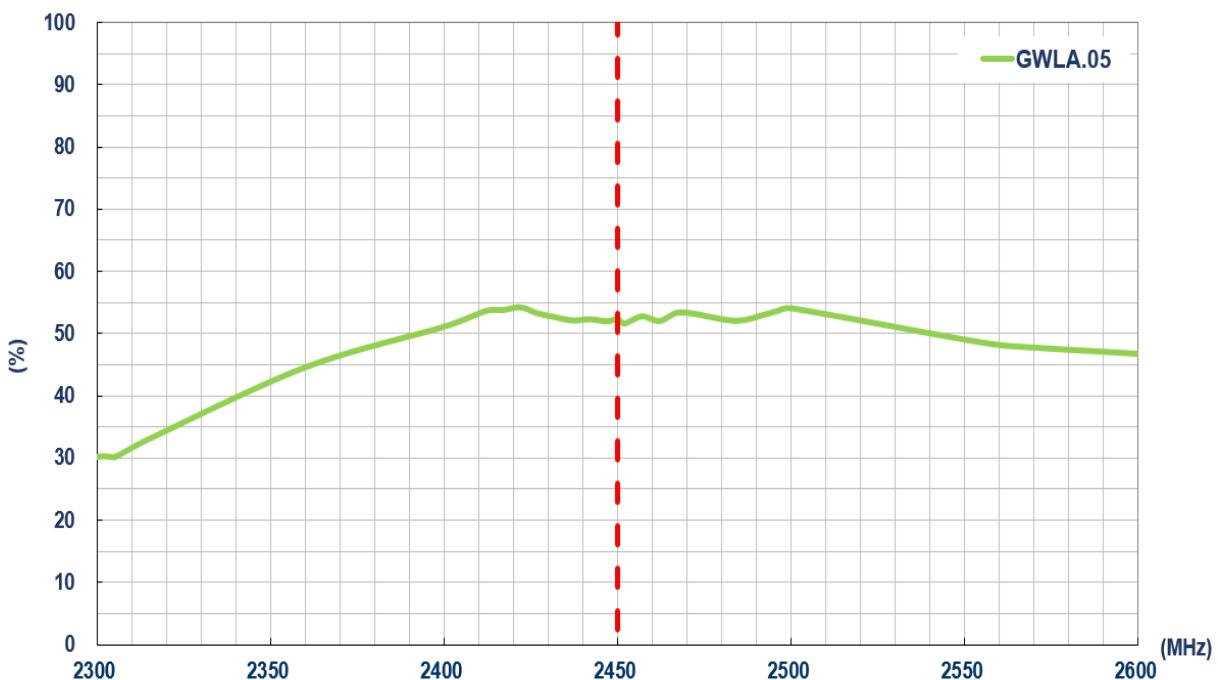


Figure 12 Wi-Fi Efficiency(%) on 30x15mm ground plane



3.2.3 Average Gain

TAOGLAS®

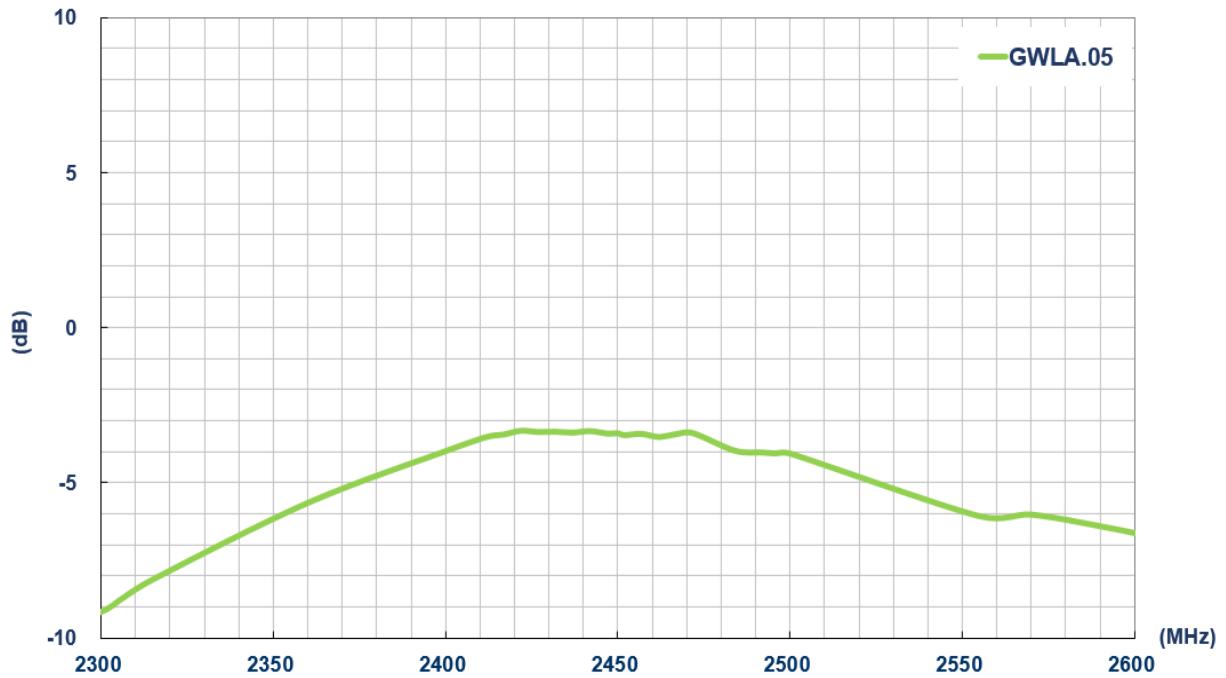


Figure 13 Wi-Fi Average Gain(dB) on 80x40mm ground plane

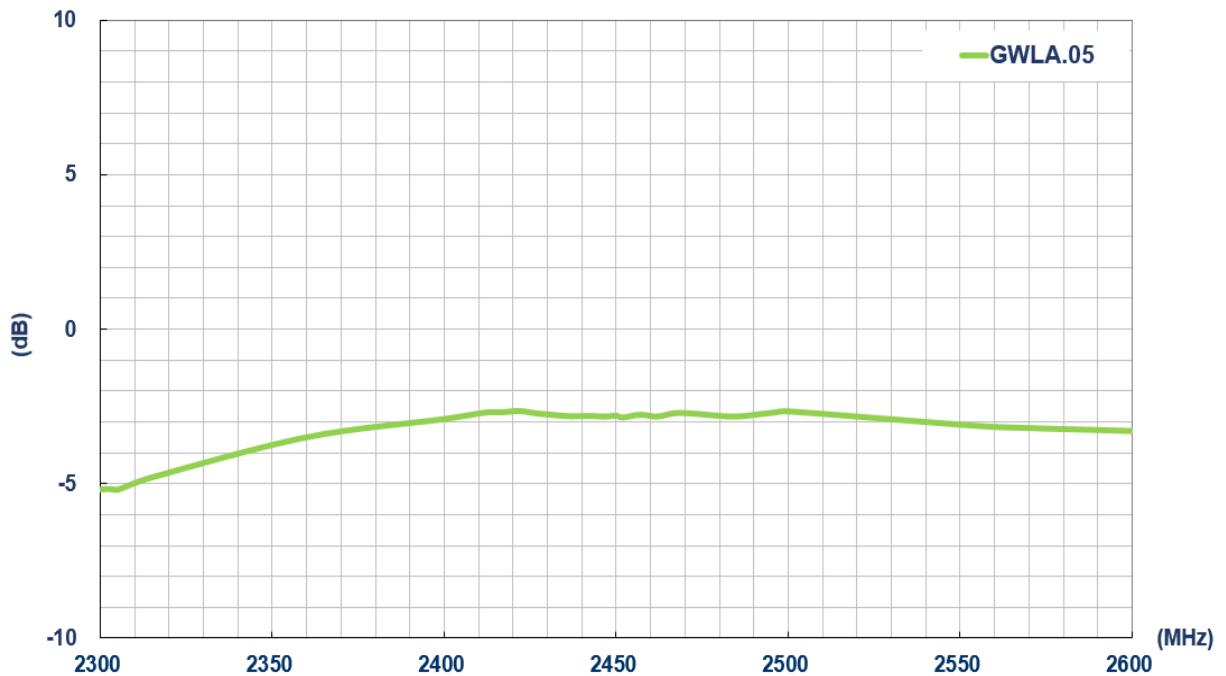


Figure 14 Wi-Fi Average Gain(dB) on 30x15mm ground plane



3.2.4 Peak Gain

TAOGLAS.[®]

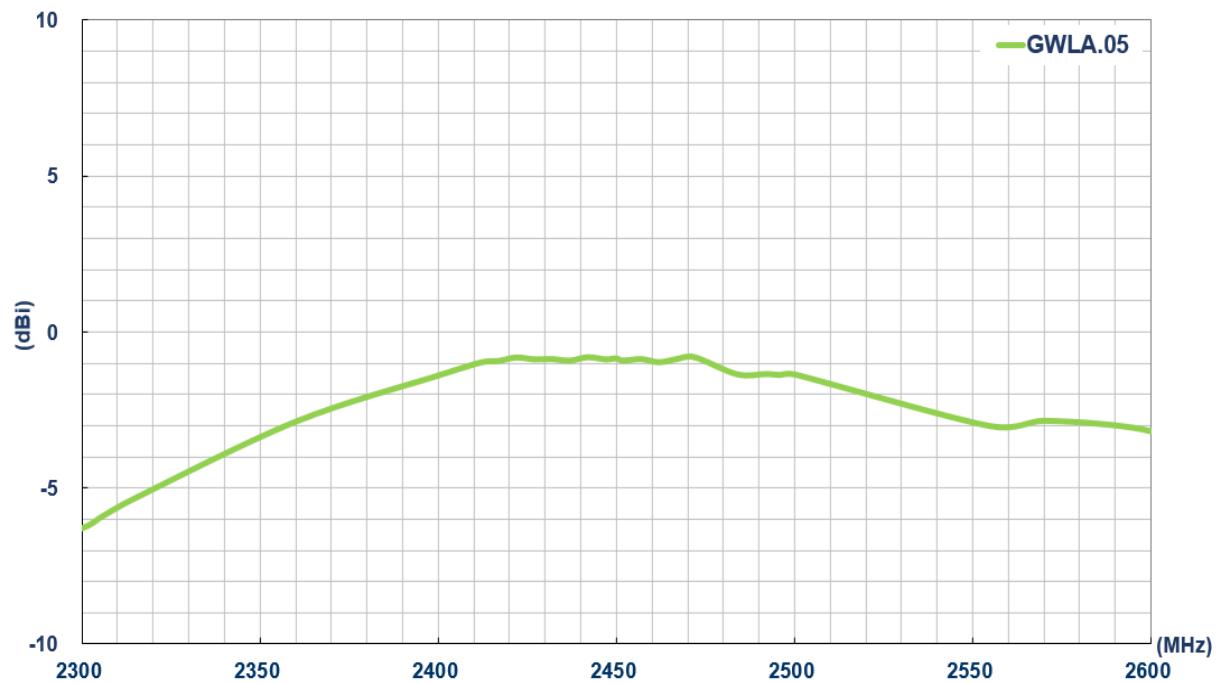


Figure 15 Wi-Fi Peak Gain on 80x40mm ground plane

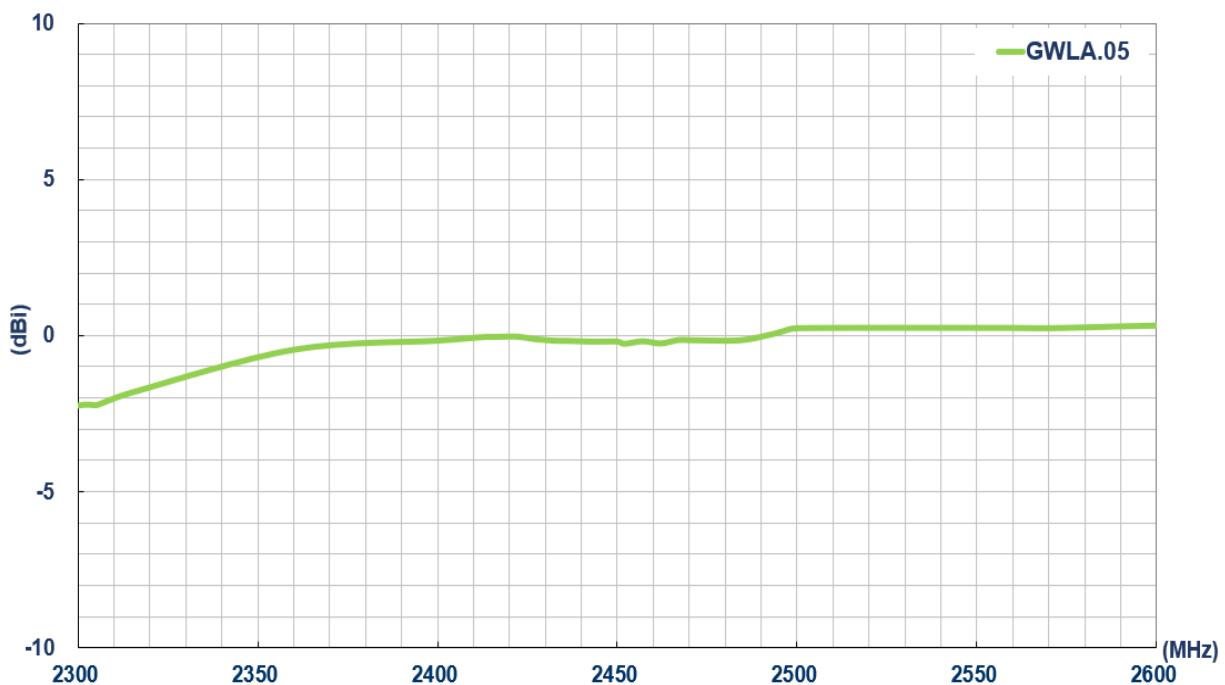


Figure 16 Wi-Fi Peak Gain(dBi) on 30x15mm ground plane



3.3 Isolation between Wi-Fi and GPS Antennas

TAOGLAS.[®]

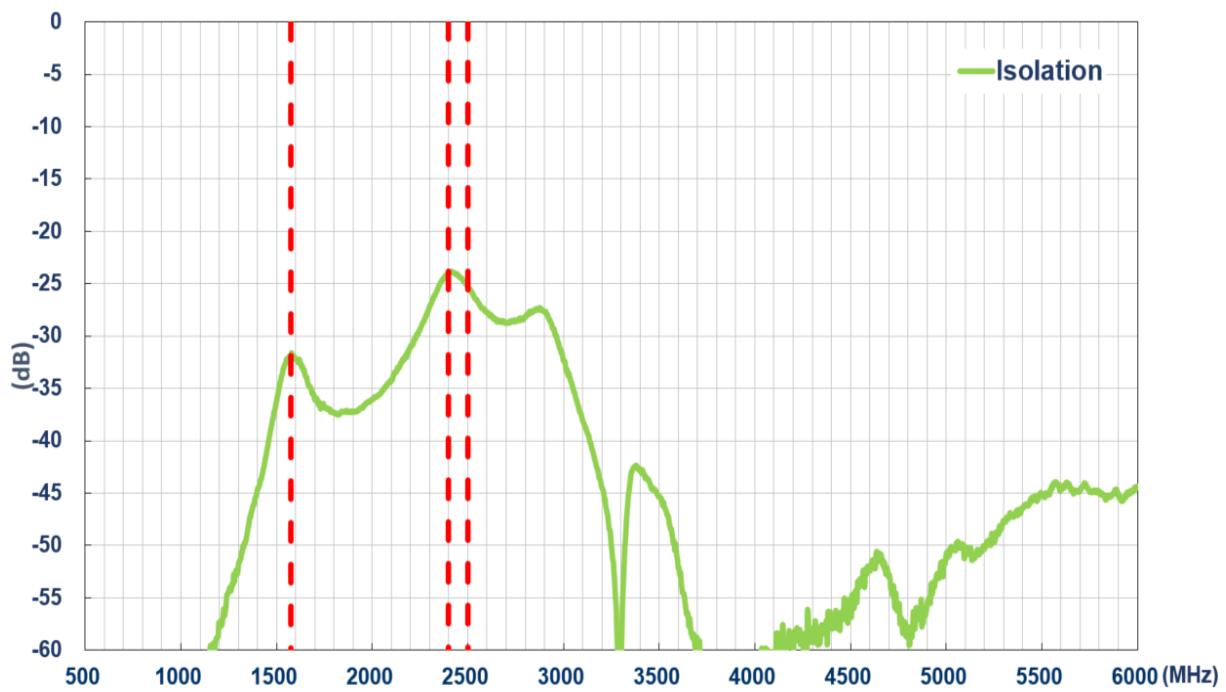


Figure 17 Isolation(dB) between GPS and Wi-Fi



4. Antenna Radiation Pattern

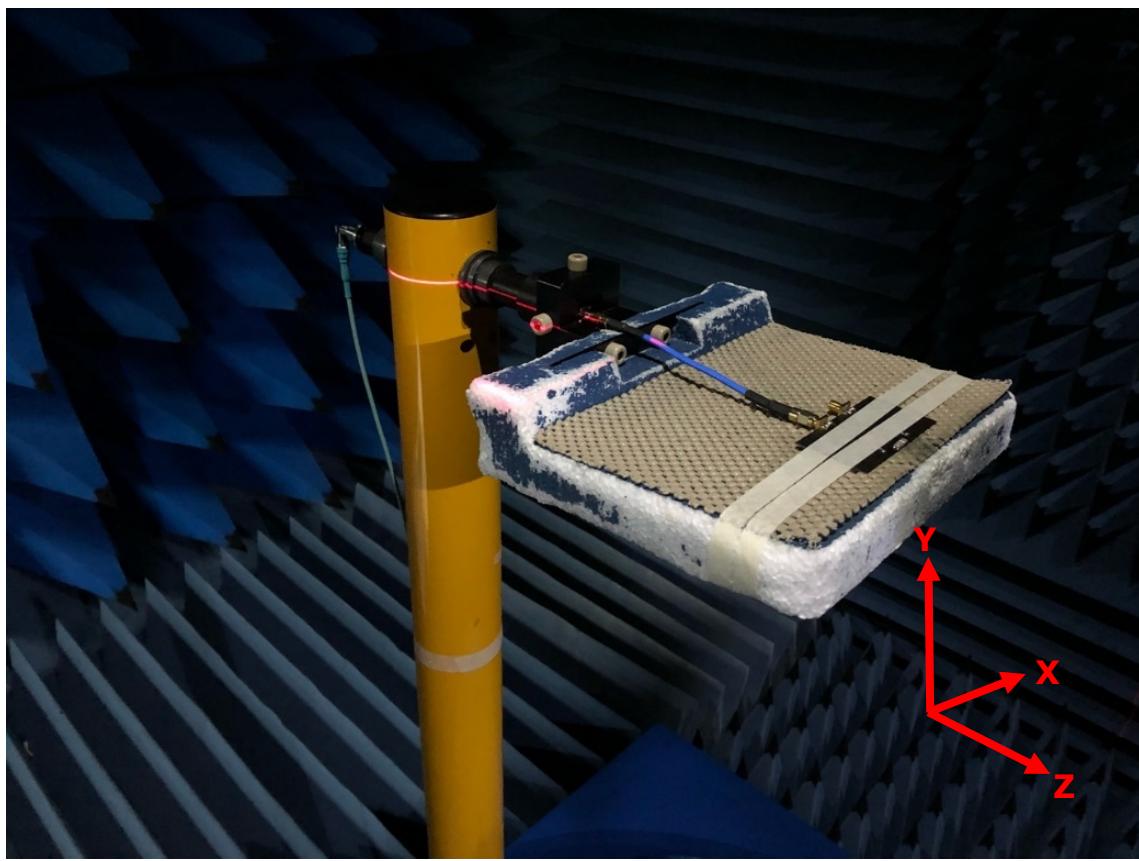


Figure 18 Anechoic Test set up

4.1 2D Radiation Pattern

4.1.1 GPS

XY Plane

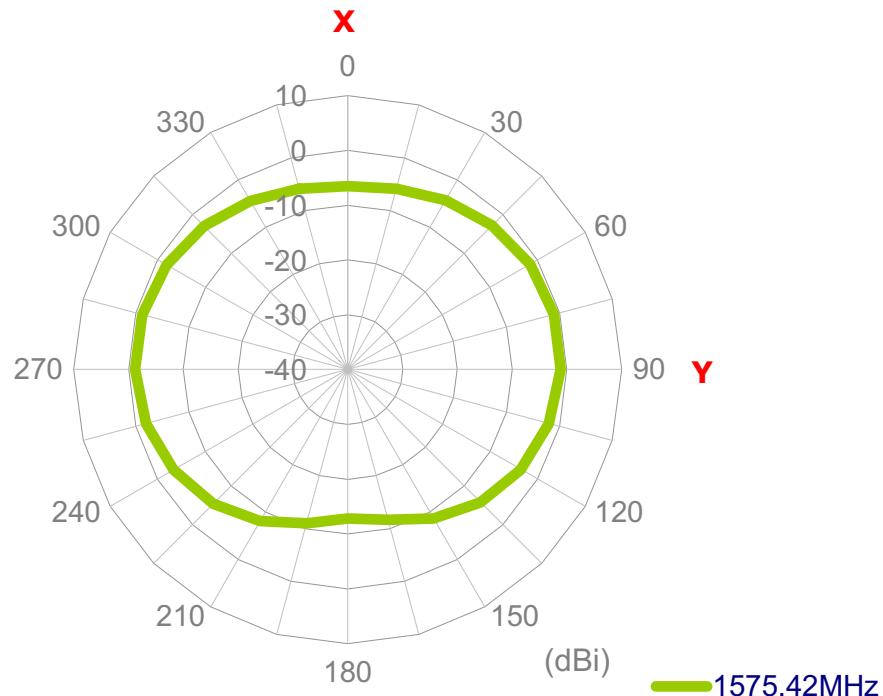


Figure 19 X-Y polar plot of GPS on 80x40mm ground plane

XZ Plane

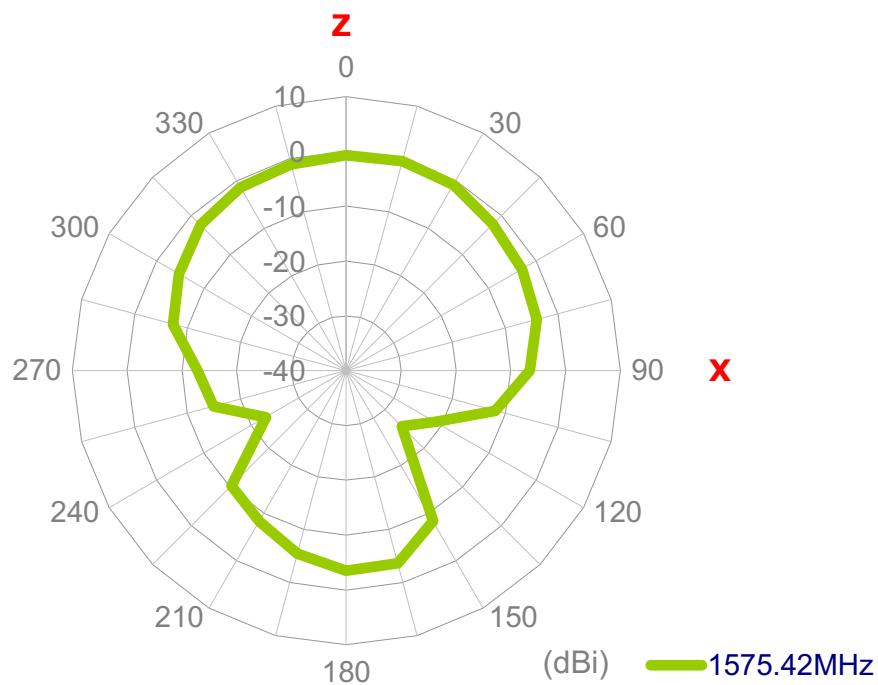


Figure 20 X-Z polar plot of GPS on 80x40mm ground plane

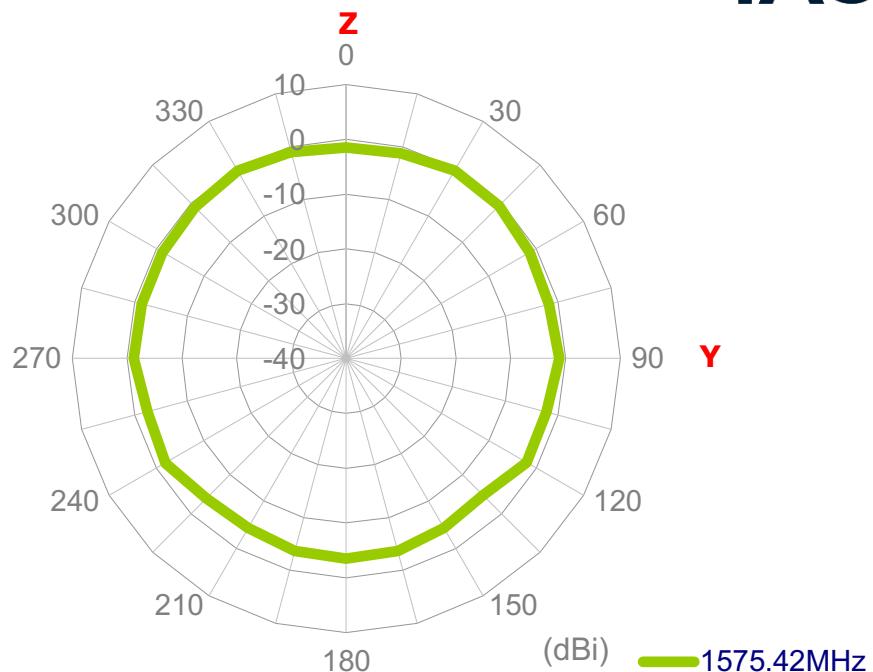
YZ Plane

Figure 21 Y-Z polar plot of GPS on 80x40mm ground plane

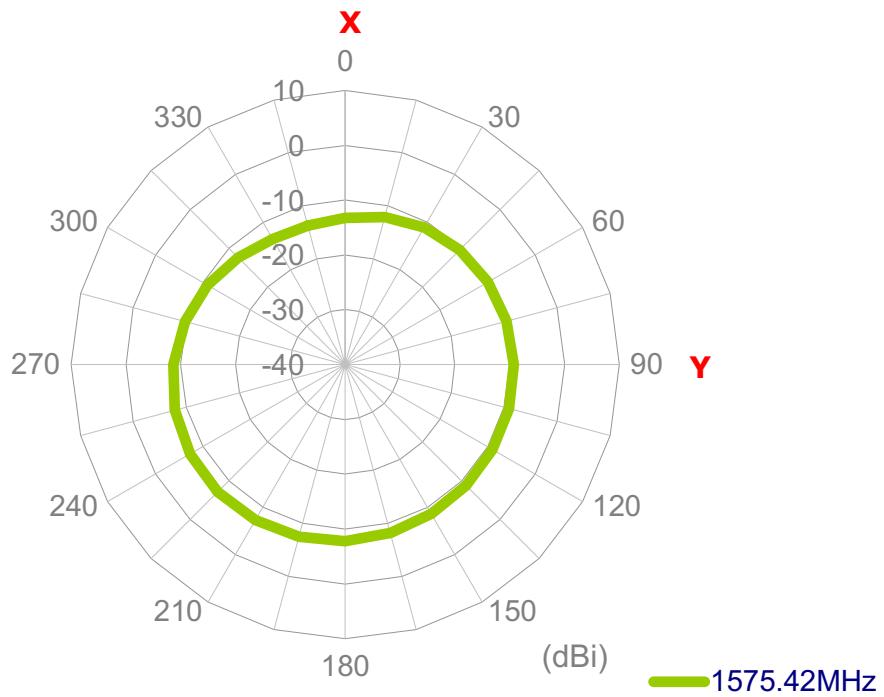
XY Plane

Figure 22 X-Y polar plot of GPS on 30x15mm ground plane

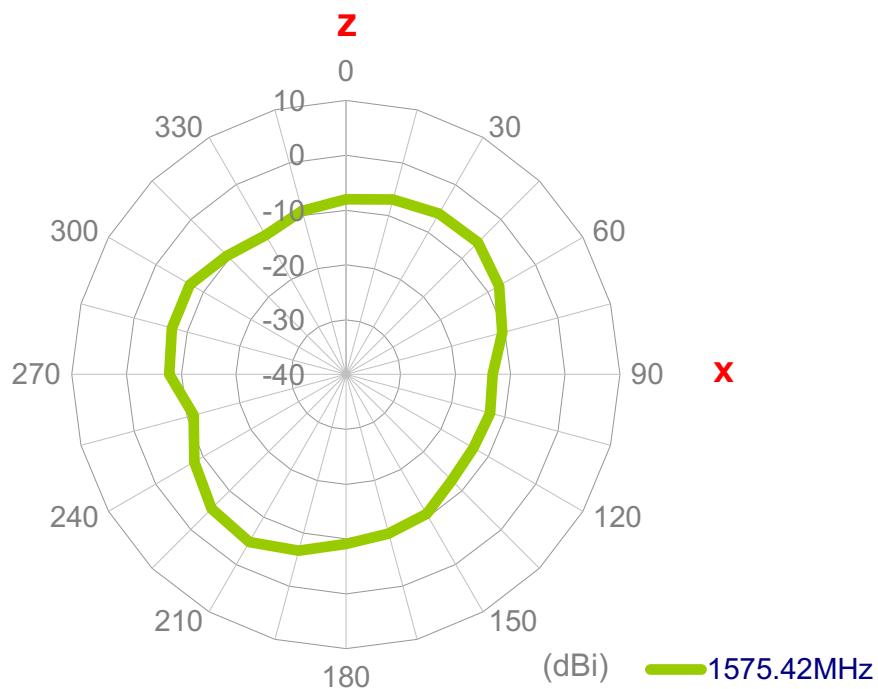
XZ Plane

Figure 23 X-Z polar plot of GPS on 30x15mm ground plane

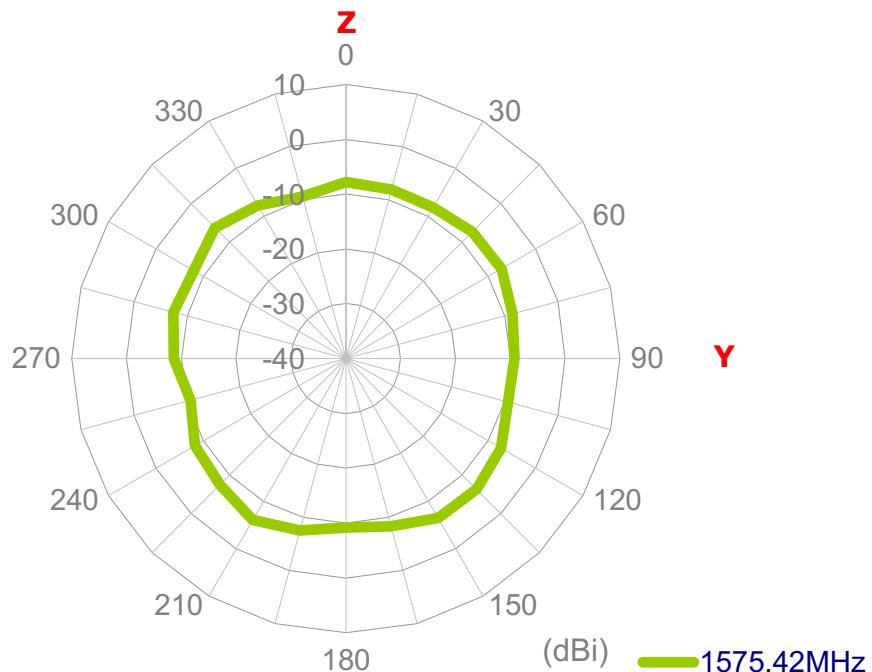
YZ Plane

Figure 24 Y-Z polar plot of GPS on 30x15mm ground plane

4.1.2 Wi-Fi 2.4G/ Bluetooth

XY Plane

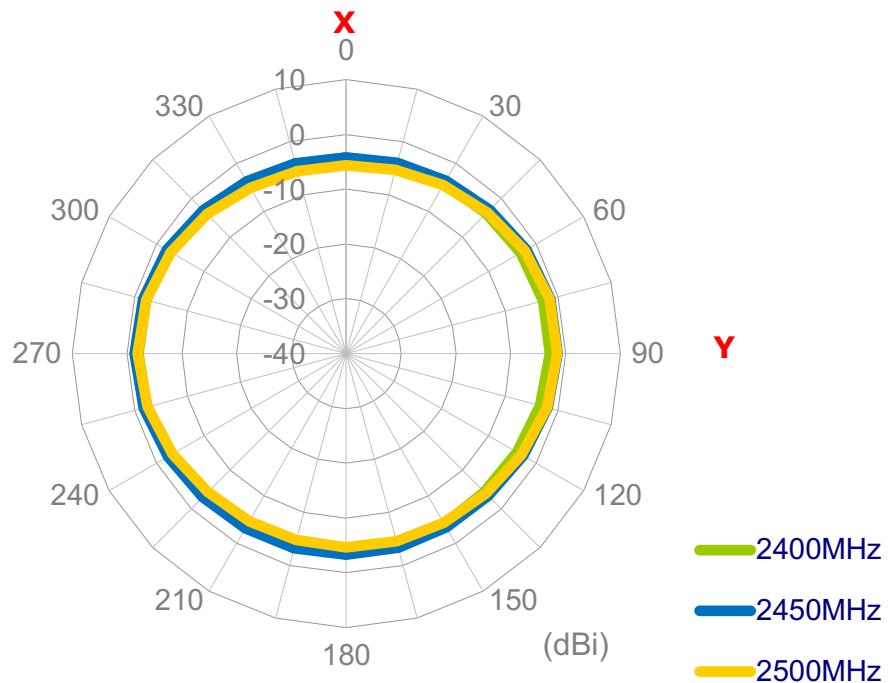


Figure 25 X-Y polar plot of Wi-Fi on 80x40mm ground plane

XZ Plane

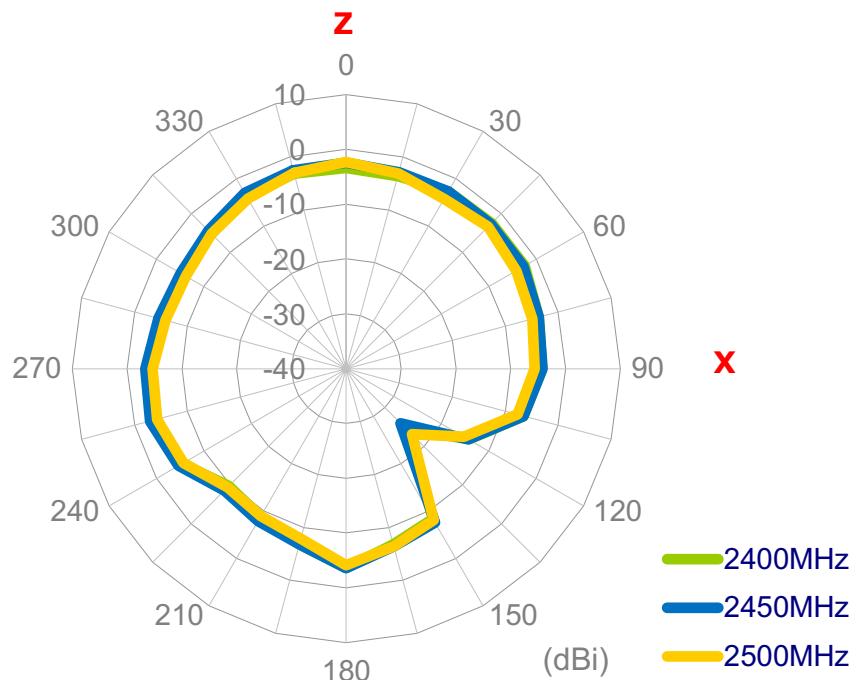


Figure 26 X-Z polar plot of Wi-Fi on 80x40mm ground plane

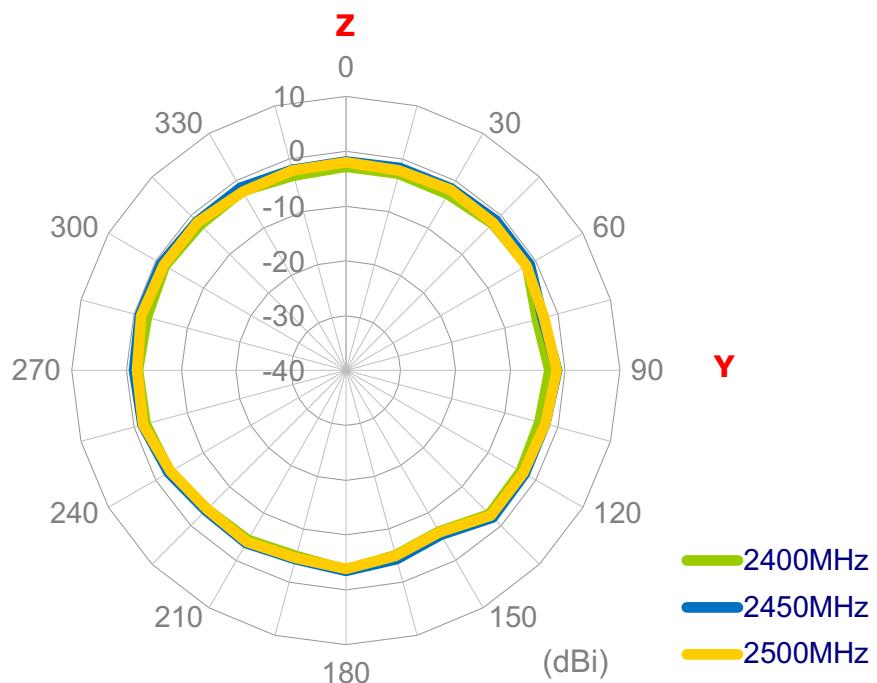
YZ Plane

Figure 27 Y-Z polar plot of Wi-Fi on 80x40mm ground plane

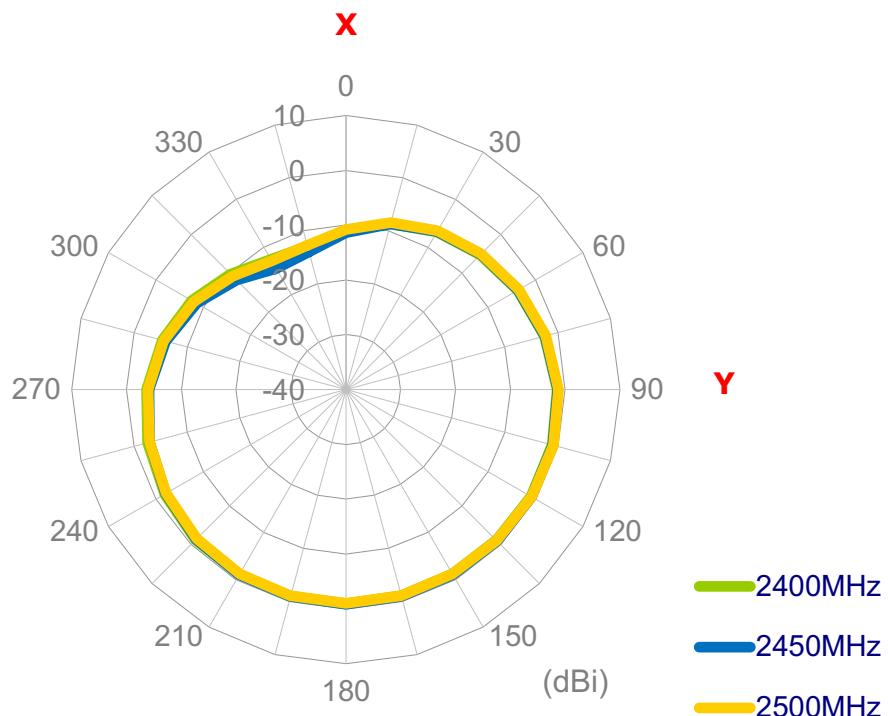
XY Plane

Figure 28 X-Y polar plot of Wi-Fi on 30x15mm ground plane

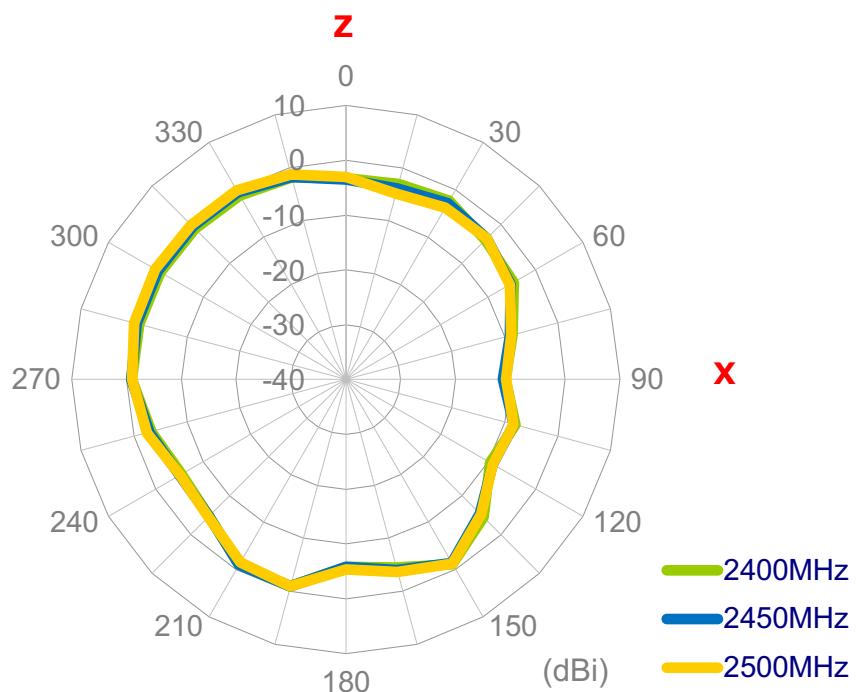
XZ Plane

Figure 29 X-Z polar plot of Wi-Fi on 30x15mm ground plane

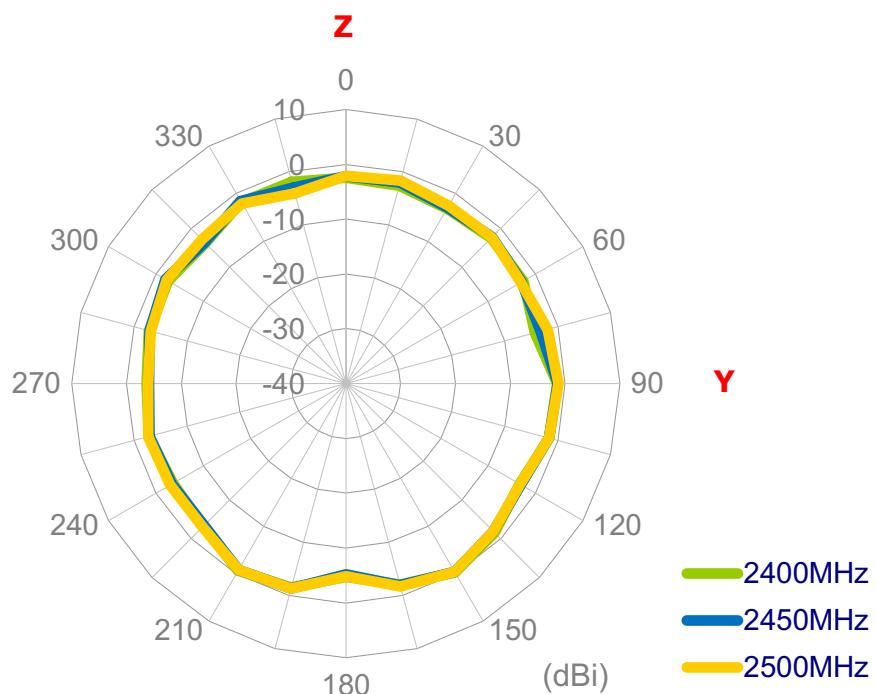
YZ Plane

Figure 30 Y-Z polar plot of Wi-Fi on 30x15mm ground plane

4.2 3D Radiation Patterns

4.1.3 GPS

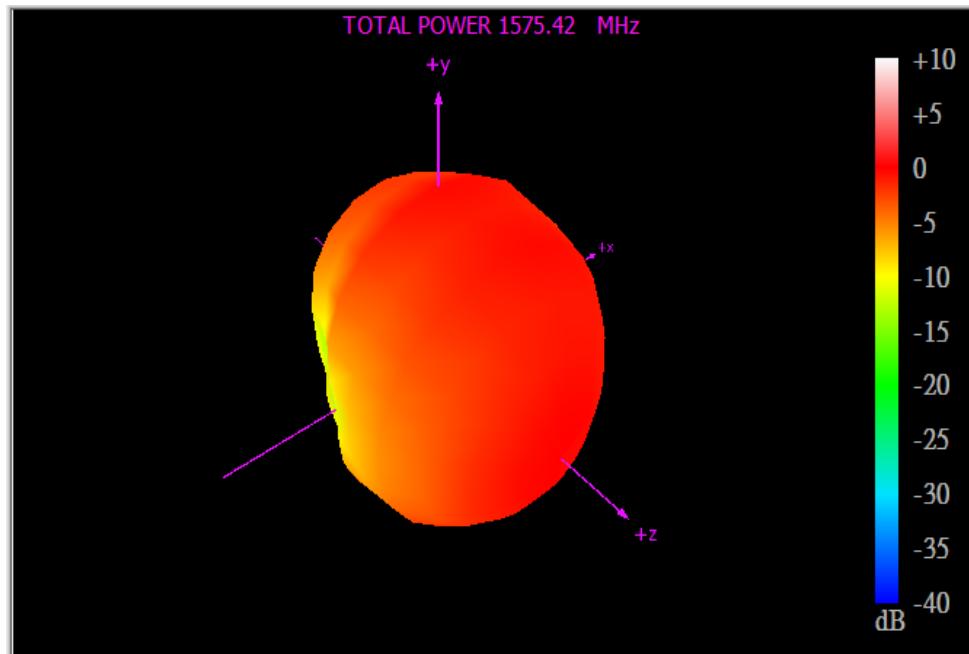


Figure 31 GPS 3D radiation pattern on 80x40mm ground plane

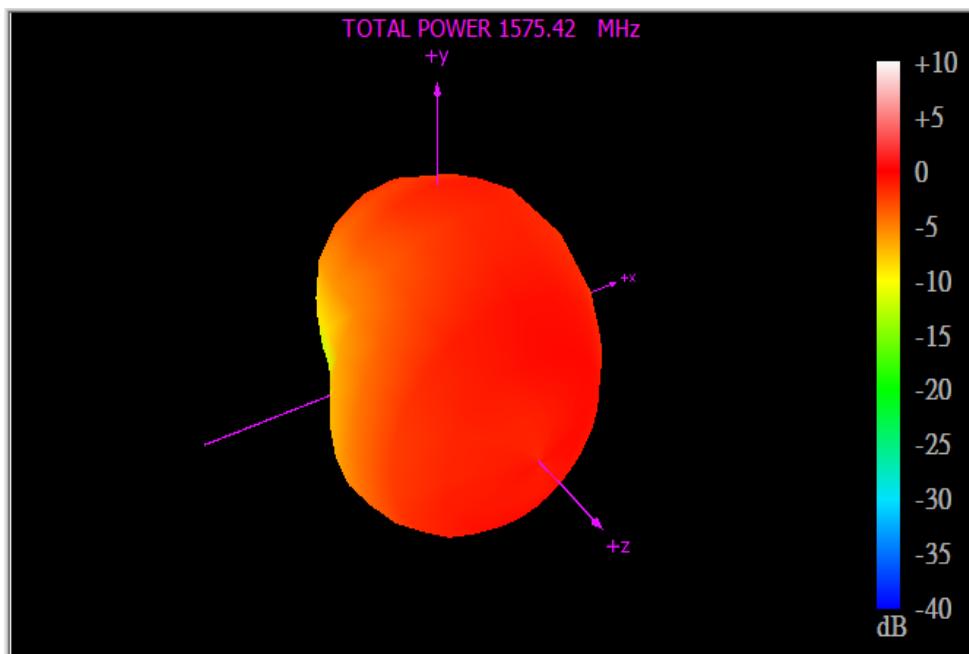


Figure 32 GPS 3D radiation pattern on 80x40mm ground plane

4.1.4 Wi-Fi and Bluetooth

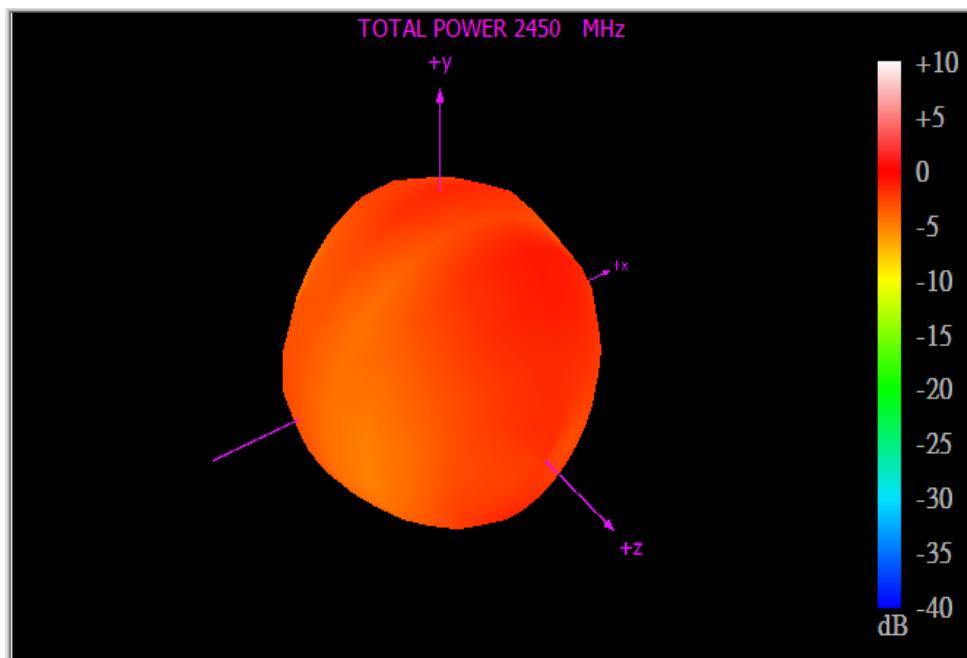


Figure 33 Wi-Fi 3D radiation pattern 80x40mm ground plane




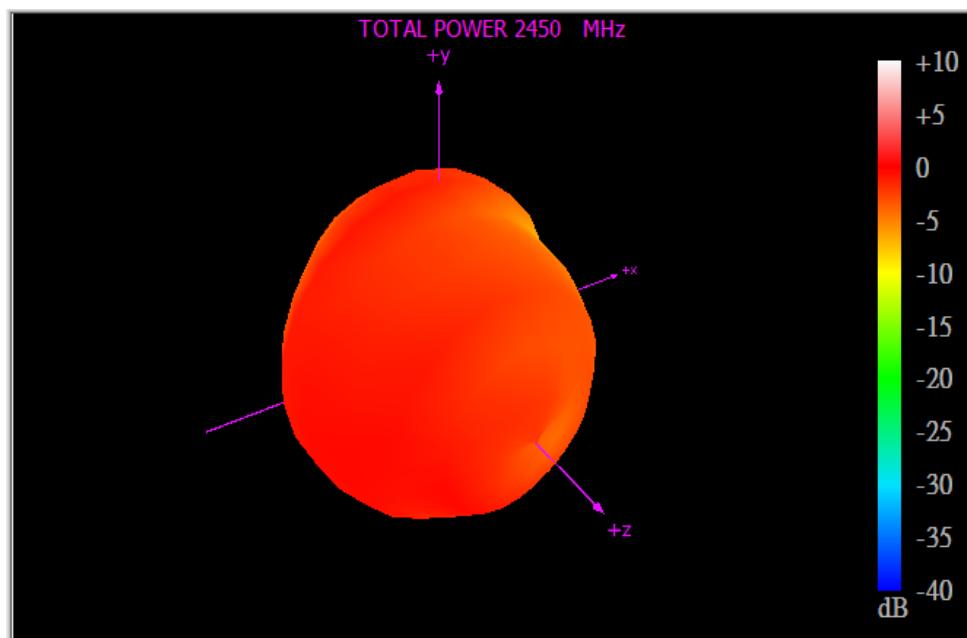


Figure 34 Wi-Fi 3D radiation pattern 30x15mm ground plane

5. Mechanical Drawing

GWLAD.05.A (80 x 40mm ground plane)

6	5	4	3	2	1																																																
ISO NO: EDW-18-8-xxxx	<Release>	REV ZONE	DESCRIPTION	ENG	APPROVED ISSUED DATE																																																
	ALL	Initial Design		Rachel	Haley 2018/10/17																																																
 <p>Front View</p>																																																					
 <p>Side View</p>																																																					
<p>FootPrint</p> 																																																					
<p>Note:</p> <ol style="list-style-type: none"> All material must be RoHS compliant. Soldered area: Copper: Matching Component: Logo & Text Ink Printing : White 																																																					
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th></th> <th>Name</th> <th>P/N</th> <th>Material</th> <th>Finish</th> <th>QTY</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>GWLAD.05.A PCB</td> <td>100218G010000A</td> <td>Composite 0.8t</td> <td>Black</td> <td>1</td> </tr> <tr> <td>2</td> <td>Capacitor 0.7pF (0402)</td> <td>001518J010000A</td> <td>Ceramic</td> <td>Clear</td> <td>1</td> </tr> <tr> <td>3</td> <td>Inductor 6.8nH (0402)</td> <td>001517H160000A</td> <td>Ceramic</td> <td>Clear</td> <td>1</td> </tr> <tr> <td>4</td> <td>Capacitor 2.2pF (0402)</td> <td>001518J020000A</td> <td>Ceramic</td> <td>Clear</td> <td>1</td> </tr> <tr> <td>5</td> <td>Capacitor 2.4pF (0402)</td> <td>001518J030000A</td> <td>Ceramic</td> <td>Clear</td> <td>1</td> </tr> <tr> <td>6</td> <td>GWLAD.05 Chip</td> <td>001518G020000A</td> <td>Ceramic</td> <td>White</td> <td>1</td> </tr> <tr> <td>7</td> <td>SMA(F)ST</td> <td>200417L00006FA</td> <td>Brass</td> <td>Au Plated</td> <td>2</td> </tr> </tbody> </table>							Name	P/N	Material	Finish	QTY	1	GWLAD.05.A PCB	100218G010000A	Composite 0.8t	Black	1	2	Capacitor 0.7pF (0402)	001518J010000A	Ceramic	Clear	1	3	Inductor 6.8nH (0402)	001517H160000A	Ceramic	Clear	1	4	Capacitor 2.2pF (0402)	001518J020000A	Ceramic	Clear	1	5	Capacitor 2.4pF (0402)	001518J030000A	Ceramic	Clear	1	6	GWLAD.05 Chip	001518G020000A	Ceramic	White	1	7	SMA(F)ST	200417L00006FA	Brass	Au Plated	2
	Name	P/N	Material	Finish	QTY																																																
1	GWLAD.05.A PCB	100218G010000A	Composite 0.8t	Black	1																																																
2	Capacitor 0.7pF (0402)	001518J010000A	Ceramic	Clear	1																																																
3	Inductor 6.8nH (0402)	001517H160000A	Ceramic	Clear	1																																																
4	Capacitor 2.2pF (0402)	001518J020000A	Ceramic	Clear	1																																																
5	Capacitor 2.4pF (0402)	001518J030000A	Ceramic	Clear	1																																																
6	GWLAD.05 Chip	001518G020000A	Ceramic	White	1																																																
7	SMA(F)ST	200417L00006FA	Brass	Au Plated	2																																																
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td colspan="2">UNLESS OTHERWISE SPECIFIED</td> <td>DATE: 2018/10/17</td> <td>MAT'L:</td> <td rowspan="2" style="vertical-align: middle;">  <small>This drawing and its inherent design concepts are property of Taoglas. Not to be copied or given to third parties without the written consent of Taoglas.</small> </td> <td rowspan="2" style="vertical-align: middle;">REV D01</td> </tr> <tr> <td colspan="2">TOLERANCES ON: $x \pm 0.2$ $xx \pm 0.5$.$xx \pm 0.1$ $x \pm 0.3$.$xxx \pm 0.05$</td> <td>UNIT: mm</td> <td>FINISH:</td> </tr> <tr> <td colspan="2">THIRD ANGLE PROJECTION</td> <td></td> <td>SCALE: 1/1</td> <td colspan="2"></td> </tr> <tr> <td colspan="2">APPROVED BY: Haley</td> <td>CHECKED BY: Jack/Bonnie</td> <td>DRAWN BY: Rachel</td> <td colspan="2">CUSTOMERS SIGNATURE / DATE</td> </tr> </table>						UNLESS OTHERWISE SPECIFIED		DATE: 2018/10/17	MAT'L:	 <small>This drawing and its inherent design concepts are property of Taoglas. Not to be copied or given to third parties without the written consent of Taoglas.</small>	REV D01	TOLERANCES ON: $x \pm 0.2$ $xx \pm 0.5$. $xx \pm 0.1$ $x \pm 0.3$. $xxx \pm 0.05$		UNIT: mm	FINISH:	THIRD ANGLE PROJECTION			SCALE: 1/1			APPROVED BY: Haley		CHECKED BY: Jack/Bonnie	DRAWN BY: Rachel	CUSTOMERS SIGNATURE / DATE																											
UNLESS OTHERWISE SPECIFIED		DATE: 2018/10/17	MAT'L:	 <small>This drawing and its inherent design concepts are property of Taoglas. Not to be copied or given to third parties without the written consent of Taoglas.</small>	REV D01																																																
TOLERANCES ON: $x \pm 0.2$ $xx \pm 0.5$. $xx \pm 0.1$ $x \pm 0.3$. $xxx \pm 0.05$		UNIT: mm	FINISH:																																																		
THIRD ANGLE PROJECTION			SCALE: 1/1																																																		
APPROVED BY: Haley		CHECKED BY: Jack/Bonnie	DRAWN BY: Rachel	CUSTOMERS SIGNATURE / DATE																																																	
TITLE: : GWLAD.05 GPS/Galileo & 2.4GHz Multi-Band Ceramic Chip on Eval Board(40*80mm) with 5pcs of GWLA.05																																																					
PART NO. : GWLAD.05.A																																																					
6	5	4	3	2	1																																																

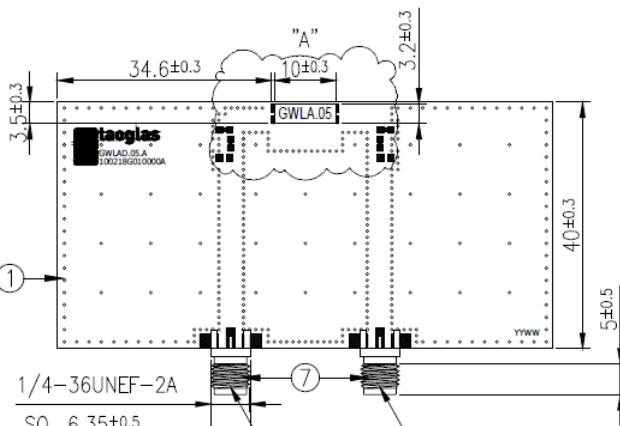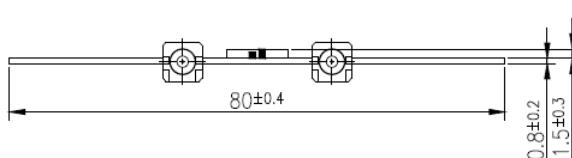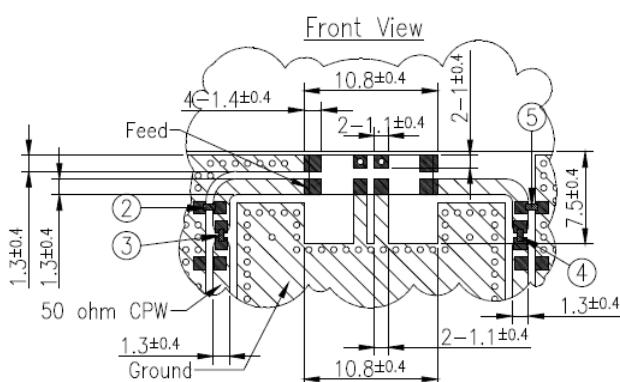

GWLA.05.B (30 x 15mm ground plane)

TAOGLAS.®

6	5	4	3	2	1																																											
ISO NO: EDW-18-8-xxxx	<Release>	REV ZONE	DESCRIPTION	ENG	APPROVED	ISSUED DATE																																										
		ALL	Initial Design	Rachel	Haley	2018/10/18																																										
G	F	E	D	C	B																																											
<p>Note:</p> <ol style="list-style-type: none"> All material must be RoHS compliant. Soldered area: Copper: Matching Component: Logo & Text Ink Printing : White 																																																
<table border="1"> <thead> <tr> <th></th> <th>Name</th> <th>P/N</th> <th>Material</th> <th>Finish</th> <th>QTY</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>GWLA.05.B PCB</td> <td>100218G000000A</td> <td>Composite 0.8t</td> <td>Black</td> <td>1</td> </tr> <tr> <td>2</td> <td>Capacitor 0.6pF (0402)</td> <td>001518J050000A</td> <td>Ceramic</td> <td>Clear</td> <td>1</td> </tr> <tr> <td>3</td> <td>RES 0.0 OHM 1/10W JUMP 0402 SMD</td> <td>001518J060000A</td> <td>Ceramic</td> <td>Clear</td> <td>1</td> </tr> <tr> <td>4</td> <td>Capacitor 4.7pF (0402)</td> <td>001515A000000A</td> <td>Ceramic</td> <td>Clear</td> <td>1</td> </tr> <tr> <td>5</td> <td>GWLA.05 Chip</td> <td>001518G020000A</td> <td>Ceramic</td> <td>White</td> <td>1</td> </tr> <tr> <td>6</td> <td>SMA(F)ST</td> <td>200417L00006FA</td> <td>Brass</td> <td>Au Plated</td> <td>2</td> </tr> </tbody> </table>								Name	P/N	Material	Finish	QTY	1	GWLA.05.B PCB	100218G000000A	Composite 0.8t	Black	1	2	Capacitor 0.6pF (0402)	001518J050000A	Ceramic	Clear	1	3	RES 0.0 OHM 1/10W JUMP 0402 SMD	001518J060000A	Ceramic	Clear	1	4	Capacitor 4.7pF (0402)	001515A000000A	Ceramic	Clear	1	5	GWLA.05 Chip	001518G020000A	Ceramic	White	1	6	SMA(F)ST	200417L00006FA	Brass	Au Plated	2
	Name	P/N	Material	Finish	QTY																																											
1	GWLA.05.B PCB	100218G000000A	Composite 0.8t	Black	1																																											
2	Capacitor 0.6pF (0402)	001518J050000A	Ceramic	Clear	1																																											
3	RES 0.0 OHM 1/10W JUMP 0402 SMD	001518J060000A	Ceramic	Clear	1																																											
4	Capacitor 4.7pF (0402)	001515A000000A	Ceramic	Clear	1																																											
5	GWLA.05 Chip	001518G020000A	Ceramic	White	1																																											
6	SMA(F)ST	200417L00006FA	Brass	Au Plated	2																																											
<table border="1"> <tr> <td colspan="2">UNLESS OTHERWISE SPECIFIED</td> <td>DATE: 2018/10/18</td> <td colspan="2">MAT'L:</td> <td colspan="2" rowspan="2"> This drawing and its inherent design concepts are property of Taoglas. Not to be copied or given to third parties without the written consent of Taoglas. </td> </tr> <tr> <td colspan="2">TOLERANCES ON: XX.± 0.5 .XX± 0.1 X.± 0.3 .XXX± 0.05</td> <td>UNIT: mm</td> <td colspan="2">FINISH:</td> <td>REV</td> </tr> <tr> <td colspan="2">THIRD ANGLE PROJECTION</td> <td></td> <td colspan="2">SCALE: 2/1</td> <td>D01</td> </tr> <tr> <td>APPROVED BY:</td> <td>CHECKED BY:</td> <td>DRAWN BY:</td> <td colspan="4">CUSTOMERS SIGNATURE / DATE</td> </tr> <tr> <td>Haley</td> <td>Jack/Bonnie</td> <td>Rachel</td> <td colspan="4"></td> </tr> </table>							UNLESS OTHERWISE SPECIFIED		DATE: 2018/10/18	MAT'L:		 This drawing and its inherent design concepts are property of Taoglas. Not to be copied or given to third parties without the written consent of Taoglas.		TOLERANCES ON: XX.± 0.5 .XX± 0.1 X.± 0.3 .XXX± 0.05		UNIT: mm	FINISH:		REV	THIRD ANGLE PROJECTION			SCALE: 2/1		D01	APPROVED BY:	CHECKED BY:	DRAWN BY:	CUSTOMERS SIGNATURE / DATE				Haley	Jack/Bonnie	Rachel													
UNLESS OTHERWISE SPECIFIED		DATE: 2018/10/18	MAT'L:		 This drawing and its inherent design concepts are property of Taoglas. Not to be copied or given to third parties without the written consent of Taoglas.																																											
TOLERANCES ON: XX.± 0.5 .XX± 0.1 X.± 0.3 .XXX± 0.05		UNIT: mm	FINISH:				REV																																									
THIRD ANGLE PROJECTION			SCALE: 2/1		D01																																											
APPROVED BY:	CHECKED BY:	DRAWN BY:	CUSTOMERS SIGNATURE / DATE																																													
Haley	Jack/Bonnie	Rachel																																														
6	5	4	3	2	1																																											



TAOGLAS.®

6. Layout Guide


6.1 Footprint

6	5	4	3	2	1
ISO NO: EDW-18-8-xxxx	<Release>	REV	ZONE	DESCRIPTION	ENG APPROVED ISSUED DATE
		D01	ALL	Initial Design	Cedric Wing 2018/07/20
		D02	ALL	Modify printing	Rachel Haley 2018/10/19
G					G
F					F
E					E
D					D
C					C
B	<p>NOTE:</p> <p>1. Tin Plated area 2. Solder Mask area 3. Copper area 4. Paste area 5. Keepout Region</p>	<p>6. Ground keepout should extend through any inner PCB layers and any side around the antenna to minimize coupling from RF feed to ground, except the side facing system ground.</p> <p>7. Any vias in pads should be either filled or tented to prevent solder from wicking away from the pad during reflow.</p> <p>8. The dimension tolerances should follow standard PCB manufacturing guidelines</p>			B
A	<p>UNLESS OTHERWISE SPECIFIED TOLERANCES ON: X± 0.2 XX± 0.5 X± 0.3 XXX± 0.05</p> <p>APPROVED BY: Wing CHECKED BY: Jack/Paul DRAWN BY: Rachel</p>	<p>DATE: 2018/07/20 UNIT: mm THIRD ANGLE PROJECTION DRAWN BY: CUSTOMERS SIGNATURE / DATE</p>	<p>MAT'L: Ceramic FINISH: White SCALE: 2/1</p>	<p> This drawing and its inherent design concepts are property of Taoglas. Not to be copied or given to third parties without the written consent of Taoglas.</p> <p>TITLE: : GPS/Galileo & 2.4GHz Multi-Band Ceramic Chip Antenna/10*3*1.5(mm) PART NO. : GWLA.05</p>	<p>REV D02 A</p>
	6	5	4	3	2
					1

* Footprint drawings in .dwg format will be provided upon request.


6.2 Matching Circuit

Like all antennas, surrounding components, enclosures, and changes to the GND plane dimensions can alter performance. A pi-matching network like the one shown below is required in case adjustments need to be made. The antenna EVB has a similar matching network. The components on the EVB are a good starting point for a new design, but will need to be adjusted upon integration for best performance. The zero ohm resistor is needed for the ability to solder down a coax pigtails to make measurements with a vector network analyzer.

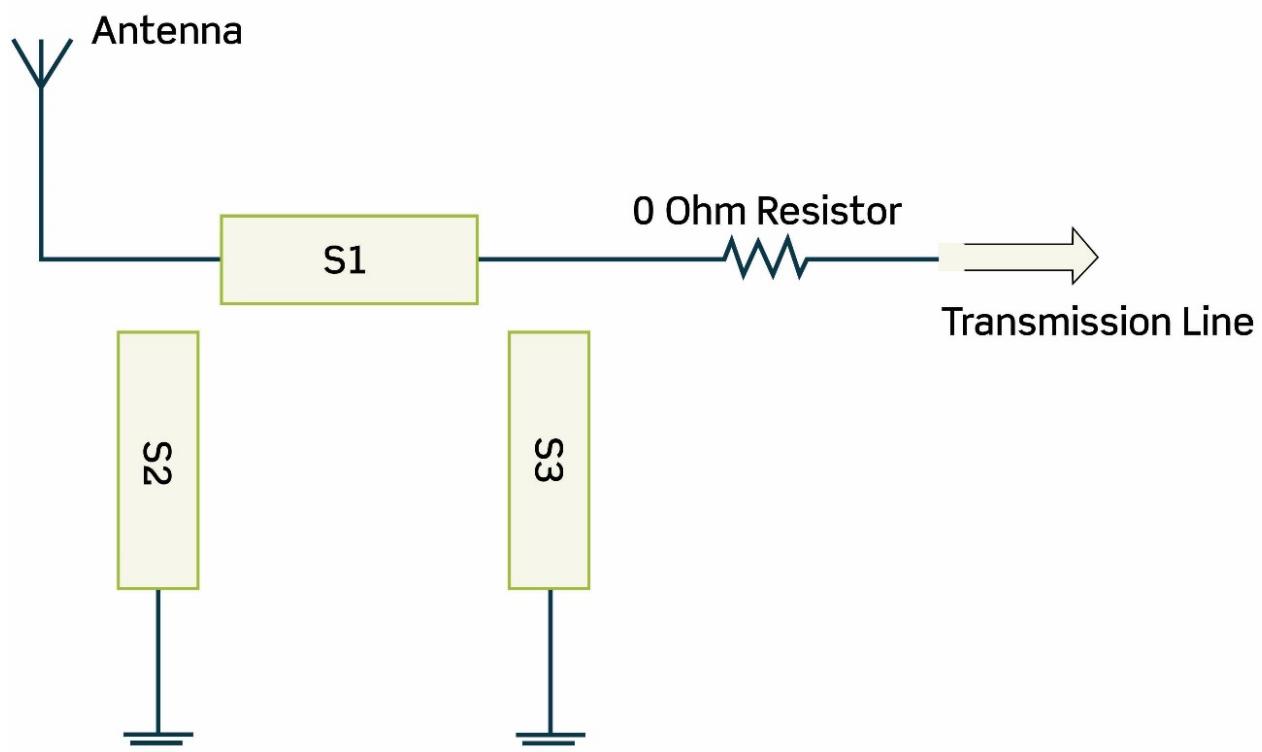

7. Solder Reflow Profile

Typical Soldering Profile for Lead-free Process:

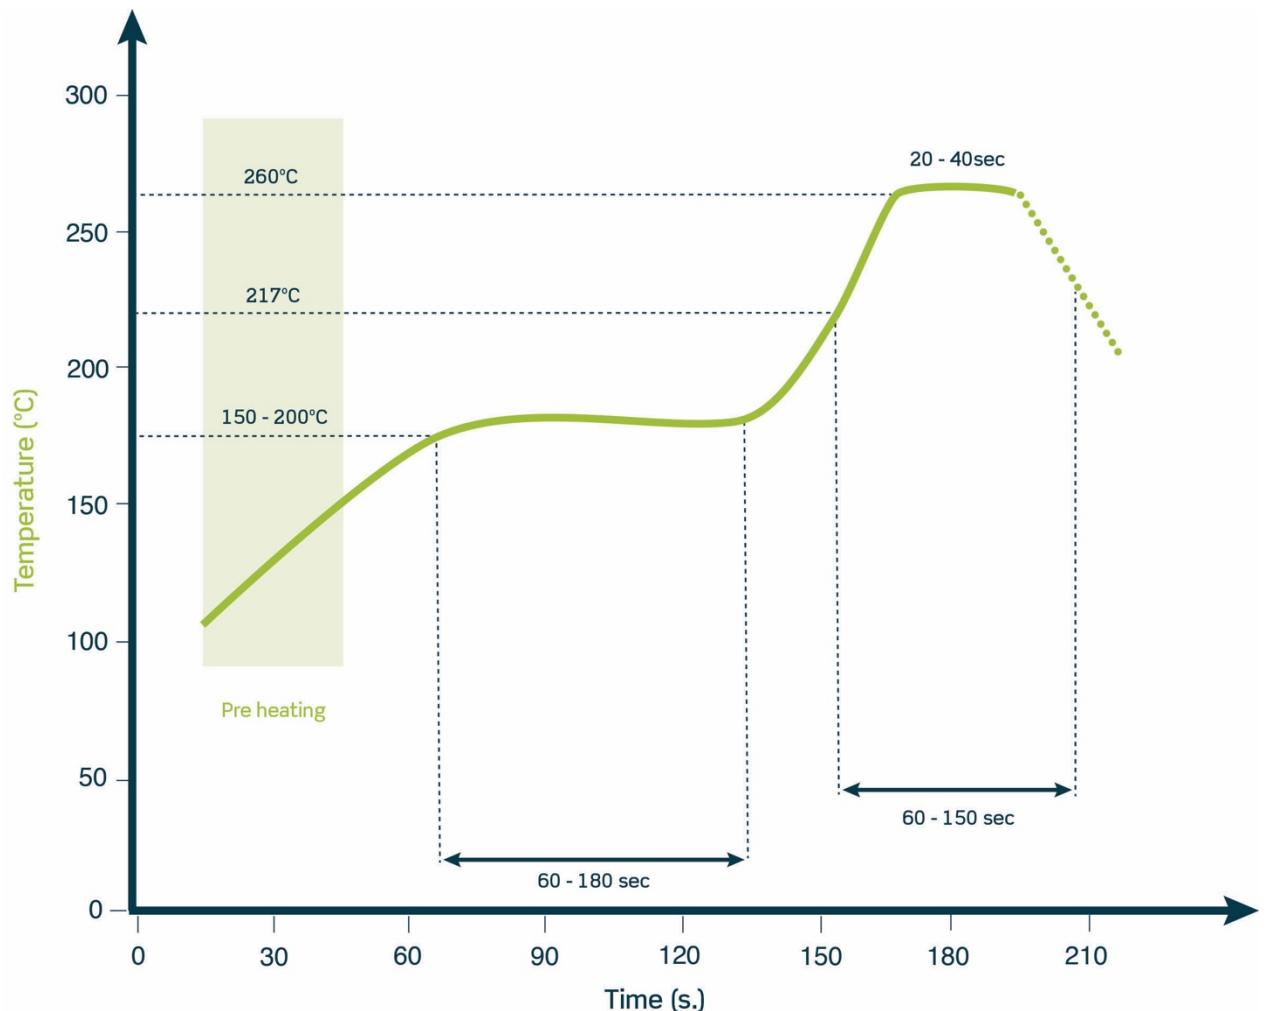



TAOGLAS.®

8. Packaging

1000pcs GWLA.05 per Tape & Reel

Dimensions - Ø330*28.4mm


Weight - 0.6Kg



1000pcs GWLA.05 per carton

Dimensions - 350*340*47mm


Weight - 0.9Kg

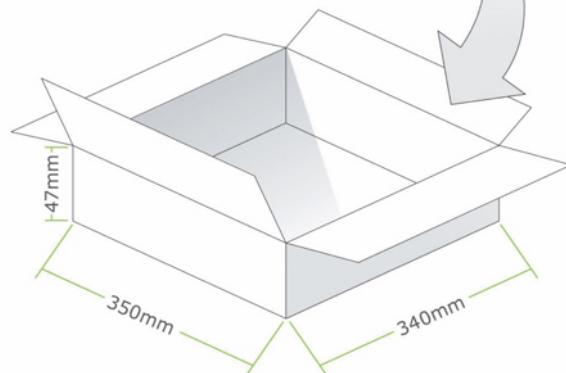

5000pcs GWLA.05 per carton

Dimensions - 360*370*275mm

Weight - 5.0Kg

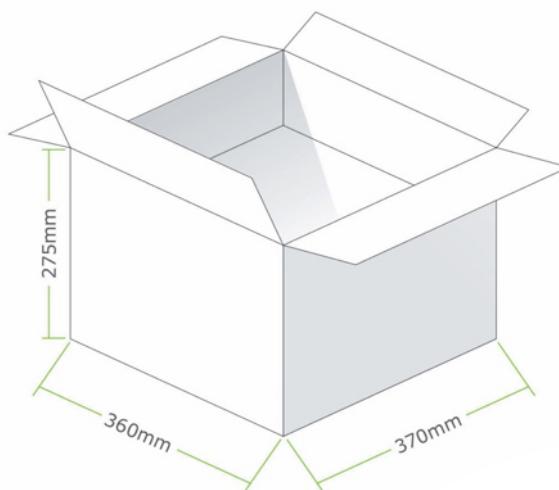



Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein.

Reproduction, use or disclosure to third parties without express permission is strictly prohibited.

Copyright © Taoglas Ltd.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помошь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помошь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.